



Valued Quality. Delivered.

**Issuing Laboratory:**

**Intertek Testing Services Hong Kong Limited**

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



**TEST REPORT**

**Report No.: 14041841HKG-002**

**JAKKS Pacific (HK) Limited**

Application  
For  
Certification  
(Original Grant)  
**(FCC ID: OTA78429)**  
**(IC: 7783A-78429)**

**Transmitter**

Prepared and Checked by:

Wong Kwok Yeung, Kenneth  
Lead Engineer

Approved by:

Chan Chi Hung, Terry  
Supervisor  
Date: June 26, 2014

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.  
This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**Intertek Testing Services Hong Kong Ltd.**

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: [www.hk.intertek-etlsemko.com](http://www.hk.intertek-etlsemko.com)



Valued Quality. Delivered.

**Issuing Laboratory:**  
**Intertek Testing Services Hong Kong Limited**

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



## GENERAL INFORMATION

|                           |                                                                                                  |
|---------------------------|--------------------------------------------------------------------------------------------------|
| Grantee:                  | JAKKS Pacific (HK) Limited                                                                       |
| Grantee Address:          | 12/F., Wharf T&T Centre,<br>7 Canton Road, Tsim Sha Tsui,<br>Kowloon, Hong Kong.                 |
| Contact Person:           | Dick Au                                                                                          |
| Tel:                      | 2269 7631                                                                                        |
| Fax:                      | 2366 8247                                                                                        |
| e-mail:                   | dicka@jakks.com.hk                                                                               |
| Manufacturer:             | Root land Plastic Factory                                                                        |
| Manufacturer Address:     | Bai Yun Keng Industrial, Danshui Town, Huiyang Zone,<br>Huizhou City, Guangdong, Province China. |
| Vendor:                   | Rootland Plastic Factory                                                                         |
| Brand Name:               | N/A                                                                                              |
| FCC & IC Model:           | Refer to report P.ii                                                                             |
| Additional Model No.:     | Refer to report P.ii                                                                             |
| Asst. No.:                | Refer to report P.ii                                                                             |
| GL Class No.:             | 3500.8020.105                                                                                    |
| Type of EUT:              | Transceiver                                                                                      |
| Description of EUT:       | Refer to report P.ii                                                                             |
| Serial Number:            | N/A                                                                                              |
| FCC ID / IC:              | OTA78429 / 7783A-78429                                                                           |
| Date of Sample Submitted: | April 30, 2014                                                                                   |
| Date of Test:             | April 30, 2014 to May 19, 2014                                                                   |
| Report No.:               | 14041841HKG-002                                                                                  |
| Report Date:              | June 26, 2014                                                                                    |
| Environmental Conditions: | Temperature: +10 to 40°C<br>Humidity: 10 to 90%                                                  |

Report No.: 14041841HKG-002

FCC ID: OTA78429

IC: 7783A-78429

i

**Intertek Testing Services Hong Kong Ltd.**

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.  
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

**Issuing Laboratory:**  
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.

## GENERAL INFORMATION

**(Cont'd)**

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC Model:                | 78429                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| FCC Additional Model No.: | 78430, 82306, 78429, 82331, 78429, 82640, 78430, 82306, 84898, 82306, 78430                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| IC Model:                 | 78429                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Asst. No.:                | 82305, 82305-CAN, 82305-EU, 82305-SP, 78429-SP, 82331, 82331-CAN, 82331-EU, 78429-QVC, 78429-UK, 82640, 82640-CAN, 82640-EU, 84898, 84898-CAN, 84898-EU, 84907, 84907-CAN, 84907-EU, 82712, 82712-CAN, 82712-EU                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Description of EUT:       | <p>HERO PORTAL ASST., HERO PORTAL ASST. – 4 characters: HERO PORTAL – TMNT (78429)</p> <p>HERO PORTAL – TMNT (Spanish Pkg):<br/>HERO PORTAL – TMNT (78429)</p> <p>HERO PORTAL - TMNT Booster Pack Asst, HERO PORTAL – TMNT Booster Pack Asst (Spanish Pkg):<br/>HERO PORTAL - TMNT Booster Pack (Mike + Don) (78430)</p> <p>HERO PORTAL TMNT Booster Pack (Splinter + Casey Jones) (82306)</p> <p>HERO PORTAL - Kmart TMNT Hero Portal + 4 Figures:<br/>HERO PORTAL - Kmart TMNT Hero Portal + 4 Figures (82331)</p> <p>HERO PORTAL WITH BONUS FIGURES – TMNT:<br/>HERO PORTAL WITH BONUS FIGURES – TMNT (78429)</p> <p>HERO PORTAL WITH TWO FIGURES – TMNT:<br/>HERO PORTAL WITH TWO FIGURES – TMNT (82640)</p> <p>TMNT HERO PORTAL BOOSTER PACK ASST.:<br/>HERO PORTAL - TMNT Booster Pack (Mike + Don) (78430)</p> <p>HERO PORTAL TMNT Booster Pack (Splinter + Casey Jones) (82306)</p> <p>HERO PORTAL BOOSTER PACK ASST.:<br/>TMNT HERO PORTAL PDQ (84898)</p> <p>HERO PORTAL BOOSTER PACK ASST.:<br/>HERO PORTAL TMNT Booster Pack (Splinter + Casey Jones) (82306)</p> <p>HERO PORTAL - TMNT Booster Pack (Mike + Don) (78430)</p> |



Valued Quality. Delivered.

**Issuing Laboratory:**  
**Intertek Testing Services Hong Kong Limited**

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



## SUMMARY OF TEST RESULT

| TEST SPECIFICATION                                | REFERENCE                | RESULTS |
|---------------------------------------------------|--------------------------|---------|
| Transmitter Field Strength<br>Frequency Stability | 15.225 /<br>RSS-210 A2.6 | Pass    |
| Radiated Emission in Restricted bands             | 15.205/<br>RSS-210 2.2   | Pass    |

The equipment under test is found to be complying with the following standards:  
FCC Part 15, October 1, 2012 Edition  
RSS-210 Issue 8, December 2010

- Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

Report No.: 14041841HKG-002

FCC ID: OTA78429

IC: 7783A-78429

iii

**Intertek Testing Services Hong Kong Ltd.**

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.  
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: [www.hk.intertek-etlsemko.com](http://www.hk.intertek-etlsemko.com)

**Issuing Laboratory:**  
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



## Table of Contents

|            |                                                |           |
|------------|------------------------------------------------|-----------|
| <b>1.0</b> | <b><u>General Description</u></b>              | <b>1</b>  |
| 1.1        | Product Description                            | 1         |
| 1.2        | Related Submittal(s) Grants                    | 1         |
| 1.3        | Test Methodology                               | 1         |
| 1.4        | Test Facility                                  | 1         |
| <b>2.0</b> | <b><u>System Test Configuration</u></b>        | <b>2</b>  |
| 2.1        | Justification                                  | 2         |
| 2.2        | EUT Exercising Software                        | 2         |
| 2.3        | Special Accessories                            | 2         |
| 2.4        | Measurement Uncertainty                        | 3         |
| 2.5        | Support Equipment List and Description         | 3         |
| <b>3.0</b> | <b><u>Emission Results</u></b>                 | <b>4</b>  |
| 3.1        | Field Strength Calculation                     | 4         |
| 3.2        | Radiated Emission Configuration Photograph     | 5         |
| 3.3        | Radiated Emission Data                         | 5         |
| 3.4        | Frequency Stability                            | 8         |
| 3.5        | Supplementary Data for IC RSS-210 Section A2.6 | 9         |
| <b>4.0</b> | <b><u>Equipment Photographs</u></b>            | <b>10</b> |
| <b>5.0</b> | <b><u>Product Labelling</u></b>                | <b>10</b> |
| <b>6.0</b> | <b><u>Technical Specifications</u></b>         | <b>10</b> |
| <b>7.0</b> | <b><u>Instruction Manual</u></b>               | <b>10</b> |
| <b>8.0</b> | <b><u>Miscellaneous Information</u></b>        | <b>11</b> |
| 8.1        | Measured Bandwidth                             | 11        |
| 8.2        | Discussion of Pulse Desensitization            | 13        |
| 8.3        | Calculation of Average Factor                  | 13        |
| 8.4        | Emissions Test Procedures                      | 14        |
| <b>9.0</b> | <b><u>Equipment List</u></b>                   | <b>16</b> |

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



## 1.0 General Description

### 1.1 Product Description

The equipment under test (EUT) is a 13MHz RFID for a Portal (RFID toy reader) operating at 13.560MHz which is controlled by a crystal. The EUT is powered by 4 x AA size batteries. This product consists of a controller, a Portal (RFID tag reader) and six Teenage Mutant Ninja Turtles Figures (passive type powered tags). The EUT has an ON/OFF switch and a RFID tag sensor on the Portal. It can also connect to the monitor for game playing. After switched on the EUT, the TV monitor can show the game mode while the Hero Figure (passive tags) was placed on the Portal.

The Model: 78430, 82306, 78429, 82331, 78429, 82640, 78430, 82306, 84898, 82306 and 78430 are the same as the Model: 78429 in hardware aspect. The difference in model number serves as marketing strategy. The models are different in packaging and figure combination only.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 1.2 Related Submittal(s) Grants

This is a single application for certification of a transmitter.

### 1.3 Test Methodology

Radiated emission measurements was performed according to the procedures in ANSI C63.4 (2009). All radiated measurements were performed in an Open Area Test Site. Preliminary scans were performed in the Open Area Test Site only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Justification Section”** of this Application.

### 1.4 Test Facility

The open area test site used to collect the radiated data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been placed on file with the FCC and IC.

**Issuing Laboratory:**  
**Intertek Testing Services Hong Kong Limited**

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



## **2.0 System Test Configuration**

### **2.1 Justification**

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2009).

The device was powered by new 4 x 1.5V AA Batteries.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions at and above 30 MHz, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

All relevant operation modes have been tested, and the worst case data is included in this report.

### **2.2 EUT Exercising Software**

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

### **2.3 Special Accessories**

There are no special accessories necessary for compliance of this product.



Valued Quality. Delivered.

**Issuing Laboratory:**  
**Intertek Testing Services Hong Kong Limited**

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



## 2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

## 2.5 Support Equipment List and Description

LCD TV monitor. (Model: Samsung LS15E33C) EW-2122 (Provided By Intertek)

2 x Figures (Provided By Client)

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



### 3.0 Emission Results

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

#### 3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where             $FS$  = Field Strength in dB $\mu$ V/m  
                     $RA$  = Receiver Amplitude (including preamplifier) in dB $\mu$ V  
                     $CF$  = Cable Attenuation Factor in dB  
                     $AF$  = Antenna Factor in dB  
                     $AG$  = Amplifier Gain in dB  
                     $AV$  = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where             $FS$  = Field Strength in dB $\mu$ V/m  
                     $RR = RA - AG - AV$  in dB $\mu$ V  
                     $LF = CF + AF$  in dB

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

|                                 |                        |
|---------------------------------|------------------------|
| $RA = 52.0$ dB $\mu$ V/m        |                        |
| $AF = 7.4$ dB                   | $RR = 18.0$ dB $\mu$ V |
| $CF = 1.6$ dB                   | $LF = 9.0$ dB          |
| $AG = 29.0$ dB                  |                        |
| $AV = 5.0$ dB                   |                        |
| $FS = RR + LF$                  |                        |
| $FS = 18 + 9 = 27$ dB $\mu$ V/m |                        |

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V/m})/20] = 22.4 \mu\text{V/m}$$



Valued Quality. Delivered.

**Issuing Laboratory:**  
**Intertek Testing Services Hong Kong Limited**

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



### 3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 187.65 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

### 3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 6.7 dB

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Applicant: JAKKS Pacific (HK) Limited  
Model: 78429  
Worst-Case Operating Mode: Transmitting

Date of Test: May 19, 2014

Table 1  
**Radiated Emissions**  
**Pursuant to FCC Part15.225/ RSS-210 Section A2.6 Requirement**

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp (dB) | Antenna Factor (dB) | Net at 3m (dBμV/m) | Distance Factor (-dB) | Calculated at 30m (dBμV/m) | Limit at 30m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|--------------|---------------------|--------------------|-----------------------|----------------------------|-----------------------|-------------|
| V            | 13.560          | 58.0           | 0            | 10.8                | 68.8               | 40.0                  | 28.8                       | 84.0                  | -55.2       |
| V            | 27.120          | 19.4           | 0            | 9.5                 | 28.9               | 40.0                  | -11.1                      | 29.5                  | -40.6       |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp (dB) | Antenna Factor (dB) | Net at 3m (dBμV/m) | Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|-----------------|----------------|--------------|---------------------|--------------------|----------------------|--------------|
| V            | 40.680          | 35.7           | 16           | 10.0                | 29.7               | 40.0                 | -10.3        |
| V            | 54.240          | 32.9           | 16           | 11.0                | 27.9               | 40.0                 | -12.1        |
| V            | 67.800          | 33.7           | 16           | 8.0                 | 25.7               | 40.0                 | -14.3        |
| V            | 81.360          | 33.9           | 16           | 7.0                 | 24.9               | 40.0                 | -15.1        |
| V            | 94.920          | 31.9           | 16           | 11.0                | 26.9               | 43.5                 | -16.6        |
| <b>V</b>     | <b>108.480</b>  | <b>29.5</b>    | <b>16</b>    | <b>14.0</b>         | <b>27.5</b>        | <b>43.5</b>          | <b>-16.0</b> |
| V            | 122.040         | 28.9           | 16           | 14.0                | 26.9               | 43.5                 | -16.6        |
| <b>V</b>     | <b>135.600</b>  | <b>28.6</b>    | <b>16</b>    | <b>14.0</b>         | <b>26.6</b>        | <b>43.5</b>          | <b>-16.9</b> |

NOTES: 1. Peak Detector Data unless otherwise stated.

- All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
- Negative sign in the column shows value below limit.
- Loop antenna is used for the emissions below 30MHz.
- Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205/ RSS-210 Section 2.2

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Applicant: JAKKS Pacific (HK) Limited  
Model: 78429  
Worst-Case Operating Mode: TV Game Playing

Date of Test: May 19, 2014

Table 2  
**Radiated Emissions**  
**Pursuant to FCC Part 15.209/ RSS-210 Section A2.6 Requirement**

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-amp (dB) | Antenna Factor (dB) | Net at 3m (dBμV/m) | Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|-----------------|----------------|--------------|---------------------|--------------------|----------------------|--------------|
| V            | 33.549          | 35.8           | 16           | 10.0                | 29.8               | 40.0                 | -10.2        |
| V            | 84.657          | 38.5           | 16           | 8.0                 | 30.5               | 40.0                 | -9.5         |
| <b>V</b>     | <b>131.325</b>  | <b>35.7</b>    | <b>16</b>    | <b>14.0</b>         | <b>33.7</b>        | <b>43.5</b>          | <b>-9.8</b>  |
| V            | 187.650         | 36.8           | 16           | 16.0                | 36.8               | 43.5                 | -6.7         |
| <b>H</b>     | <b>277.560</b>  | <b>25.5</b>    | <b>16</b>    | <b>22.0</b>         | <b>31.5</b>        | <b>46.0</b>          | <b>-14.5</b> |
| <b>H</b>     | <b>334.444</b>  | <b>22.7</b>    | <b>16</b>    | <b>24.0</b>         | <b>30.7</b>        | <b>46.0</b>          | <b>-15.3</b> |

- NOTES: 1. Quasi-Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

**Issuing Laboratory:**  
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.

### 3.4 Frequency Tolerance

**Data Table**  
**Frequency tolerance of Transmitter**  
**(Temperature Variation: -20°C to +50°C)**

| Operating frequency |                  | Model: 13.563627MHz      |                     |           |
|---------------------|------------------|--------------------------|---------------------|-----------|
| Test Voltage (V)    | Temperature (°C) | Measured frequency (MHz) | Frequency error (%) | Limit (%) |
| 6.0                 | + 50             | 13.563621                | -0.00004            | ±0.01     |
|                     | + 40             | 13.563619                | -0.00006            | ±0.01     |
|                     | + 30             | 13.563625                | -0.00001            | ±0.01     |
|                     | + 20             | 13.563627                | 0                   | ±0.01     |
|                     | + 10             | 13.563643                | +0.00012            | ±0.01     |
|                     | 0                | 13.563638                | +0.00008            | ±0.01     |
|                     | - 10             | 13.563594                | -0.00024            | ±0.01     |
|                     | - 20             | 13.563573                | -0.00040            | ±0.01     |

We found that the EUT met the requirement of FCC Part 15 Section 15.225(e).

**Issuing Laboratory:**  
**Intertek Testing Services Hong Kong Limited**

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.

### 3.5 Supplementary Data for IC RSS-210 Section A2.6

#### **RSS-210 Section A2.6**

**Data Table**  
**Frequency Deviation with Voltage Variation**

| Operating frequency |                  | 13.563627MHz             |                     |           |
|---------------------|------------------|--------------------------|---------------------|-----------|
| Test Voltage (V)    | Temperature (°C) | Measured frequency (MHz) | Frequency error (%) | Limit (%) |
| 6.0                 | +20              | 13.563627                | 0                   | ±0.01     |
| 5.44                | +20              | 13.563629                | +0.00001            | ±0.01     |
| 4.87                | +20              | 13.563635                | +0.00006            | ±0.01     |
| 4.30                | +20              | 13.563693                | +0.00049            | ±0.01     |

**Note:**

The battery operating end point is 4.30V, which is declared by the manufacturer.



Valued Quality. Delivered.

**Issuing Laboratory:**  
**Intertek Testing Services Hong Kong Limited**

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



#### **4.0 Equipment Photographs**

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

#### **5.0 Product Labelling**

For electronics filing, the FCC ID/IC ID label artwork and the label location are saved with filename: label.pdf.

#### **6.0 Technical Specifications**

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

#### **7.0 Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States and Canada.

**Issuing Laboratory:**  
Intertek Testing Services Hong Kong Limited


Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.

## 8.0 Miscellaneous Information

The miscellaneous information includes details of the test procedure and measured bandwidth



### 8.1 Measured Emission of Bandedge

The below plot shows the fundamental emission is confined in the specified band. The emission of the fundamental is 28.8 dB $\mu$ V/m and it is below the limit of 50.5 dB $\mu$ V/m in the range of (13.410-13.553MHz) and (13.567-13.710MHz) and the limit of 40.5 dB $\mu$ V/m in the frequency range of (13.110-14.410MHz) and (13.710-14.010MHz). In the frequency range from 13.110-14.010MHz, we can not find any emission higher than the fundamental emission. Therefore they meet the requirement of Section 15.225(a), (b), (c), & (d).

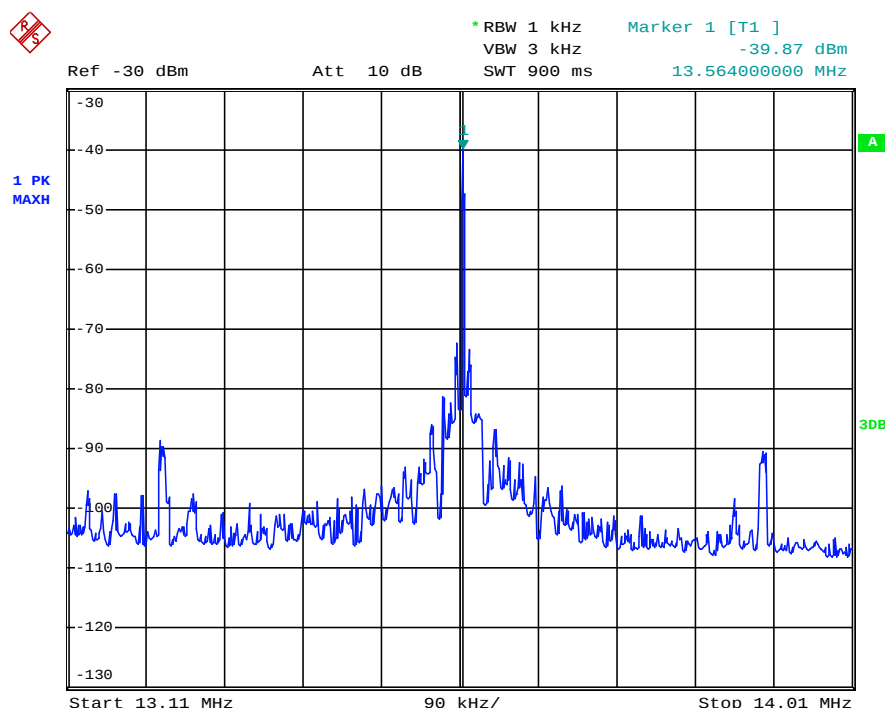

## Issuing Laboratory: Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.

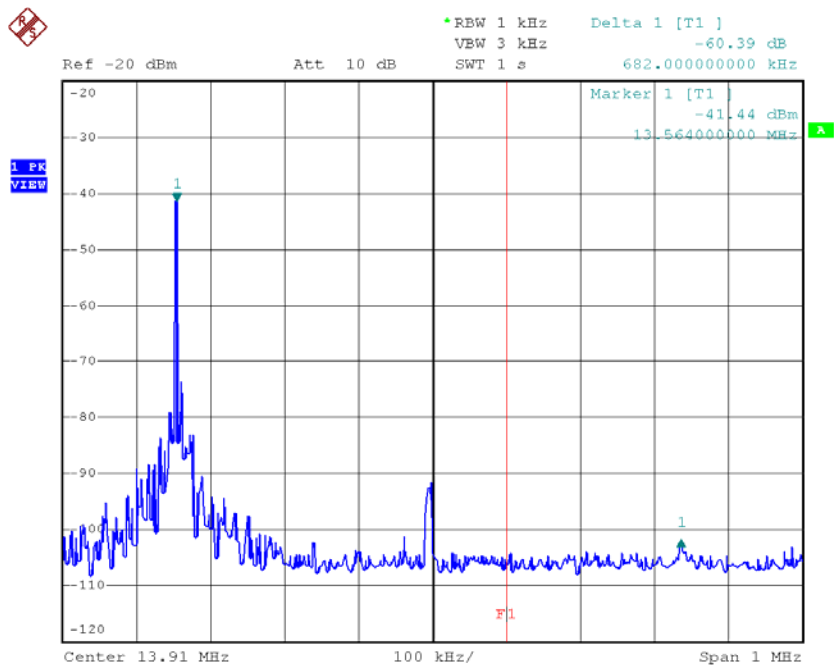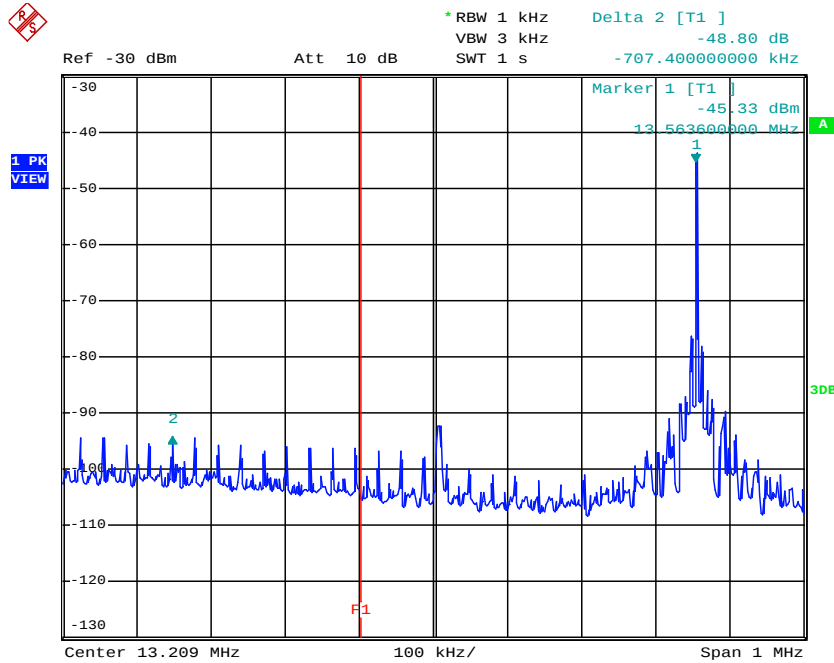



Valued Quality. Delivered.

**Issuing Laboratory:**  
**Intertek Testing Services Hong Kong Limited**

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



## 8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. Since the transmitter transmits the RF signal continuously.

## 8.3 Calculation of Average Factor

The average factor is not applicable for this device as the transmitted signal is a continuously signal.



Valued Quality. Delivered.

**Issuing Laboratory:**  
**Intertek Testing Services Hong Kong Limited**

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



## 8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to 1GHz.



Valued Quality. Delivered.

**Issuing Laboratory:**  
**Intertek Testing Services Hong Kong Limited**

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



## 8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 1 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.

**Issuing Laboratory:**  
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.

## 9.0 Equipment List

### 1) Radiated Emissions Test

| Equipment            | EMI Test Receiver | Log Periodic Antenna |
|----------------------|-------------------|----------------------|
| Registration No.     | EW-2666           | EW-0446              |
| Manufacturer         | R&S               | EMCO                 |
| Model No.            | ESCI7             | 3146                 |
| Calibration Date     | Jun. 20, 2013     | Apr. 30, 2013        |
| Calibration Due Date | Jun. 20, 2014     | Oct. 30, 2014        |

| Equipment            | Spectrum Analyzer | Active Loop H-field Antenna |
|----------------------|-------------------|-----------------------------|
| Registration No.     | EW-2188           | EW-0191                     |
| Manufacturer         | AGILENTTECH       | EMCO                        |
| Model No.            | E4407B            | 6502                        |
| Calibration Date     | Apr. 16, 2014     | Jan. 30, 2013               |
| Calibration Due Date | Apr. 16, 2015     | Jul. 30, 2014               |

### 2) Bandedge Measurement

| Equipment            | Spectrum Analyzer |
|----------------------|-------------------|
| Registration No.     | EW-3016           |
| Manufacturer         | ROHDESCHWARZ      |
| Model No.            | FSV40             |
| Calibration Date     | Feb. 13, 2014     |
| Calibration Due Date | Feb. 13, 2015     |

### 3) Frequency Tolerance

| Equipment            | Temperature & Humidity Chamber | Spectrum Analyzer |
|----------------------|--------------------------------|-------------------|
| Registration No.     | EW-2395                        | EW-2249           |
| Manufacturer         | GIANT FORCE                    | R&S               |
| Model No.            | GTH-210-40-SP-AR               | FSP30             |
| Calibration Date     | Feb. 24, 2014                  | Oct. 28, 2013     |
| Calibration Due Date | Feb. 28, 2015                  | Oct. 28, 2014     |

**END OF TEST REPORT**