

**TEST REPORT No: (5216)245-0786**

## TEST REPORT

|                                                                                                               |                                                                                                                                               |                                                                                       |                                                |
|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|------------------------------------------------|
| To:                                                                                                           | <b>JAKKS PACIFIC (HK) LIMITED</b>                                                                                                             | To:                                                                                   | -                                              |
| Attn:                                                                                                         | Dick Au / Mathew Chu / Kin Yiu / Jessica Ho                                                                                                   | Attn:                                                                                 | -                                              |
| Address:                                                                                                      | 12/F., Wharft T&T Centre, 7 Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong                                                                    | Address:                                                                              | -                                              |
| Fax:                                                                                                          | --                                                                                                                                            | Fax:                                                                                  | -                                              |
| E-mail:                                                                                                       | <a href="mailto:JPHK-ProdIntg@jakks.com.hk">JPHK-ProdIntg@jakks.com.hk</a> / <a href="mailto:Jessicah@jakks.com.hk">Jessicah@jakks.com.hk</a> | E-mail:                                                                               | -                                              |
| Folder No.:                                                                                                   | --                                                                                                                                            |                                                                                       |                                                |
| Factory name:                                                                                                 | --                                                                                                                                            |                                                                                       |                                                |
| Location:                                                                                                     | --                                                                                                                                            |                                                                                       |                                                |
| Product:                                                                                                      | MXS RC Pro Stunt Bike<br>Model No.: 97036RX                                                                                                   |                                                                                       |                                                |
|                             |                                                                                                                                               | Sample No:                                                                            | (5216)245-0786                                 |
|                                                                                                               |                                                                                                                                               | Date of Receipt:                                                                      | September 02, 2016                             |
|                                                                                                               |                                                                                                                                               | Test date:                                                                            | September 09, 2016<br>to<br>September 14, 2016 |
|                                                                                                               |                                                                                                                                               | Test Requested:                                                                       | FCC Part 15 - 2015                             |
|                                                                                                               |                                                                                                                                               | Test Method:                                                                          | ANSI C63.10 - 2013                             |
|                                                                                                               |                                                                                                                                               | FCC ID:                                                                               | OTA97036RX                                     |
| The results given in this report are related to the tested specimen of the described electrical apparatus.    |                                                                                                                                               |                                                                                       |                                                |
| <b>CONCLUSION:</b> The submitted sample was found to <u>COMPLY</u> with requirement of FCC Part 15 Subpart C. |                                                                                                                                               |                                                                                       |                                                |
| Authorized Signature:                                                                                         |                                                                                                                                               |                                                                                       |                                                |
|                            |                                                                                                                                               |  |                                                |
| Reviewed by: Keith Yeung                                                                                      |                                                                                                                                               | Approved by: Law Man kit                                                              |                                                |
| Date: January 06, 2017                                                                                        |                                                                                                                                               | Date: January 06, 2017                                                                |                                                |

**BUREAU VERITAS HONG KONG LIMITED –**  
**Kowloon Bay Office**  
 1/F Pacific Trade Centre,  
 2 Kai Hing Road, Kowloon Bay,  
 Kowloon, HONG KONG  
 Tel: +852 2331 0888  
 Fax: +852 2331 0889  
[www.cps.bureauveritas.com](http://www.cps.bureauveritas.com)

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



**TEST REPORT No: (5216)245-0786**  
**Test Result Summary**

| EMISSION TEST                            |             |                                     |                          |
|------------------------------------------|-------------|-------------------------------------|--------------------------|
| Test requirement: FCC Part 15 - 2015     |             |                                     |                          |
| Test Condition                           | Test Method | Test Result                         |                          |
|                                          |             | Pass                                | Failed                   |
| Radiated Emission Test,<br>9kHz to 24GHz | ANSI C63.10 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Frequency range of Fundamental Emission  | ANSI C63.10 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 26dB Bandwidth of Fundamental Emission   | ANSI C63.10 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Duty Cycle Correction During 100msec     | ANSI C63.10 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |

**Report Revision & Sample Re-submit History:**

--



## TEST REPORT No: (5216)245-0786

### Location of the test laboratory

Radiated and Conducted emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013. An Open Area Test Site and Full Anechoic Chamber are set up for investigation and located at :

### BUREAU VERITAS HONG KONG LIMITED, EMC CENTRE

No. 2106-2107, 21/F., Westin Centre,  
26 Hung To Road,  
Kwun Tong, Kowloon,  
Hong Kong

### List of measuring equipment

#### Radiated Emission

| EQUIPMENT                         | MANUFACTURER   | MODEL NO.         | SERIAL NO.   | CAL. DATE    | CAL. DUE DATE |
|-----------------------------------|----------------|-------------------|--------------|--------------|---------------|
| EMI TEST RECEIVER                 | R&S            | ESCI              | 100379       | 23-FEB-2016  | 22-FEB-2017   |
| SIGNAL ANALYZER 40GHZ             | R&S            | FSV 40            | 100977       | 16-AUG-2016  | 15-AUG-2017   |
| BILOG ANTENNA                     | SCHAFFNER      | CBL6112D          | 25229        | 27-FEB-2016  | 26-FEB-2018   |
| OPEN AREA TEST SITE               | BVCPS          | N/A               | N/A          | 18-JUN-2016  | 17-JUN-2017   |
| ANECHOIC CHAMBER                  | ALBATROSS      | M-CDC             | 80374004499B | 11-MAY-2016  | 10-MAY-2017   |
| BICONICAL ANTENNA                 | R&S            | HK116             | 100179       | 14-APR-2016  | 13-APR-2018   |
| LOG-PERIODIC DIPOLE ARRAY ANTENNA | R&S            | HL223             | 832369/001   | 07-APR-2016  | 06-APR-2018   |
| LOOP ANTENNA                      | ETS-LINDGREN   | 6502              | 00102266     | 06-NOV-2015  | 05-NOV-2017   |
| HORN ANTENNA (1-18GHZ)            | SCHWARZBECK    | BBHA9120D         | 9120D-692    | 05-NOV-2016  | 04-NOV-2018   |
| HORN ANTENNA (7.5 – 18GHZ)        | SCHWARZBECK    | HWRD 750          | 00015        | 17-JUNE-2016 | 16-JUNE-2018  |
| WIDEBAND HORN ANTENNA             | STEATITE       | QWH-SL-18-40-K-SG | 12688        | 03-SEP-2015  | 02-SEP-2017   |
| COAXIAL CABLE                     | SUHNER         | N/A               | N/A          | 07-Jan-2016  | 06-Jan-2017   |
| COAXIAL CABLE                     | HUBER + SUHNER | RG214             | N/A          | 04-OCT-2016  | 03-Oct-2016   |

### Measurement Uncertainty

| MEASUREMENT        | FREQUENCY       | UNCERTAINTY |
|--------------------|-----------------|-------------|
| Radiated emissions | 9kHz to 30MHz   | 4.2dB       |
|                    | 30MHz to 200MHz | 4.5dB       |
|                    | 200MHZ to 1GHz  | 5.6dB       |
|                    | 1GHz to 18GHz   | 4.7dB       |
|                    | 18GHz to 40GHz  | 5.2dB       |

#### Remarks:-

N/A : Not Applicable or Not Available

The measurement instrumentation uncertainty would be taking into consideration on each of the test result

## TEST REPORT No: (5216)245-0786

### Equipment Under Test [EUT]

#### Description of Sample:

Model Name: MXS RC Pro Stunt Bike  
 Model Number: 97036RX  
 Additional Model Name: --  
 Additional Model Number: --  
 Additional Model information: --  
 Rating: 6Vd.c. ("AA" size battery x 4)

#### Description of EUT Operation:

The Equipment Under Test (EUT) is a **JAKKS PACIFIC (H.K.) LIMITED** of Remote Control Transceiver. It is a 1 switch transceiver and operating at 2408.2MHz to 2464.2MHz The lowest, middle and highest frequencies were tested and the results are shown in the report. The EUT transmit while corresponding remote controller sticks are being pushed or pulled, Modulation by IC, and type is GFSK.

There are total **3** channels and below is the frequency list :

| ch.no | freq.  | ch.no | freq.  | ch.no | freq.  |
|-------|--------|-------|--------|-------|--------|
| 1     | 2408.2 | 2     | 2436.2 | 3     | 2464.2 |


The transceiver has different control:

1. ON/OFF Switch – control power on/off

#### Antenna Requirement (Section 15.203)

The EUT is use of a permanently antenna. It is soldered on the PCB. The antenna consists of 3cm long wire The antenna is not replaceable or user serviceable. The requirements of S15.203 are met. There are no deviations or exceptions to the specifications.

#### Photo of Antenna

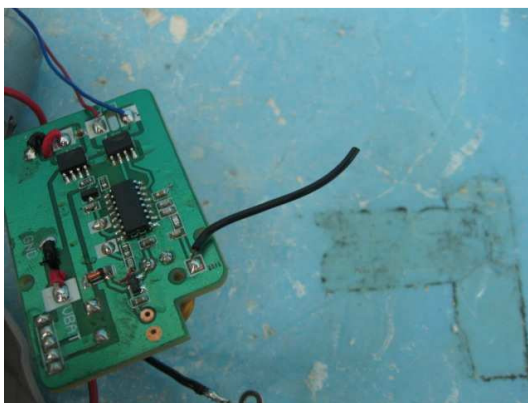

## TEST REPORT No: (5216)245-0786

### Test Results

#### Radiated Emissions (Fundamental)

Test Requirement: FCC Part 15 Section 15.249  
 Test Method: ANSI C63.10  
 Test Date(s): 2016-09-09  
 Temperature: 30.0 °C  
 Humidity: 73.0 %  
 Atmospheric Pressure: 100.3 kPa  
 Mode of Operation: Transmission mode  
 Tested Voltage: 6Vd.c. ("AA" size battery x 4)

#### Test Procedure:


Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground for measurement frequency below 1GHz and 1.5m high above the ground for measurement frequency above 1GHz. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

Location: The Roof, Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

#### Test Setup: Open Area Test Site

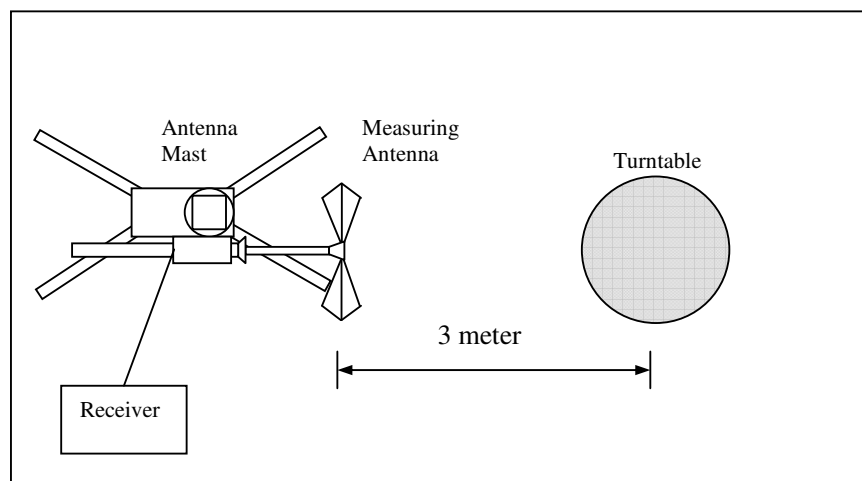



## TEST REPORT No: (5216)245-0786

### Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.249]:

| Frequency Range of Fundamental<br>[MHz] | Field Strength of Fundamental Emission<br>(Average)<br>[mV/m] | Field Strength of Harmonics Emission<br>(Average)<br>[μV/m] |
|-----------------------------------------|---------------------------------------------------------------|-------------------------------------------------------------|
| 2400-2483.5                             | 50                                                            | 500                                                         |

### Measurement Data

#### Test Result of (Transmission mode, Lowest frequency): PASS

| Frequency (MHz) | Polarity (H/V) | Antenna Factor & Cable Loss (dB/m) | Duty-cycle correction (dB) | Field Strength at 3m – Peak (dBμV/m) | Limit at 3m – Peak (dBμV/m) | Margin - Peak (dB) | Field Strength at 3m – Average (dBμV/m) | Limit at 3m – Average (dBμV/m) | Margin - Average (dB) |
|-----------------|----------------|------------------------------------|----------------------------|--------------------------------------|-----------------------------|--------------------|-----------------------------------------|--------------------------------|-----------------------|
| 2408.20         | H              | -3.5                               | -19.1                      | 95.2                                 | 114.0                       | -18.8              | **76.1                                  | 94.0                           | -17.9                 |
| 2408.20         | V              | -3.5                               | -19.1                      | 96.7                                 | 114.0                       | -17.3              | **77.6                                  | 94.0                           | -16.4                 |

#### Test Result of (Transmission mode, Middle frequency): PASS

| Frequency (MHz) | Polarity (H/V) | Antenna Factor & Cable Loss (dB/m) | Duty-cycle correction (dB) | Field Strength at 3m – Peak (dBμV/m) | Limit at 3m – Peak (dBμV/m) | Margin - Peak (dB) | Field Strength at 3m – Average (dBμV/m) | Limit at 3m – Average (dBμV/m) | Margin - Average (dB) |
|-----------------|----------------|------------------------------------|----------------------------|--------------------------------------|-----------------------------|--------------------|-----------------------------------------|--------------------------------|-----------------------|
| 2436.20         | H              | -3.5                               | -19.1                      | 93.2                                 | 114.0                       | -20.8              | **74.1                                  | 94.0                           | -19.9                 |
| 2436.20         | V              | -3.5                               | -19.1                      | 96.9                                 | 114.0                       | -17.1              | **77.8                                  | 94.0                           | -16.2                 |

#### Test Result of (Transmission mode, Highest frequency): PASS

| Frequency (MHz) | Polarity (H/V) | Antenna Factor & Cable Loss (dB/m) | Duty-cycle correction (dB) | Field Strength at 3m – Peak (dBμV/m) | Limit at 3m – Peak (dBμV/m) | Margin - Peak (dB) | Field Strength at 3m – Average (dBμV/m) | Limit at 3m – Average (dBμV/m) | Margin - Average (dB) |
|-----------------|----------------|------------------------------------|----------------------------|--------------------------------------|-----------------------------|--------------------|-----------------------------------------|--------------------------------|-----------------------|
| 2464.20         | H              | -3.5                               | -19.1                      | 91.7                                 | 114.0                       | -22.3              | **72.6                                  | 94.0                           | -21.4                 |
| 2464.20         | V              | -3.5                               | -19.1                      | 94.4                                 | 114.0                       | -19.6              | **75.3                                  | 94.0                           | -18.7                 |

# For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

\*\*Duty Cycle Correction =  $20\log(0.11) = -19.1\text{dB}$ .

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz  
VBW = 1MHz



## TEST REPORT No: (5216)245-0786

### Radiated Emissions (Spurious Emission)

Test Requirement: FCC Part 15 Section 15.249  
 Test Method: ANSI C63.10  
 Test Date(s): 2016-09-09  
 Temperature: 30.0 °C  
 Humidity: 73.0 %  
 Atmospheric Pressure: 100.3 kPa  
 Mode of Operation: Transmission mode  
 Tested Voltage: 6Vd.c. ("AA" size battery x 4)

### Measurement Data

#### Test Result of (Transmission mode, Lowest frequency): PASS

| Frequency (MHz) | Polarity (H/V) | Antenna Factor & Cable Loss (dB/m) | Duty-cycle correction (dB) | Field Strength at 3m – Peak (dBμV/m) | Limit at 3m – Peak (dBμV/m) | Margin - Peak (dB) | Field Strength at 3m – Average (dBμV/m) | Limit at 3m – Average (dBμV/m) | Margin - Average (dB) |
|-----------------|----------------|------------------------------------|----------------------------|--------------------------------------|-----------------------------|--------------------|-----------------------------------------|--------------------------------|-----------------------|
| 2400.00         | H              | -3.5                               | -19.1                      | 62.9                                 | 74.0                        | -11.1              | **43.8                                  | 54.0                           | -10.2                 |
| 4816.40         | H              | 1.6                                | -19.1                      | 69.7                                 | 74.0                        | -4.3               | **50.6                                  | 54.0                           | -3.4                  |
| 7224.60         | H              | 10.7                               | -19.1                      | 52.0                                 | 74.0                        | -22.0              | **32.9                                  | 54.0                           | -21.1                 |
| 9632.80         | H              | 15.5                               | -19.1                      | 55.0                                 | 74.0                        | -19.0              | **35.9                                  | 54.0                           | -18.1                 |
| 12041.00        | H              | 18.0                               | -19.1                      | 51.4                                 | 74.0                        | -22.6              | **32.3                                  | 54.0                           | -21.7                 |
| 14449.20        | H              | 24.0                               | -19.1                      | 55.1                                 | 74.0                        | -18.9              | **36.0                                  | 54.0                           | -18.0                 |
| 16857.40        | H              | 19.1                               | -19.1                      | 51.2                                 | 74.0                        | -22.8              | **32.1                                  | 54.0                           | -21.9                 |
| 19265.60        | H              | 46.5                               | -19.1                      | 57.2                                 | 74.0                        | -16.8              | **38.1                                  | 54.0                           | -15.9                 |
| 21673.80        | H              | 46.8                               | -19.1                      | 57.3                                 | 74.0                        | -16.7              | **38.2                                  | 54.0                           | -15.8                 |
| 24082.00        | H              | 47.6                               | -19.1                      | 58.9                                 | 74.0                        | -15.1              | **39.8                                  | 54.0                           | -14.2                 |
| 26490.20        | H              | 48.6                               | -19.1                      | 59.8                                 | 74.0                        | -14.2              | **40.7                                  | 54.0                           | -13.3                 |

# For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

\*\*Duty Cycle Correction =  $20\log(0.11) = -19.1\text{dB}$ .

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz  
VBW = 1MHz



## TEST REPORT No: (5216)245-0786

### Measurement Data

### Test Result of (Transmission mode, Lowest frequency): PASS

| Frequency (MHz) | Polarity (H/V) | Antenna Factor & Cable Loss (dB/m) | Duty-cycle correction (dB) | Field Strength at 3m – Peak (dBμV/m) | Limit at 3m – Peak (dBμV/m) | Margin - Peak (dB) | Field Strength at 3m – Average (dBμV/m) | Limit at 3m – Average (dBμV/m) | Margin - Average (dB) |
|-----------------|----------------|------------------------------------|----------------------------|--------------------------------------|-----------------------------|--------------------|-----------------------------------------|--------------------------------|-----------------------|
| 2400.00         | V              | -3.5                               | -19.1                      | 63.7                                 | 74.0                        | -10.3              | **44.6                                  | 54.0                           | -9.4                  |
| 4816.40         | V              | 1.6                                | -19.1                      | 69.9                                 | 74.0                        | -4.1               | **50.8                                  | 54.0                           | -3.2                  |
| 7224.60         | V              | 10.7                               | -19.1                      | 49.0                                 | 74.0                        | -25.0              | **29.9                                  | 54.0                           | -24.1                 |
| 9632.80         | V              | 15.5                               | -19.1                      | 56.2                                 | 74.0                        | -17.8              | **37.1                                  | 54.0                           | -16.9                 |
| 12041.00        | V              | 18.0                               | -19.1                      | 50.3                                 | 74.0                        | -23.7              | **31.2                                  | 54.0                           | -22.8                 |
| 14449.20        | V              | 24.0                               | -19.1                      | 54.1                                 | 74.0                        | -19.9              | **35.0                                  | 54.0                           | -19.0                 |
| 16857.40        | V              | 19.1                               | -19.1                      | 50.6                                 | 74.0                        | -23.4              | **31.5                                  | 54.0                           | -22.5                 |
| 19265.60        | V              | 46.5                               | -19.1                      | 57.4                                 | 74.0                        | -16.6              | **38.3                                  | 54.0                           | -15.7                 |
| 21673.80        | V              | 46.8                               | -19.1                      | 57.8                                 | 74.0                        | -16.2              | **38.7                                  | 54.0                           | -15.3                 |
| 24082.00        | V              | 47.6                               | -19.1                      | 58.8                                 | 74.0                        | -15.2              | **39.7                                  | 54.0                           | -14.3                 |
| 26490.20        | V              | 48.6                               | -19.1                      | 60.2                                 | 74.0                        | -13.8              | **41.1                                  | 54.0                           | -12.9                 |

# For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

\*\*Duty Cycle Correction =  $20\log(0.11) = -19.1\text{dB}$ .

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz  
VBW = 1MHz

## TEST REPORT No: (5216)245-0786

### Measurement Data

#### Test Result of (Transmission mode, Middle frequency): PASS

| Frequency (MHz) | Polarity (H/V) | Antenna Factor & Cable Loss (dB/m) | Duty-cycle correction (dB) | Field Strength at 3m – Peak (dBμV/m) | Limit at 3m – Peak (dBμV/m) | Margin - Peak (dB) | Field Strength at 3m – Average (dBμV/m) | Limit at 3m – Average (dBμV/m) | Margin - Average (dB) |
|-----------------|----------------|------------------------------------|----------------------------|--------------------------------------|-----------------------------|--------------------|-----------------------------------------|--------------------------------|-----------------------|
| 4872.40         | H              | 1.6                                | -19.1                      | 69.2                                 | 74.0                        | -4.8               | **50.1                                  | 54.0                           | -3.9                  |
| 7308.60         | H              | 10.7                               | -19.1                      | 51.2                                 | 74.0                        | -22.8              | **32.1                                  | 54.0                           | -21.9                 |
| 9744.80         | H              | 15.8                               | -19.1                      | 54.8                                 | 74.0                        | -19.2              | **35.7                                  | 54.0                           | -18.3                 |
| 12181.00        | H              | 17.9                               | -19.1                      | 52.1                                 | 74.0                        | -21.9              | **33.0                                  | 54.0                           | -21.0                 |
| 14617.20        | H              | 25.2                               | -19.1                      | 57.2                                 | 74.0                        | -16.8              | **38.1                                  | 54.0                           | -15.9                 |
| 17053.40        | H              | 22.1                               | -19.1                      | 56.9                                 | 74.0                        | -17.1              | **37.8                                  | 54.0                           | -16.2                 |
| 19489.60        | H              | 46.5                               | -19.1                      | 57.3                                 | 74.0                        | -16.7              | **38.2                                  | 54.0                           | -15.8                 |
| 21925.80        | H              | 47.1                               | -19.1                      | 57.8                                 | 74.0                        | -16.2              | **38.7                                  | 54.0                           | -15.3                 |
| 24362.00        | H              | 47.8                               | -19.1                      | 59.0                                 | 74.0                        | -15.0              | **39.9                                  | 54.0                           | -14.1                 |
| 26798.20        | H              | 48.6                               | -19.1                      | 60.2                                 | 74.0                        | -13.8              | **41.1                                  | 54.0                           | -12.9                 |

| Frequency (MHz) | Polarity (H/V) | Antenna Factor & Cable Loss (dB/m) | Duty-cycle correction (dB) | Field Strength at 3m – Peak (dBμV/m) | Limit at 3m – Peak (dBμV/m) | Margin - Peak (dB) | Field Strength at 3m – Average (dBμV/m) | Limit at 3m – Average (dBμV/m) | Margin - Average (dB) |
|-----------------|----------------|------------------------------------|----------------------------|--------------------------------------|-----------------------------|--------------------|-----------------------------------------|--------------------------------|-----------------------|
| 4872.40         | V              | 1.6                                | -19.1                      | 69.0                                 | 74.0                        | -5.0               | **49.9                                  | 54.0                           | -4.1                  |
| 7308.60         | V              | 10.7                               | -19.1                      | 49.1                                 | 74.0                        | -24.9              | **30.0                                  | 54.0                           | -24.0                 |
| 9744.80         | V              | 15.8                               | -19.1                      | 56.0                                 | 74.0                        | -18.0              | **36.9                                  | 54.0                           | -17.1                 |
| 12181.00        | V              | 17.9                               | -19.1                      | 50.3                                 | 74.0                        | -23.7              | **31.2                                  | 54.0                           | -22.8                 |
| 14617.20        | V              | 25.2                               | -19.1                      | 58.3                                 | 74.0                        | -15.7              | **39.2                                  | 54.0                           | -14.8                 |
| 17053.40        | V              | 22.1                               | -19.1                      | 53.7                                 | 74.0                        | -20.3              | **34.6                                  | 54.0                           | -19.4                 |
| 19489.60        | V              | 46.5                               | -19.1                      | 57.2                                 | 74.0                        | -16.8              | **38.1                                  | 54.0                           | -15.9                 |
| 21925.80        | V              | 47.1                               | -19.1                      | 58.3                                 | 74.0                        | -15.7              | **39.2                                  | 54.0                           | -14.8                 |
| 24362.00        | V              | 47.8                               | -19.1                      | 58.8                                 | 74.0                        | -15.2              | **39.7                                  | 54.0                           | -14.3                 |
| 26798.20        | V              | 48.6                               | -19.1                      | 60.1                                 | 74.0                        | -13.9              | **41.0                                  | 54.0                           | -13.0                 |

# For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

\*\*Duty Cycle Correction =  $20\log(0.11) = -19.1\text{dB}$ .

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz  
VBW = 1MHz



## TEST REPORT No: (5216)245-0786

### Measurement Data

### Test Result of (Transmission mode, Highest frequency): PASS

| Frequency (MHz) | Polarity (H/V) | Antenna Factor & Cable Loss (dB/m) | Duty-cycle correction (dB) | Field Strength at 3m – Peak (dBμV/m) | Limit at 3m – Peak (dBμV/m) | Margin - Peak (dB) | Field Strength at 3m – Average (dBμV/m) | Limit at 3m – Average (dBμV/m) | Margin - Average (dB) |
|-----------------|----------------|------------------------------------|----------------------------|--------------------------------------|-----------------------------|--------------------|-----------------------------------------|--------------------------------|-----------------------|
| 4928.40         | H              | 1.7                                | -19.1                      | 71.0                                 | 74.0                        | -3.0               | **51.9                                  | 54.0                           | -2.1                  |
| 7392.60         | H              | 10.7                               | -19.1                      | 52.0                                 | 74.0                        | -22.0              | **32.9                                  | 54.0                           | -21.1                 |
| 9856.80         | H              | 15.9                               | -19.1                      | 55.7                                 | 74.0                        | -18.3              | **36.6                                  | 54.0                           | -17.4                 |
| 12321.00        | H              | 17.6                               | -19.1                      | 49.8                                 | 74.0                        | -24.2              | **30.7                                  | 54.0                           | -23.3                 |
| 14785.20        | H              | 24.6                               | -19.1                      | 56.8                                 | 74.0                        | -17.2              | **37.7                                  | 54.0                           | -16.3                 |
| 17249.40        | H              | 23.5                               | -19.1                      | 55.6                                 | 74.0                        | -18.4              | **36.5                                  | 54.0                           | -17.5                 |
| 19713.60        | H              | 46.6                               | -19.1                      | 57.2                                 | 74.0                        | -16.8              | **38.1                                  | 54.0                           | -15.9                 |
| 22177.80        | H              | 47.5                               | -19.1                      | 58.0                                 | 74.0                        | -16.0              | **38.9                                  | 54.0                           | -15.1                 |
| 24642.00        | H              | 47.9                               | -19.1                      | 58.9                                 | 74.0                        | -15.1              | **39.8                                  | 54.0                           | -14.2                 |
| 27106.20        | H              | 48.7                               | -19.1                      | 59.9                                 | 74.0                        | -14.1              | **40.8                                  | 54.0                           | -13.2                 |

# For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

\*\*Duty Cycle Correction =  $20\log(0.11) = -19.1\text{dB}$ .

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz  
VBW = 1MHz



## TEST REPORT No: (5216)245-0786

### Measurement Data

**Test Result of (Transmission mode, Highest frequency): PASS**

| Frequency (MHz) | Polarity (H/V) | Antenna Factor & Cable Loss (dB/m) | Duty-cycle correction (dB) | Field Strength at 3m – Peak (dBμV/m) | Limit at 3m – Peak (dBμV/m) | Margin - Peak (dB) | Field Strength at 3m – Average (dBμV/m) | Limit at 3m – Average (dBμV/m) | Margin - Average (dB) |
|-----------------|----------------|------------------------------------|----------------------------|--------------------------------------|-----------------------------|--------------------|-----------------------------------------|--------------------------------|-----------------------|
| 4928.40         | V              | 1.7                                | -19.1                      | 70.6                                 | 74.0                        | -3.4               | **51.5                                  | 54.0                           | -2.5                  |
| 7392.60         | V              | 10.7                               | -19.1                      | 49.7                                 | 74.0                        | -24.3              | **30.6                                  | 54.0                           | -23.4                 |
| 9856.80         | V              | 15.9                               | -19.1                      | 56.6                                 | 74.0                        | -17.4              | **37.5                                  | 54.0                           | -16.5                 |
| 12321.00        | V              | 17.6                               | -19.1                      | 49.8                                 | 74.0                        | -24.2              | **30.7                                  | 54.0                           | -23.3                 |
| 14785.20        | V              | 24.6                               | -19.1                      | 56.3                                 | 74.0                        | -17.7              | **37.2                                  | 54.0                           | -16.8                 |
| 17249.40        | V              | 23.5                               | -19.1                      | 56.1                                 | 74.0                        | -17.9              | **37.0                                  | 54.0                           | -17.0                 |
| 19713.60        | V              | 46.6                               | -19.1                      | 57.6                                 | 74.0                        | -16.4              | **38.5                                  | 54.0                           | -15.5                 |
| 22177.80        | V              | 47.5                               | -19.1                      | 58.6                                 | 74.0                        | -15.4              | **39.5                                  | 54.0                           | -14.5                 |
| 24642.00        | V              | 47.9                               | -19.1                      | 59.1                                 | 74.0                        | -14.9              | **40.0                                  | 54.0                           | -14.0                 |
| 27106.20        | V              | 48.7                               | -19.1                      | 59.8                                 | 74.0                        | -14.2              | **40.7                                  | 54.0                           | -13.3                 |

# For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

\*\*Duty Cycle Correction =  $20\log(0.11) = -19.1\text{dB}$ .

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 1MHz  
VBW = 1MHz



## TEST REPORT No: (5216)245-0786

### Radiated Emissions (30MHz – 2.4GHz)

Test Requirement: FCC Part 15 Section 15.209  
Test Method: ANSI C63.10  
Test Date(s): 2016-09-09  
Temperature: 30.0 °C  
Humidity: 73.0 %  
Atmospheric Pressure: 100.3 kPa  
Mode of Operation: On mode  
Tested Voltage: 6Vd.c. ("AA" size battery x 4)

### Limits for Radiated Emissions [FCC 47 CFR 15.209]:

| Frequency Range<br>[MHz] | Quasi-Peak Limits<br>[μV/m] | Measurement Distance<br>m |
|--------------------------|-----------------------------|---------------------------|
| 0.009-0.490              | 2400/F(kHz)                 | 300                       |
| 0.490-1.705              | 24000/F(kHz)                | 30                        |
| 1.705-30                 | 30                          | 30                        |
| 30-88                    | 100                         | 3                         |
| 88-216                   | 150                         | 3                         |
| 216-960                  | 200                         | 3                         |
| Above960                 | 500                         | 3                         |

### Measurement Data

Test Result of (On mode): PASS

Detection mode: Quasi-Peak

| Frequency                                                                          | Polarity<br>(H/V) | Field<br>Strength | Limit | Margin (dB) |
|------------------------------------------------------------------------------------|-------------------|-------------------|-------|-------------|
| Emissions detected are more than 20 dB below the limit line(s) in<br>9kHz to 30MHz |                   |                   |       |             |
|                                                                                    |                   |                   |       |             |

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 200Hz  
VBW = 200Hz



# TEST REPORT No: (5216)245-0786

## Measurement Data

Test Result of (On mode): PASS

Detection mode: Quasi-Peak

| Frequency (MHz) | Polarity (H/V) | Field Strength at 3m (dBμV/m) | Limit at 3m (dBμV/m) | Margin (dB) |
|-----------------|----------------|-------------------------------|----------------------|-------------|
| 209.84          | H              | 21.3                          | 43.5                 | -22.2       |
| 233.16          | H              | 22.4                          | 46.0                 | -23.6       |
| 372.72          | H              | 25.2                          | 46.0                 | -20.8       |
| 586.12          | H              | 38.1                          | 46.0                 | -7.9        |
| 710.20          | H              | 31.5                          | 46.0                 | -14.5       |
| 954.60          | H              | 35.6                          | 46.0                 | -10.4       |

| Frequency (MHz) | Polarity (H/V) | Field Strength at 3m (dBμV/m) | Limit at 3m (dBμV/m) | Margin (dB) |
|-----------------|----------------|-------------------------------|----------------------|-------------|
| 209.84          | V              | 25.0                          | 43.5                 | -18.5       |
| 233.16          | V              | 26.6                          | 46.0                 | -19.4       |
| 372.72          | V              | 36.7                          | 46.0                 | -9.3        |
| 586.12          | V              | 32.2                          | 46.0                 | -13.8       |
| 710.20          | V              | 37.0                          | 46.0                 | -9.0        |
| 954.60          | V              | 37.5                          | 46.0                 | -8.5        |

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 120KHz  
VBW = 120KHz



## TEST REPORT No: (5216)245-0786

### Frequency range of Fundamental Emission

Test Requirement: FCC 47 CFR 15.249  
Test Method: ANSI C63.10 Clause 6.10  
Test Date(s): 2016-09-09  
Temperature: 30.0 °C  
Humidity: 73.0 %  
Atmospheric Pressure: 100.3 kPa  
Mode of Operation: Transmission mode  
Tested Voltage: 6Vd.c. ("AA" size battery x 4)

#### Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### Limits for Frequency range of Fundamental Emission:


| Frequency<br>[MHz] | FCC Limits<br>[MHz] |
|--------------------|---------------------|
| 2406.42 – 2465.38  | 2400 – 2483.5       |

**TEST REPORT No: (5216)245-0786**


**Measurement Data :**

**Test Result of Frequency Range of Fundamental Emission: PASS**


**Lowest Frequency – 2408.20MHz**

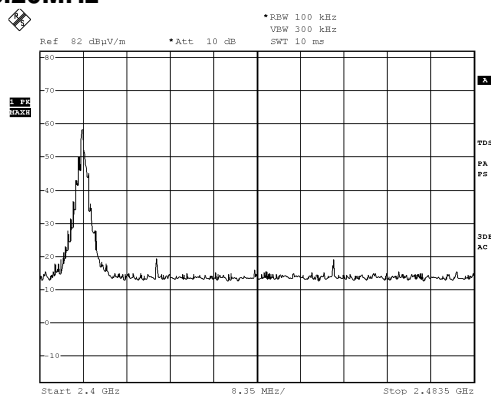

**Middle Frequency – 2436.20MHz**

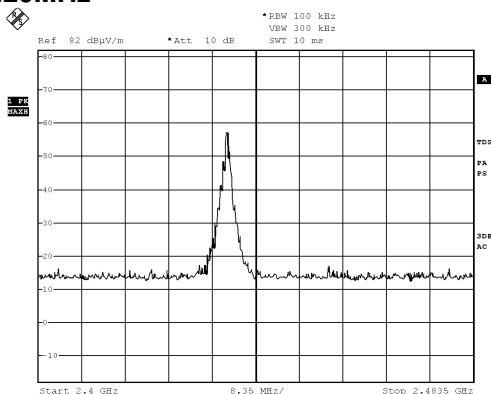


**Highest Frequency – 2464.20MHz**

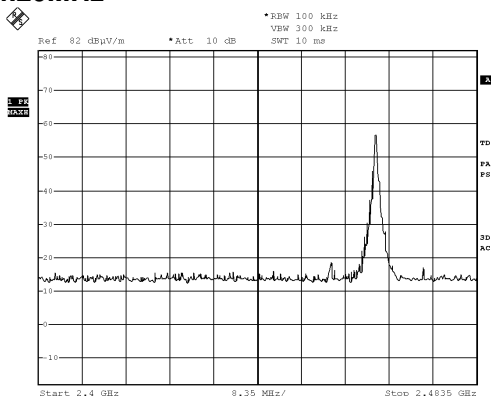


**TEST REPORT No: (5216)245-0786**  
**Measurement Data :**

**Test Result of 26dB Bandwidth of Fundamental Emission: PASS**


**Lowest Frequency – 2408.20MHz**

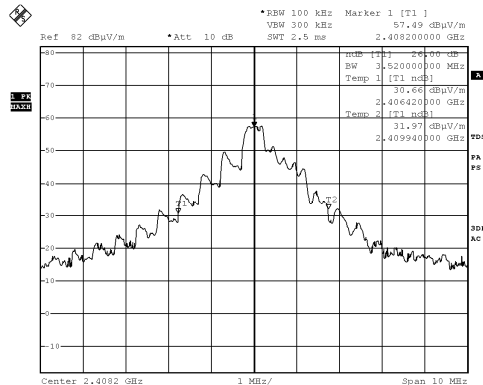

**Middle Frequency – 2436.20MHz**

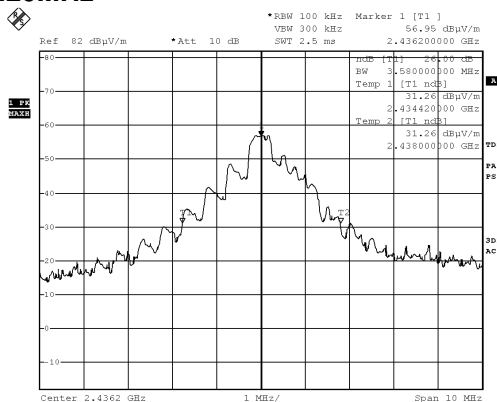

**Highest Frequency – 2464.20MHz**

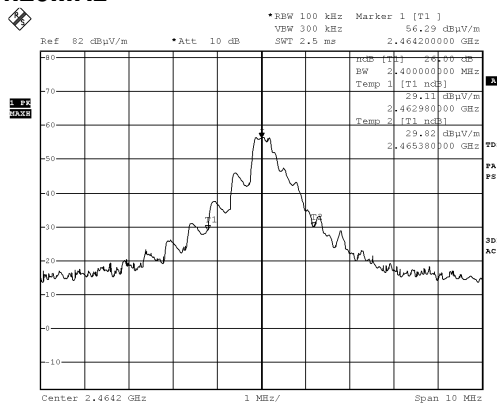



## TEST REPORT No: (5216)245-0786

### Duty Cycle Correction During 100msec:

Each function key sends a different series of characters, but each packet period (100msec) never exceeds a series of 11 (1msec) pulses. Assuming any combination of short or long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered  $11 \times (1\text{msec}) \text{ per } 100\text{msec} = 11\%$  duty cycle.

Remarks:


Duty Cycle Correction =  $20\text{Log}(0.11) = -19.1\text{dB}$

The following figures Figure A show the characteristics of the pulse train for one of these functions.

**TEST REPORT No: (5216)245-0786**

**Measurement Data :**

**Figure A [Pulse Train]**

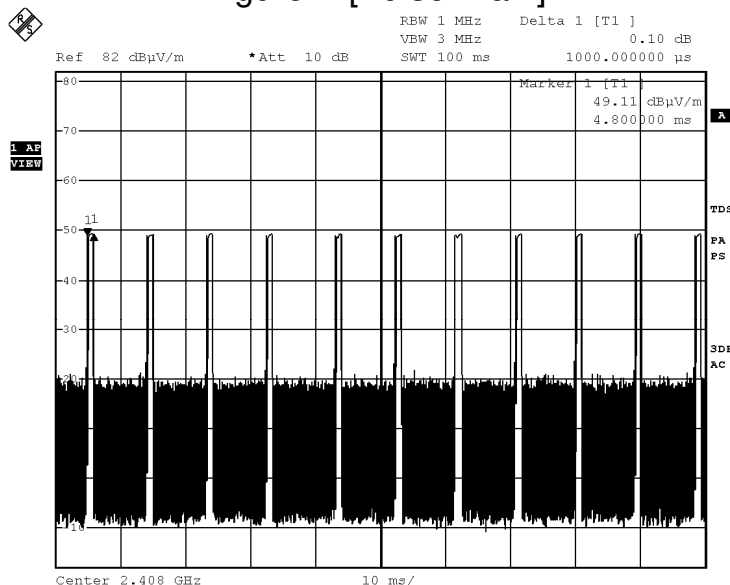

## TEST REPORT No: (5216)245-0786

### Photographs of EUT

**Front View of the product**



**Rear View of the product**



**Top View of the product**



**Bottom View of the product**



**Side View of the product**



**Side View of the product**



**Battery compartment**



**Battery compartment**



**TEST REPORT No: (5216)245-0786**

**Photographs of EUT**

**Battery Cover**




**Internal View of the product**



**Internal View of the product**




**Inner Circuit Top View**

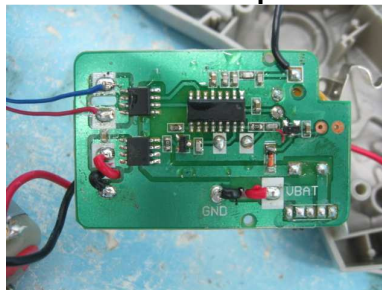

**Inner Circuit Bottom View**



**Antenna**

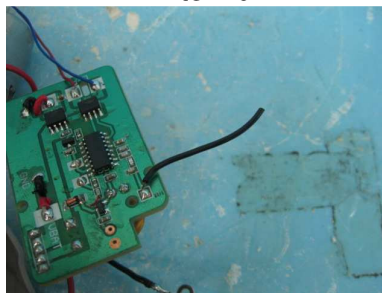

**TEST REPORT No: (5216)245-0786**

**Measurement of Radiated Emission Test Set Up**



**\*\*\*\*\* End of Report \*\*\*\*\***