



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0041108(3) Date : 17 Jul 2018

Application No. : LW018539(4)

Client : Kidztech Toys Manufacturing Limited
Room 1201, 12/F., Inter-Continental Plaza,
94 Granville Road, Tsim Sha Tsui East,
Kowloon, Hong Kong

Sample Description : One(1) item of submitted sample stated to be:

Sample Description	Model No.
1/6 R/C Yamaha Raptor 700R	84052

Radio Frequency : 49.860MHz
Rating : 1 x 9V battery
No. of submitted sample : One (1) piece (s)
Sample registration No. : RW019274-002(3)

Date Received : 19 Jun 2018

Test Period : 19 Jun 2018 to 10 Jul 2018

Test Requested : FCC 47CFR Part 15 Certification and RSS-310 Verification.

Test Method : 47 CFR Part 15 (10-1-17 Edition)
RSS-310 Issue 4, July 2015
ANSI C63.10 – 2013

Test Result : See attached sheet(s) from page 2 to 15.

Conclusion : The submitted sample was found to comply with requirement of FCC 47CFR Part 15 Subpart C and RSS-310 Issue 4.

For and on behalf of
CMA Industrial Development Foundation Limited

Authorized Signature : _____

Mr. WONG Lap-pong, Andrew
Manager
Electrical Division

Page 1 of 15

FCC ID: OTM-8405218-49MTX



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0041108(3)

Date : 17 Jul 2018

Table of Contents

1	General Information	3
1.1	General Description	3
1.2	Location of the test site	4
1.3	List of measuring equipment.....	5
1.4	Measurement Uncertainty.....	6
1.5	Test Summary	6
2	Description of the radiated emission test	7
2.1	Test Procedure	7
2.2	Test Setup	8
2.3	Test Result	10
3.1	Test Procedure	12
3.2	Test Result	12
3.3	Test Setup	12
3.4	Graph and Table of Conducted Emission Measurement Data	12
4	Supplementary document.....	13
4.1	Bandwidth.....	13
5	Appendices.....	14

FCC ID: OTM-8405218-49MTX



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0041108(3)

Date : 17 Jul 2018

1 General Information

1.1 General Description

The equipment under test (EUT) model 84052 is a remote controlled toys. It operates at frequency band 27.145MHz for transmitter. The oscillation of radio control is generated by a 49.860MHz crystal (TX1) and modulated by encoder IC1 977. The EUT is powered by one 9V battery. The EUT contains two control levers to control moving direction and a ON/OFF switch (K1).

The extendable antenna is used in EUT and the radio output power is unable to adjust.

The brief circuit description is listed as follows:

- | | |
|----------------------|--|
| - S1-S4 and K1 | and its associated circuit act as switch and control lever. |
| - IC1 | and its associated circuit act as Encoder. |
| - TX1 | and its associated circuit act as oscillation clock. |
| - Q1 | and its associated circuit act as modulator. |
| - Q2 | and its associated circuit act as RF amplifier. |
| - C6, C7, C8, T1, L3 | and its associated circuit act as Filter and Antenna matching. |
| - ZD3 | and its associated circuit act as Regulator circuit |

FCC ID: OTM-8405218-49MTX



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0041108(3)

Date : 17 Jul 2018

1.2 Location of the test site

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2014. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 – 2014. A shielded room is located at :

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

FCC Accredited Lab (Designation Number: HK0004)
ISED Wireless Test Site (ISED Assigned Code: 4093A)

FCC ID: OTM-8405218-49MTX



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0041108(3)

Date : 17 Jul 2018

1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	Rohde & Schwarz	ESCS30	100001	01 Feb 2019	1Year
EMI Test Receiver	Rohde & Schwarz	ESCI	100152	07 Dec 2018	1Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100964	08 Feb 2019	1Year
Broadband Antenna	Schaffner	CBL6112B	2692	28 Mar 2020	2Years
Loop Antenna	EMCO	6502	00056620	25 Jan 2020	2Years
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-531	21 Dec 2018	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9718	9718-119	21 Dec 2018	2Years
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170442	02 Aug 2018	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9719	9719-010	02 Aug 2018	2Years
Coaxial Cable	Schaffner	RG 213/U	N/A	17 May 2019	1Year
Coaxial Cable	Suhner	RG 214/U	N/A	17 May 2019	1Year
Coaxial Cable	Suhner	Sucoflex_104	N/A	21 Dec 2018	1Year
LISN	Rohde & Schwarz	ENV216	101323	16 Jan 2019	1Year
Coaxial Cable	Tyco Electronics	RG 58C/U	N/A	24 Oct 2018	1Year

FCC ID: OTM-8405218-49MTX



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0041108(3)

Date : 17 Jul 2018

1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

Radiated emissions

Frequency	Uncertainty (U_{lab})
30MHz ~ 200MHz (Horizontal)	4.59dB
30MHz ~ 200MHz (Vertical)	4.49dB
200MHz ~ 1000MHz (Horizontal)	4.94dB
200MHz ~ 1000MHz (Vertical)	4.97dB
1GHz ~ 6GHz	4.52dB

1.5 Test Summary

TEST ITEM	FCC REFERENCE	RSS REFERENCE	RESULT
Fundamental emission	15.235(a)	RSS-310, section 3.9	Comply
Out-band emission	15.235(b)	RSS-310, section 3.9	Comply
Bandwidth	15.215(c)	RSS-Gen	Comply

FCC ID: OTM-8405218-49MTX



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0041108(3)

Date : 17 Jul 2018

2 Description of the radiated emission test

2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013.

A non-conductive turntable with dimensions of 1.5m x 0.4m x 0.8m (L x W x H) placed above the reference ground plane. The equipment under test (EUT) was placed at 0.8m height for below 1GHz measurement and 1.5m height for above 1GHz measurement. The test distance is 3m between EUT and receiving antenna. A broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated. Additional absorbing material will be placed between the EUT and receiving antenna for above 1GHz measurement.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement.

FCC ID: OTM-8405218-49MTX



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AW0041108(3)

Date : 17 Jul 2018

2.2 Test Setup

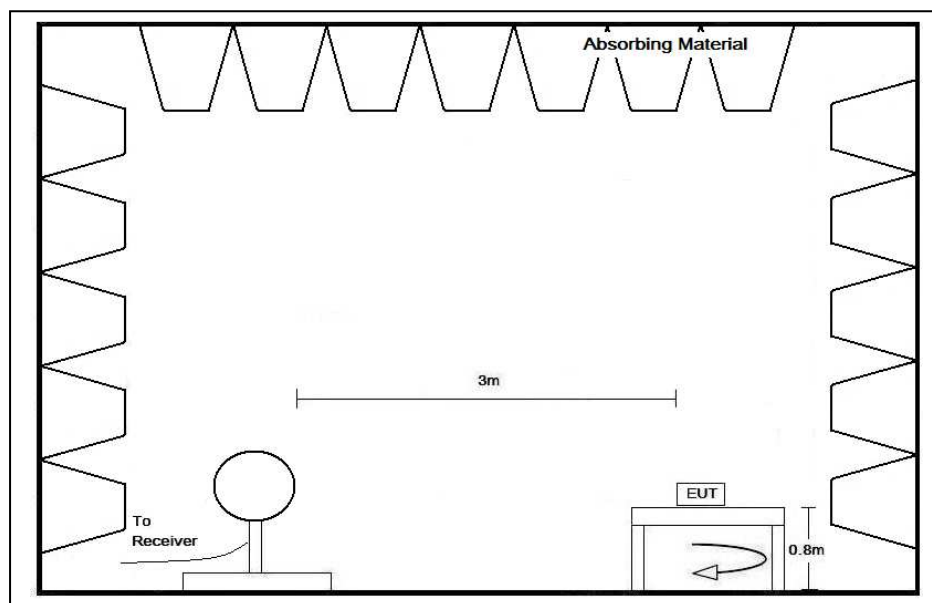

Below 30MHz

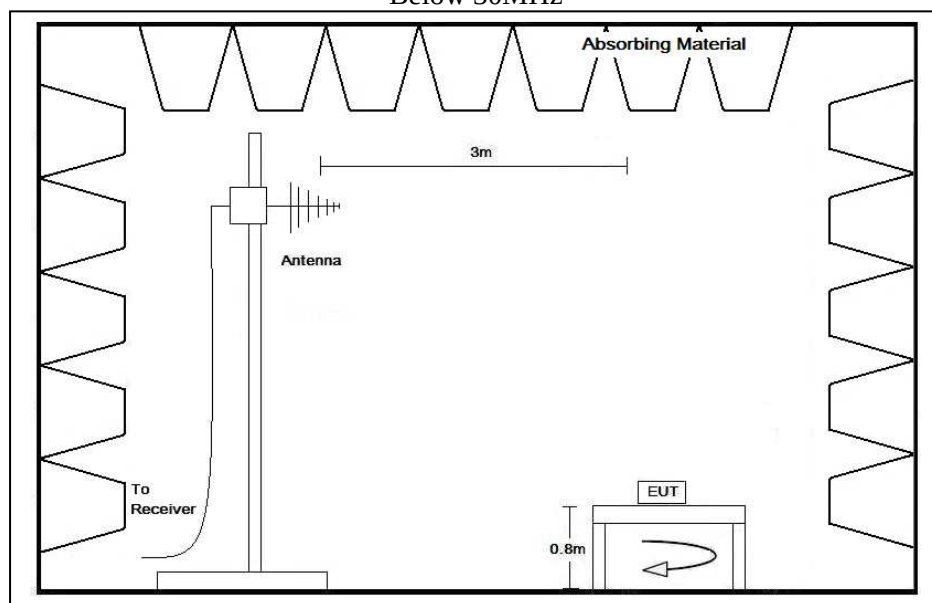

30MHz – 1GHz

FCC ID: OTM-8405218-49MTX



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AW0041108(3)

Date : 17 Jul 2018

2.2 Test Setup

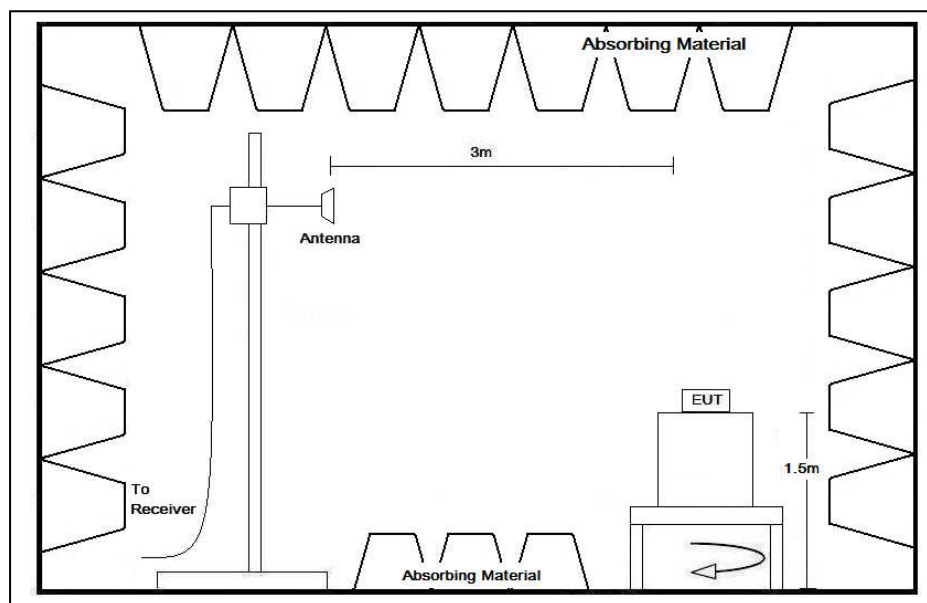

Above 1GHz

FCC ID: OTM-8405218-49MTX



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0041108(3)

Date : 17 Jul 2018

2.3 Test Result

Peak Detector data was measured unless otherwise stated.

The radiated emissions are measured from 9kHz to 500MHz (the tenth harmonics)

The worst case configuration is shown on the worst case configuration of test setup photo.

The frequencies from fundamental up to tenth harmonics were investigated, and emissions more 20dB below limit were not reported. Thus, those highest emissions were presented in next pages.

The EUT has been tested in Transmission mode and antenna is fully extended.

It was found that the EUT meet the FCC requirement and RSS requirement.

The Receiver (CAR) for this Transmitter (Remove) is under Supplier's Declaration of Conformity procedure.

FCC ID: OTM-8405218-49MTX



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0041108(3)

Date : 17 Jul 2018

2.4 Radiated Emission Measurement Data

Radiated emission

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	24.3	° C
Relative humidity:	60.2	%

Polarization	Frequency (MHz)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)	Detector Type
V	49.860	60.0	11.3	71.3	80.0	-8.7	Peak
V	99.721	14.4	10.3	24.7	43.5	-18.8	Peak
H	149.582	11.5	13.6	25.1	43.5	-18.4	Peak
V	199.451	10.6	15.3	25.9	43.5	-17.6	Peak
H	249.311	11.7	14.6	26.3	46.0	-19.7	Peak
H	299.171	11.3	14.6	25.9	46.0	-20.1	Peak

Remark: All other emission below the limit more than 20dB are not reported in this report.

FCC ID: OTM-8405218-49MTX



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0041108(3)

Date : 17 Jul 2018

3 Description of the Line-conducted Test


3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.10 – 2013. The EUT was setup as described in the procedures, and both lines were measured.

3.2 Test Result

No measurement is required as the EUT is a battery-operated product.

3.3 Test Setup

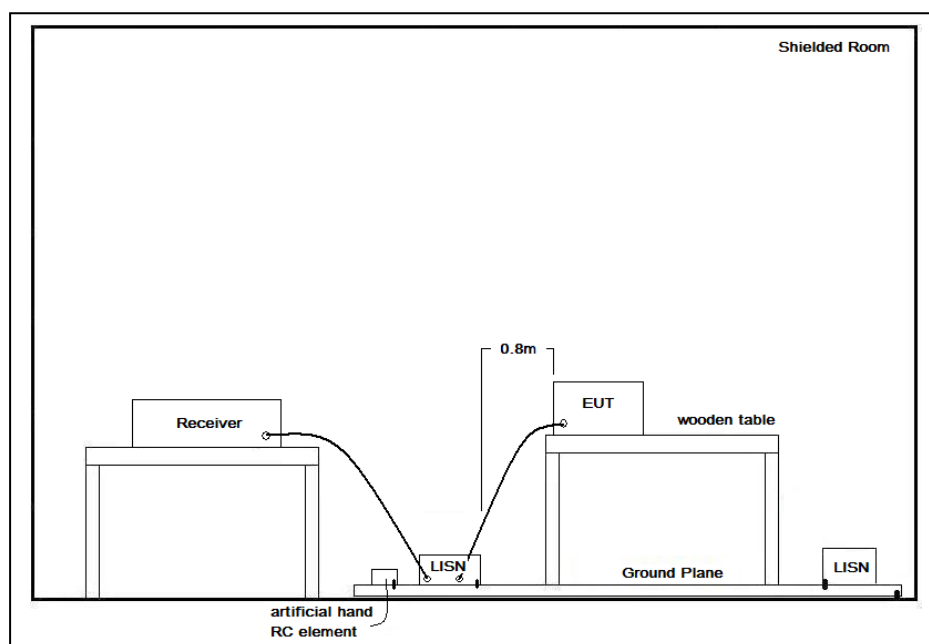

3.4 Graph and Table of Conducted Emission Measurement Data

Not Applicable

FCC ID: OTM-8405218-49MTX



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0041108(3)

Date : 17 Jul 2018

4 Supplementary document

The following document were submitted by applicant, and for electronic filing, the document are saved with the following filenames:

Document	Filename
ID Label/Location	Label Artwork and Location.pdf
Block Diagram	Block Diagram.pdf
Schematic Diagram	Schematic.pdf
Users Manual	User Manual.pdf
Operational Description	Operation Description.pdf

4.1 Bandwidth

Appendices A1 is shown the fundamental emission is confined in the specified band. 20dB bandwidth and 99% bandwidth are 6.3kHz and 17.6kHz and both bandwidth are within the assigned band. It shows that the EUT meets the FCC Part 15.215(c) and RSS-Gen requirement. And the in-band emission is more than 26dBc within the band 49.81 – 49.91MHz. It shows that the EUT meets the FCC Part 15.235(b).

FCC ID: OTM-8405218-49MTX



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AW0041108(3)

Date : 17 Jul 2018

5 Appendices

A1. Bandwidth Plot 1 page(s)

FCC ID: OTM-8405218-49MTX



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AW0041108(3)

Date : 17 Jul 2018

A1. Bandwidth Plot

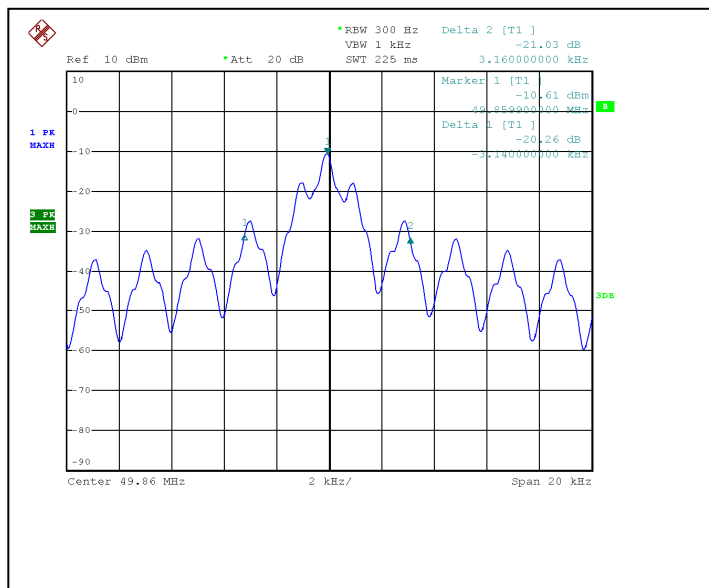

20dB Bandwidth

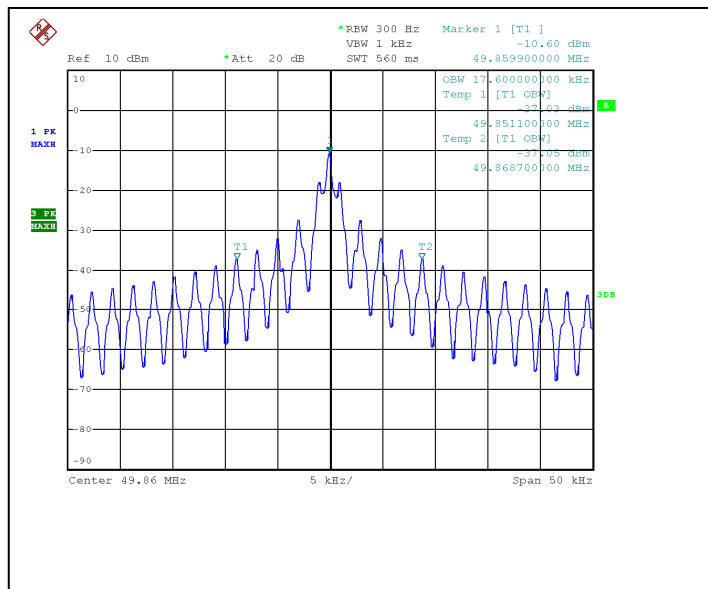

99% Bandwidth

***** End of Report *****

FCC ID: OTM-8405218-49MTX