



# CMA Testing and Certification Laboratories

廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2) Date : July 20, 2018

Application No. : LW018593(4)

Applicant : Kidztech Toys Manufacturing Limited  
Room 1201, 12/F., Inter-Continental Plaza,  
94 Granville Road, Tsim Sha Tsui East,  
Kowloon, Hong Kong

Sample Description : One(1) item of submitted sample stated to be:

| Sample Description | Model No.         |
|--------------------|-------------------|
| 1/16 R/C Glo Racer | 84491, 844911824G |

Radio Frequency : 2405 – 2475MHz  
Rating : 2 x 1.5V AAA size batteries  
No. of submitted sample : One (1) set (s)  
Sample registration No. : RW019048-001(1)

Date Received : 15 Jun 2018.

Test Period : 16 Jun 2018 to 19 July 2018

Test Requested : FCC 47CFR Part 15 Certification  
ISED Certification for License-exempt Device

Test Method : 47 CFR Part 15 (10-1-17 Edition)  
ANSI C63.10 – 2013  
ANSI C63.4 – 2014  
RSS-210 Issue 9  
RSS-Gen Issue 4

Test Result : See attached sheet(s) from page 2 to 20.

Conclusion : The submitted sample was found to comply with requirement of FCC 47CFR Part 15 Subpart C, section 15.249 and ISED Canada Radio Standard Specification.

Remark : Model: 844911824G is identical to model: 84491 and only difference in model number for Canada version and US version respectively. Model 84491 is selected as representative model for testing.

For and on behalf of  
CMA Industrial Development Foundation Limited

Authorized Signature : \_\_\_\_\_ Page 1 of 20  
Mr. WONG Lap-pong, Andrew  
Manager  
Electrical Division

FCC ID: OTM-8449118-24GTX  
IC: 20978-844911824G



# CMA Testing and Certification Laboratories

廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2)

Date : July 20, 2018

### Table of Contents

|     |                                                              |    |
|-----|--------------------------------------------------------------|----|
| 1   | General Information .....                                    | 3  |
| 1.1 | General Description .....                                    | 3  |
| 1.2 | Location of the test site .....                              | 4  |
| 1.3 | List of measuring equipment.....                             | 5  |
| 1.4 | Measurement Uncertainty.....                                 | 6  |
| 1.5 | Test Summary .....                                           | 6  |
| 2   | Description of the radiated emission test .....              | 7  |
| 2.1 | Test Procedure .....                                         | 7  |
| 2.2 | Test Setup .....                                             | 8  |
| 2.3 | Test Result .....                                            | 10 |
| 3.1 | Test Procedure .....                                         | 14 |
| 3.2 | Test Result .....                                            | 14 |
| 3.3 | Test Setup .....                                             | 14 |
| 3.4 | Graph and Table of Conducted Emission Measurement Data ..... | 14 |
| 4   | Supplementary document.....                                  | 15 |
| 4.1 | Bandwidth.....                                               | 15 |
| 5   | Appendices.....                                              | 16 |



# CMA Testing and Certification Laboratories

廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2)

Date : July 20, 2018

### 1 General Information

#### 1.1 General Description

The 12MHz crystal oscillator drives the base of IC final amplifier. The modulation provided by IC U1. The output of U1 has the matching network consisting C3, C4, C5 and L1 that limit the harmonic content and effect the proper coupling of the antenna to the output stage. 0.0dBi wire antenna is used.

Antenna, Ground and Power Source:

The antenna consists of an Internal wired integral antenna. There is no external ground connection. The ground is only that of the printed circuit board. Electric current is supplied by two 1.5V AAA primary batteries.

Operation Descriptions:

The Equipment Under Test (EUT) is a portable 2.4GHz Pure Transmitter (Receiver function is disable), The transmitter is a remote control system. The transmission signal is frequency hopping with channel frequency range 2405.0.-2475.0MHz during normal use with channel spacing 1MHz, and total 71 channels. The EUT was set to fixed frequency test mode by application. The EUT is powered by two 1.5V AAA batteries, After switching on the EUT, the car can be controlled to move forward, backward, turning left/right direction.

The transmitter has one control wheel and one control lever to control the left and right turn and forward and backward movement respectively. The EUT continues to transmit while Power on. Modulation by IC with GFSK (FHSS - Frequency Hopping Spread Spectrum) modulation.



# CMA Testing and Certification Laboratories

廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2)

Date : July 20, 2018

### 1.2 Location of the test site

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2014. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre,  
9 – 13 Wong Chuk Yeung Street,  
Fo Tan, Shatin,  
New Territories,  
Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 – 2014. A shielded room is located at :

Ground Floor, Yan Hing Centre,  
9 – 13 Wong Chuk Yeung Street,  
Fo Tan, Shatin,  
New Territories,  
Hong Kong.

FCC Accredited Lab (Designation Number: HK0004)  
ISED Wireless Test Site (ISED Assigned Code: 4093A)



# CMA Testing and Certification Laboratories

廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2)

Date : July 20, 2018

### 1.3 List of measuring equipment

| Equipment               | Manufacturer     | Model No.    | Serial No.  | Calibration Due Date | Calibration Period |
|-------------------------|------------------|--------------|-------------|----------------------|--------------------|
| EMI Test Receiver       | Rohde & Schwarz  | ESCS30       | 100001      | 01 Feb 2019          | 1Year              |
| EMI Test Receiver       | Rohde & Schwarz  | ESCI         | 100152      | 07 Dec 2018          | 1Year              |
| Spectrum Analyzer       | Rohde & Schwarz  | FSV40        | 100964      | 08 Feb 2019          | 1Year              |
| Broadband Antenna       | Schaffner        | CBL6112B     | 2692        | 28 Mar 2020          | 2Years             |
| Loop Antenna            | EMCO             | 6502         | 00056620    | 25 Jan 2020          | 2Years             |
| Horn Antenna            | Schwarzbeck      | BBHA 9120D   | 9120D-531   | 21 Dec 2018          | 2Years             |
| Broadband Pre-Amplifier | Schwarzbeck      | BBV 9718     | 9718-119    | 21 Dec 2018          | 2Years             |
| Horn Antenna            | Schwarzbeck      | BBHA 9170    | BBHA9170442 | 02 Aug 2018          | 2Years             |
| Broadband Pre-Amplifier | Schwarzbeck      | BBV 9719     | 9719-010    | 02 Aug 2018          | 2Years             |
| Coaxial Cable           | Schaffner        | RG 213/U     | N/A         | 17 May 2019          | 1Year              |
| Coaxial Cable           | Suhner           | RG 214/U     | N/A         | 17 May 2019          | 1Year              |
| Coaxial Cable           | Suhner           | Sucoflex_104 | N/A         | 21 Dec 2018          | 1Year              |
| LISN                    | Rohde & Schwarz  | ENV216       | 101323      | 16 Jan 2019          | 1Year              |
| Coaxial Cable           | Tyco Electronics | RG 58C/U     | N/A         | 24 Oct 2018          | 1Year              |

Page 5 of 20

FCC ID: OTM-8449118-24GTX  
IC: 20978-844911824G



# CMA Testing and Certification Laboratories

廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2)

Date : July 20, 2018

### 1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor  $k=2$ , providing a level of confidence of approximately 95%.

#### Radiated emissions

| Frequency                     | Uncertainty ( $U_{lab}$ ) |
|-------------------------------|---------------------------|
| 30MHz ~ 200MHz (Horizontal)   | 4.59dB                    |
| 30MHz ~ 200MHz (Vertical)     | 4.49dB                    |
| 200MHz ~ 1000MHz (Horizontal) | 4.94dB                    |
| 200MHz ~ 1000MHz (Vertical)   | 4.97dB                    |
| 1GHz ~ 6GHz                   | 4.52dB                    |
| 6GHz ~ 18GHz                  | 4.58dB                    |

### 1.5 Test Summary

| TEST ITEM                         | FCC REFERENCE | RSS REFERENCE          | RESULT |
|-----------------------------------|---------------|------------------------|--------|
| Fundamental and harmonic emission | 15.249(a)     | RSS-210, Annex B.10(a) | Comply |
| Out-band emission                 | 15.249(d)     | RSS-210, Annex B.10(6) | Comply |
| Peak Limit                        | 15.249(e)     | RSS-Gen, 8.1           | Comply |
| Bandwidth                         | 15.215(c)     | RSS-Gen, 6.7           | Comply |



# CMA Testing and Certification Laboratories

廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2)

Date : July 20, 2018

### 2 Description of the radiated emission test

#### 2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013.

A non-conductive turntable with dimensions of 1.5m x 0.4m x 0.8m (L x W x H) placed above the reference ground plane. The equipment under test (EUT) was placed at 0.8m height for below 1GHz measurement and 1.5m height for above 1GHz measurement. The test distance is 3m between EUT and receiving antenna. A broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated. Additional absorbing material will be placed between the EUT and receiving antenna for above 1GHz measurement.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement.



# CMA Testing and Certification Laboratories


廠商會檢定中心

## TEST REPORT


Report No. : AW0034836(2)

Date : July 20, 2018

### 2.2 Test Setup

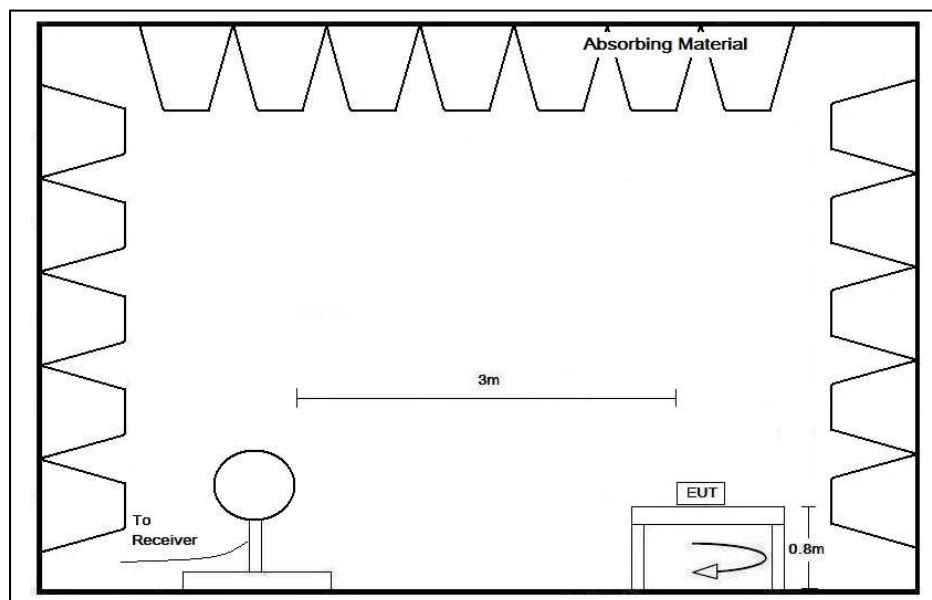

Below 30MHz

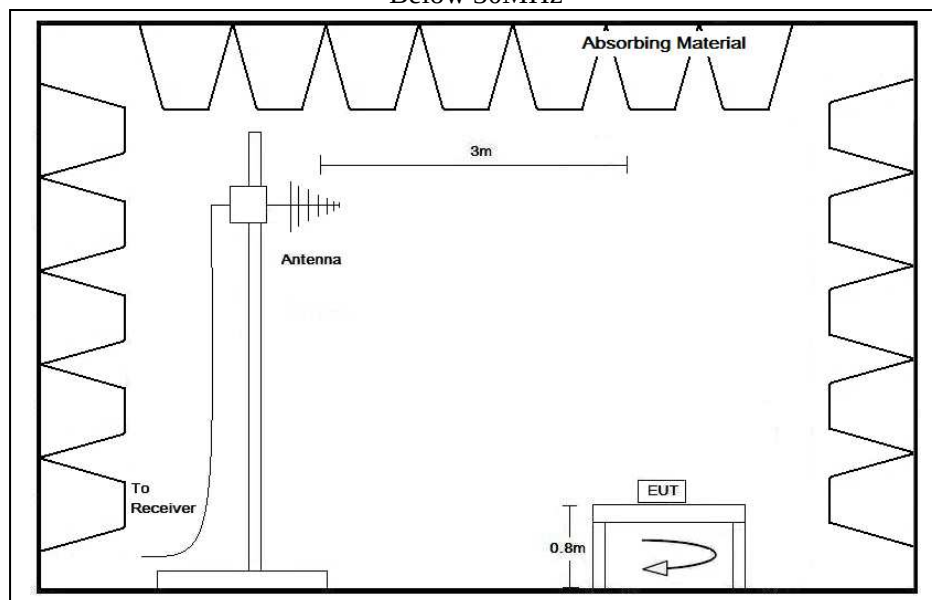

30MHz – 1GHz



# CMA Testing and Certification Laboratories


廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2)

Date : July 20, 2018

### 2.2 Test Setup

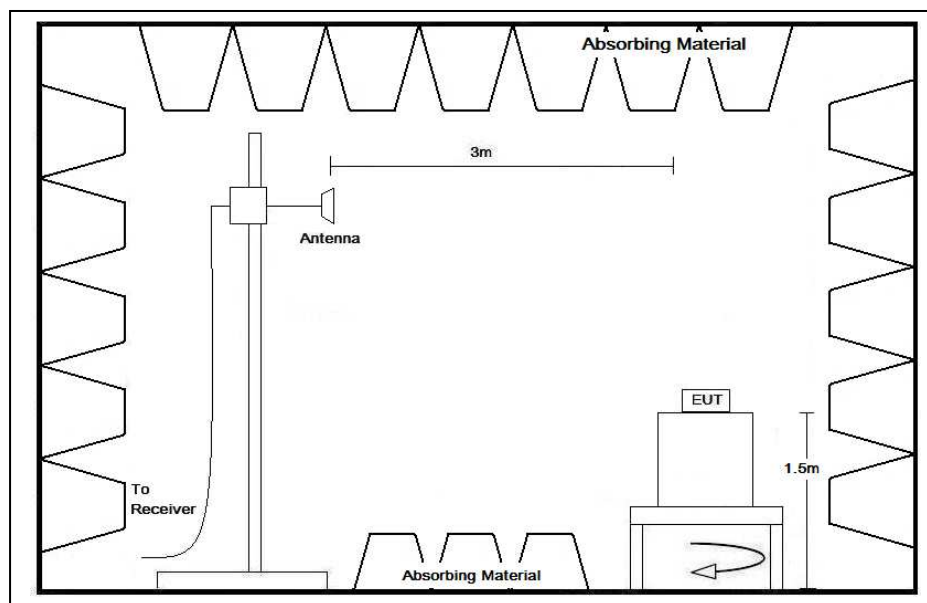

Above 1GHz



# CMA Testing and Certification Laboratories

廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2)

Date : July 20, 2018

### 2.3 Test Result

Peak Detector data was measured unless otherwise stated.

The radiated emissions are measured from 9kHz to 26GHz (the tenth harmonics)

The worst case configuration is shown on the worst case configuration of test setup photo.

The frequencies from fundamental up to tenth harmonics were investigated, and emissions more 20dB below limit were not reported. Thus, those highest emissions were presented in next pages.

The EUT has been tested in Transmission mode.

It was found that the EUT meet the FCC and RSS requirement.



# CMA Testing and Certification Laboratories

廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2)

Date : July 20, 2018

### 2.4 Radiated Emission Measurement Data

#### Radiated emission

##### Environmental conditions:

| Parameter            | Recorded value |     |
|----------------------|----------------|-----|
| Ambient temperature: | 24.3           | ° C |
| Relative humidity:   | 65.2           | %   |

Channel: 2405MHz

| Polarization | Frequency (MHz)       | Reading at 3m (dBμV) | Antenna Factor and Cable Loss (dB/m) | Field Strength at 3m (dBμV/m) | Limit at 3m (dBμV/m) | Margin (dB) | Detector Type |
|--------------|-----------------------|----------------------|--------------------------------------|-------------------------------|----------------------|-------------|---------------|
| H            | 2405.616 <sup>1</sup> | 95.0                 | -4.7                                 | 90.3                          | 94.0                 | -3.7        | Peak          |
| V            | 2405.578 <sup>1</sup> | 93.9                 | -4.7                                 | 89.2                          | 94.0                 | -4.8        | Peak          |
| H            | 2400.000              | 64.5                 | -4.7                                 | 59.8                          | 74.0                 | -14.2       | Peak          |
| H            | 2400.000              | 28.3                 | -4.7                                 | 23.6                          | 54.0                 | -30.4       | Average       |
| H            | 4809.000              | 52.5                 | 2.3                                  | 54.8                          | 74.0                 | -19.2       | Peak          |
| H            | 4809.420              | 25.8                 | 2.3                                  | 28.1                          | 54.0                 | -25.9       | Average       |
| H            | 7214.267              | 50.2                 | 9.6                                  | 59.8                          | 74.0                 | -14.2       | Peak          |
| H            | 7214.159              | 23.4                 | 9.6                                  | 33.0                          | 54.0                 | -21.0       | Average       |
| H            | 9620.120 <sup>1</sup> | 20.5                 | 12.7                                 | 33.2                          | 54.0                 | -20.8       | Peak          |

Remark: 1) The peak value of emission 2405.616MHz, 2405.578MHz, and 9620.120MHz are below the average limit, so no average measurement is performed.



# CMA Testing and Certification Laboratories

廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2)

Date : July 20, 2018

Channel: 2440 MHz

| Polarization | Frequency (MHz)       | Reading at 3m (dBμV) | Antenna Factor and Cable Loss (dB/m) | Field Strength at 3m (dBμV/m) | Limit at 3m (dBμV/m) | Margin (dB) | Detector Type |
|--------------|-----------------------|----------------------|--------------------------------------|-------------------------------|----------------------|-------------|---------------|
| H            | 2439.713 <sup>1</sup> | 94.7                 | -4.7                                 | 90.0                          | 94.0                 | -4.0        | Peak          |
| V            | 2439.875 <sup>1</sup> | 93.3                 | -4.7                                 | 88.6                          | 94.0                 | -5.4        | Peak          |
| H            | 4879.660              | 55.4                 | 2.3                                  | 57.7                          | 74.0                 | -16.3       | Peak          |
| H            | 4879.950              | 25.8                 | 2.3                                  | 28.1                          | 54.0                 | -25.9       | Average       |
| H            | 7319.610              | 50.5                 | 9.6                                  | 60.1                          | 74.0                 | -13.9       | Peak          |
| H            | 7319.920              | 23.4                 | 9.6                                  | 33.0                          | 54.0                 | -21.0       | Average       |
| H            | 9759.456 <sup>1</sup> | 20.1                 | 12.7                                 | 32.8                          | 54.0                 | -21.2       | Peak          |

Remark: 1) The peak value of emission 2439.713MHz, 2439.875 and 97759.456MHz are below the average limit, so no average measurement is performed.



# CMA Testing and Certification Laboratories

廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2)

Date : July 20, 2018

Channel: 2475MHz

| Polarization | Frequency (MHz)       | Reading at 3m (dBμV) | Antenna Factor and Cable Loss (dB/m) | Field Strength at 3m (dBμV/m) | Limit at 3m (dBμV/m) | Margin (dB) | Detector Type |
|--------------|-----------------------|----------------------|--------------------------------------|-------------------------------|----------------------|-------------|---------------|
| H            | 2474.645 <sup>1</sup> | 94.3                 | -4.7                                 | 89.6                          | 94.0                 | -4.4        | Peak          |
| V            | 2474.684 <sup>1</sup> | 93.5                 | -4.7                                 | 88.8                          | 94.0                 | -5.2        | Peak          |
| H            | 2483.500 <sup>1</sup> | 57.4                 | -4.7                                 | 52.7                          | 54.0                 | -1.3        | Peak          |
| H            | 4950.480              | 57.7                 | 2.8                                  | 60.5                          | 74.0                 | -13.5       | Peak          |
| H            | 4950.164              | 25.5                 | 2.8                                  | 28.3                          | 54.0                 | -25.7       | Average       |
| H            | 7424.910              | 50.3                 | 9.6                                  | 59.9                          | 74.0                 | -14.1       | Peak          |
| H            | 7424.980              | 23.6                 | 9.6                                  | 33.2                          | 54.0                 | -20.8       | Average       |
| H            | 9899.253 <sup>1</sup> | 18.9                 | 12.7                                 | 31.6                          | 54.0                 | -22.4       | Peak          |

Remark: 1) The peak value of emission 2474.645MHz, 2474.684MHz, 2483.5MHz and 9899.253MHz are below the average limit, so no average measurement is performed.



# CMA Testing and Certification Laboratories

廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2)

Date : July 20, 2018

### 3 Description of the Line-conducted Test


#### 3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.10 – 2013. The EUT was setup as described in the procedures, and both lines were measured.

#### 3.2 Test Result

No measurement is required as the EUT is a battery-operated product.

#### 3.3 Test Setup

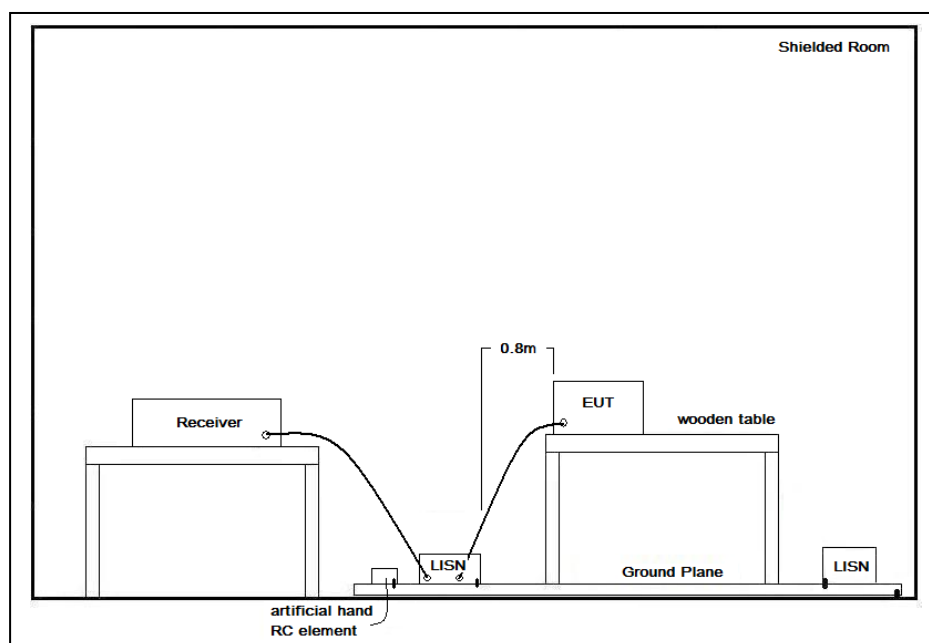

#### 3.4 Graph and Table of Conducted Emission Measurement Data

Not Applicable



# CMA Testing and Certification Laboratories

廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2)

Date : July 20, 2018

### 4 Supplementary document

The following document were submitted by applicant, and for electronic filing, the document are saved with the following filenames:

| Document                | Filename                       |
|-------------------------|--------------------------------|
| ID Label/Location       | Label Artwork and Location.pdf |
| Block Diagram           | Block Diagram.pdf              |
| Schematic Diagram       | Schematic.pdf                  |
| Users Manual            | User Manual.pdf                |
| Operational Description | Operation Description.pdf      |

#### 4.1 Bandwidth

Appendices A1 and A2 show the fundamental emission is confined in the specified band. 20dB bandwidth is 7.84MHz and 99% bandwidth is 7.56MHz. Both bandwidth fall in the band of 2400 – 2483.5MHz. It also shows that the EUT met the requirement of FCC Part 15.215(c) and RSS-GEN.



# CMA Testing and Certification Laboratories

廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2)

Date : July 20, 2018

### 5 Appendices

|     |                     |   |         |
|-----|---------------------|---|---------|
| A1. | 20dB Bandwidth Plot | 2 | page(s) |
| A2. | 99% Bandwidth Plot  | 2 | Page(s) |



# CMA Testing and Certification Laboratories


廠商會檢定中心

## TEST REPORT


Report No. : AW0034836(2)

Date : July 20, 2018

### A1. 20dB Bandwidth Plot

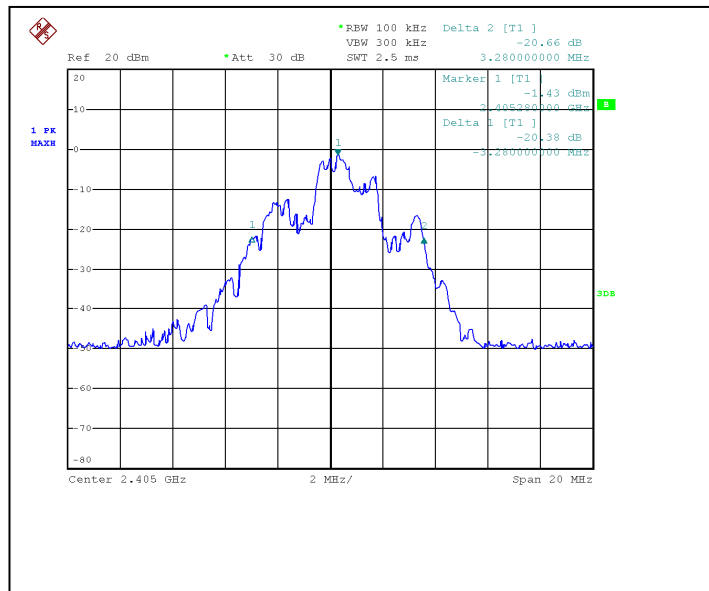

Channel: 2405MHz

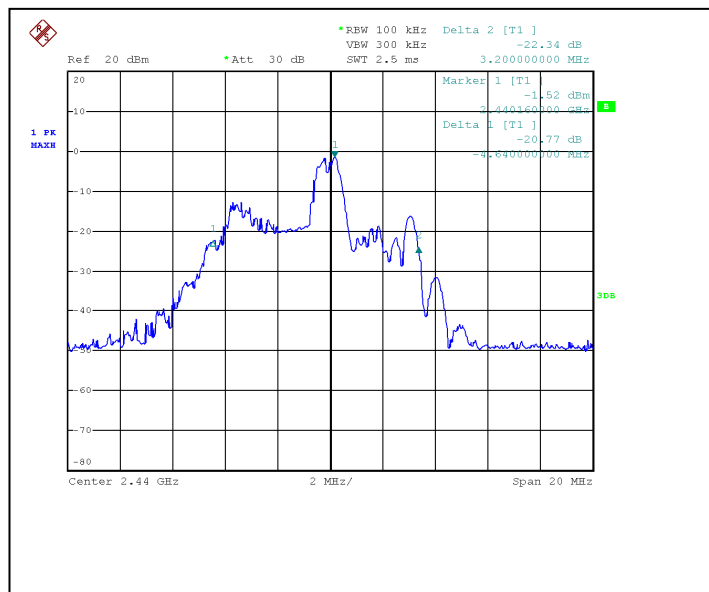

Channel: 2440MHz




# CMA Testing and Certification Laboratories

廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2)

Date : July 20, 2018

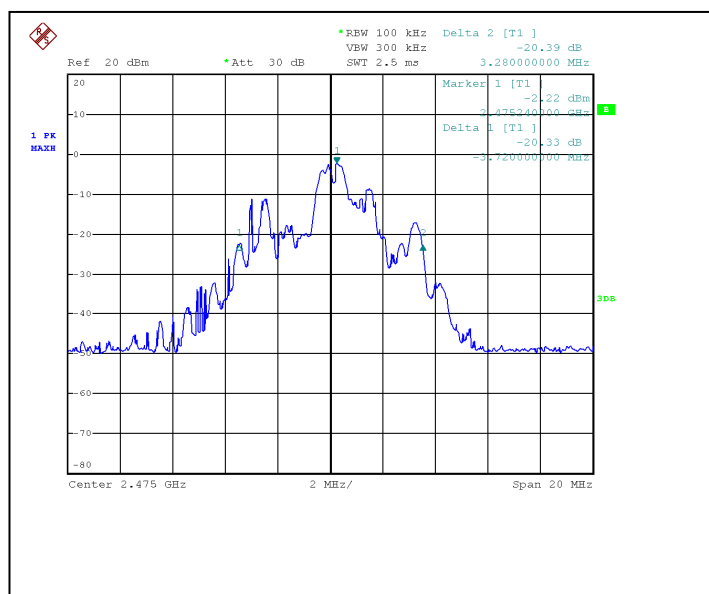

Channel: 2475MHz



# CMA Testing and Certification Laboratories


廠商會檢定中心

## TEST REPORT


Report No. : AW0034836(2)

Date : July 20, 2018

### A2. 99% Bandwidth Plot

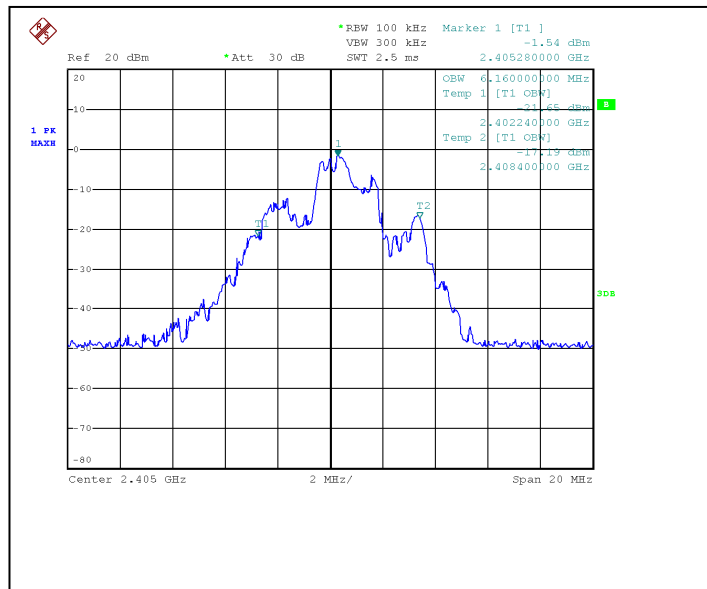

Channel: 2405MHz

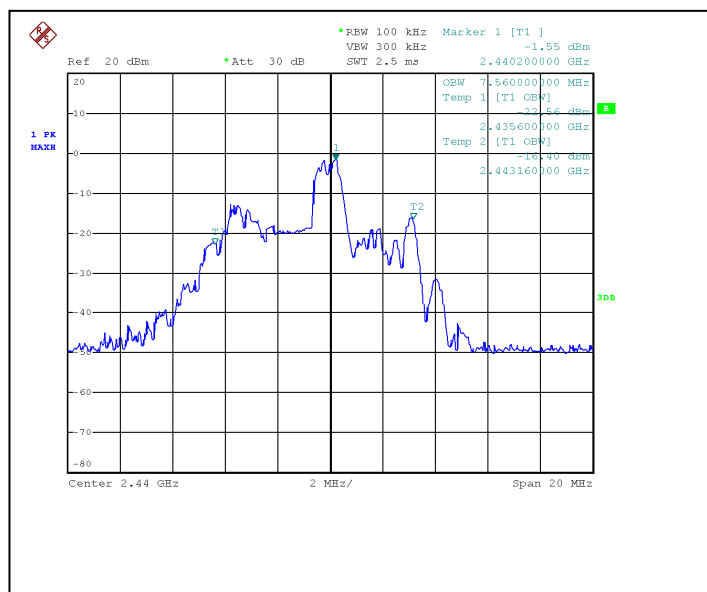

Channel: 2440MHz




# CMA Testing and Certification Laboratories

廠商會檢定中心

## TEST REPORT

Report No. : AW0034836(2)

Date : July 20, 2018

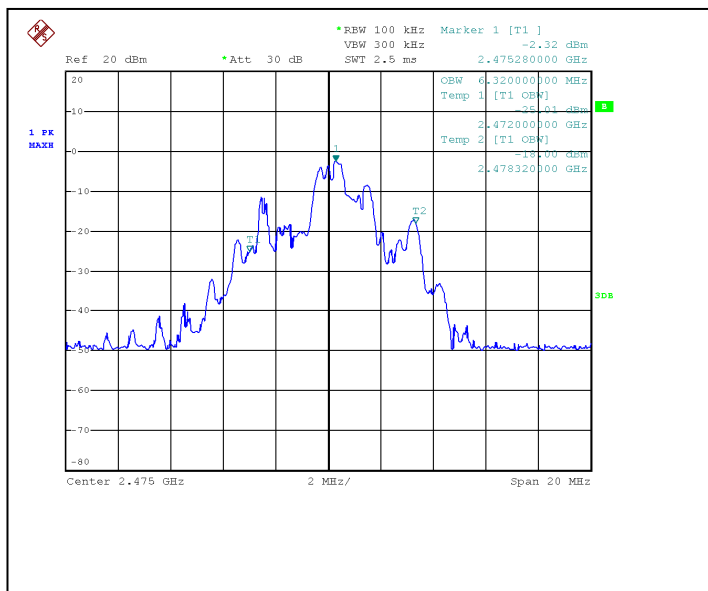

Channel: 2475MHz

\*\*\*\*\* End of Report \*\*\*\*\*