


Exhibit J: Users Manual
Xanboo
Mcam XWC900 Security Camera Transmitter


**DRILLING TEMPLATE FOR WALL MOUNTING
WIRELESS CAMERA(S) ///**

For wall-mounting Camera(s), drill two holes using a 1/4" drill bit and the template below. Insert supplied wall anchors into holes and secure Camera to wall with supplied screws.

Printers and copy machines can affect the scale of this template. Before drilling, compare this template with the actual Camera by placing the template on the back of the Camera and observing if mounting holes on Camera line up exactly with the drill holes on this template.

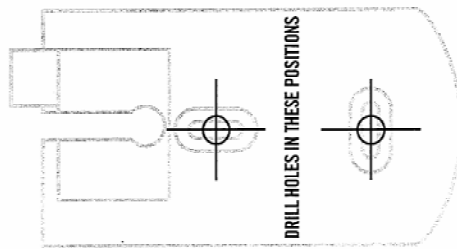

WIRELESS CAMERA

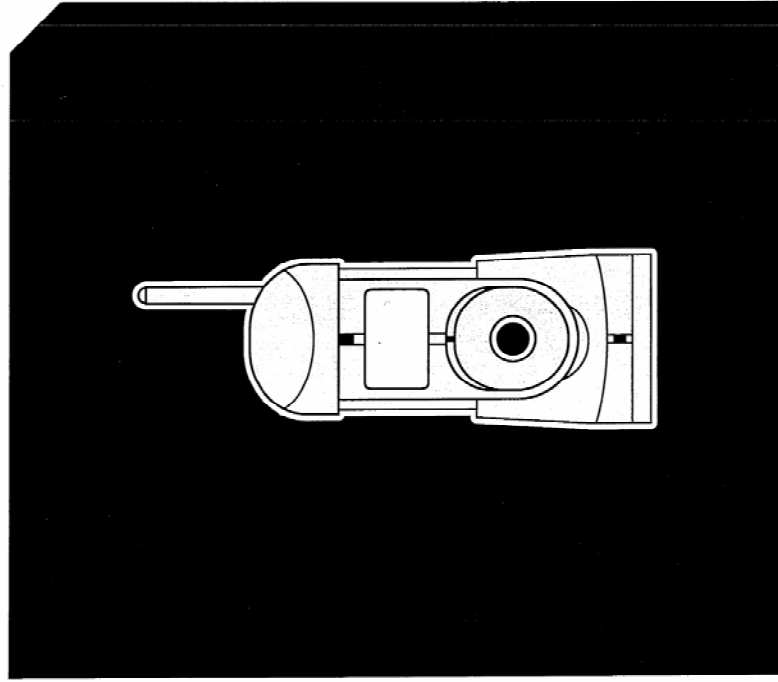


PRODUCT DESCRIPTION ///


The Shell HomeGenie™ Wireless Camera is a 2.4 GHz wireless camera with an integrated infrared motion sensor.

PACKAGE CONTENTS ///

- (1) Shell HomeGenie™ Wireless Camera
- (1) 10' Extension Cable
- (1) 9V Power Adapter
- (1) Wall Mounting Kit



SHELL HOMEGENIE
WIRELESS CAMERA



RECHARGEABLE BATTERY/
INLET/ TOP STAND



WALL MOUNTING KIT



WALL MOUNTING KIT




12V CAMERA ADAPTER

MOUNTING CAMERA ///


1. Unpack the Camera.
2. Decide whether the Camera will be wall-mounted or sit on a desk/table top. If wall mounting, use drilling template on the back cover of these instructions. If using the desktop stand, attach the camera to the stand as shown. The Camera can be adjusted for either mounting scenario by rotating the Camera head to the required position.

WIRELESS CAMERA




RECHARGEABLE BATTERY
TABLETOP STAND

WIRELESS CAMERA



WALL MOUNT




DESK/TABLETOP



WALL MOUNTED

3. To use the 12V camera power adapter, connect power jack to the rear of the tabletop stand. Make sure the Camera is positioned no more than 5 1/2 feet from an AC power outlet.
4. Select the Camera operating channel on the DIP switch, on the back of the camera, by moving switches 1, 2, or 3 to the down position. Switch is preset to channel 2.



REAR VIEW OF CAMERA

5. The Camera (Transmitter) installation is now complete.

TECHNICAL SPECS ///

- High resolution color video camera with integrated infrared motion detection
- All hardware for either wall or ceiling mounting included
- AC or battery operation (batteries not included)
- Auto Brightness, Auto Contrast, Auto White-Balance

TV System:

NTSC or PAL (color) standard
3.6 mm, F1.2 fixed focus
80 degree field of view
2-Infinity

Resolution:

350 horizontal TV lines

Signal/Noise Ratio:

48 dB

Image Sensor:

1/3" CMOS

Frequency Range:

2.41 - 2.47GHz

High Speed Electronic Shutter:

1/60 - 1/15,000 sec

Modulation:

FM

Min Illumination:

3 lux

Current Consumption:

approx. 22mA

Channel Selection:

Electronic tuning with PLL

Output Power:

10mW

RX Sensitivity:

-102 dBm

Typical free range space:

200 feet

Typical indoor range:

60 feet

APPROVALS ///

FCC ID NUMBER: 0U4-XWC980 / IC: 4576A-XWC980

STANDARDS

93/68/EEC, 89/336/EEC, BS EN 50082-1:1992, 73/23/EEC, EN60950:1992 CE

INSTRUCTIONS TO THE USER:

The user is cautioned that changes and modifications made to the equipment without the approval of manufacturer could void the user's authority to operate this equipment.

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CE directive 93/68/EEC, EMC directive 89/336/EEC, IV directive 73/23/EEC.

This class B digital apparatus complies with Canadian ICES-003.

The term "IC:" before the certification/registration number only signifies that the Industry Canada technical specifications were met. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

