

I N S T A L L A T I O N



**Wireless Home
Observation System**

I N S T R U C T I O N S

In "Manual Mode" individual channels may be selected. Pressing the button on the right will select "Manual" and the LED indicator will turn red.

In "Auto Mode" the RX244 will search between the channels available. To select "Auto" press the button on the left and the LED indicator will turn to green. To avoid searching empty channels which do not have a camera connected make sure the DIL switch on the rear of the unit has the corresponding switch in the down (ON) position for each camera.

Example shows a 2-camera installation.



Dwell Time Setting

To alter the dwell time press both of the buttons on the front of the unit simultaneously. Each flash of the LED is one extra second of dwell time added. Dwell time can range between 2-30 seconds.




WARRANTY

This product has a one year manufacturer's warranty which covers parts and labor only. In the unlikely event that you encounter a problem, the unit should be returned to Customer Care, Core Technology Inc., 175 Tompkins Avenue, Pleasantville, NY 10570.

ADDING ADDITIONAL CAMERAS


You can add up to 3 additional cameras to your system.

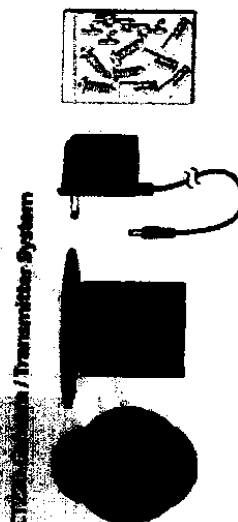


SET UP INSTRUCTIONS

TX240V Transmitter

1. Unpack the TX240V
2. Mount the wall bracket 6 to 7 feet high at a convenient location close to a power outlet. Best results will be achieved with the bracket facing in the direction of the RX244 Receiver.
3. Select the channel on the DIL switch at the base of the unit by switching any one of the four switches. NOTE -this is best done before attaching the transmitter to the wall bracket.
4. Snap the TX240V Transmitter into the wall bracket.
5. Plug the DIN Video Connector from the TV Camera into the TX240V. (This connection supplies power to the camera and the microphone while allowing the video and audio signals to come back to the TX240V).
6. Plug the power adapter into the Power Jack of the transmitter and plug the power adapter into any power outlet.




7. Point the antenna on the TX240V at the RX244 Receiver. (The arrow on the TX240V disk shows the direction of the transmitted beam. The RX244 receiver has an omni-directional antenna and picks up signals from all directions.)



The TX240V transmitter installation is now complete.

RX244 Receiver

1. Unpack the RX244 Receiver.
2. Connect one end of the AV cord to the RX244, the yellow plug to the yellow jack and the white plug to the white jack. Connect the other end of the AV cord to your television's AV inputs, the yellow plug to the yellow jack and the white plug to the white jack.

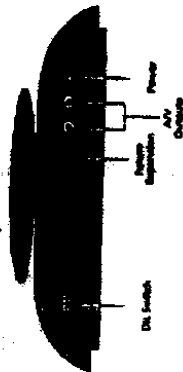

3. Plug the RX244 power adapter into the power jack and plug the power adapter into any power outlet.

4. Place the receiver either on top or near to your TV.

The RX244 Receiver installation is now complete.

Optimizing the RX244 Receiver

Mount the wall bracket to a convenient spot where the camera can view the area of interest. Mounting screws are provided for your convenience. (Make sure that the camera never directly views the sun. Sunrise and sunset are the most likely times this could occur. Direct sunlight would damage the TV camera sensor). Route the video wire through the slot in the camera mount base and slide the camera up and into the wall bracket.

Secure the camera mount base with two screws up through the base of the mount. Position the camera to view the area of interest.



Using the Optional Table Mount Bracket

The camera is supplied with a table top adapter, which will allow the use of the camera in any convenient location. Route the DIN plug through the base then simply push down onto the bracket with two pins on the bracket locating into the screw holes on the assembly.



Optimizing the CR241 Video System

The 2.4GHz video signals pass easily through your home's interior walls, but the signal may be reflected by power wires or plumbing inside the wall. Usually a slight adjustment of the receiver and/or transmitter antenna will improve reception. Take care not to force the antennas past their lock positions.

The most common source of interference are microwave ovens. Try to avoid mounting the RX244 receiver near a microwave oven or other source of RF interference.

RX244 - Camera Channel Selection

Before selecting the channels make sure all the DIL switches are in the up (OFF) position.




The CTR241 System is a combined camera and receiver system. The TX240V is a small, compact 2.4 GHz Video Transmitter and, together with the RX244, is an ideal combination for monitoring TV cameras on the porch, watching the yard and the baby.

PRODUCT FEATURES

- ▶ High resolution black and white video
- ▶ Built-in microphone transmits sound from camera to TV
- ▶ High quality audio and video components for long life
- ▶ Plug 'n' play installation
- ▶ Durable weatherproof camera construction
- ▶ Short Range Nightvision - Adaptive Sensitivity Control (ASC)
- ▶ Includes table top stand and bracket for wall mounting

SYSTEM CONTENTS

Please check ☒ and identify all the parts before proceeding with the installation.

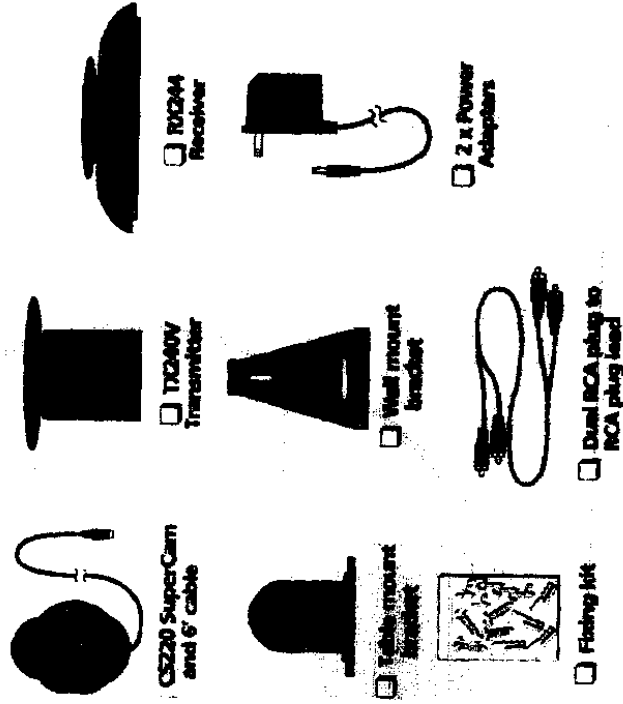

PRODUCT SPECIFICATION

CS220 SuperCam	TV System	EIA standard
Integrated lens	Resolution	1.6mm, F2.0 fixed focus
Signal/Noise Ratio	300 horizontal TV lines	
High Speed Electronic Shutter	48db	
Image Sensor	1/60 - 1/15,000 sec	
Min. Illumination	1/3" CMOS	
Nightvision	1 lux	
Power Consumption	8	2.4 x High Power IR LED's - ASC
Overall Size	2.3" W x 2.75" H x 3" D	240mW 12.0 ~ A
Case Finish	Black UV resistant ABS plastic	Black UV resistant ABS plastic
	suited for outdoor or indoor use -	CS220C

TX240V Transmitter	Frequency Range	2.4 - 2.49 GHz
	Current Consumption	160mA 1.40 ~ A
	Modulation	FM
	Video Signal/Noise Ratio	48db
	Audio Signal/Noise Ratio	45db

RX244 Receiver	Frequency Range	2.4 - 2.49 GHz
	Current Consumption	160mA 1.40 ~ A
	Channel Selection	Electronic Tuning with PLL
	Output	600mW 12.0 ~ A
	Signal/Noise Ratio	38db

General	Operating temperature	-10°C to +40°C
	Humidity	Less than 85%

Approvals

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

