



RADIO TEST REPORT


Test Report No. : 11840085H-A-R1

Applicant : OMRON Automotive Electronics Co. Ltd.
Type of Equipment : UNIT ASSY
Model No. : GHR-H015-R
FCC ID : OUCGHR-H015R
Test regulation : FCC Part 15 Subpart C: 2017
Test Result : Complied


1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. This report is a revised version of 11840085H-A.

Date of test: June 28, 2017

Representative test engineer:


Masafumi Niwa
Engineer
Consumer Technology Division

Approved by:


Motoya Imura
Engineer
Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
http://japan.ul.com/resources/emc_accredited/

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

13-EM-F0429

REVISION HISTORY

Original Test Report No.: 11840085H-A

[illegible]

CONTENTS	PAGE
SECTION 1: Customer information	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results	5
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Radiated emission (Fundamental and Spurious Emission)	9
SECTION 6: -26dB Bandwidth.....	11
SECTION 7: 99% Occupied Bandwidth.....	11
APPENDIX 1: Test data	12
Radiated Emission below 30 MHz (Fundamental and Spurious Emission)	12
Radiated Emission above 30 MHz (Spurious Emission).....	14
-26 dB Bandwidth and 99 % Occupied Bandwidth	16
APPENDIX 2: Test instruments	18
APPENDIX 3: Photographs of test setup	19
Radiated Emission.....	19
Worst Case Position	21

SECTION 1: Customer information

Company Name : OMRON Automotive Electronics Co. Ltd.
Address : 6368 NENJOZAKA OKUSA KOMAKI AICHI, 485-0802 JAPAN
Telephone Number : +81-568-78-6159
Facsimile Number : +81-568-78-7659
Contact Person : Takashi Betsui

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : UNIT ASSY
Model No. : GHR-H015-R
Serial No. : Refer to Section 4, Clause 4.2
Rating : DC 12 V
Receipt Date of Sample : May 30, 2017
Country of Mass-production : Japan
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product Description

Model No: GHR-H015-R (referred to as the EUT in this report) is the UNIT ASSY.

General Specification

Clock frequencies in the system : 8 MHz, 10 MHz (CPU)
21.948717 MHz (Crystal)

Radio Specification

[Transmitter part]

Radio Type : Transmitter
Frequency of Operation : 125 kHz
Modulation : FSK
Method of Frequency Generation : Crystal resonator
Antenna type : Inverted L antenna

[Receiver part]*

Radio Type : Receiver
Frequency of Operation : 433.92 MHz
Method of Frequency Generation : Crystal

*The test of receiver part was performed separately from this test report, and the conformability is confirmed.

UNIT ASSY (model: GHR-H015-R) consists of the following parts:

- BCM (included UHF Receiver)
- LF ANT (Front)
- LF ANT (Rear)

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on June 14, 2017 and effective July 14, 2017

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted Emission
Section 15.209 Radiated emission limits, general requirements

* The revision on June 14, 2017, does not affect the test specification applied to the EUT.

* Also the EUT complies with FCC Part 15 Subpart B.

3.2 Procedures and results

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	Conducted Emission	<FCC> ANSI C63.10:2013 6 Standard test methods <IC> RSS-Gen 8.8	<FCC> Section 15.207 <IC> RSS-Gen 8.8	-	N/A *1)	N/A	N/A
2	Electric Field Strength of Fundamental Emission	<FCC> ANSI C63.10:2013 6 Standard test methods <IC> RSS-Gen 6.4, 6.12	<FCC> Section 15.209 <IC> RSS-210 4.4 RSS-Gen 8.9	Radiated	N/A	11.1 dB 125 kHz 0 deg. PK with Duty factor <LF ANT (Rear)>	Complied
3	Electric Field Strength of Spurious Emission	<FCC> ANSI C63.10:2013 6 Standard test methods <IC> RSS-Gen 6.4, 6.13	<FCC> Section 15.209 <IC> RSS-210 4.4 RSS-Gen 8.9	Radiated	N/A	18.1 dB 42.225 MHz Vertical, QP <LF ANT (Rear)>	Complied
4	-26dB Bandwidth	<FCC> ANSI C63.10:2013 6 Standard test methods <IC> -	<FCC> Reference data <IC> -	Radiated	N/A	N/A	N/A

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.

FCC Part 15.31 (e)

The EUT provides stable voltage (DC 6 V) constantly to the wireless transmitter regardless of input voltage.
Instead of a new battery, DC power supply was used for the test.
That does not affect the test result, therefore the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the vehicle. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.3 Addition to standard

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	99 % Occupied Band Width	RSS-Gen 6.6	-	Radiated	N/A	N/A	N/A

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test distance	Radiated emission (+/-)
	9 kHz to 30 MHz
3 m	3.8 dB
10 m	3.6 dB

*Measurement distance

Polarity	Radiated emission (Below 1 GHz)			
	(3 m*)(+/-)		(10 m*)(+/-)	
	30 MHz to 200 MHz	200 MHz to 1000 MHz	30 MHz to 200 MHz	200 MHz to 1000 MHz
Horizontal	5.0 dB	5.3 dB	5.0 dB	5.0 dB
Vertical	5.2 dB	6.3 dB	5.0 dB	5.0 dB

Radiated emission test(3 m)

The data listed in this test report has enough margin, more than the site margin.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Ise EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8999 Facsimile : +81 596 24 8124

	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	4.0 x 4.5 x 2.7m	4.0 x 4.5 m	-
No.6 measurement room	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	8.0 x 4.6 x 2.8m	2.4 x 2.4m	-
No.11 measurement room	-	6.2 x 4.7 x 3.0m	4.8 x 4.6m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.


SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

Test mode	Remarks
Transmitting mode (Tx) 125 kHz	-

Justification : The system was configured in typical fashion (as a user would normally use it) for testing.

4.2 Configuration and peripherals

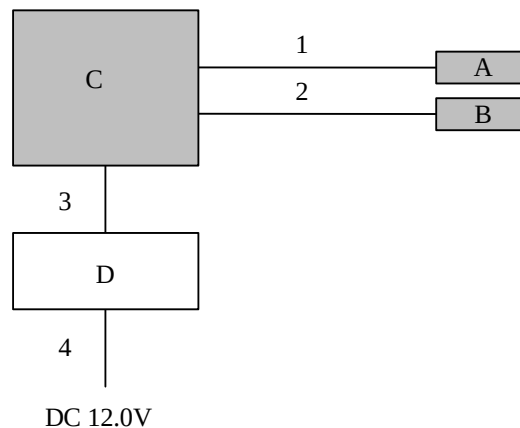

* Cabling and setup were taken into consideration and test data was taken under worse case conditions.

* The EUT does not transmit simultaneously from multiple antennas.

* Antennas were evaluated with the worst duty respectively.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remark
A	LF Antenna (Rear)	CGF-H003-0010	No.1	OMRON Automotive Electronics Co. Ltd.	EUT
B	LF Antenna (Front)	CGF-H001-0010	No.1	OMRON Automotive Electronics Co. Ltd.	EUT
C	ECU	GHR-H015-R01	No.19	OMRON Automotive Electronics Co. Ltd.	EUT
D	ECU Simulator	-	No.9	OMRON Automotive Electronics Co. Ltd.	-

List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	Antenna Cable	0.70	Unshielded	Unshielded	-
2	Antenna Cable	0.55	Unshielded	Unshielded	-
3	Signal Cable	0.60	Unshielded	Unshielded	-
4	DC Cable	2.00	Unshielded	Unshielded	-

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Radiated emission (Fundamental and Spurious Emission)

Test Procedure

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

Frequency : From 9 kHz to 30 MHz

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for vertical polarization (antenna angle: 0 deg., 45 deg., 90 deg., and 135 deg.) and horizontal polarization.

*Refer to Figure 1 about Direction of the Loop Antenna.

Frequency: From 30 MHz to 1 GHz

The measuring antenna height varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

The test was made with the detector (RBW / VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	Below 30 MHz	30 MHz to 200 MHz	200 MHz to 1 GHz
Antenna Type	Loop	Biconical	Logperiodic

Frequency	From 9 kHz to 90 kHz and From 110 kHz to 150 kHz	From 90 kHz to 110 kHz	From 150 kHz to 490 kHz	From 490 kHz to 30 MHz	From 30 MHz to 1 GHz
Instrument used	Test Receiver				
Detector	PK / AV	QP	PK / AV	QP	QP
IF Bandwidth	200 Hz	200 Hz	9 kHz	9 kHz	120 kHz
Test Distance	3 m *1)	3 m *1)	3 m *1)	3 m *2)	3 m

*1) Distance Factor: $40 \times \log(3 \text{ m} / 300 \text{ m}) = -80 \text{ dB}$

*2) Distance Factor: $40 \times \log(3 \text{ m} / 30 \text{ m}) = -40 \text{ dB}$

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open field test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

These tests were performed in semi anechoic chamber. Therefore the measured level of emissions may be higher than if measurements were made without a ground plane.

However test results were confirmed to pass against standard limit.

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 9 kHz - 1 GHz

Test data : APPENDIX 1

Test result : Pass

Date: June 28, 2017

Test engineer: Masafumi Niwa

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

Figure 1: Direction of the Loop Antenna

Side View (Vertical)

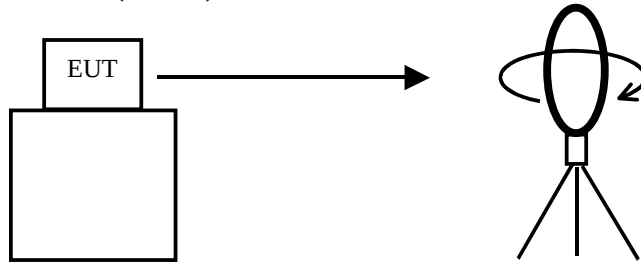


Top View (Horizontal)

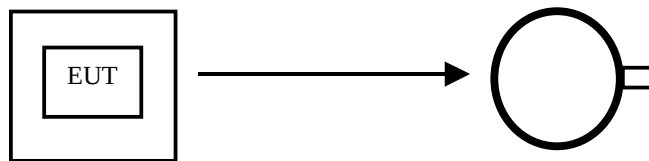

Antenna was not rotated.

Top View (Vertical)

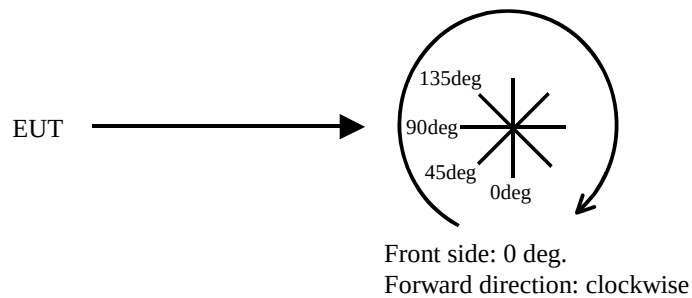

SECTION 6: -26dB Bandwidth

Test Procedure

The test was measured with a spectrum analyzer using a test fixture.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
-26 dB Bandwidth	50 kHz	510 Hz	1.5 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

Test data : APPENDIX 1

Test result : Pass

SECTION 7: 99% Occupied Bandwidth

Test Procedure

The test was measured with a spectrum analyzer using a test fixture.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
99 % Occupied Bandwidth	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak *1)	Max Hold *1)	Spectrum Analyzer

*1) The measurement was performed with Peak detector, Max Hold since the duty cycle was not 100 %.
Peak hold was applied as Worst-case measurement.

Test data : APPENDIX 1

Test result : Pass

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 1: Test data

Radiated Emission below 30 MHz (Fundamental and Spurious Emission)

LF ANT (Front)

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Order No. : 11840085H
Date : 06/28/2017
Temperature/ Humidity : 22 deg. C / 54 % RH
Engineer : Masafumi Niwa
Mode : Tx 125 kHz LF ANT (Front)

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0	0.12500	PK	100.7	19.7	-73.9	32.2	-	14.3	45.6	31.3	Fundamental
0	0.25000	PK	62.9	19.6	-73.9	32.2	-	-23.6	39.6	63.2	
0	0.37500	PK	58.9	19.6	-73.9	32.2	-	-27.6	36.1	63.7	
0	0.50000	QP	44.9	19.5	-33.8	32.1	-	-1.5	33.6	35.1	
0	0.62500	QP	43.3	19.5	-33.8	32.2	-	-3.2	31.7	34.9	
0	0.75000	QP	40.2	19.5	-33.8	32.2	-	-6.3	30.1	36.4	
0	0.87500	QP	34.8	19.5	-33.8	32.2	-	-11.7	28.7	40.4	
0	1.00000	QP	36.9	19.5	-33.8	32.2	-	-9.6	27.6	37.2	
0	1.12500	QP	31.1	19.5	-33.8	32.2	-	-15.4	26.5	41.9	
0	1.25000	QP	34.4	19.5	-33.7	32.2	-	-12.0	25.6	37.6	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0	0.125	PK	100.7	19.7	-73.9	32.2	0.0	14.3	25.6	11.3	
0	0.250	PK	62.9	19.6	-73.9	32.2	0.0	-23.6	19.6	43.2	
0	0.375	PK	58.9	19.6	-73.9	32.2	0.0	-27.6	16.1	43.7	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3m without Distance factor

PK or QP

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0	0.12500	PK	100.7	19.7	6.1	32.2	-	94.3	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable + Attenuator) - Gain(Amplifier)

* All spurious emissions lower than this result.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Emission below 30 MHz (Fundamental and Spurious Emission)

LF ANT (Rear)

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Order No. : 11840085H
Date : 06/28/2017
Temperature/ Humidity : 22 deg. C / 54 % RH
Engineer : Masafumi Niwa
Mode : Tx 125 kHz LF ANT (Rear)

PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0	0.12500	PK	100.9	19.7	-73.9	32.2	-	14.5	45.6	31.1	Fundamental
0	0.25000	PK	61.5	19.6	-73.9	32.2	-	-25.0	39.6	64.6	
0	0.37500	PK	59.0	19.6	-73.9	32.2	-	-27.5	36.1	63.6	
0	0.50000	QP	43.7	19.5	-33.8	32.1	-	-2.7	33.6	36.3	
0	0.62500	QP	43.9	19.5	-33.8	32.2	-	-2.6	31.7	34.3	
0	0.75000	QP	39.1	19.5	-33.8	32.2	-	-7.4	30.1	37.5	
0	0.87500	QP	35.3	19.5	-33.8	32.2	-	-11.2	28.7	39.9	
0	1.00000	QP	35.7	19.5	-33.8	32.2	-	-10.8	27.6	38.4	
0	1.12500	QP	31.3	19.5	-33.8	32.2	-	-15.2	26.5	41.7	
0	1.25000	QP	33.4	19.5	-33.7	32.2	-	-13.0	25.6	38.6	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor) - Gain(Amplifier)

PK with Duty factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0	0.125	PK	100.9	19.7	-73.9	32.2	0.0	14.5	25.6	11.1	
0	0.250	PK	61.5	19.6	-73.9	32.2	0.0	-25.0	19.6	44.6	
0	0.375	PK	59.0	19.6	-73.9	32.2	0.0	-27.5	16.1	43.6	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + D.Factor) - Gain(Amplifier) + Duty factor *

* Since the peak emission result satisfied the average limit, duty factor was omitted.

Result of the fundamental emission at 3m without Distance factor

PK or QP

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0	0.12500	PK	100.9	19.7	6.1	32.2	-	94.5	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable + Attenuator) - Gain(Amplifier)

* All spurious emissions lower than this result.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Emission above 30 MHz (Spurious Emission)
LF ANT (Front)

DATA OF RADIATED EMISSION TEST


UL Japan, Inc. Ise EMC Lab. No.2 Semi Anechoic Chamber
Date : 2017/06/28

Report No. : 11840085H

Temp./Humi. : 23deg. C / 54% RH
Engineer : Masafumi Niwa

Mode / Remarks : Tx 125 kHz LF ANT (Front) Worst Axis (Ant Hori: X, Vert: X / ECU: Hori: Z, Vert: Z)

LIMIT : FCC15.209 3m, below 1GHz:QP, above 1GHz:PK
All other spurious emissions were less than 20dB for the limit.

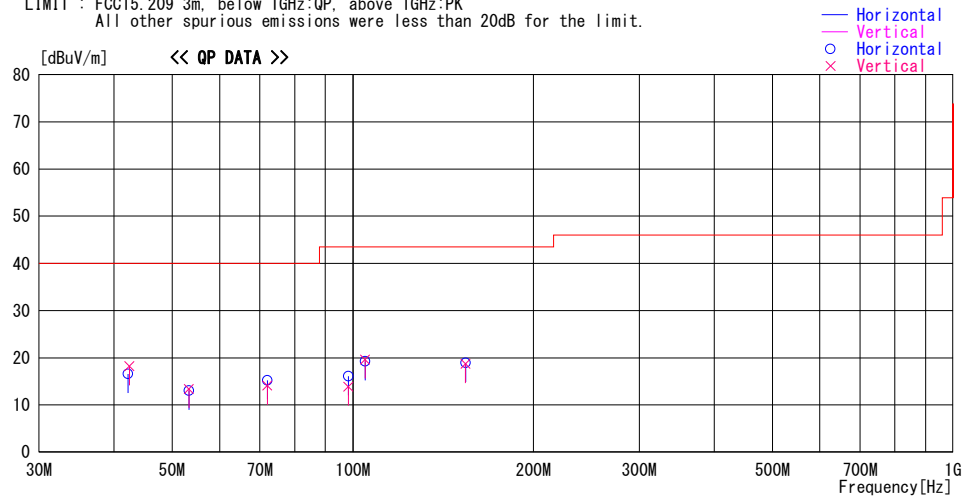

Frequency	Reading	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain							
[MHz]	[dBuV]		[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
42.235	24.6	QP	13.3	-21.3	16.6	0	300	Hori.	40.0	23.4	
42.435	26.2	QP	13.3	-21.3	18.2	0	100	Vert.	40.0	21.8	
53.324	24.5	QP	9.6	-21.1	13.0	0	300	Hori.	40.0	27.0	
53.325	24.9	QP	9.6	-21.1	13.4	0	100	Vert.	40.0	26.6	
72.024	28.8	QP	6.2	-20.9	14.1	20	146	Vert.	40.0	25.9	
72.025	29.9	QP	6.2	-20.9	15.2	47	147	Hori.	40.0	24.8	
98.303	24.7	QP	9.8	-20.6	13.9	0	100	Vert.	43.5	29.6	
98.323	26.9	QP	9.8	-20.6	16.1	140	191	Hori.	43.5	27.4	
104.823	29.2	QP	10.8	-20.4	19.6	0	100	Vert.	43.5	23.9	
104.899	28.9	QP	10.8	-20.4	19.3	24	180	Hori.	43.5	24.2	
154.000	23.6	QP	15.0	-19.9	18.7	204	100	Vert.	43.5	24.8	
154.238	23.8	QP	15.0	-19.9	18.9	0	300	Hori.	43.5	24.6	

CHART: WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-200MHz:BICONICAL, 200MHz-1000MHz:LOGPERIODIC, 1000MHz:-HORN
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATTEN - GAIN (AMP))

*The test result is rounded off to one or two decimal places, so some differences might be observed.

UL Japan, Inc.
Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Emission above 30 MHz (Spurious Emission)

LF ANT (Rear)

DATA OF RADIATED EMISSION TEST


UL Japan, Inc. Ise EMC Lab. No.2 Semi Anechoic Chamber
Date : 2017/06/28

Report No. : 11840085H

Temp./Humi. : 23deg. C / 54% RH
Engineer : Masafumi Niwa

Mode / Remarks : Tx 125 kHz LF ANT (Rear) Worst Axis (Ant Hori: X, Vert: X / ECU: Hori: Z, Vert: Z)

LIMIT : FCC15.209 3m, below 1GHz:QP, above 1GHz:PK
All other spurious emissions were less than 20dB for the limit.

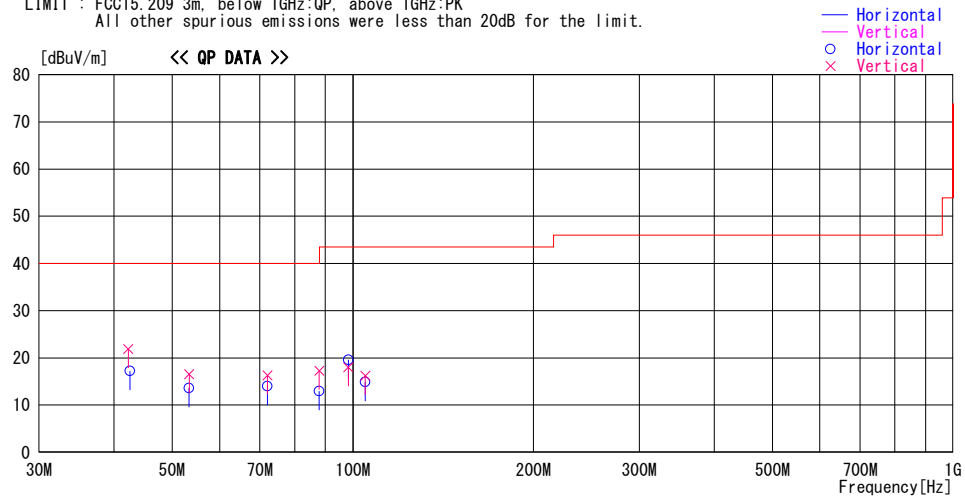

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Gain [dB]							
42.255	29.9	QP	13.3	-21.3	21.9	0	100	Vert.	40.0	18.1	
42.529	25.3	QP	13.2	-21.3	17.2	172	120	Hori.	40.0	22.8	
53.365	25.1	QP	9.6	-21.1	13.6	0	300	Hori.	40.0	26.4	
53.375	28.0	QP	9.6	-21.1	16.5	51	100	Vert.	40.0	23.5	
72.078	28.7	QP	6.2	-20.9	14.0	0	162	Hori.	40.0	26.0	
72.089	30.9	QP	6.3	-20.9	16.3	10	146	Vert.	40.0	23.7	
87.874	25.7	QP	7.9	-20.7	12.9	0	192	Hori.	40.0	27.1	
87.875	30.1	QP	7.9	-20.7	17.3	207	111	Vert.	40.0	22.7	
98.303	30.4	QP	9.8	-20.6	19.6	145	190	Hori.	43.5	23.9	
98.303	28.8	QP	9.8	-20.6	18.0	0	100	Vert.	43.5	25.5	
104.899	24.5	QP	10.8	-20.4	14.9	0	300	Hori.	43.5	28.6	
104.899	25.8	QP	10.8	-20.4	16.2	0	100	Vert.	43.5	27.3	

CHART: WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-200MHz:BICONICAL, 200MHz-1000MHz:LOGPERIODIC, 1000MHz-:HORN
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN(CABLE + ATTEN - GAIN(AMP))

*The test result is rounded off to one or two decimal places, so some differences might be observed.

UL Japan, Inc.
Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

-26 dB Bandwidth and 99 % Occupied Bandwidth

LF ANT (Front)

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber
Order No.	11840085H
Date	06/28/2017
Temperature/ Humidity	22 deg. C / 54 % RH
Engineer	Masafumi Niwa
Mode	Tx 125 kHz LF ANT (Front)

-26 dB Bandwidth [kHz]	99 % Occupied Bandwidth [kHz]
11.394	10.3828

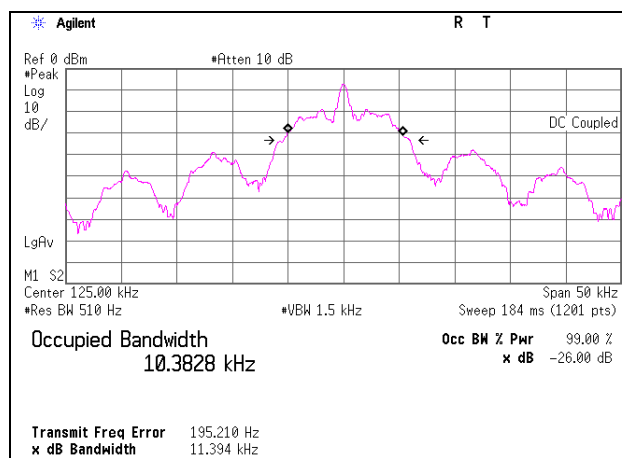


-26 dB Bandwidth and 99 % Occupied Bandwidth

LF ANT (Rear)

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber
Order No.	11840085H
Date	06/28/2017
Temperature/ Humidity	22 deg. C / 54 % RH
Engineer	Masafumi Niwa
Mode	Tx 125 kHz LF ANT (Rear)

-26 dB Bandwidth [kHz]	99 % Occupied Bandwidth [kHz]
11.648	10.3789

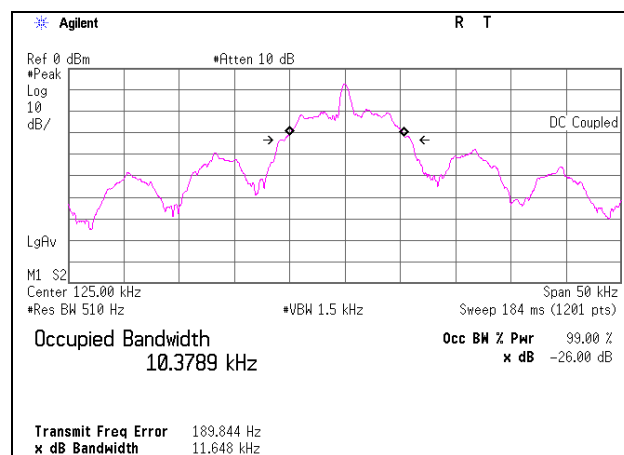

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 2: Test instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-02	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	RE	2016/08/02 * 12
MOS-22	Thermo-Hygrometer	Custom	CTH-201	0003	RE	2016/12/13 * 12
MJM-14	Measure	KOMELON	KMC-36	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MRENT-130	Spectrum Analyzer	Agilent	E4440A	MY46187750	RE	2017/06/20 * 12
MTR-03	Test Receiver	Rohde & Schwarz	ESCI	100300	RE	2016/10/21 * 12
MBA-08	Biconical Antenna	Schwarzbeck	VHA9103B	08031	RE	2016/09/29 * 12
MLA-21	Logperiodic Antenna(200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-190	RE	2017/01/05 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	-	-	RE	2017/02/24 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	BK7970	RE	2016/11/28 * 12
MPA-09	Pre Amplifier	Agilent	8447D	2944A10845	RE	2016/09/13 * 12
MMM-01	Digital Tester	Fluke	FLUKE 26-3	78030611	RE	2016/08/23 * 12
MLPA-01	Loop Antenna	Rohde & Schwarz	HFH2-Z2	100017	RE	2016/10/14 * 12
MCC-13	Coaxial Cable	Fujikura	3D-2W(12m)/ 5D-2W(5m)/ 5D-2W(0.8m)/ 5D-2W(1m)	-	RE	2017/02/24 * 12
MCC-143	Coaxial Cable	UL Japan	-	-	RE	2017/06/12 * 12
MPA-14	Pre Amplifier	SONOMA INSTRUMENT	310	260833	RE	2017/03/27 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item:

RE: Spurious emission

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124