


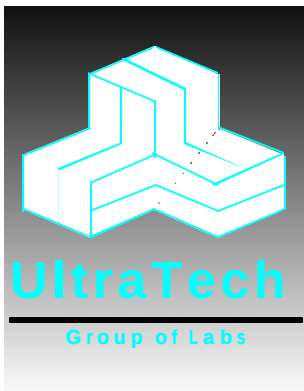

Dec. 12, 2001

TIMCO ENGINEERING INC.

P O BOX 370
849 N.W. STATE ROAD 45
NEWBERRY, FLORIDA
USA 32669

Subject: FCC Certification Authorization Application under FCC PART 15, Subpart C, Sec. 15.247 - Frequency Hopping Spread Spectrum Transmitters operating in the frequency band 2404.95 - 2482.15 MHz.

Applicant: MAXSTREAM, INC.
Product: 2.4 GHz Frequency Hopping OEM Module
Model No.: 24XSTREAM
FCC ID: OUR-24XSTREAM

Dear Sir/Madam

As appointed agent for Maxstream, we would like to submit the application to the Federal Communications Commission for certification of the above product. Please review all necessary files uploaded to TIMCO UPLOAD web site for detailed information.

- Modular Transmitter Approval Request:- This application is subject to the FCC certification for a Mobile & Fixed Base Station modular transceiver, please kindly refer to the Section 6.5 of the submitted test report for clarification of compliance for this modular transmitter with FCC Public Notice DA 00-1407.
- Limitation of the FCC Modular Certification for Model 24XSTREAM:
 - This FCC certification for the Maxstream Model 24XSTREAM is only limited for the radio to be used in the Mobile or Fixed, Base Station with the antenna separation distance complies with FCC Rules @ 2.1091
 - The transmitter is approved for being used only with antennas filed with FCC in compliance with FCC RF Exposure Requirements per FCC Rule @ 2.1091 with the minimum RF safety distance(s) specified in the Antenna Installation Instruction Section of the Installation/Users Manual.

If you have any queries, please do not hesitate to contact us.

Yours truly,



Tri Minh Luu, P. Eng.,
V.P., Engineering

Encl

3000 Bristol Circle
Oakville, Ontario, Canada
L6H 6G4

Telephone (905) 829-1570
Facsimile (905) 829-8050



Dec. 12, 2001

MAXSTREAM, INC.

PO Box 1508 / 1215 South 1680 West
Orem, UT
USA, 84058

Attn.: Mr. David Steed
Vice President - Engineering

Subject: FCC Certification Application Testing under FCC PART 15,
Subpart C, Sec. 15.247 - Frequency Hopping Spread
Spectrum Transmitters operating in the frequency band
2404.95 - 2482.15 MHz.

Product: 2.4 GHz Frequency Hopping OEM Module
Model No.: 24XSTREAM
FCC ID: OUR-24XSTREAM

Dear Steed,

The product sample, as provided by you, has been tested and found to comply with **FCC PART 15, Subpart C, Sec. 15.247 - Frequency Hopping Spread Spectrum Transmitters operating in the frequency band 2404.95 - 2482.15 MHz.**

- Modular Transmitter Approval Request:- This application is subject to the FCC certification for a Mobile & Fixed Base Station modular transceiver, please kindly refer to the Section 6.5 of the submitted test report for clarification of compliance for this modular transmitter with FCC Public Notice DA 00-1407.
- Limitation of the FCC Modular Certification for Model 24XSTREAM:
 - This FCC certification for the Maxstream Model 24XSTREAM is only limited for the radio to be used in the Mobile or Fixed, Base Station with the antenna separation distance complies with FCC Rules @ 2.1091
 - The transmitter is approved for being used only with antennas filed with FCC in compliance with FCC RF Exposure Requirements per FCC Rule @ 2.1091 with the minimum RF safety distance(s) specified in the Antenna Installation Instruction Section of the Installation/Users Manual.

Enclosed you will find copies of the engineering report. If you have any queries, please do not hesitate to contact us.

Yours truly,




Tri Minh Luu, P. Eng.,
V.P., Engineering

Encl

3000 Bristol Circle
Oakville, Ontario, Canada
L6H 6G4

Telephone (905) 829-1570
Facsimile (905) 829-8050

ENGINEERING TEST REPORT



2.4 GHz Frequency Hopping OEM Module Model No.: 24XSTREAM

FCC ID: OUR-24XSTREAM

Applicant: **Maxstream**
PO Box 1508 / 1215 South 1680 West
Orem, UT
USA, 84058

In Accordance With

**FEDERAL COMMUNICATIONS COMMISSION (FCC)
PART 15, SUBPART C, SEC. 15.247
Frequency Hopping Spread Spectrum Transmitters
operating in the frequency band 2404.95 - 2482.15 MHz**

UltraTech's File No.: MXS-009FTX

This Test report is Issued under the Authority of
Tri M. Luu, Professional Engineer,
Vice President of Engineering
UltraTech Group of Labs



Date: Dec. 12, 2001

Report Prepared by: Tri Luu, P.Eng.

Tested by: Hung Trinh, EMI/RFI Technician

Issued Date: Dec. 12, 2001

Test Dates: Dec. 06-12, 2001

The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Telephone (905) 829-1570 Facsimile (905) 829-8050
Website: www.ultrat4ech-labs.com Email: vkh.ultratech@sympatico.ca

TABLE OF CONTENTS

EXHIBIT 1.	SUBMITTAL CHECK LIST.....	4
EXHIBIT 2.	INTRODUCTION	5
2.1.	SCOPE.....	5
2.2.	RELATED SUBMITAL(S)/GRANT(S).....	5
2.3.	NORMATIVE REFERENCES	6
EXHIBIT 3.	PERFORMANCE ASSESSMENT	7
3.1.	CLIENT INFORMATION.....	7
3.2.	EQUIPMENT UNDER TEST (EUT) INFORMATION	7
3.3.	EUT'S TECHNICAL SPECIFICATIONS	8
3.4.	LIST OF EUT'S PORTS.....	8
3.5.	ASSOCIATED ANTENNA DESCRIPTIONS.....	9
3.6.	ANCILLARY EQUIPMENT	12
3.7.	GENERAL TEST SETUP.....	12
EXHIBIT 4.	EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS	13
4.1.	CLIMATE TEST CONDITIONS.....	13
4.2.	OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST S.....	13
EXHIBIT 5.	SUMMARY OF TEST RESULTS.....	14
5.1.	LOCATION OF TESTS.....	14
5.2.	APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS.....	14
5.3.	MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES.....	14
EXHIBIT 6.	MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS	15
6.1.	TEST PROCEDURES.....	15
6.2.	MEASUREMENT UNCERTAINTIES.....	15
6.3.	MEASUREMENT EQUIPMENT USED:.....	15
6.4.	ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:.....	15
6.5.	UNLICENSED MODULAR TRANSMITTER APPROVAL REQUIREMENTS @ FCC PUBLIC NOTICE DA 00-1407 (JUNE 26, 2000).....	16
6.6.	COMPLIANCE WITH FCC PART 15 – GENERAL TECHNICAL REQUIREMENTS.....	19
6.7.	HOPPING CHANNEL CARRIER FREQUENCY CHARACTERISTICS @ FCC CFR 47, PARA 15.247(A)(1) & (A)(1)(II).....	21
6.7.1.	<i>Limits</i>	21
6.7.2.	<i>Method of Measurements</i>	21
6.7.3.	<i>Test Arrangement</i>	22
6.7.4.	<i>Test Equipment List</i>	22
6.7.5.	<i>Test data</i>	23
6.8.	PEAK OUTPUT POWER & EFFECTIVE RADIATED POWER (EIRP) @ FCC 15.247(B)	24
6.8.1.	<i>Limits</i>	24
6.8.2.	<i>Method of Measurements</i>	24
6.8.3.	<i>Test Arrangement</i>	24
6.8.4.	<i>Test Equipment List</i>	25
6.8.5.	<i>Test Data</i>	25
6.9.	RF EXPOSURE REQUIRMENTS @ FCC 15.247(B)(4), 1.1310 & 2.1091.....	29
6.9.1.	<i>Limits</i>	29

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.9.2.	Method of Measurements.....	29
6.9.3.	Test Data.....	31
6.10.	TRANSMITTER BAND-EDGE & SPURIOUS EMISSIONS (CONDUCTED), FCC CFR 47, PARA. 15.247(C).....	32
6.10.1.	Limits.....	32
6.10.2.	Method of Measurements.....	32
6.10.3.	Test Arrangement.....	32
6.10.4.	Test Equipment List	32
6.10.5.	Test Data.....	33
6.11.	TRANSMITTER SPURIOUS EMISSIONS (RADIATED @ 3 METERS), FCC CFR 47, PARA. 15.247(C), 15.209 & 15.205	34
6.11.1.	Limits.....	34
6.11.2.	Method of Measurements.....	35
6.11.3.	Test Arrangement.....	35
6.11.4.	Test Equipment List	35
6.11.5.	Photographs of Test Setup	35
6.11.6.	Test Data.....	36
EXHIBIT 7.	MEASUREMENT UNCERTAINTY.....	51
7.1.	LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY.....	51
7.2.	RADIATED EMISSION MEASUREMENT UNCERTAINTY.....	52
EXHIBIT 8.	MEASUREMENT METHODS.....	53
8.1.	GENERAL TEST CONDITIONS	53
8.1.1.	Normal temperature and humidity	53
8.1.2.	Normal power source	53
8.1.3.	Operating Condition of Equipment under Test.....	53
8.2.	METHOD OF MEASUREMENTS - AC MAINS CONDUCTED EMISSIONS.....	54
8.3.	EFFECTIVE RADIATED POWER.....	55
8.4.	SPURIOUS EMISSIONS (CONDUCTED & RADIATED).....	57
8.4.1.	Band-edge and Spurious Emissions (Conducted).....	57
8.4.2.	Spurious Emissions (Radiated).....	58
8.5.	ALTERNATIVE TEST PROCEDURES.....	60
8.5.1.	Peak Power Measurements.....	60
8.5.2.	Spurious RF conducted emissions.....	60

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-009I

Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 1. SUBMITTAL CHECK LIST

Annex No.	Exhibit Type	Description of Contents	Quality Check (OK)
	Test Report	- Exhibit 1: Submittal check lists - Exhibit 2: Introduction - Exhibit 3: Performance Assessment - Exhibit 4: EUT Operation and Configuration during Tests - Exhibit 5: Summary of test Results - Exhibit 6: Measurement Data - Exhibit 7: Measurement Uncertainty - Exhibit 8: Measurement Methods	OK
1	Test Report - Plots of Measurement Data	Plots # 1 to 60	OK
2	Test Setup Photos		OK
3	External Photos of EUT		OK
4	Internal Photos of EUT		OK
5	Cover Letters	Letter from Ultratech for Certification Request	OK
6	Attestation Statements	- Letter from the Applicant to appoint Ultratech to act as an agent - Letter from the Applicant to request for Confidentiality Filing	OK OK
7	ID Label/Location Info	- Internal ID Label for Module & External ID for OEM Product - Location of ID Label	OK OK
8	Block Diagrams	Block diagrams	OK
9	Schematic Diagrams	Schematic diagrams	OK
10	Parts List/Tune Up Info		None
11	Operational Description	Operational Description	OK
12	RF Exposure Info	RF Exposure Info	OK
13	Users Manual	Users Manual	OK

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 2. INTRODUCTION

2.1. SCOPE

Reference:	FCC Part 15, Subpart C, Section 15.247:1998
Title	Telecommunication - Code of Federal Regulations, CFR 47, Part 15
Purpose of Test:	To gain FCC Certification Authorization for a Modular Frequency Hopping Spread Spectrum Transmitter operating in the Frequency Band 2404.95 - 2482.15 MHz .
Type of Certification:	- Modular Transmitter Approval: This application is subject to the FCC certification for a Mobile & Fixed Base Station modular transceiver. This modular transmitter is clarified to comply with the requirements for Modular Approval specified in FCC Public Notice DA 00-1407. - Limitation of the FCC Modular Certification for Model 24XSTREAM: - This FCC certification for the Maxstream Model 24XSTREAM is only limited for the radio to be used in the Mobile or Fixed, Base Station with the antenna separation distance complies with FCC Rules @ 2.1091 - The transmitter is approved for being used only with antennas filed with FCC in compliance with FCC RF Exposure Requirements per FCC Rule @ 2.1091 with the minimum RF safety distance(s) specified in the Antenna Installation Instruction Section of the Installation/Users Manual.
Test Procedures	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
Environmental Classification:	- Residential - Light-industry, Commercial - Industry

2.2. RELATED SUBMITAL(S)/GRANT(S)

None

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.3. NORMATIVE REFERENCES

Publication	YEAR	Title
FCC CFR Parts 0-19	1999	Code of Federal Regulations – Telecommunication
ANSI C63.4	1992	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CISPR 22 & EN 55022	1997 1998	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
CISPR 16-1		Specification for Radio Disturbance and Immunity measuring apparatus and methods
FCC Public Notice DA 00-705	2000	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
FCC Public Notice DA 00-1407	2000	Part 15 Unlicensed Modular Transmitter Approval

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 3. PERFORMANCE ASSESSMENT

3.1. CLIENT INFORMATION

APPLICANT:	
Name:	MAXSTREAM, INC.
Address:	PO Box 1508 / 1215 South 1680 West Orem, UT USA, 84058
Contact Person:	Mr. David Steed Vice President - Engineering Phone #: 801-765-9885 Fax #: 801-765-9895 Email Address: david@maxstream.net

MANUFACTURER:	
Name:	MAXSTREAM, INC.
Address:	PO Box 1508 / 1215 South 1680 West Orem, UT USA, 84058
Contact Person:	Mr. David Steed Vice President - Engineering Phone #: 801-765-9885 Fax #: 801-765-9895 Email Address: david@maxstream.net

3.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name	MAXSTREAM, INC.
Product Name	2.4 GHz Frequency Hopping OEM Module
Model Name or Number	24XSTREAM
Serial Number	Pre-production sample
Type of Equipment	Frequency Hopping Spread Spectrum Transmitters
Input Power Supply Type	• External regulated DC Sources
Primary User Functions of EUT:	Provide data communication link through air

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

3.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	- Mobile - Base station (fixed use)
Intended Operating Environment:	- Residential - Commercial, light industry & heavy industry
Power Supply Requirement:	9 Vdc
RF Output Power Rating:	55 mili-Watts peak (conducted) fixed or 3.2 Watts peak EIRP with highest antenna gain of 19 dBi and minimum cable loss of 1.0 dB.
Operating Frequency Range:	2404.95 - 2482.15 MHz
Total Number of Channel Frequencies	194
Number of hopping frequencies	75
RF Output Impedance:	50 Ohms
Channel Spacing:	400 kHz
Duty Cycle:	Continuous frequency-hopping
20 dB Bandwidth:	246 kHz
Modulation Type:	FSK
Maximum Data Rate:	19.2 kbps
Per Channel Occupancy:	145.7 mili-seconds in an interval of 30 seconds
Emission Designation:	400K0F1D
Spectral Density	3.2 Watts/MHz EIRP maximum (Power output at the antenna / bandwidth of the RF output spectrum)
Antenna Port	The 24XSTREAM Module is provided with a reversed SMA connector
Rx & Tx Oscillator Frequency	Tx Frequency / 2

3.4. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	RF IN/OUT Port	1	Reversed SMA for external antenna	Shielded
2	DC Supply & I/O Port	1	Pin header	No cable. Direct connection

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

3.5. ASSOCIATED ANTENNA DESCRIPTIONS

APPROVED ANTENNA LIST & ANTENNA SEPARATION DISTANCES FOR COMPLIANCE WITH FCC EXPOSURE REQUIREMENTS

Manufacturer	Part Number	Type	Gain (dBi)	Application*	Antenna Separation Distance for FCC RX Exposure Compliance
MaxStream	A24-Y6	Yagi	6	F	2 meters
MaxStream	A24-Y8	Yagi	8.8	F	2 meters
MaxStream	A24-Y9	Yagi	9	F	2 meters
MaxStream	A24-Y10	Yagi	10	F	2 meters
MaxStream	A24-Y11	Yagi	11	F	2 meters
MaxStream	A24-Y12	Yagi	12	F	2 meters
MaxStream	A24-Y12	Yagi	12.5	F	2 meters
MaxStream	A24-Y13	Yagi	13.5	F	2 meters
MaxStream	A24-Y15	Yagi	15	F	2 meters
MaxStream	A24-F2	Omni Directional	2.1	M/F	20 centimeters
MaxStream	A24-F3	Omni Directional	3	M/F	20 centimeters
MaxStream	A24-F5	Omni Directional	5	M/F	20 centimeters
MaxStream	A24-F7	Omni Directional	7.2	F	2 meters
MaxStream	A24-F8	Omni Directional	8	F	2 meters
MaxStream	A24-F9	Omni Directional	9.5	F	2 meters
MaxStream	A24-F10	Omni Directional	10	F	2 meters
MaxStream	A24-F12	Omni Directional	12	F	2 meters
MaxStream	A24-F15	Omni Directional	15	F	2 meters
MaxStream	A24-P8	Panel	8.5	F	2 meters
MaxStream	A24-P13	Panel	13	F	2 meters
MaxStream	A24-P14	Panel	14	F	2 meters
MaxStream	A24-P15	Panel	15	F	2 meters
MaxStream	A24-P16	Panel	16	F	2 meters
MaxStream	A24-P19	Panel	19	F	2 meters
MaxStream	A24-HABMM-P6I	Dipole	2.1	M/F	20 centimeters
MaxStream	A24-HBMM-P6I	Dipole	2.1	M/F	20 centimeters
MaxStream	A24-HABSM	Dipole	2.1	M/F	20 centimeters
MaxStream	A24-QABMM-P6I	Monopole	1.9	M/F	20 centimeters
MaxStream	A24-QBMM-P6I	Monopole	1.9	M/F	20 centimeters
MaxStream	A24-QI	Monopole	1.9	M/F	20 centimeters

*M=Mobile, F=Fixed/Base-Station

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091

Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

NOTE: The above removable antennas are provided with the a customized made "N-to-Reversed SMA" adaptors so that they can be coupled to the EUT's reversed SMA connector.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-009I

Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

RF EXPOSURE



WARNING: This equipment is approved only for mobile and base station transmitting devices separation distances of (i) 20 centimeters or more for antennas with gains < 6 dBi or (ii) 2 meters or more for antennas with gains $\geq$ 6 dBi should be maintained between the antenna of this device and persons during operation. To ensure compliance, operation at distances closer than this is not recommended.

The preceding statement must be included as a CAUTION statement in manuals for OEM products to alert users on FCC RF Exposure compliance.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-009I
Dec. 12, 2


- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

3.6. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

Ancillary Equipment # 1	
Description:	Interface Test Board
Brand name:	Maxstream
Model Name or Number:	N/A
FCC Certification	N/A
Serial Number:	N/A
Connected to EUT's Port:	PCMCIA type II

3.7. GENERAL TEST SETUP

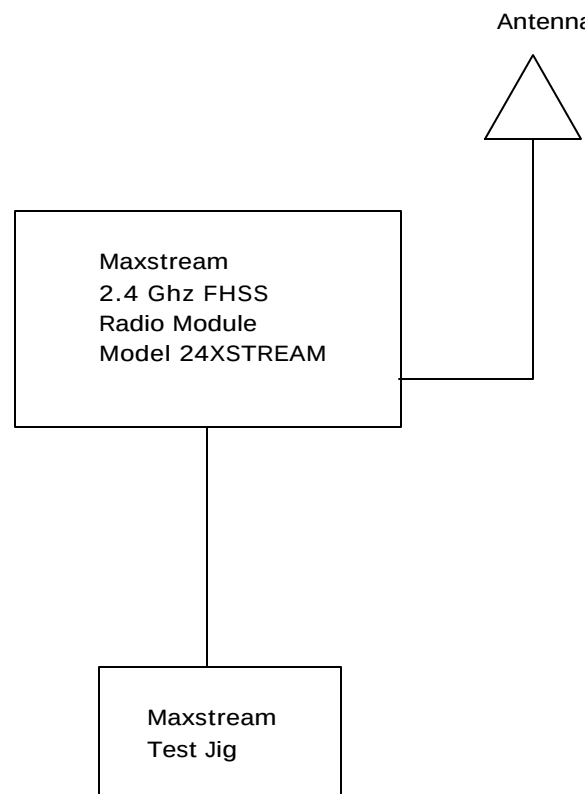

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 4. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

4.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power input source:	9 Vdc

4.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

Operating Modes:	- Each of lowest, middle and highest channel frequencies transmits continuously for emissions measurements. - The EUT operates in normal Frequency Hopping mode for occupancy duration, and frequency separation.
Special Test Software & Hardware:	Special firmware and hardware are installed to allow the EUT operates in hopping mode or at each channel frequency continuously. For example, the transmitter will be operated at each of lowest, middle and highest frequencies individually continuously during testing.
Transmitter Test Antenna:	The EUT is tested with the antenna fitted in a manner typical of normal intended use as an integral / non-integral antenna equipment as described with the test results.

Transmitter Test Signals:	
Frequencies: 2404.95 - 2482.15 MHz band:	Lowest, middle and highest channel frequencies tested: 2404.95, 2443.75 and 2482.15 MHz
Transmitter Wanted Output Test Signals: - RF Power Output (measured maximum output power): - Normal Test Modulation - Modulating signal source:	17.4 dBm - FSK - Internal

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-009I
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 5. SUMMARY OF TEST RESULTS

5.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Powerline Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).
- Radiated Emissions were performed at the Ultratech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario.

The above sites have been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville Open Field Test Site has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049). Last Date of Site Calibration: Aug. 08, 2001.

5.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC PARAGRAPH.	TEST REQUIREMENTS	COMPLIANCE (YES/NO)
Public Notice DA 00-1407	Part 15 Unlicensed Modular Transmitter Approval	Yes
15.107(a)	AC Power Line Conducted Emissions Measurements	N/A
15.247(a)(1) & 15.247(a)(1)(ii)	Hopping Channel Frequency Characteristics	Yes
15.247(b)(2)	Peak Output Power	Yes
1.1307, 1.1310, 2.1091 & 2.1093	RF Exposure Limit	Yes
15.247(c)	Band-edge and RF Conducted Spurious Emissions at the Transmitter Antenna Terminal	Yes
15.247(c), 15.209 & 15.205	Transmitter Radiated Emissions	Yes
The digital circuit portion of the EUT has been tested and verified to comply with FCC Part 15, Subpart B, Class B Digital Devices, the associated Radio Receiver operating in 2404.95 - 2482.15 MHz is exempted from FCC authorization . The engineering test report can be provided upon FCC requests.		

5.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 6. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

6.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in Exhibit 8 of this report, ANSI C63-4:1992 and FCC Public Notice @ DA 00-705 (March 30, 2000) – Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

6.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 7 for Measurement Uncertainties.

6.3. MEASUREMENT EQUIPMENT USED:

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C64-3:1992, FCC 15.247 and CISPR 16-1.

6.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:

The essential function of the EUT is to correctly communicate data to and from radios over RF link.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

6.5. UNLICENSED MODULAR TRANSMITTER APPROVAL REQUIREMENTS @ FCC PUBLIC NOTICE DA 00-1407 (JUNE 26, 2000)

In order to satisfy FCC requirements for equipment authorization for modular transmitters, the transmitters shall meet the following parameters:

	Requirements for Modular Transmitters	Manufacturer's Clarification	Laboratory's Comments
(a)	In order to be considered a transmitter module, the device must be complete RF transmitter, i.e., it must have its own reference oscillator (e.g., VCO), antenna, etc.... The only connectors to the module, if any, may be power supply and modulation/data inputs	✓ The transmitter is completed with its own reference oscillator, antenna. ✓ Only connectors provide are dc supply, data and rf ports are provided with the modular transmitter	Conform Conform
(b)	Compliance with FCC RF Exposure requirements may, in some instances, limit the output power of a module and/or the final applications in which the approved module may be employed	✓ The radio is intended for use with mobile or fixed base stations only. It complies with MPE per 2.1091 & 1.1307	Conform
(c)	While the applicant for a device into which an authorized module is installed is not required to obtain a new authorization for the module, this does not preclude the possibility that some other form of authorization or testing may be required for the device (e.g., a WLAN into which the authorized module is installed still be authorized as PC peripheral, subject to the appropriate equipment authorization)	✓ The equipment under complies with FCC Part15, Subpart B, Class B – Unintentional radiators	Conform
(d)	In the case of a modular transceiver, the modular approval policy only applies to the transmitter portion of such devices. Pursuant to section 15.101(b), the receiver portion will either be subject to Verification, or it will not be subject to any authorization requirements (unless if is a Scanning Receiver, in which case it is also subject to Certification, pursuant to Section 15.101(a))	✓ The receiver operates in the band above 960 MHz; therefore, the FCC authorization for the receiver is exempted.	Conform

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-009I
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

	Requirements for Modular Transmitters	Manufacturer's Clarification	Laboratory's Comments
(e)	The holder of the grant of equipment authorization (Grantee) of the module is responsible for the compliance of the module in its final configuration, provided that the OEM, integrator, and /or end user has complied with all of the instructions provided by the Grantee which indicate installation and/or operating conditions necessary for compliance.	End-users must comply with the following instruction stated in the users' manual: ✓ Labeling requirement for equipment using this modular transmitter. ✓ RF Exposure Warning for compliance with FCC Rules 2.1091 and 1.1307 when the radio is used in a mobile or base system	Conform. See Page 4 of Users Manual Conform. See Page 30 of the Users Manual

In order to obtain a modular transmitter approval, a cover letter requesting modular approval must be submitted and the numbered requirements identified below must be addressed in the application for equipment authorization:

	Requirements for Modular Transmitters	Manufacturer's Clarification	Laboratory's Comments
1.	The modulator transmitter must have its own RF shielding. This is intended to ensure that the module does not have to rely upon the shielding provided by the device into which it is installed in order for all modular transmitter emissions to comply with Part 15 limits. It is also intended to prevent coupling between the RF circuitry of the module and any wires or circuits in the device into which the module is installed. Such coupling may result in non-complaint operation.	✓ Metal enclosure and ground plane to finish the complete shielding on the radio portion of the module. Holes on the metal enclosure is specifically designed to reduced in radiated emissions above 1 GHz from the radio.	Conform
2.	The modular transmitter must have buffered modulation/data inputs (if such inputs are provided) to ensure that the module will comply with Part 15 requirements under conditions of excessive data rates or over-modulation.	✓ The modular transmitter has buffered modulation/data inputs	Conform
3.	The modular transmitter must have its own power supply regulation. This is intended to ensure that the module will comply with Part 15 requirements regardless of the design of the power supplying circuitry in the device into which the module is installed.	✓ The modular transmitter has its own power supply regulation.	Conform

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

	Requirements for Modular Transmitters	Manufacturer's Clarification	Laboratory's Comments
4.	The modular transmitter must comply with the antenna requirements of section 15.203 and 15.204(c). The antenna must either be permanently attached or employ a "unique" antenna coupler (at all connections between the module and the antenna, including the cable). Any antenna used with the module must be approved with the module, either at the time of initial authorization or through a Class II permissive change. The "professional installation" provision of Section 15.203 may not be applied to modules.	✓ The radio complies with Rules 15.203 and 15.204(c) with permanently attached antenna. ✓ The radio and its associated antennas are provided with the special coupling antenna connectors (MMCX, reversed SMA.....).	Conform Conform
5	The modular transmitter must be tested in a stand-alone configuration, i.e., the module must not be inside another device during testing. This is intended to demonstrate that the module is capable of complying with Part 15 emission limits regardless of the device into which it is eventually installed. Unless the transmitter module will be battery powered, it must comply with the AC conducted requirements found in Section 15.207. AC or DC power lines and data input/output lines connected to the module must not contain ferrites, unless they will marketed with the module (see Section 15.27(a)). The length of these lines shall be length typical of actual use or, if that length is unknown, at least 10 centimeters to insure that there is no coupling between the case of the module and supporting equipment. Any accessories, peripherals, or support equipment connected to the module during testing shall be unmodified or commercially available (See Section 15.31(I)).	✓ The modular transmitter was tested in a stand-alone configuration	Conform

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.6. COMPLIANCE WITH FCC PART 15 – GENERAL TECHNICAL REQUIREMENTS

FCC Section	FCC Rules	
15.31	The hopping function must be disabled for tests, which should be performed with the EUT transmitting on the number of frequencies specified in this Section. The measurements made at the upper and lower ends of the band of operation should be made with the EUT tuned to the highest and lowest available channels.	✓ Hopping function was disabled during testing
15.203	Described how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT. The exception is in those cases where EUT must be professionally installed. In order to demonstrate that professional installation is required, the following 3 points must be addressed: • The application (or intended use) of the EUT • The installation requirements of the EUT • The method by which the EUT will be marketed	✓ The transmitter is completed with its own reference oscillator, antenna. ✓ Only connectors provide are dc supply, data and rf ports are provided with the modular transmitter
15.204	Provided the information for every antenna proposed for use with the EUT: (a) type (e.g. Yagi, patch, grid, dish, etc...), (b) manufacturer and model number (c) gain with reference to an isotropic radiator	Please refer to Sec. 3.5 of this test report for details of antenna information
15.247(a)	Description of how the EUT meets the definition of a frequency hopping spread spectrum, found in Section 2.1. Based on the technical description.	Conform. Please refer to Technical Description specified in Annex 11
15.247(a)	<u>Pseudo Frequency Hopping Sequence:</u> Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, in order to demonstrate that the sequence meets the requirements specified in the definition of a frequency hopping spread spectrum system, found in Section 2.1	Conform. Please refer to Technical Description specified in Annex 11
15.247(a)	<u>Equal Hopping Frequency Use:</u> Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g. that each new transmission event begins on the next channel in the hopping sequence after final channel used in the previous transmission events).	Conform. Please refer to Technical Description specified in Annex 11

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

FCC Section	FCC Rules	
15.247(g)	Describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system	Transmitter operation: When presented with a continuous stream of data, the transmitter transmits a preamble for syncing, and then as much data as possible until the channel duration time nears 400 milliseconds. Just before the 400 millisecond timer elapses, the transmitter hops then to a new channel that is pseudo randomly ordered, and transmits first a preamble for syncing and then data. This occurs over and over again until all of the data has been transmitted. If the transmitter sits idle most of the time and transmits only for short bursts, each transmission occurs on a separate channel. Receiver operation: The receiver continuously scans all 75 channels for valid data. Once valid data is detected, it is demodulated. If the data transmission extends longer than 400 milliseconds, the receiver hops in synchronization with the transmitter in order to receive all the data. The receiver has the same pseudo randomly sequenced hopping channels as does the transmitter.
15.247(h)	Describe how the EUT complies with the requirement that it not have the ability to coordinated with other FHSS is an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters	The EUT has no ability in either hardware or software to coordinate the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
Public Notice DA 00-705	<u>System Receiver Input Bandwidth:</u> Describe how the associated receiver(s) complies with the requirement that its input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.	The approximate occupied bandwidth of the transmitter is 250 kHz. The receiver, as per the system block diagram, has 10.7 MHz IF filters with a bandwidth of 330 kHz. The channel spacing for the FHSS system is 400 kHz. Therefore, unless both the transmitter and receiver are on the same channel, no successful data transfer takes place.
Public Notice DA 00-705	<u>System Receiver Hopping Capability:</u> Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals	Receiver operation: The receiver continuously scans all 75 channels for valid data. Once valid data is detected, it is demodulated. If the data transmission extends longer than 400 milliseconds, the receiver hops in synchronization with the transmitter in order to receive all the data. The receiver has the same pseudo randomly sequenced hopping channels as does the transmitter.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.7. HOPPING CHANNEL CARRIER FREQUENCY CHARACTERISTICS @ FCC CFR 47, PARA 15.247(A)(1) & (A)(1)(II)

6.7.1. Limits

- **FCC CFR 47, Para 15.247(a)(1):-** Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.
- **FCC CFR 47, Para 15.247(a)(1)(ii):-** Frequency hopping systems operating in the 2404.95 - 2482.15 MHz and 5725-5850 MHz bands shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.
- **FCC CFR 47, Para 15.247(a)(1)(ii):-** Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting

6.7.2. Method of Measurements

Refer to FCC 15.247(a)(1) & ANSI C63-4:1992 and Public Notice DA 00-705

Carrier Frequency Separation:

The hopping function of the EUT is enabled. Use the spectrum analyzer setting as follows:

- Span = wide enough to capture the peaks of two adjacent channels
- RBW = 1% of the span
- VBW = RBW
- Sweep = Auto
- Detector = peak
- Trace = max hold

Number of hopping frequency:

The hopping function of the EUT is enabled. Use the spectrum analyzer setting as follows:

- Span = the frequency band of operation
- RBW = 1% of the span
- VBW = RBW
- Sweep = Auto
- Detector = peak
- Trace = max hold

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-009I

Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Time of Occupancy (Dwell Time):

The hopping function of the EUT is enabled. Use the spectrum analyzer setting as follows:

- Span = 0 Hz centered on a hopping channel
- RBW = 1 MHz
- VBW = RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector = peak
- Trace = max hold


If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g. data rate modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.

20 dB Bandwidth:

Use the spectrum analyzer setting as follows:

- Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
- RBW = 1% of the 20 dB bandwidth
- VBW = RBW
- Sweep = auto
- Detector = peak
- Trace = max hold
- The transmitter shall be transmitting at its maximum data rate.
- Allow the trace to stabilize.
- Use the marker-to-peak function to set the marker to the peak of the emission.
- Use the marker-delta function to measure 20 dB down on both sides of the emission.
- The 20 dB BW is the delta reading in frequency between two markers.

6.7.3. Test Arrangement



6.7.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Microwave Amplifier	Hewlett Packard	83017A	..	1 GHz – 26.5 GHz 34-38 dB gain
Horn Antenna	EMCO	3115	9701-5061	1 – 18 GHz

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-009I
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.7.5. Test data

20 dB BANDWIDTH MEASUREMENTS

CHANNEL FREQUENCY (MHz)	20 dB BANDWIDTH (kHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
2404.95	264	500	PASS
2443.75	264	500	PASS
2482.15	264	500	PASS

* Refer plots # 1 to 3 in Annex 1 for detailed information of measurements

Test Description	FCC Specification	Measured Values	Comments
Channel Hopping Frequency Separation	minimum of 25 KHz or 20dB BW whichever is greater.	400 kHz	Pass. Refer to Plot 4 in Annex 1 for measurement data
Number hopping frequencies	75 minimum	75 selected channel hopping frequencies among 194 available channel frequencies	Pass. Refer to Technical Description in Annex 11
20 dB BW of the hopping channel	1 MHz maximum	264 kHz	Pass. Refer to Plots # 1 to 3 in Annex 1
Average Time of Occupancy	0.4 seconds max. within 30 seconds period	147.71 mili-seconds within 30 seconds period (equal occupancy time for each channel)	Pass. Refer to Plots # 5 to 10 in Annex 1

	Manufacturer's Explanation
FCC Requirement @ Section 15.247(a)(1): The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals	Conform. Refer to section 6.6 of this report
FCC Requirement @ Section 15.247(g): Describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system	Conform. Refer to section 6.6 of this report
FCC Requirement @ Section 15.247(h): Describe how the EUT complies with the requirement that it not have the ability to coordinated with other FHSS is an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters	Conform. Refer to section 6.6 of this report

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.8. PEAK OUTPUT POWER & EFFECTIVE RADIATED POWER (EIRP) @ FCC 15.247(B)

6.8.1. Limits

- **FCC 15.247(b)(1):** Maximum peak output power of the transmitter shall not exceed 1 Watt.
- **FCC 15.247(b)(3):** If the antenna of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- **FCC 15.247(b)(3)(i):** Systems operating in the 2404.95 - 2482.15 MHz band that are used exclusively for fixed, **point-to-point operations** may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduce by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi..

De Facto EIRP Limit

Describe how the EUT complies with the de facto EIRP limit for every antenna proposes for use with the EUT. This includes those devices that will be used in point-to-point applications. If the peak power, as measured above, must be reduced so that the de facto EIRP limit may be met for a particular antenna, described exactly how much it will be reduced for that antenna. If the minimum length of cable which will always be used, the type of cable, and its loss, in dB per unit length, for the frequency of the emission. The limit is specified in one of the subparagraphs of this section. Also, specify who will be responsible for ensuring that compliant operation is maintained for every antenna that will be used with EUT.


Point-to-Point Operation:

- If the EIRP relaxation for point-to-point operation is proposed for any particular antenna, describe who will be responsible for ensuring that the EUT is only used in such an application.
- Fixed, point-to-point operation, as used in 2400-2483.5 MHz and 5725-5850 MHz bands, excludes the use of the following:
 - Point-to-multipoint systems
 - Omnidirectional applications
 - Multiple co-located intentional radiators transmitting the same information.
- The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that *the system is used exclusively for fixed, point-to-point operations*. The instruction manual furnished with the intentional radiators shall contain language in the installation instructions informing the operator and the installer of this reponsibility.

6.8.2. Method of Measurements

Refer to Exhibit 8, Sec. 8.3 of this test report, FCC 15.247(b)(1)&(3), ANSI C63-4:1992

6.8.3. Test Arrangement



ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-009I
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.8.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Peak Power Meter & Peak Power Sensor	Hewlett Packard	8900 8481A	2131A00124 2551A01965	0.1-18 GHz 50 Ohms Input
Microwave Amplifier	Hewlett Packard	HP 83017A		1 GHz to 26.5 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz
Horn Antenna	EMCO	3155	9911-5955	1 GHz – 18 GHz

6.8.5. Test Data

Duty cycle: Continuous

6.8.5.1. PEAK POWER MEASUREMENTS AT THE RF ANTENNA PORT FOR ALL ANTENNAS

Transmitter Channel	Frequency (MHz)	Peak Power P @ Antenna Port (dBm)	RF Conducted Power Limit (dBm)
Lowest	2404.95	17.4	18.0
Middle	2443.75	17.4	18.0
Highest	2482.15	16.0	18.0

Conducted RF Power Limit = 36 dBm - Maximum Allowable Antenna Gain = 36 - 18 dBi = 18 dBm

Where: Maximum Allowable Antenna Gain = Gain of the Model A24-P19NF Antenna - Minimum Cable Loss
= 19 dBi - 1 dB = 18 dBi

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.8.5.2. EIRP MEASUREMENTS – SUBSTITUTION METHOD

Maximum EIRP: 35 dBm or 3.2 Watts for Maxstream 2.4 GHz FHSS Radio Module, Model 24XSTREAM, with FLAT Panel Antenna, Model A24-P19 (Gain = 19 dBi) and the cable with the minimum loss of 1 dB. Refer to the following Sec. 6.8.5.2.3 of this test report.

6.8.5.2.1. Maxstream 2.4 GHz FHSS Radio Module, Model 24XSTREAM, with Yagi Directional Antenna, Model A24-Y18 (Gain = 15 dBi)

Note: The Model A24-Y18 with the highest gain of 15 dBi was used for testing and representing the worst case among all other family Yagi Directional Antenna with lower gain as shown in Sec. 3.5 of this test report.

Frequency (MHz)	E-Field E1 in 100 kHz BW @ 3m (dBuV/m)	Antenna Polarization (V/H)	ERP measured from Signal GEN. S – Cable Loss (dBm)	Substitution Antenna Gain G (dBi)	Measured Total EIRP (dBm)	EIRP LIMIT (dBm)
2404.95	129.4	V	23.2	7.8	31.0	36.0
	111.4	H	3.0	8.0	11.0	36.0
2443.75	130.2	V	23.4	7.8	31.2	36.0
	111.3	H	3.2	8.0	11.2	36.0
2482.15	129.3	V	22.1	7.8	29.9	36.0
	109.2	H	1.6	8.0	9.6	36.0

6.8.5.2.2. Maxstream 2.4 GHz FHSS Radio Module, Model 24XSTREAM, with Fiberglass Omnidirectional, Model A24-F15 (Gain = 15 dBi)

Note: The Model A24-F15 with the highest gain of 15 dBi was used for testing and representing the worst case among all other family Fiberglass Omnidirectional with lower gain as shown in Sec. 3.5 of this test report

Since the antenna was too long and the E-field could not be maximized at 3 meter distance. The E-field of the fundamental was measured at 10 meter distance and then converted to 3m E-field by adding 10.5 dB to the 10m E-field. The EIRP measurement was conducted at 3 meter distance wrt. The converted 3m E-field level.

Frequency (MHz)	E-Field E1 in 100 kHz BW @ 3m (dBuV/m)	Antenna Polarization (V/H)	ERP measured from Signal GEN. S – Cable Loss (dBm)	Substitution Antenna Gain G (dBi)	Measured Total EIRP (dBm)	EIRP LIMIT (dBm)
2404.95	133.3	V	27.1	7.8	34.9	36.0
	116.7	H	8.3	8.0	16.3	36.0
2443.75	132.3	V	25.5	7.8	33.3	36.0
	113.1	H	5.0	8.0	13.0	36.0
2482.15	130.1	V	23.0	7.8	30.8	36.0
	116.6	H	9.0	8.0	17.0	36.0

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
 Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.8.5.2.3. Maxstream 2.4 GHz FHSS Radio Module, Model 24XSTREAM, with FLAT Panel Antenna, Model A24-P19 (Gain = 19 dBi) and cable with a minimum loss of 1.0 dB.

Note: The Model A24-P19 with the highest gain of 19 dBi and cable with the insertion loss of at least 1 dB was used for testing and representing the worst case among all other family Fiberglass Omnidirectional with lower gain as shown in Sec. 3.5 of this test report

Frequency (MHz)	E-Field E1 in 100 kHz BW @ 3m (dBuV/m)	Antenna Polarization (V/H)	ERP measured from Signal GEN. S – Cable Loss (dBm)	Substitution Antenna Gain G (dBi)	Measured Total EIRP (dBm)	EIRP LIMIT (dBm)
2404.95	133.4	V	27.2	7.8	35.0	36.0
	111.6	H	3.2	8.0	11.2	36.0
2443.75	132.9	V	26.1	7.8	33.9	36.0
	112.0	H	3.9	8.0	11.9	36.0
2482.15	130.5	V	23.4	7.8	31.2	36.0
	108.3	H	0.4	8.0	8.4	36.0

6.8.5.2.4. Maxstream 2.4 GHz FHSS Radio Module, Model 24XSTREAM, with 1/2 Wave Dipole Antenna, Model A24-HABSM (Gain = 2.1 dBi)

Note: The Model A24-HABSM with the gain of 2.1 dBi was used for testing and representing the worst case among all other family 1/2 Wave Dipole Antenna which have the same gain but different connection method. Refer to Sec. 3.5 of this test report for details descriptions of 1/2 Wave Dipole Antenna.

Frequency (MHz)	E-Field E1 in 100 kHz BW @ 3m (dBuV/m)	Antenna Polarization (V/H)	ERP measured from Signal GEN. S – Cable Loss (dBm)	Substitution Antenna Gain G (dBi)	Measured Total EIRP (dBm)	EIRP LIMIT (dBm)
2404.95	117.2	V	11.0	7.8	18.8	36.0
	117.8	H	9.4	8.0	17.4	36.0
2443.75	118.0	V	11.2	7.8	19.0	36.0
	118.5	H	10.4	8.0	18.4	36.0
2482.15	116.7	V	9.6	7.8	17.4	36.0
	114.6	H	7.0	8.0	15.0	36.0

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-009I
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.8.5.2.5. Maxstream 2.4 GHz FHSS Radio Module, Model 24XSTREAM, with 1/4 Wave Dipole Antenna, Model A24-QI (Gain = 1.9 dBi)

Note: The Model A24-QI with the gain of 1.9 dBi was used for testing and representing the worst case among all other family 1/4 Wave Dipole Antenna which have the same gain but different connection method and housing. Refer to Sec. 3.5 of this test report for details descriptions of 1/4 Wave Dipole Antenna.

Frequency (MHz)	E-Field E1 in 100 kHz BW @ 3m (dBuV/m)	Antenna Polarization (V/H)	ERP measured from Signal GEN. S – Cable Loss (dBm)	Substitution Antenna Gain G (dBi)	Measured Total ERP (dBm)	EIRP LIMIT (dBm)
2404.95	115.0	V	8.8	7.8	16.6	36.0
	110.3	H	1.9	8.0	9.9	36.0
2443.75	114.1	V	7.3	7.8	15.1	36.0
	112.3	H	4.2	8.0	12.2	36.0
2482.15	113.0	V	5.9	7.8	13.7	36.0
	110.0	H	2.4	8.0	10.4	36.0

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.9. RF EXPOSURE REQUIRMENTS @ FCC 15.247(B)(4), 1.1310 & 2.1091

6.9.1. Limits

- **FCC 15.247(b)(4):** Systems operating under provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See @ 1.1307(b)(1).
- **FCC 1.1310:-** The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(A) Limits for Occupational/Control Exposures				
300-1500	...	...	F/300	6
1500-100,000	...	...	5	6
(B) Limits for General Population/Uncontrolled Exposure				
300-1500	...	...	F/1500	6
1500-100,000	...	...	1.0	30

F = Frequency in MHz

6.9.2. Method of Measurements

Refer to FCC @ 1.1310, 2.1091 and Public Notice DA 00-705 (March 30, 2000)

- Spread spectrum transmitters operating under section 15.247 are categorically from routine environmental evaluation to demonstrating RF exposure compliance with respect to MPE and/or SAR limits. These devices are not exempted from compliance (As indicated in Section 15.247(b)(4), these transmitters are required to operate in a manner that ensures that exposure to public users and nearby persons) does not exceed the Commission's RF exposure guidelines (see Section 1.1307 and 2.1093). Unless a device operates at substantially low power levels, with a low gain antenna(s), supporting information is generally needed to establish the various potential operating configurations and exposure conditions of a transmitter and its antenna(s) in order to determine compliance with the RF exposure guidelines.
- In order to demonstrate compliance with MPE requirements (see Section 2.1091), the following information is typically needed:
 - (1) Calculation that estimates the minimum separation distance (20 cm or more) between an antenna and persons required to satisfy power density limits defined for free space.
 - (2) Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement
 - (3) Any caution statements and/or warning labels that are necessary in order to comply with the exposure limits
 - (4) Any other RF exposure related issues that may affect MPE compliance

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Calculation Method of RF Safety Distance:

$$S = PG/4\pi r^2 = EIRP/4\pi r^2$$

Where: P: power input to the antenna in mW
EIRP: Equivalent (effective) isotropic radiated power.
S: power density mW/cm²
G: numeric gain of antenna relative to isotropic radiator
r: distance to centre of radiation in cm

FCC radio frequency exposure limits may be exceeded at distances closer than r cm from the antenna of this device

$$r = \sqrt{PG/4\pi S}$$

FCC radio frequency exposure limits may not be exceeded at distances closer than r cm from the antenna of this device

- For portable transmitters (see Section 2.1093), or devices designed to operate next to a person's body, compliance is determined with respect to the SAR limit (define in the body tissues) for near-field exposure conditions. If the maximum average output power, operating condition configurations and exposure conditions are comparable to those of existing cellular and PCS phones., an SAR evaluation may be required in order to determine if such a device complies with SAR limit. When SAR evaluation data is not available, and the additional supporting information cannot assure compliance, the Commission may request that an SAR evaluation be performed, as provided for in Section 1.1307(d)

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-009I
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.9.3. Test Data

The minimum separation distance between the antenna and bodies of users are calculated using the following formula:

$$\text{RF EXPOSURE DISTANCE LIMITS: } r = (PG/4\pi S)^{1/2} = (EIRP/4\pi S)^{1/2}$$

Where: $S = 1.0 \text{ mW/cm}^2$

EIRP (in mW) = maximum EIRP measured in Section 5.8 of this test report

Antenna Family	Frequency (MHz)	Maximum Measured peak EIRP	Laboratory's Recommended Minimum Antenna Separation Distance r (cm)	Manufacturer's specification for Antenna Separation Distance in User's Manual
Yagi Directional Antennas, Model A24-Ygg	2404.95 – 2482.15	31.2 dBm or 1.3 W	10.2 cm	2 meters outdoor for base station use only
Fiberglass Omnidirectionals, Model A24-Fgg	2404.95 – 2482.15	34.9 dBm or 3.2 W	15.7 cm	2 meters outdoor for base station use only
Flat Pannel Antennas, Model A24-Pgg	2404.95 – 2482.15	35.0 dBm or 3.2 W	15.9 cm	2 meters outdoor for base station use only
1/2 Wave Dipole Antennas, Model A24-Hgg	2404.95 – 2482.15	19.0 dBm or 79.4mW	2.5 cm	20 cm indoor/outdoor for mobile station
1/4 Wave Dipole Antennas, Model A24-Qgg	2404.95 – 2482.15	16.6 dBm or 45.7 mW	1.9 cm	20 cm indoor/outdoor for mobile station

** gg: antenna part number

Evaluation of RF Exposure Compliance Requirements	
RF Exposure Requirements	Compliance with FCC Rules
Minimum calculated separation distance between antenna and persons required:	Manufacturer' instruction for separation distance between antenna and persons required: 2 meters outdoor with base station antennas and 20 cm indoor/outdoor for mobile antennas.
10.2 cm for base station and 2.5 cm for mobile station	Please refer to page # 30 of the Users/ Manual and FCC RF Exposure folder
Antenna installation and device operating instructions for installers	Please refer to Users Manual
Caution statements and/or warning labels that are necessary in order to comply with the exposure limits	Please refer to page # 30 of the Users/ Manual and FCC RF Exposure folder

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.10. TRANSMITTER BAND-EDGE & SPURIOUS EMISSIONS (CONDUCTED), FCC CFR 47, PARA. 15.247(C)


6.10.1. Limits

In any 100 KHz bandwidth outside the operating frequency band, the radio frequency power that is produced by modulation products of the spreading sequence, the information sequence and the carrier frequency shall be at least 20 dB below that in any 100 KHz bandwidth within the band that contains the highest level of the desired power.

6.10.2. Method of Measurements

Refer to Exhibit 8, Sec. 8.4 of this test report, FCC 15.247(c) & ANSI C63-4:1992

6.10.3. Test Arrangement

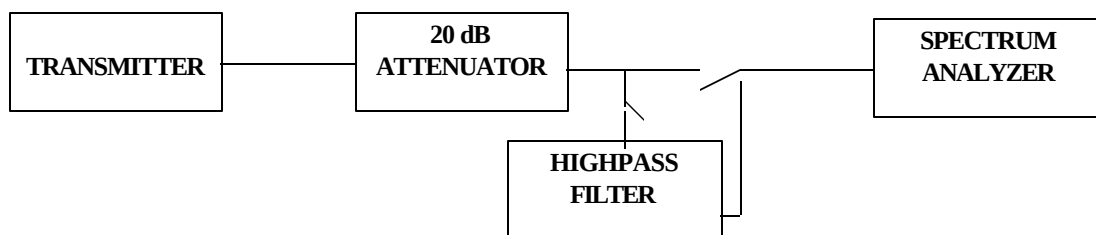

6.10.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.10.5. Test Data

6.10.5.1. Band-edge Spurious Emissions during Hopping

There were click noises appeared during frequency hopping function; however, measurement using the average detector will show that these click noises were insignificant. Please refer plot # 11 to 16 for detailed measurements

6.10.5.2. Lowest Frequency (2404.95 MHz, RF Conducted Power = 55 mWatts peak)

FREQUENCY (MHz)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
3607.44	-53.0	PEAK	-1.3	-51.7	PASS
4809.92	-45.3	PEAK	-1.3	-44.0	PASS
➤ The emissions were scanned from 10 MHz to 25 GHz and all emissions less 30 dB below the limits were recorded. ➤ Please refer to Plot # 17 to 19 in Annex 1 for measurement details.					

6.10.5.3. Middle Frequency (2404.95 MHz, RF Conducted Power = 55 mWatts peak)

FREQUENCY (MHz)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
3665.63	-61.0	PEAK	-1.7	-59.3	PASS
4887.50	-47.2	PEAK	-1.7	-45.5	PASS
➤ The emissions were scanned from 10 MHz to 25 GHz and all emissions less 30 dB below the limits were recorded. ➤ Please refer to Plot # 20 to 22 in Annex 1 for measurement details.					

6.10.5.4. Highest Frequency (2482.15 MHz, RF Conducted Power = 39.8 mWatts peak)

FREQUENCY (MHz)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
2789.00	-32.3	PEAK	-3.3	-29.0	PASS
3111.00	-47.3	PEAK	-3.3	-44.0	PASS
3432.00	-32.0	PEAK	-3.3	-28.7	PASS
3723.23	-45.7	PEAK	-3.3	-42.4	PASS
4964.30	-42.0	PEAK	-3.3	-38.7	PASS
➤ The emissions were scanned from 10 MHz to 25 GHz and all emissions less 30 dB below the limits were recorded. ➤ Please refer to Plot # 23 to 25 in Annex 1 for measurement details.					

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11. TRANSMITTER SPURIOUS EMISSIONS (RADIATED @ 3 METERS), FCC CFR 47, PARA. 15.247(C), 15.209 & 15.205

6.11.1. Limits

In any 100 KHz bandwidth outside the operating frequency band, the radio frequency power that is produced by modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 KHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in @ 15.209(a), which lesser attenuation.

All other emissions inside restricted bands specified in @ 15.205(a) shall not exceed the general radiated emission limits specified in @ 15.209(a)

Remarks:

- Applies to harmonics/spurious emissions that fall in the restricted bands listed in Section 15.205. The maximum permitted average field strength is listed in Section 15.209.
- @ FCC CFR 47, Para. 15.237(c) - The emission limits as specified above are based on measurement instrument employing an average detector. The provisions in @15.35 for limiting peak emissions apply.

FCC CFR 47, Part 15, Subpart C, Para. 15.205(a) - Restricted Frequency Bands

MHz	MHz	MHz	GHz
0.090 - 0.110	162.0125 - 167.17	2310 - 2390	9.3 - 9.5
0.49 - 0.51	167.72 - 173.2	2483.5 - 2500	10.6 - 12.7
2.1735 - 2.1905	240 - 285	2655 - 2900	13.25 - 13.4
8.362 - 8.366	322 - 335.4	3260 - 3267	14.47 - 14.5
13.36 - 13.41	399.9 - 410	3332 - 3339	14.35 - 16.2
25.5 - 25.67	608 - 614	3345.8 - 3358	17.7 - 21.4
37.5 - 38.25	960 - 1240	3600 - 4400	22.01 - 23.12
73 - 75.4	1300 - 1427	4500 - 5250	23.6 - 24.0
108 - 121.94	1435 - 1626.5	5350 - 5460	31.2 - 31.8
123 - 138	1660 - 1710	7250 - 7750	36.43 - 36.5
149.9 - 150.05	1718.8 - 1722.2	8025 - 8500	Above 38.6
156.7 - 156.9	2200 - 2300	9000 - 9200	

FCC CFR 47, Part 15, Subpart C, Para. 15.209(a)
-- Field Strength Limits within Restricted Frequency Bands --

FREQUENCY (MHz)	FIELD STRENGTH LIMITS (microvolts/m)	DISTANCE (Meters)
0.009 - 0.490	2,400 / F (KHz)	300
0.490 - 1.705	24,000 / F (KHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-009I
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11.2. Method of Measurements

Refer to Exhibit 8, Sec. 8.4 of this test report and **ANSI 63.4-1992, Para. 8** for detailed radiated emissions measurement procedures.

The following measurement procedures were also applied:

- Applies to harmonics/spurious that fall in the restricted bands listed in Section 15.205. the maximum permitted average field strength is listed in Section 15.209. A Pre-Amp and highpass filter are used for this measurement.
- For measurement below 1 GHz, set RBW = 100 KHz, VBW $\geq$ 100 KHz, SWEEP=AUTO.
- For measurement above 1 GHz, set RBW = 1 MHz, VBW = 1 MHz (Peak) & VBW = 10 Hz (Average), SWEEP=AUTO.
- If the emission is pulsed, modified the unit for continuous operation, then use the settings above for measurements, then correct the reading by subtracting the peak-average correction factor derived from the appropriate duty cycle calculation. See Section 15.35(b) and (c).

6.11.3. Test Arrangement

Please refer to Test Arrangement in Sec. 5.5.3 for details of test setup for emission measurements.

6.11.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Advantest	R3271	15050203	100 Hz to 32 GHz with external mixer for frequency above 32 GHz
Microwave Amplifier	Hewlett Packard	HP 83017A		1 GHz to 26.5 GHz
Biconilog Antenna	EMCO	3143	1029	20 MHz to 2 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz
Horn Antenna	EMCO	3160-09	..	18 GHz – 26.5 GHz
Horn Antenna	EMCO	3160-10	..	26.5 GHz – 40 GHz
Mixer	Tektronix	118-0098-00	..	18 GHz – 26.5 GHz
Mixer	Tektronix	119-0098-00	..	26.5 GHz – 40 GHz

6.11.5. Photographs of Test Setup

Refer to the Photographs in Annex 2 for setup and arrangement of equipment under tests and its ancillary equipment.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11.6. Test Data


6.11.6.1.1. Maxstream 2.4 GHz FHSS Radio Module, Model 24XSTREAM, with Yagi Directional Antenna, Model A24-Y18 (Gain = 15 dBi)

Note: The Model A24-Y18 with the highest gain of 15 dBi was used for testing and representing the worst case among all other family Yagi Directional Antenna with lower gain as shown in Sec. 3.5.1 of this test report.

6.11.6.1.1.1. Lowest Frequency (2404.95 MHz, RF Conducted Power = 55 mWatts)

FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
1202.48	36.9	19.1	V	54.0	108.9	-34.9	*PASS
1202.48	33.6	23.4	H	54.0	108.9	-30.6	*PASS
2404.95	128.9	128.9	V	--	--	--	--
2404.95	110.7	110.7	H	--	--	--	--
3607.43	54.9	40.7	V	54.0	108.9	-13.3	*PASS
3607.43	59.8	44.0	H	54.0	108.9	-10.0	*PASS
4809.90	51.8	38.6	V	54.0	108.9	-15.4	*PASS
4809.90	52.8	39.5	H	54.0	108.9	-14.5	*PASS
7214.85	48.6	35.8	H	54.0	108.9	-73.1	PASS
7214.85	51.7	39.2	H	54.0	108.9	-69.7	PASS

- The emissions were scanned from 10 MHz to 25 GHz and all emissions less 80 dB below the limits were recorded.
- * the frequency fall in the restricted band @ FCC 15.205 and the limit @ FCC 15.209 is applied.
- Refer to Plots # 26 & 27 in Annex 1 for band-edge emissions.

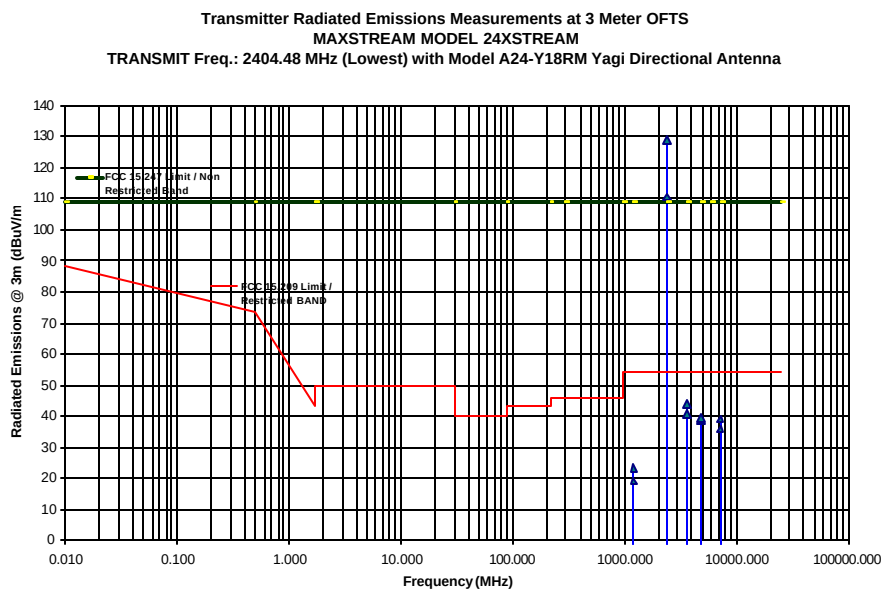

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091

Dec. 12, 2


- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11.6.1.1.2. Middle Frequency (2443.75 MHz, RF Conducted Power = 55 mWatts)

FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
1221.88	35.4	27.4	V	54.0	109.8	-26.6	*PASS
1221.88	34.6	27.8	H	54.0	109.8	-26.2	*PASS
2443.75	129.8	129.8	V	--	--	--	--
2443.75	111.3	111.3	H	--	--	--	--
3665.63	43.7	32.1	V	54.0	109.8	-21.9	*PASS
3665.63	48.3	36.0	H	54.0	109.8	-18.0	*PASS
4887.50	40.4	26.8	V	54.0	109.8	-27.2	*PASS
4887.50	39.3	26.4	H	54.0	109.8	-27.6	*PASS
7331.25	52.6	40.6	H	54.0	109.8	-13.4	*PASS
7331.25	51.7	38.9	H	54.0	109.8	-15.1	*PASS

- The emissions were scanned from 10 MHz to 25 GHz and all emissions less 80 dB below the limits were recorded.
- * the frequency fall in the restricted band @ FCC 15.205 and the limit @ FCC 15.209 is applied.
- Refer to Plots # 28 & 29 in Annex 1 for band-edge emissions.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
MAXSTREAM MODEL 24XSTREAM
TRANSMIT Freq.: 2443.75 MHz (Middle) with Model A24-Y18RM Yagi Directional Antenna

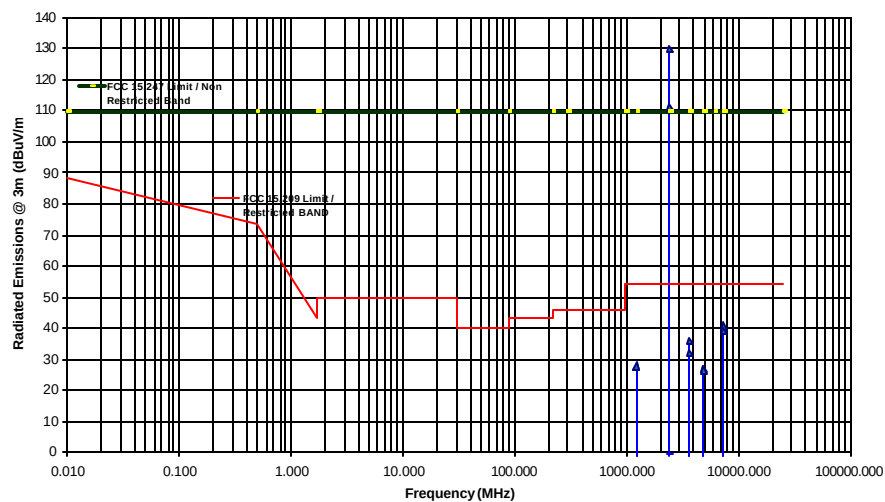

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-009I


Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11.6.1.1.3. Highest Frequency (2482.15 MHz, RF Conducted Power = 39.8 mWatts)

FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
1241.08	34.0	23.2	V	54.0	108.7	-85.5	PASS
1241.08	38.0	32.5	H	54.0	108.7	-76.2	PASS
2482.15	128.7	128.7	V	--	--	--	--
2482.15	108.7	108.7	H	--	--	--	--
3723.23	44.3	32.8	V	54.0	108.7	-21.2	*PASS
3723.23	50.0	37.3	H	54.0	108.7	-16.7	*PASS
4964.30	46.6	34.2	V	54.0	108.7	-19.8	*PASS
4964.30	48.5	36.8	H	54.0	108.7	-17.2	*PASS
7446.45	51.3	39.8	H	54.0	108.7	-14.2	*PASS
7446.45	53.7	41.6	H	54.0	108.7	-12.4	*PASS

- The emissions were scanned from 10 MHz to 25 GHz and all emissions less 80 dB below the limits were recorded.
- * the frequency fall in the restricted band @ FCC 15.205 and the limit @ FCC 15.209 is applied.
- Refer to Plots # 30, 31 & 32 in Annex 1 for band-edge emissions.

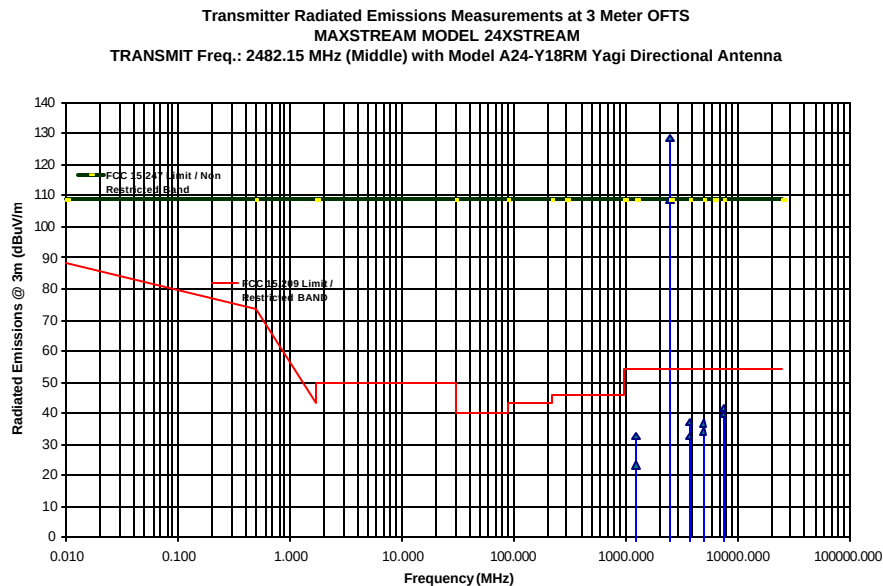

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091

Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


6.11.6.1.2. Maxstream 2.4 GHz FHSS Radio Module, Model 24XSTREAM, with Fiberglass Omnidirectional, Model A24-F15 (Gain = 15 dBi)

Note: The Model A24-F15 with the highest gain of 15 dBi was used for testing and representing the worst case among all other family Fiberglass Omnidirectional with lower gain as shown in Sec. 3.5.2 of this test report

6.11.6.1.2.1. Lowest Frequency (2404.95 MHz, RF Conducted Power = 55 mWatts)

FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
1202.48	40.8	37.2	V	54.0	113.4	-16.8	*PASS
1202.48	36.3	30.7	H	54.0	113.4	-23.3	*PASS
2404.95	133.4	133.4	V	--	--	--	--
2404.95	111.6	111.6	H	--	--	--	--
3607.43	46.6	34.8	V	54.0	113.4	-19.2	*PASS
3607.43	43.2	32.2	H	54.0	113.4	-21.8	*PASS
4809.90	46.7	33.2	V	54.0	113.4	-20.8	*PASS
4809.90	44.9	33.4	H	54.0	113.4	-20.6	*PASS

- The emissions were scanned from 10 MHz to 25 GHz and all emissions less 80 dB below the limits were recorded.
- * the frequency fall in the restricted band @ FCC 15.205 and the limit @ FCC 15.209 is applied.
- Refer to Plots # 33 & 34 in Annex 1 for band-edge emissions.
- Since the antenna was too long and the E-field could not be maximized at 3 meter distance. The E-field of the fundamental was measured at 10 meter distance and then converted to 3m E-field by adding 10.5 dB to the 10m E-field.

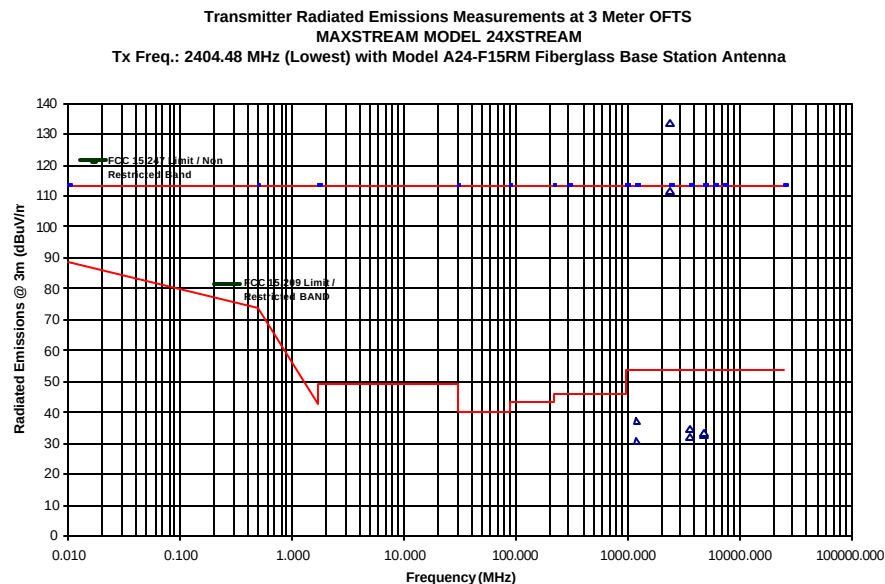

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11.6.1.2.2. Middle Frequency (2443.75 MHz, RF Conducted Power = 55 mWatts)

FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/ FAIL
1221.88	54.6	52.8	V	54.0	112.3	-1.2	*PASS
1221.88	47.1	45.0	H	54.0	112.3	-9.0	*PASS
2443.75	132.3	132.3	V	--	--	--	--
2443.75	113.1	113.1	H	--	--	--	--
3665.63	45.3	30.0	V	54.0	112.3	-24.0	*PASS
4887.50	43.1	31.2	V	54.0	112.3	-22.8	*PASS
4887.50	43.6	31.3	H	54.0	112.3	-22.7	*PASS

- The emissions were scanned from 10 MHz to 25 GHz and all emissions less 80 dB below the limits were recorded.
- * the frequency fall in the restricted band @ FCC 15.205 and the limit @ FCC 15.209 is applied.
- Refer to Plots # 35 & 36 in Annex 1 for band-edge emissions.
- Since the antenna was too long and the E-field could not be maximized at 3 meter distance. The E-field of the fundamental was measured at 10 meter distance and then converted to 3m E-field by adding 10.5 dB to the 10m E-field.

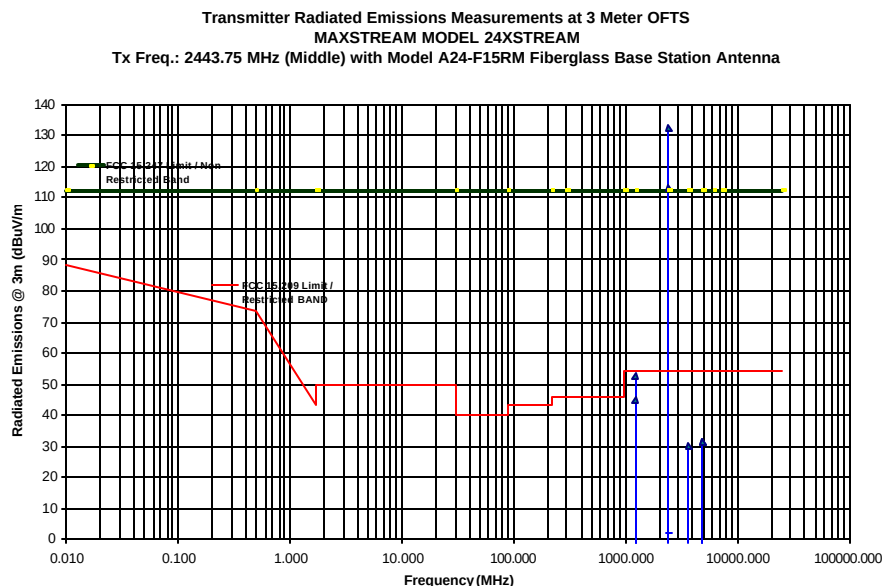

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091


Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11.6.1.2.3. Highest Frequency (2482.15 MHz, RF Conducted Power = 39.8 mWatts)

FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
1241.08	51.2	48.5	V	54.0	110.1	-61.6	PASS
1241.08	45.3	41.8	H	54.0	110.1	-68.3	PASS
2482.15	130.1	130.1	V	--	--	--	--
2482.15	116.6	116.6	H	--	--	--	--
3723.23	41.1	30.8	V	54.0	110.1	-23.2	*PASS
3723.23	40.5	28.3	H	54.0	110.1	-25.7	*PASS
4964.30	47.2	35.8	V	54.0	110.1	-18.2	*PASS
4964.30	45.5	34.6	H	54.0	110.1	-19.4	*PASS

- The emissions were scanned from 10 MHz to 25 GHz and all emissions less 80 dB below the limits were recorded.
- * the frequency fall in the restricted band @ FCC 15.205 and the limit @ FCC 15.209 is applied.
- Refer to Plots # 37, 38 & 39 in Annex 1 for band-edge emissions.
- Since the antenna was too long and the E-field could not be maximized at 3 meter distance. The E-field of the fundamental was measured at 10 meter distance and then converted to 3m E-field by adding 10.5 dB to the 10m E-field.

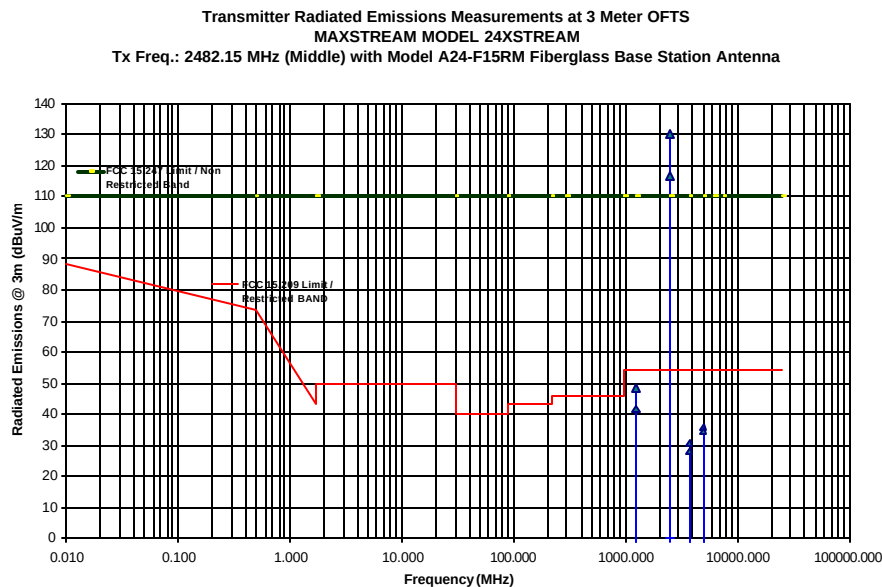

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-009I

Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


6.11.6.1.3. Maxstream 2.4 GHz FHSS Radio Module, Model 24XSTREAM, with FLAT Panel Antenna, Model A24-P19 (Gain = 19 dBi) and cable with a minimum loss of 1.0 dB.

Note: The Model A24-P19 with the highest gain of 19 dBi and cable with the insertion loss of at least 1 dB was used for testing and representing the worst case among all other family Fiberglass Omnidirectional with lower gain as shown in Sec. 3.5.3 of this test report

6.11.6.1.3.1. Lowest Frequency (2404.95 MHz, RF Conducted Power = 55 mWatts)

FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/ FAIL
1202.48	48.8	46.7	V	54.0	113.4	-7.3	*PASS
1202.48	41.0	37.8	H	54.0	113.4	-16.2	*PASS
2404.95	133.4	133.4	V	--	--	--	--
2404.95	111.6	111.6	H	--	--	--	--
3607.43	49.1	36.9	V	54.0	113.4	-17.1	*PASS
3607.43	55.8	41.5	H	54.0	113.4	-12.5	*PASS
4809.90	54.4	40.9	V	54.0	113.4	-13.1	*PASS
4809.90	54.4	40.4	H	54.0	113.4	-13.6	*PASS
7214.85	50.4	39.2	H	54.0	113.4	-74.2	PASS
7214.85	51.5	39.1	H	54.0	113.4	-74.3	PASS

- The emissions were scanned from 10 MHz to 25 GHz and all emissions less 80 dB below the limits were recorded.
- * the frequency fall in the restricted band @ FCC 15.205 and the limit @ FCC 15.209 is applied.
- Refer to Plots # 40 & 41 in Annex 1 for band-edge emissions.

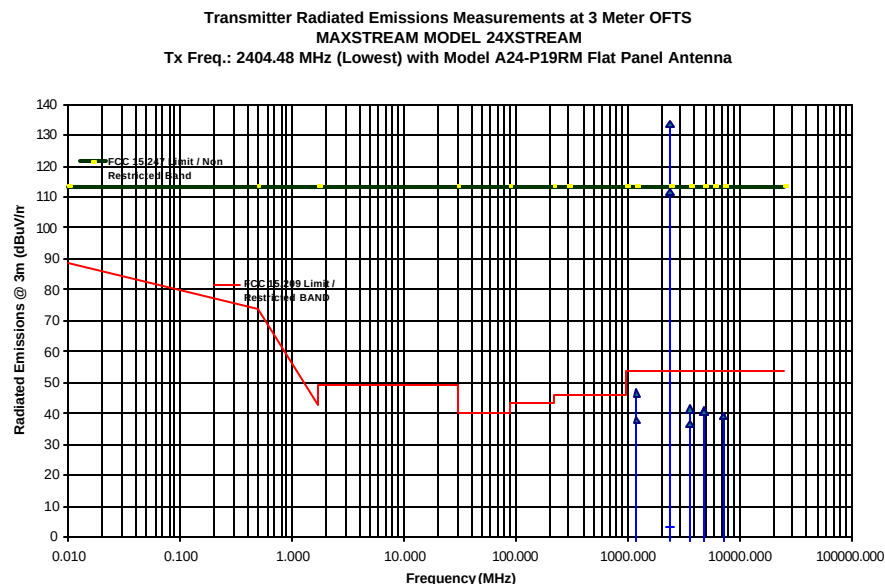

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
 Dec. 12, 2


- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11.6.1.3.2. Middle Frequency (2443.75 MHz, RF Conducted Power = 55 mWatts)

FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
1221.88	55.2	53.0	V	54.0	112.9	-1.0	*PASS
1221.88	46.4	44.0	H	54.0	112.9	-10.0	*PASS
2443.75	132.9	132.9	V	--	--	--	--
2443.75	112.0	112.0	H	--	--	--	--
3665.63	53.0	37.6	V	54.0	112.9	-16.4	*PASS
3665.63	50.9	38.2	H	54.0	112.9	-15.8	*PASS
4887.50	52.1	38.8	V	54.0	112.9	-15.2	*PASS
4887.50	50.8	36.4	H	54.0	112.9	-17.6	*PASS
7331.25	54.8	41.7	H	54.0	112.9	-12.3	*PASS
7331.25	50.0	37.7	H	54.0	112.9	-16.3	*PASS

- The emissions were scanned from 10 MHz to 25 GHz and all emissions less 80 dB below the limits were recorded.
- * the frequency fall in the restricted band @ FCC 15.205 and the limit @ FCC 15.209 is applied.
- Refer to Plots # 42 & 43 in Annex 1 for band-edge emissions.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
MAXSTREAM MODEL 24XSTREAM
Tx Freq.: 2482.15 MHz (Middle) with Model Model A24-P19RM Flat Panel Antenna

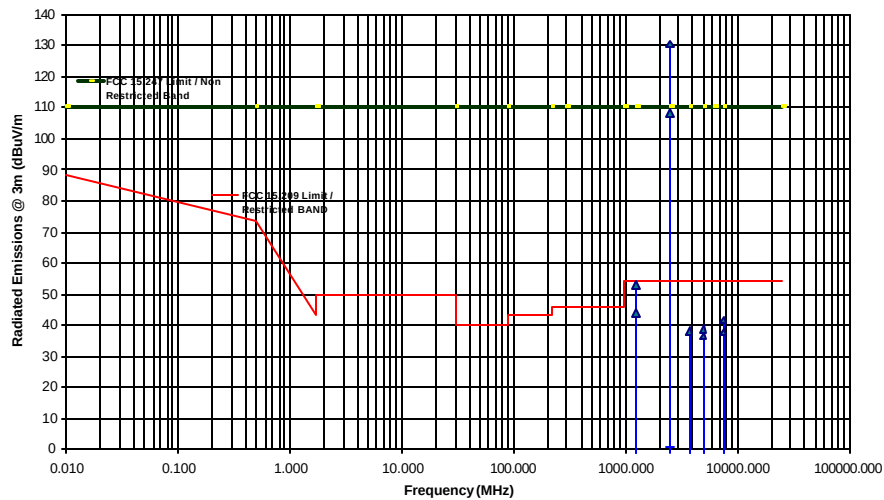

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091


Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11.6.1.3.3. Highest Frequency (2482.15 MHz, RF Conducted Power = 39.8 mWatts)

FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
1241.08	40.6	36.3	V	54.0	110.5	-74.2	PASS
1241.08	36.3	31.3	H	54.0	110.5	-79.2	PASS
2482.15	130.5	130.5	V	--	--	--	--
2482.15	108.3	108.3	H	--	--	--	--
3723.23	42.8	32.2	V	54.0	110.5	-21.8	*PASS
3723.23	54.3	40.3	H	54.0	110.5	-13.7	*PASS
4964.30	50.8	38.4	V	54.0	110.5	-15.6	*PASS
4964.30	49.7	37.5	H	54.0	110.5	-16.5	*PASS
7446.45	55.7	43.0	H	54.0	110.5	-11.0	*PASS
7446.45	50.2	38.2	H	54.0	110.5	-15.8	*PASS

- The emissions were scanned from 10 MHz to 25 GHz and all emissions less 80 dB below the limits were recorded.
- * the frequency fall in the restricted band @ FCC 15.205 and the limit @ FCC 15.209 is applied.
- Refer to Plots # 44 & 46 in Annex 1 for band-edge emissions.

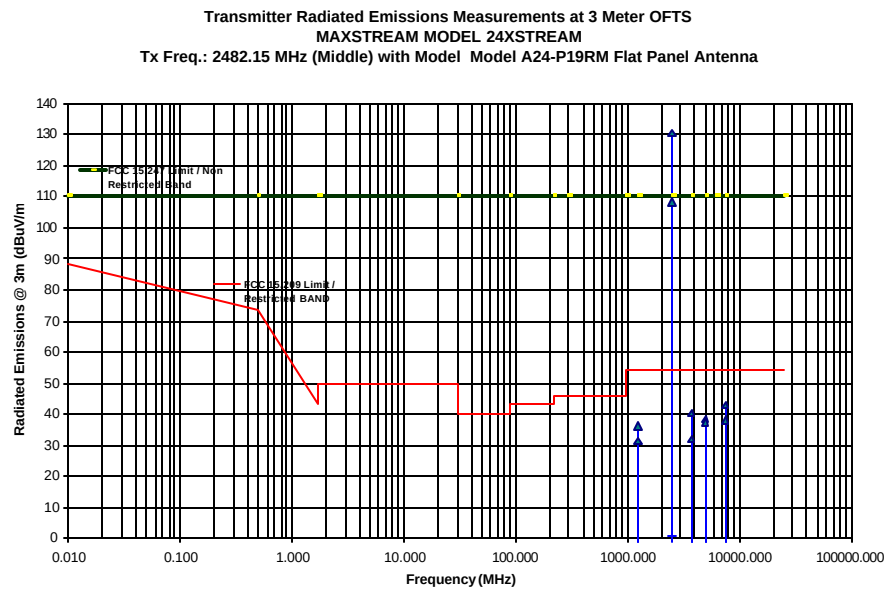

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091

Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11.6.1.4. Maxstream 2.4 GHz FHSS Radio Module, Model 24XSTREAM, with 1/2 Wave Dipole Antenna, Model A24-HABSM (Gain = 2.1 dBi)


Note: The Model A24-HABSM with the gain of 2.1 dBi was used for testing and representing the worst case among all other family 1/2 Wave Dipole Antenna which have the same gain but different connection method. Refer to Sec. 3.5.4 of this test report for details descriptions of 1/2 Wave Dipole Antenna.

6.11.6.1.4.1. Lowest Frequency (2404.95 MHz, RF Conducted Power = 55 mWatts)

FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
1202.48	42.5	38.4	V	54.0	97.4	-15.6	*PASS
1202.48	41.5	36.4	H	54.0	97.4	-17.6	*PASS
2404.95	116.7	116.7	V	--	--	--	--
2404.95	117.4	117.4	H	--	--	--	--
3607.43	42.6	30.6	V	54.0	97.4	-23.4	*PASS
3607.43	41.4	29.1	H	54.0	97.4	-24.9	*PASS
4809.90	39.3	26.7	V	54.0	97.4	-27.3	*PASS
4809.90	37.3	26.1	H	54.0	97.4	-27.9	*PASS
7214.85	38.9	26.7	H	54.0	97.4	-70.7	PASS
7214.85	35.3	24.1	H	54.0	97.4	-73.3	PASS

- The emissions were scanned from 10 MHz to 25 GHz and all emissions less 80 dB below the limits were recorded.
- * the frequency fall in the restricted band @ FCC 15.205 and the limit @ FCC 15.209 is applied.
- Refer to Plots # 47 & 48 in Annex 1 for band-edge emissions.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
MAXSTREAM MODEL 24XSTREAM
Tx Freq.: 2404.48 MHz (Lowest) with Model A24-HABSM 1/2 Dipole Antenna

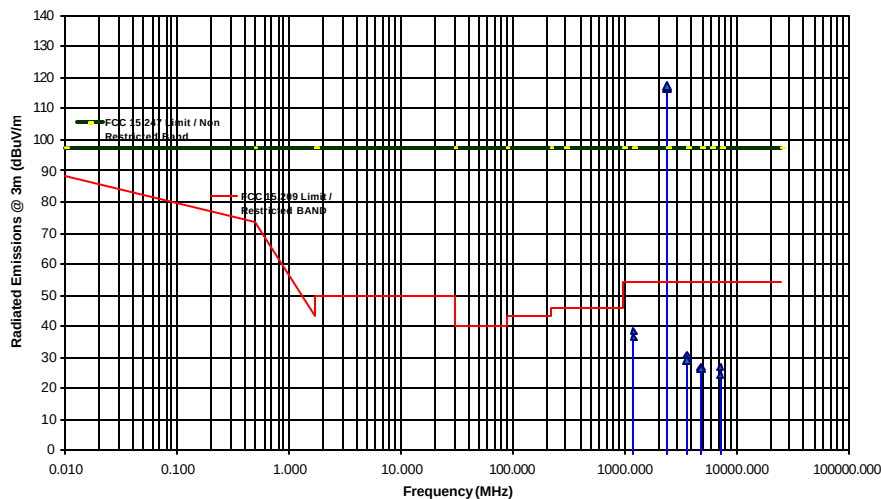

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2


- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11.6.1.4.2. Middle Frequency (2443.75 MHz, RF Conducted Power = 55 mWatts)

FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
1221.88	47.7	45.3	V	54.0	98.2	-8.7	*PASS
1221.88	49.8	47.6	H	54.0	98.2	-6.4	*PASS
2443.75	117.8	117.8	V	--	--	--	--
2443.75	118.2	118.2	H	--	--	--	--
3665.63	37.3	25.5	V	54.0	98.2	-28.5	*PASS
3665.63	36.6	25.6	H	54.0	98.2	-28.4	*PASS
4887.50	39.2	27.0	V	54.0	98.2	-27.0	*PASS
4887.50	35.2	26.9	H	54.0	98.2	-27.1	*PASS
7331.25	41.0	26.9	H	54.0	98.2	-27.1	*PASS
7331.25	35.8	22.8	H	54.0	98.2	-31.2	*PASS

- The emissions were scanned from 10 MHz to 25 GHz and all emissions less 80 dB below the limits were recorded.
- * the frequency fall in the restricted band @ FCC 15.205 and the limit @ FCC 15.209 is applied.
- Refer to Plots # 49 & 50 in Annex 1 for band-edge emissions.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
MAXSTREAM MODEL 24XSTREAM
Tx Freq.: 2443.75 MHz (Middle) with Model A24-HABSM 1/2 Dipole Antenna

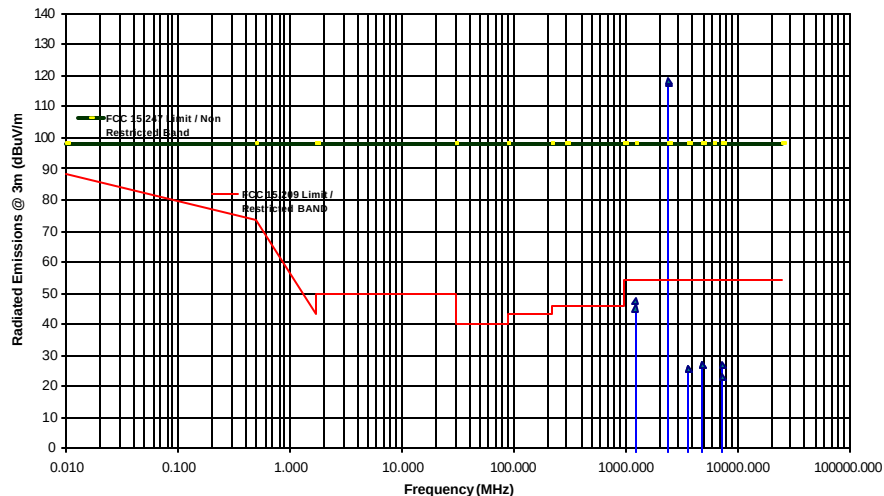

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2


- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11.6.1.4.3. Highest Frequency (2482.15 MHz, RF Conducted Power = 39.8 mWatts)

FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/ FAIL
1241.08	42.5	37.8	V	54.0	95.8	-58.0	PASS
1241.08	39.4	33.9	H	54.0	95.8	-61.9	PASS
2482.15	115.8	115.8	V	--	--	--	--
2482.15	114.3	114.3	H	--	--	--	--
3723.23	41.8	30.4	V	54.0	95.8	-23.6	*PASS
3723.23	45.0	33.6	H	54.0	95.8	-20.4	*PASS
4964.30	52.5	39.5	V	54.0	95.8	-14.5	*PASS
7446.45	55.4	42.7	H	54.0	95.8	-11.3	*PASS
7446.45	51.9	39.5	H	54.0	95.8	-14.5	*PASS

➤ The emissions were scanned from 10 MHz to 25 GHz and all emissions less 80 dB below the limits were recorded.
 ➤ * the frequency fall in the restricted band @ FCC 15.205 and the limit @ FCC 15.209 is applied.
 ➤ Refer to Plots # 51 & 53 in Annex 1 for band-edge emissions.

Transmitter Radiated Emissions Measurements at 3 Meter OFTS
 MAXSTREAM MODEL 24XSTREAM
 Tx Freq.: 2482.15 MHz (Middle) with Model A24-HABSM 1/2 Dipole Antenna

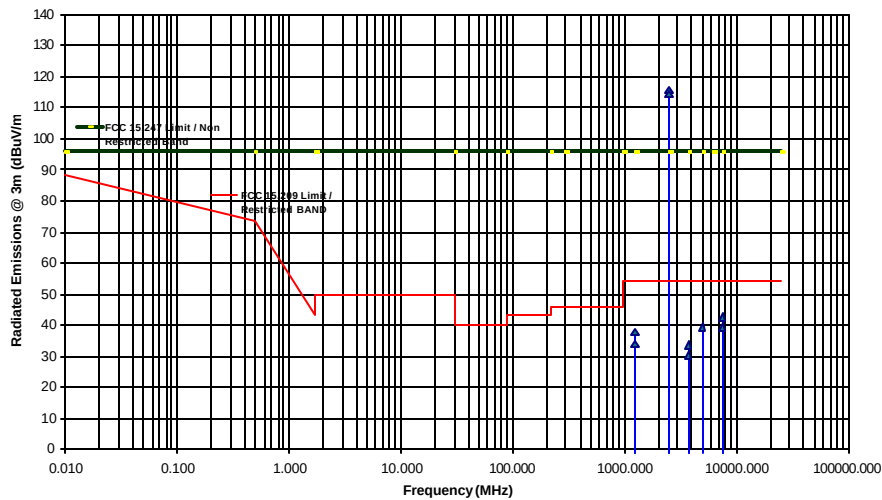

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
 Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


6.11.6.1.5. Maxstream 2.4 GHz FHSS Radio Module, Model 24XSTREAM, with 1/4 Wave Dipole Antenna, Model A24-QI (Gain = 1.9 dBi)

Note: The Model A24-QI with the gain of 1.9 dBi was used for testing and representing the worst case among all other family 1/4 Wave Dipole Antenna which have the same gain but different connection method and housing. Refer to Sec. 3.5.5 of this test report for details descriptions of 1/4 Wave Dipole Antenna.

6.11.6.1.5.1. Lowest Frequency (2404.95 MHz, RF Conducted Power = 55 mWatts)

FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
1202.48	38.4	33.2	V	54.0	94.2	-20.8	*PASS
1202.48	39.4	34.2	H	54.0	94.2	-19.8	*PASS
2404.95	114.2	114.2	V	--	--	--	--
2404.95	110.3	110.3	H	--	--	--	--
3607.43	43.0	31.8	V	54.0	94.2	-22.2	*PASS
3607.43	47.4	35.7	H	54.0	94.2	-18.3	*PASS
4809.90	49.5	37.5	V	54.0	94.2	-16.5	*PASS
4809.90	50.0	37.6	H	54.0	94.2	-16.4	*PASS

- The emissions were scanned from 10 MHz to 25 GHz and all emissions less 80 dB below the limits were recorded.
- * the frequency fall in the restricted band @ FCC 15.205 and the limit @ FCC 15.209 is applied.
- Refer to Plots # 54 & 55 in Annex 1 for band-edge emissions.

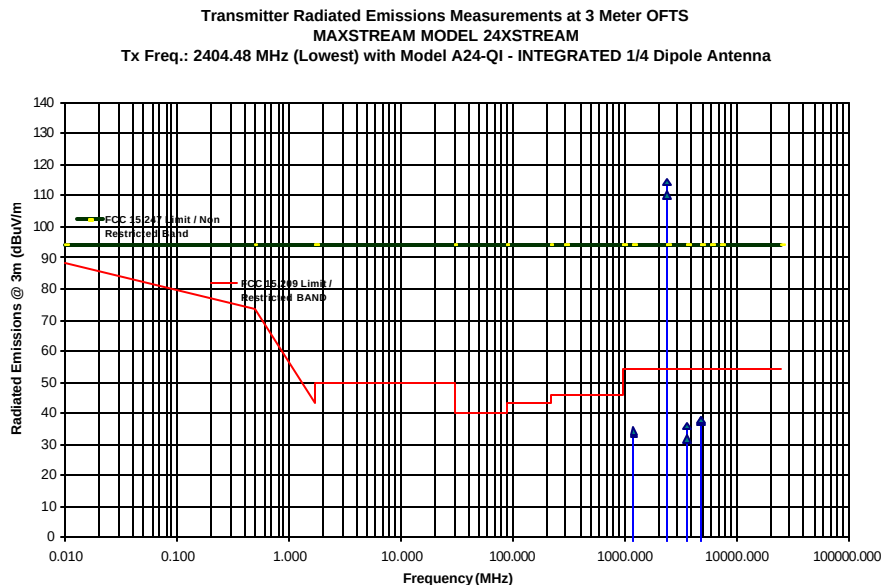

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: MXS-0091
 Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11.6.1.5.2. Middle Frequency (2443.75 MHz, RF Conducted Power = 55 mWatts)

FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
1221.88	44.2	41.6	V	54.0	93.5	-12.4	*PASS
1221.88	42.2	39.4	H	54.0	93.5	-14.6	*PASS
2443.75	113.5	113.5	V	--	--	--	--
2443.75	112.3	112.3	H	--	--	--	--
3665.63	45.3	33.7	V	54.0	93.5	-20.3	*PASS
3665.63	43.6	32.5	H	54.0	93.5	-21.5	*PASS
4887.50	47.5	35.3	V	54.0	93.5	-18.7	*PASS
4887.50	43.3	31.0	H	54.0	93.5	-23.0	*PASS

- The emissions were scanned from 10 MHz to 25 GHz and all emissions less 80 dB below the limits were recorded.
- * the frequency fall in the restricted band @ FCC 15.205 and the limit @ FCC 15.209 is applied.
- Refer to Plots # 56 & 57 in Annex 1 for band-edge emissions.

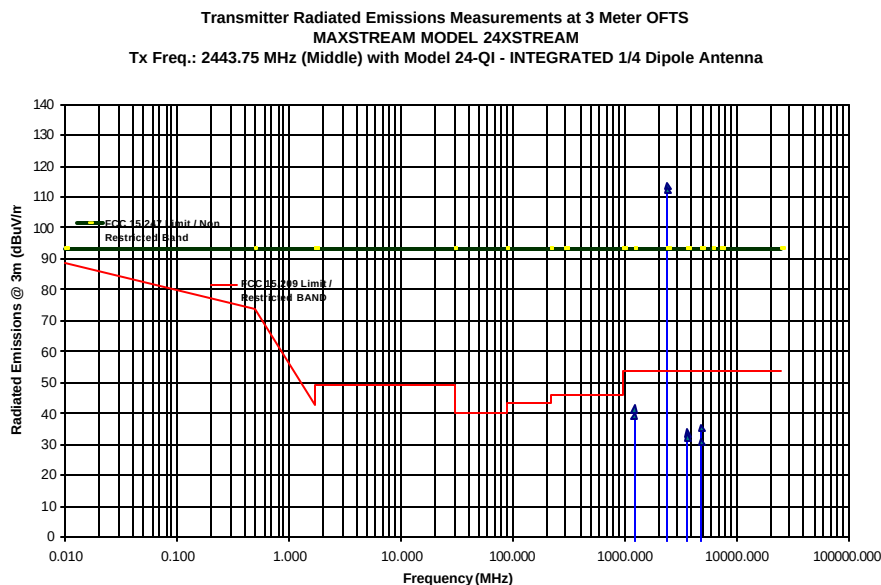

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: MXS-009I
 Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11.6.1.5.3. Highest Frequency (2482.15 MHz, RF Conducted Power = 39.8 mWatts)

FREQUENCY (MHz)	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT 15.247 (dBuV/m)	MARGIN (dB)	PASS/FAIL
1241.08	37.9	32.3	V	54.0	92.9	-60.6	PASS
1241.08	35.8	28.8	H	54.0	92.9	-64.1	PASS
2482.15	112.9	112.9	V	--	--	--	--
2482.15	109.8	109.8	H	--	--	--	--
3723.23	45.4	34.3	V	54.0	92.9	-19.7	*PASS
3723.23	45.0	33.2	H	54.0	92.9	-20.8	*PASS
4964.30	50.3	37.3	V	54.0	92.9	-16.7	*PASS
4964.30	48.3	36.3	H	54.0	92.9	-17.7	*PASS
7446.45	47.9	38.6	H	54.0	92.9	-15.4	*PASS
7446.45	47.3	35.3	H	54.0	92.9	-18.7	*PASS

- The emissions were scanned from 10 MHz to 25 GHz and all emissions less 80 dB below the limits were recorded.
- * the frequency fall in the restricted band @ FCC 15.205 and the limit @ FCC 15.209 is applied.
- Refer to Plots # 58, 59 & 60 in Annex 1 for band-edge emissions.

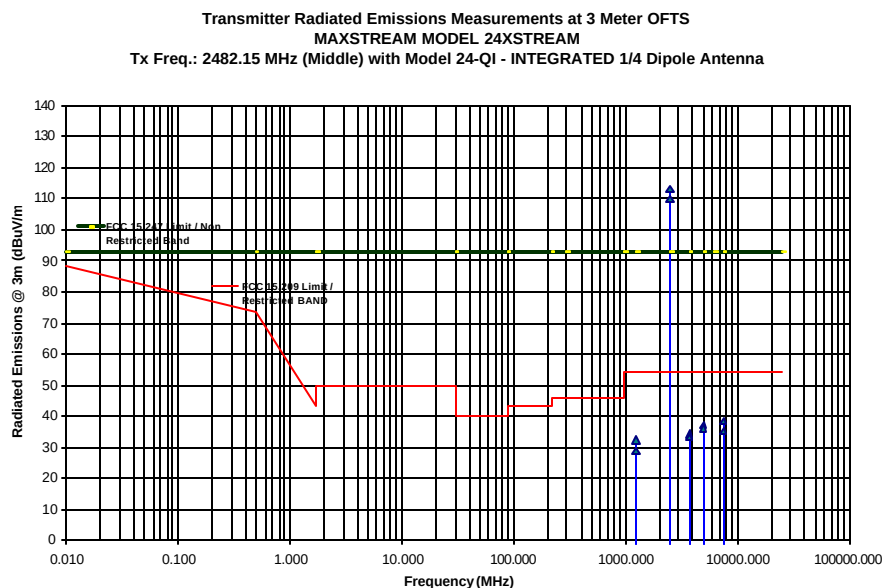

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994)

7.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Line Conducted)	PROBABILITY DISTRIBUTION	UNCERTAINTY (dB)	
		9-150 kHz	0.15-30 MHz
EMI Receiver specification	Rectangular	± 1.5	± 1.5
LISN coupling specification	Rectangular	± 1.5	± 1.5
Cable and Input Transient Limiter calibration	Normal (k=2)	± 0.3	± 0.5
Mismatch: Receiver VRC $\Gamma_1 = 0.03$ LISN VRC $\Gamma_R = 0.8(9 \text{ kHz}) 0.2 (30 \text{ MHz})$ Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	± 0.2	± 0.3
System repeatability	Std. deviation	± 0.2	± 0.05
Repeatability of EUT	--	--	--
Combined standard uncertainty	Normal	± 1.25	± 1.30
Expanded uncertainty U	Normal (k=2)	± 2.50	± 2.60

Sample Calculation for Measurement Accuracy in 450 kHz to 30 MHz Band:

$$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \pm \sqrt{(1.5^2 + 1.5^2)/3 + (0.5/2)^2 + (0.05/2)^2 + 0.35^2} = \pm 1.30 \text{ dB}$$

$$U = 2u_c(y) = \pm 2.6 \text{ dB}$$

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
 Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

7.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Radiated Emissions)	PROBABILITY DISTRIBUTION	UNCERTAINTY ($\pm$ dB)	
		3 m	10 m
Antenna Factor Calibration	Normal (k=2)	± 1.0	± 1.0
Cable Loss Calibration	Normal (k=2)	± 0.3	± 0.5
EMI Receiver specification	Rectangular	± 1.5	± 1.5
Antenna Directivity	Rectangular	± 0.5	± 0.5
Antenna factor variation with height	Rectangular	± 2.0	± 0.5
Antenna phase center variation	Rectangular	0.0	± 0.2
Antenna factor frequency interpolation	Rectangular	± 0.25	± 0.25
Measurement distance variation	Rectangular	± 0.6	± 0.4
Site imperfections	Rectangular	± 2.0	± 2.0
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(\text{Bi}) 0.3 (\text{Lp})$ Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	± 1.1 -1.25	± 0.5
System repeatability	Std. Deviation	± 0.5	± 0.5
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	$+2.19 / -2.21$	$+1.74 / -1.72$
Expanded uncertainty U	Normal (k=2)	$+4.38 / -4.42$	$+3.48 / -3.44$

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k=2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 8. MEASUREMENT METHODS

8.1. GENERAL TEST CONDITIONS

The following test conditions shall be applied throughout the tests covered in this report.

8.1.1. Normal temperature and humidity

- Normal temperature: +15°C to +35°C
- Relative Humidity: +20% to 75%

The actual values during tests shall be recorded in the test report.

8.1.2. Normal power source

8.1.2.1. Mains Voltage

The nominal test voltage of the equipment to be connected to mains shall be the nominal mains voltage which is the declared voltage or any of the declared voltages for which the equipment was designed.

The frequency of test power source corresponding to the AC mains shall be between 59 Hz and 61 Hz.

8.1.2.2. Battery Power Source.

For operation from battery power sources, the nominal test voltage shall be as declared by the equipment manufacturer. This shall be recorded in the test report.

8.1.3. Operating Condition of Equipment under Test

- All tests were carried out while the equipment operated at the following frequencies:
 - The lowest operating frequency,
 - The middle operating frequency and
 - The highest operating frequency
- Modulation were applied using the Test Data sequence
- The transmitter was operated at the highest output power, or in the case the equipment able to operate at more than one power level, at the lowest and highest output powers

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

8.2. METHOD OF MEASUREMENTS - AC MAINS CONDUCTED EMISSIONS

- AC Mains conducted emissions measurements were performed in accordance with the standard against appropriate limits for each detector function.
- The test was performed in the shielded room, 16'(L) by 16'(W) by 12'(H).
- The test was performed over the frequency range from 450 kHz to 30 MHz to determine the line-to-ground radio noise voltage which was conducted from the EUT power-input terminals that were directly connected to a public power network.
- The EUT normally received power from another device that connects to the public utility ac power lines, measurements would be made on that device with the EUT in operation to ensure that the device continues to comply with the appropriate limits while providing the EUT with power.
- If the EUT operates only from internal or dedicated batteries, with no provisions for connection to the public utility ac power lines, AC Mains conducted measurements are not required.
- Table-top devices were placed on a platform of nominal size 1 m by 1.5m raised 80 cm above the conducting ground plane.
- The EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN to the power source. All unused 50-Ohm connectors of the LISN was terminated in 50-ohm when not connected to the measuring instruments.
- The line cord of the EUT connected to one LISN which was connected to the measuring instrument. Those power cords for the units of devices not under measurement were connected to a separate multiple ac outlet. Drawings and photographs of typically conducted emission test setups were shown in the Test Report. Each current-carrying conductor of the EUT shall be individually tested.
- The EUT was normally operated with a ground (safety) connection, the EUT was connected to the ground at the LISN through a conductor provided in the lead from the ac power mains to the LISN.
- The excess length of the power cord was folded back and forth in an 8-shape on a wooden strip with a vertical prong located on the top of the LISN case.
- The EUT was set-up in its typical configuration and operated in its various modes as described in 3.2 of the test report.
- A preliminary scan was made by using spectrum analyzer system with the detector function set to PEAK mode (9 KHz RBW, VBW > RBW), frequency span 450 kHz to 30 MHz.
- The maximum conducted emission for a given mode of operation was found by using the following step-by-step procedure:
 - Step1. Monitor the frequency range of interest at a fixed EUT azimuth.
 - Step2. Manipulate the system cables and peripheral devices to produce highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.
 - Step3. The effects of various modes of operation is examined. This is done by varying equipment operation modes as step 2 is being performed.
 - Step4. After completing step 1 through 3, record EUT and peripheral device configuration, mode of operation, cable configuration, signal levels and frequencies for final test.
- Each highest signal level at the maximized test configuration was zoomed in a small frequency span on the spectrum analyzer's display (the manipulation of cables and peripheral devices and EUT operation modes might have to be repeated to obtain the highest signal level with the spectrum analyzer set to PEAK detector mode 10 KHz RBW and VBW > RBW). The spectrum analyzer was then set to CISPR QUASI-PEAK detector mode (9 KHz RBW, 1 MHz VBW) and AVERAGE detector mode (10 kHz RBW, 1 Hz VBW). The final highest RF signal levels and frequencies were record.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

- **Broad-band ac Powerline conducted emissions:-** If the EUT exhibits ac Powerline conducted emissions that exceed the limit with the instrument set to the quasi-peak mode, then measurements should be made in the average mode. If the amplitude measured in the quasi-peak mode is at least 6 dB higher than the amplitude measured in the average mode, the level measured in quasi peak mode may be reduced by 13 dB before comparing it to the limit.

8.3. EFFECTIVE RADIATED POWER

- The following shall be applied to the combination(s) of the radio device and its intended antenna(e).
- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
- The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
- The measurement shall be performed using normal operation of the equipment with modulation.

Test procedure shall be as follows:

Step 1: Duty Cycle measurements

- Using a spectrum analyzer with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter, $x = T_x \text{ on} / (T_x \text{ on} + T_x \text{ off})$ with $0 < x < 1$, is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


Step 2: Calculation of Peak and Average EIRP

- The peak output power of the transmitter shall be determined using a wideband, calibrated RF Peak Power Meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as “P” (in dBm);
- The Average EIRP. shall be calculated from the above measured power output “A”, the observed duty cycle x, and the applicable antenna assembly gain “G” in dBi, according to the formula:

$$\text{Peak EIRP} = P + G$$

$$\text{Average EIRP} = \text{Peak EIRP} + 10\log(1/x)$$

Figure 1.

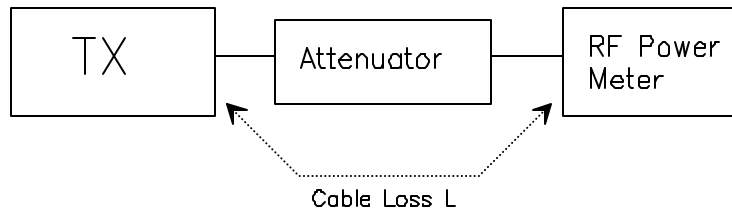

Step 3: Substitution Method. See Figure 2

- The measurements was performed in the absence of modulation (un-modulated)
- Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- The dipole test antenna was used and tuned to the transmitter carrier frequency.
- The spectrum analyzer was tuned to transmitter carrier frequency. The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

- (g) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (h) The substitution dipole antenna and the signal generator replaced the transmitter and antenna under test in the same position, and the substitution dipole antenna was placed in vertical polarization. The test dipole antenna was lowered or raised as necessary to ensure that the maximum signal is still received.
- (i) The input signal to the substitution antenna was adjusted in level until an equal or a known related level to that detected from the transmitter was obtained in the test receiver. The maximum carrier radiated power is equal to the power supply by the generator.
- (j) The substitution antenna gain and cable loss were added to the signal generator level for the corrected ERP level.
- (k) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.
- (l) Actual gain of the EUT's antenna is the difference of the measured ERP and measured RF power at the RF port. Correct the antenna gain if necessary.

Figure 2


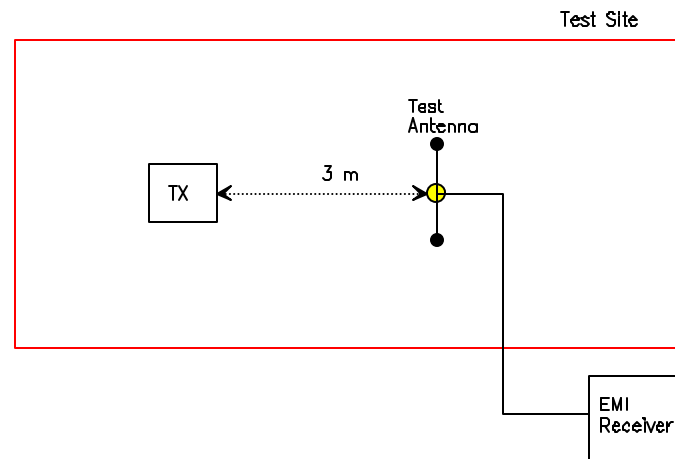


Figure 3

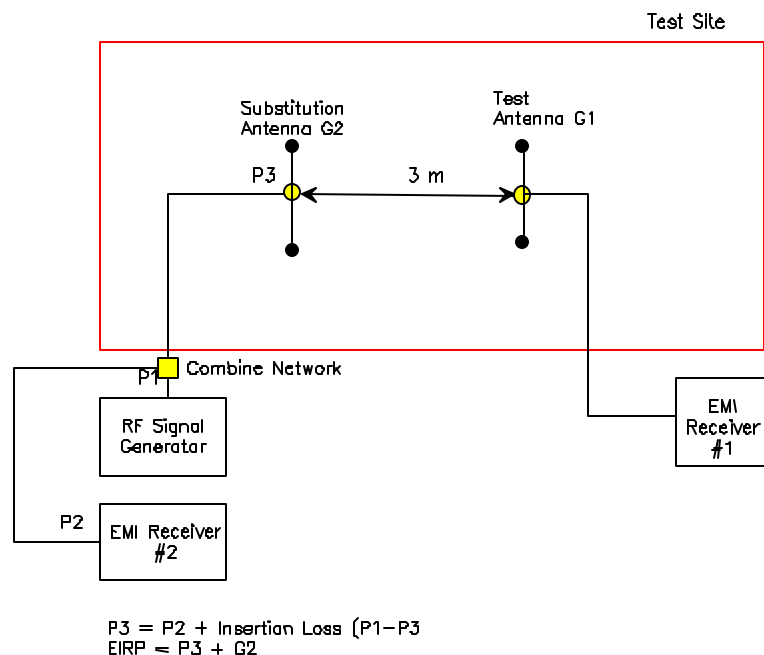

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-009I

Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Use the following spectrum analyzer settings:

- Span = approximately 5 times the 20 dB BW, centered on a hopping channel
- RBW > 20 dB BW of the emission measured
- VBW = RBW
- Trace = max hold
- Allow the trace to stabilize
- Use the marker-to-marker function to set the marker to the peak of the emission.
- The indicated level is the peak output power (with the addition of the external attenuation and cable loss).
- The limit is specified in one of the subparagraph of this Section.
- Submit this plot.
- A peak responding power meter may be used instead of a spectrum analyzer.

8.4. SPURIOUS EMISSIONS (CONDUCTED & RADIATED)

For both conducted and radiated measurements, the spurious emissions were scanned from the lowest frequency generated by the EUT or 10 MHz whichever is lower to 10th harmonic of the highest frequency generated by the EUT.

8.4.1. Band-edge and Spurious Emissions (Conducted)

Band-edge Compliance of RF Conducted Emissions:

Use the following spectrum analyzer settings:

- The radio was connected to the measuring equipment via a suitable attenuator.
- Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.
- RBW = 1 % of the span
- VBW = RBW
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize
- Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge
- Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- The marker-delta value now displayed must comply with the limit specified
- Now, using the same instrument settings, enable the hopping function of the EUT
- Allow the trace to stabilize
- Follow the same procedure listed above to determine if any spurious emissions cause by the hopping function also comply with the specify limits.
- Submit this plot

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-009I
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Spurious RF Conducted Emissions:

Use the following spectrum analyzer settings:

- The radio was connected to the measuring equipment via a suitable attenuator.
- Span = wide enough to capture the peak level of the in-band-emission and all spurious emissions (e.g. harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
- RBW = 100 kHz
- VBW = RBW
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize
- Set the marker on the any spurious emission recorded. The level displayed must comply with the limit specified in this Section.
- Submit this plot

8.4.2. Spurious Emissions (Radiated)

- The radiated emission measurements were performed at the UltraTech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario. The Attenuation Characteristics of OFTS have been filed to FCC, Industry Canada, ACA/Austel, NVLap and ITI.
- Radiated emissions measurements were made using the following test instruments:
 1. Calibrated EMCO BiconiLog antenna in the frequency range from 30 MHz to 2000 MHz.
 2. Calibrated Emco Horn antennas in the frequency range above 1000 MHz (1GHz - 40 GHz).
 3. The test is required for any spurious emission or modulation product that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:
 - RBW = 100 kHz for $f < 1\text{GHz}$ and RBW = 1 MHz for $f \geq 1\text{GHz}$
 - VBW = RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
 - Follows the guidelines in ANSI C63.4-1992 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc.. A pre-amp and highpass filter are required for this test, in order to provide the measuring system with sufficient sensitivity.
 - Allow the trace to stabilize.
 - The peak reading of the emission, after being corrected by the antenna correction factor, cable loss, pre-amp gain, etc.... is the peak field strength which comply with the limit specified in Section 15.35(b)

Calculation of Field Strength:

The field strength is calculated by adding the calibrated antenna factor and cable factor, and subtracting the Amplifier gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Where	FS	=	Field Strength
	RA	=	Receiver/Analyzer Reading
	AF	=	Antenna Factor
	CF	=	Cable Attenuation Factor
	AG	=	Amplifier Gain

Example: If a receiver reading of 60.0 dBuV is obtained, the antenna factor of 7.0 dB/m and cable factor of 1.0 dB are added, and the amplifier gain of 30 dB is subtracted. The actual field strength will be:

Field Level = $60 + 7.0 + 1.0 - 30 = 38.0$ dBuV/m.

Field Level = $10^{(38/20)} = 79.43$ uV/m.

- Submit this test data
- Now set the VBW to 10Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100ms, then the reading obtained may be further adjusted by a “duty cycle correction factor”, derived from $10\log(\text{dwell time}/100\text{ms})$ in an effort to demonstrate compliance with the 15.209.
- Submit test data

Maximizing The Radiated Emissions:

- The frequencies of emissions was first detected. Then the amplitude of the emissions was measured at the specified measurement distance using required antenna height, polarization, and detector characteristics.
- During this process, cables and peripheral devices were manipulated within the range of likely configuration.
- For each mode of operation required to be tested, the frequency spectrum was monitored. Variations in antenna heights (from 1 meter to 4 meters above the ground plane), antenna polarization (horizontal plane and vertical plane), cable placement and peripheral placement were explored to produce the highest amplitude signal relative to the limit.

The maximum radiated emission for a given mode of operation was found by using the following step-by-step procedure:

- Step1: Monitor the frequency range of interest at a fixed antenna height and EUT azimuth.
- Step2: Manipulate the system cables to produce highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.
- Step3: Rotate the EUT 360 degrees to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, go back to the azimuth and repeat Step 2. Otherwise, orient the EUT azimuth to repeat the highest amplitude observation and proceed.
- Step4: Move the antenna over its full allowable range of travel (1 to 4 meters) to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, return to Step 2 with the highest amplitude observation and proceed.
- Step5: Change the polarization of the antenna and repeat Step 2 through 4. Compare the resulting suspected highest amplitude signal with that found for the other polarization. Select and note the higher of the two signals. This signal is termed the highest observed signal with respect to the limit for this EUT operational mode.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

- Step6: The effects of various modes of operation is examined. This is done by varying the equipment modes as steps 2 through 5 are being performed.
- Step7: After completing steps 1 through 6, record the final highest emission level, frequency, antenna polarization and detector mode of the measuring instrument.

8.5. ALTERNATIVE TEST PROCEDURES

If the antenna conducted tests cannot be performed on this device, radiated tests show compliance with the peak output power limit specified in Section 15.247(b) and the spurious RF conducted emission limit specified in Section 15.247(c) are acceptable. As stated previously, a pre-amp, and, in the later case, a high pass filter, are required for the following measurements:

8.5.1. Peak Power Measurements

Calculate the transmitter's peak power using the following equation:

$$E = 30PG/d$$
$$P = (Ed)^2/30G$$

Where:

- E: measured maximum fundamental field strength in V/m. Utilizing a RBW, the 20 dB bandwidth of the emission VBW > RBW, peak detector function. Follow the procedures in C63.4-1992 with respect to maximizing the emission
- G is numeric gain of the transmitting antenna with reference to an isotropic radiator
- D is the distance in meters from which the field strength was measured
- P is the distance in meters from which the field strength was measured

8.5.2. Spurious RF conducted emissions

The demonstrate compliance with the spurious RF conducted emission requirement of Section 15.247©, use the following spectrum analyzer settings:

- Span = wide enough to fully capture the emission being measured
- RBW = 100 kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Measure the field strength of both the fundamental and all spurious emissions with these settings.
- Follow the procedures C62-4:1994 with respect to maximizing the emissions. The measured field strength of all spurious emissions must be below the measured field strength of the fundamental emission by the amount specified in Section 15.247©. Note that if the emission falls in a Restricted Band, as defined in Section 15.205, the procedure for measuring spurious radiated emissions listed above must be followed

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: MXS-0091
Dec. 12, 2

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)