


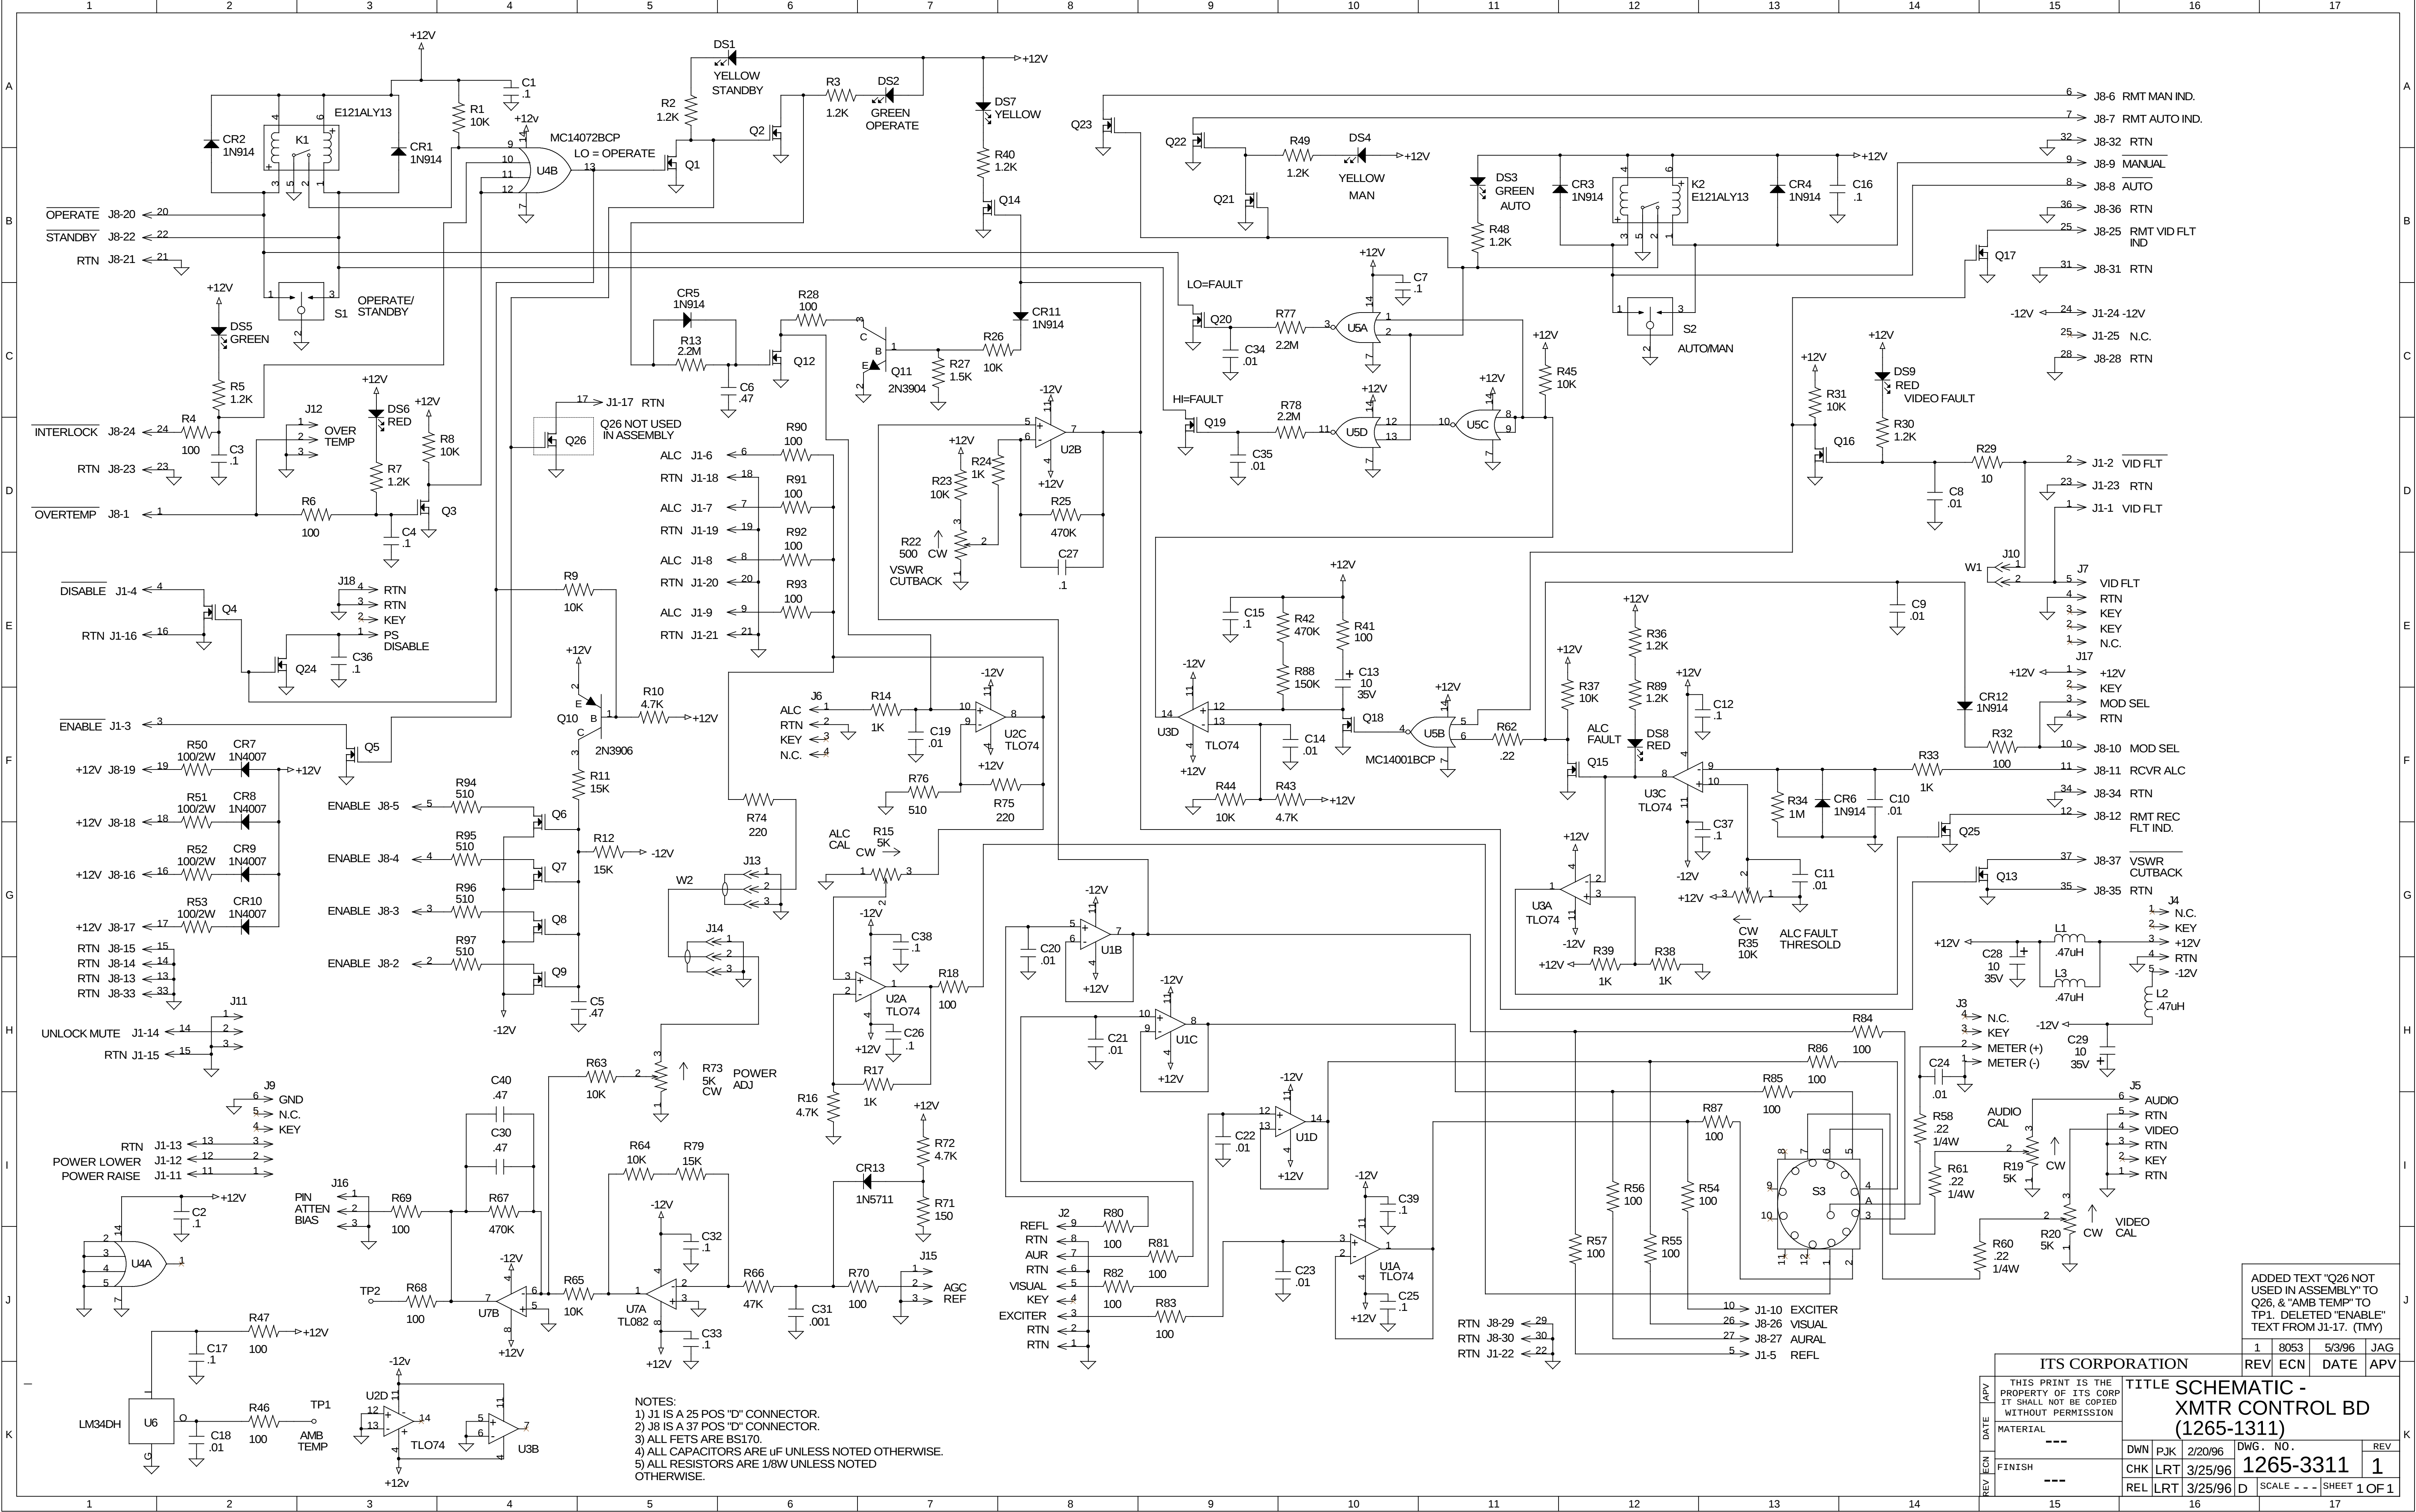

NOTES:
1) J1 IS A 25 POS "D" CONNECTOR.
2) J8 IS A 37 POS "D" CONNECTOR.
3) ALL FETS ARE BS170.
4) ALL CAPACITORS ARE μ F UNLESS NOTED OTHERWISE.
5) ALL RESISTORS ARE 1/8W UNLESS NOTED OTHERWISE.

ADDED TEXT "Q26 NOT USED IN ASSEMBLY" TO Q26, & "AMB TEMP" TO TP1. DELETED "ENABLE" TEXT FROM J1-17. (TMY)

ITS CORPORATION			
REV	ECN	DATE	APV
1	8053	5/3/96	JAG
TITLE SCHEMATIC - XMTR CONTROL BD (1265-1311)			
APV	DATE	DATE	DATE
---	---	---	---
FINISH	---	---	---
REL	LRT	3/25/96	1
SCALE	---	SHEET	1 OF 1