

AUT report for SDR operation of Kamstrup wall antenna
As per "35-Part-15-Antenna-Updates-TCB_Oct_2022.pdf"

Tested by	kamstrup a/s				
Address	Industrivej 28, Stilling dk-8660 Skanderborg				
Contact	TEL: +45 89 93 10 00 FAX: +45 89 93 10 01 E-MAIL: kamstrup@kamstrup.dk WEB: www.kamstrup.com				
Test specification	EN/IEC 61000-4-3 (M-CDC)				
Device under test					
Antenna type	IFA				
Reference	6699490 and 699491				
Use	The antenna is used with Kamstrup meters KWM2220 and KWM3220 both approved under FCC id OUY-KWMX220.				
Test results		Frequency	902 MHz	914 MHz	928 MHz
		Peak Gain	-1 dBi	-1 dBi	-3 dBi
		Total efficiency	-5 dB	-4 dB	-5 dB
		Directivity	4 dBi	3 dBi	2 dBi
Test conditions					
Temperature	20 oC - 22 oC / 68 oF - 72 oF				
Date	2017.01.25				
Test by	Kamstrup				
Report					
Date	2023.07.12				
Report by	Kamstrup				

Contents

1	EQUIPMENT UNDER TEST	3
2	SUPPORT EQUIPMENT	3
3	TEST SETUP	3
4	RESULTS	5
4.1	SOURCE OF ANTENNA GAIN INFORMATION	5
4.2	MAX GAIN, POLARIZATION, Θ, ϕ AND RADIATION PLOTS FOR MAX GAIN PLANE	6
4.2.1	RADIATION PLOTS AT 902 MHZ	6
4.2.2	RADIATION PLOTS AT 915 MHZ	7
4.2.3	RADIATION PLOTS AT 928 MHZ	8

1 Equipment under test

Description	Proprietary antenna for use if the meter is placed inside or near a building with bad coverage. It is designed specifically for Kamstrup KWM series water meters. The antenna comes with either 2- or 20-meter cable. Hence, two reference numbers 6699490 and 6699491 refer to this antenna. The test is performed with a shortened cable.
Electric specification	
Frequency range:	902 - 928 MHz
Impedance:	50 Ohm
VSWR:	3:1
Gain:	0 dBi
Radiation	Omnidirectional
Polarization	Linear
Mechanical specification	
Connector	Proprietary
Material	
Radiator	Steel
Dielectric	Air and polycarbonate
Temperature	
Operational	-20 °C - 55 °C / 32 °F - 131°F
Storage	-20 °C - 55 °C / 68°F - 131°F
Design	
Antenna information used for conformity with limits	Spurious emission measurements were performed with the antenna mounted on the DUT in reports G0M-2211-1783-EF0115B and G0M-2211-1783-TFC247DT. The maximal in-band gain is used for calculations of exposure in report G0M-2211-1783-TFC91MP.

2 Support Equipment

NA	
----	--

3 Test setup

Method	Full 3D antenna measurements in the anechoic chamber
Chamber certification	Shielding Efficiency: EN 50147-1 (M-CDC, AR and AC) Field Uniformity: EN 61000-4-3 (M-CDC) FS-NSA and VSWR: CISPR 16-1-4 (M-CDC)

Site/equipment information:	
Test Chamber	Antenna Chamber AC and Pre-Compliance EMC Chamber M-CDC, AlbatrossProjects 003-008-017/14E
Test Equipment	
Network analyzer	Rohde & Schwarz, ZVL6
Antenna	The Howland Company, QR-3A
Theta Axis Boom	Maturo
Phi Axis Turntable	Maturo
Antenna/equipment calibration status:	
ZVL6:	Received from vendor 01-09-2016
Antenna	Verified on 2016-11-10 by Kamstrup technical personnel
Boom	Verified on 2016-11-10 by Kamstrup technical personnel
Turntable	Verified on 2016-11-10 by Kamstrup technical personnel
Full system	Verified on 2016-11-10 by Kamstrup technical personnel
Test software	AMS32 antenna test suit from Rohde & Schwarz
Test setup	
Anechoic chamber	
Antenna Placement	
Additional equipment	NA
Signal feed	The signal was fed through the coaxial cable.

4 Results


4.1 Source of antenna gain information

The antenna gain was characterized with 3D measurements performed with the system and methods described in section above.


4.2 Max gain, polarization, θ , ϕ and radiation plots for max gain plane

4.2.1 Radiation plots at 902 MHz


Theta = 0, Phi = 0

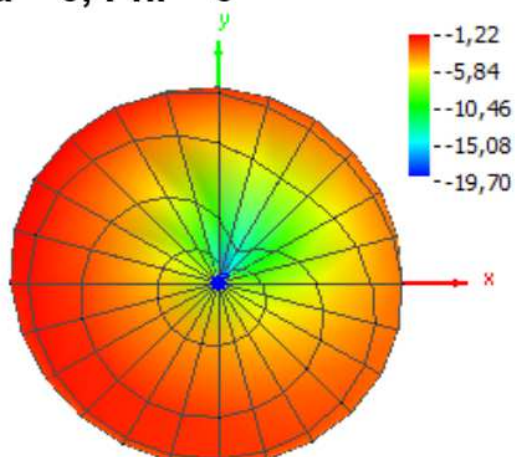


Theta = 180, Phi = 0

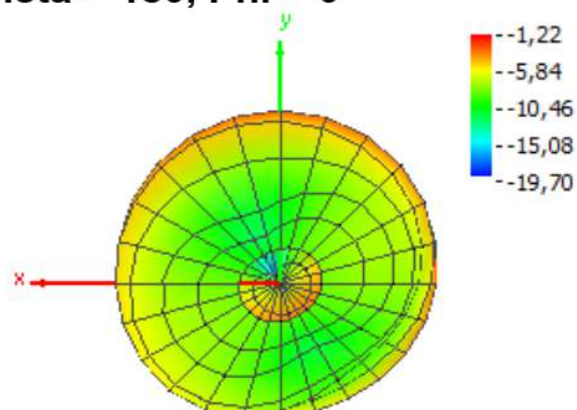


Theta = 90, Phi = 0

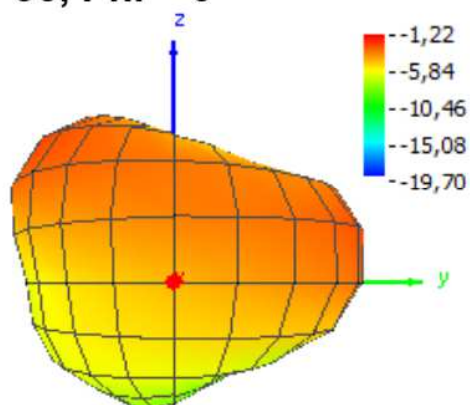


Theta = 90, Phi = 180

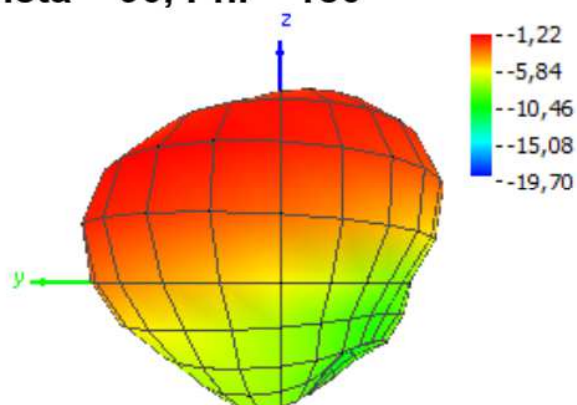

Theta = 90, Phi = 270

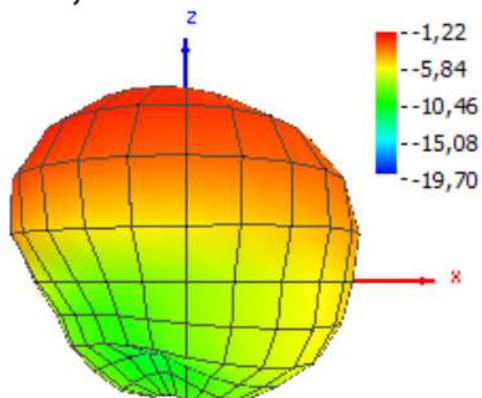


Theta = 90, Phi = 90

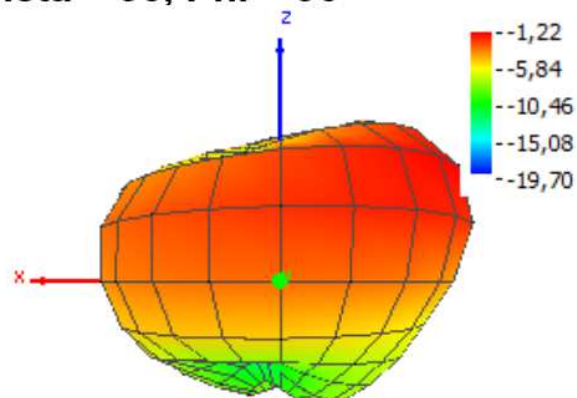


4.2.2 Radiation plots at 914 MHz


Theta = 0, Phi = 0

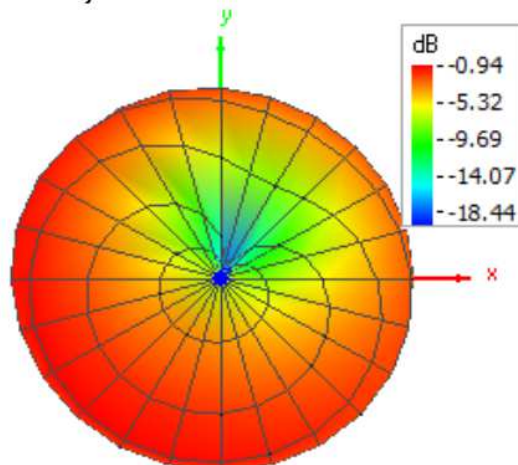


Theta = 180, Phi = 0

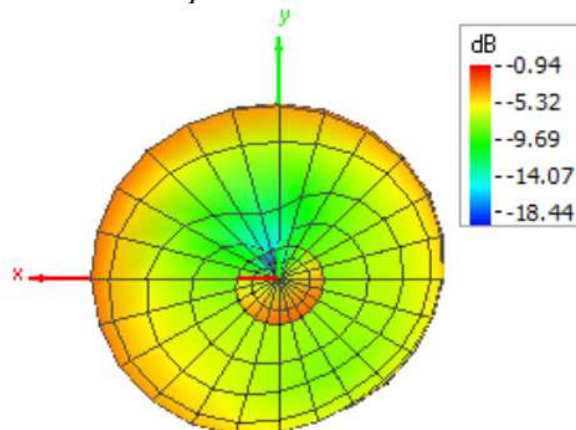


Theta = 90, Phi = 0

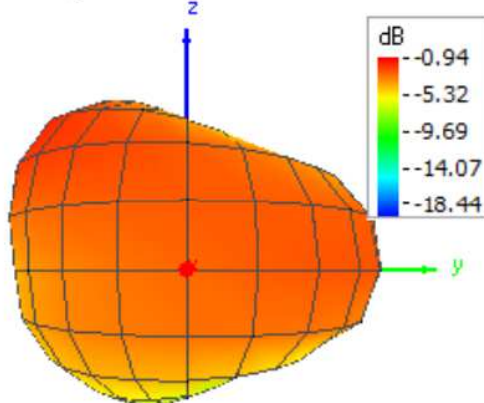


Theta = 90, Phi = 180

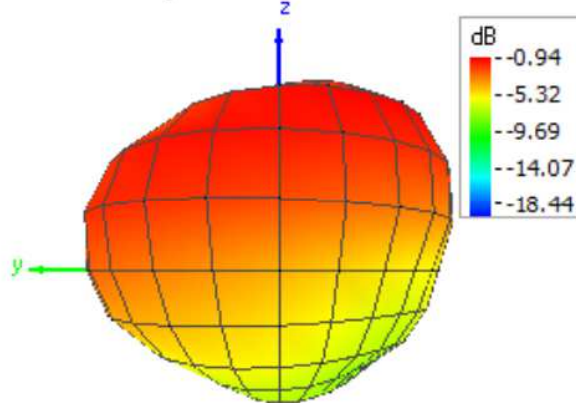

Theta = 90, Phi = 270

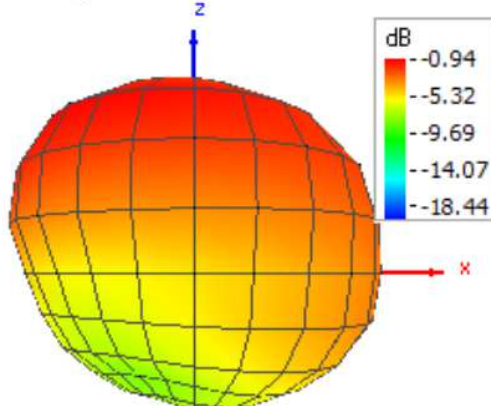


Theta = 90, Phi = 90

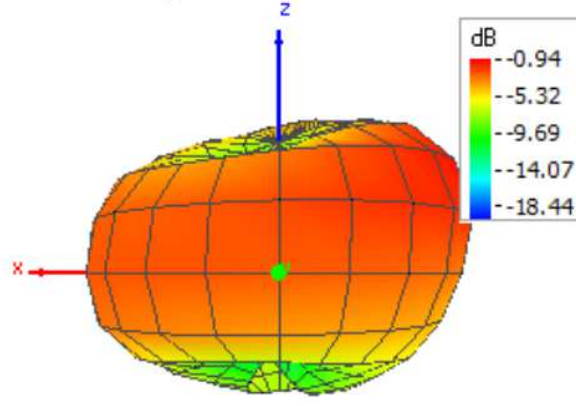


4.2.3 Radiation plots at 928 MHz


Theta = 0, Phi = 0

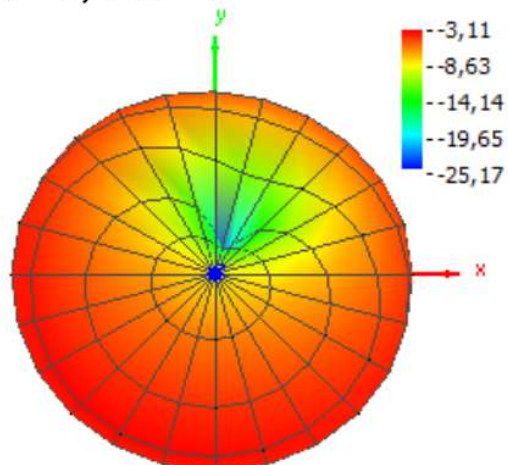


Theta = 180, Phi = 0

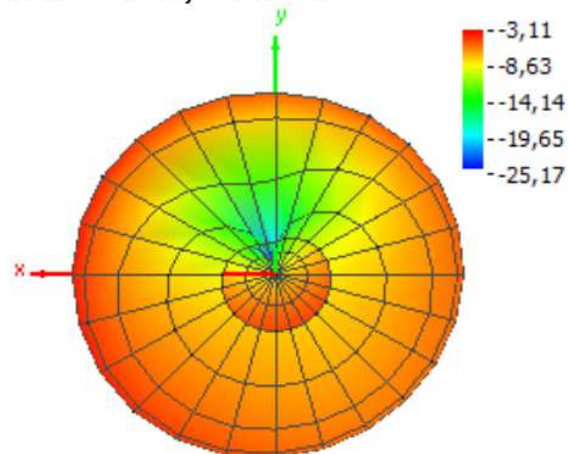


Theta = 90, Phi = 0

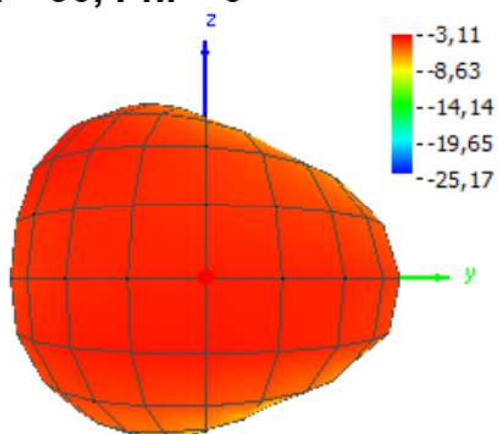


Theta = 90, Phi = 180

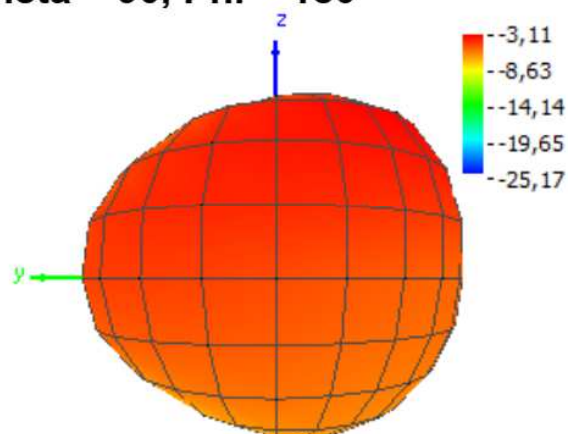

Theta = 90, Phi = 270

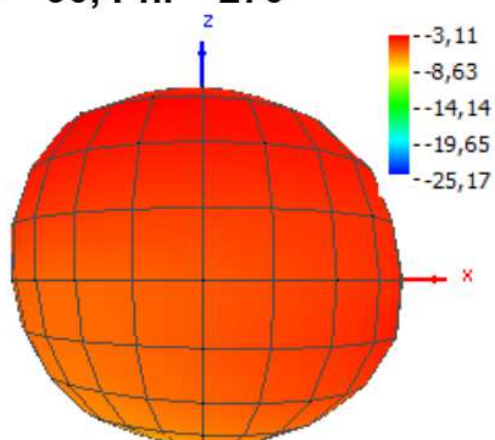

Theta = 90, Phi = 90

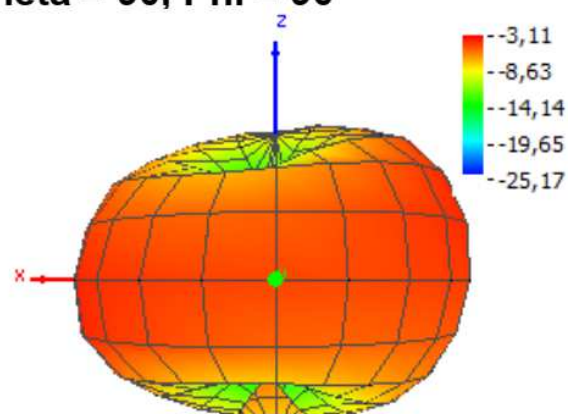

5 Signature

A handwritten signature in black ink, appearing to read 'Frederik S.' with a stylized flourish at the end.

Frederik Grandt Søndergaard
Product Manager
Water Division
Direct phone: +45 89 93 10 00
E-mail: fgrs@kamstrup.com