

RF TEST REPORT

Applicant	FOCAL JMLab
IC	22660-FH2307
Product	WIRELESS SPEAKER SYSTEM
Brand	FOCAL
Model	DIVA ALTA UTOPIA
HVIN	DIVAALTA; DIVAALTA2
Report No.	EFTA25100018-IE-05-R10V2
Issue Date	March 25, 2026

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **RSS-220 Issue 1, Amendment 1**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Xu Ying

Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	5
1.1. Notes of the test report	5
1.2. Test facility	5
1.3. Testing Location.....	5
2. General Description of Equipment under Test	6
2.1. Applicant and Manufacturer Information	6
2.2. General information	6
3. Applied Standards	8
4. Test Case Results	9
4.1. -10dB Bandwidth.....	9
4.2. Peak Power.....	12
4.3. Transmitter Radiated Emissions.....	14
4.4. AC Power Line Conducted Emissions.....	21
5. Main Test Instruments	23
6. The EUT Appearance	24
7. Test Setup Photos.....	25

Version	Revision Description	Issue Date
Rev.0	Initial issue of report.	January 27, 2026
Rev.1	Updated information.	February 2, 2026
Rev.2	Updated information.	March 25, 2026
Note: This revised report (Report No.: EFTA25100018-IE-05-R10V2) supersedes and replaces the previously issued report (Report No.: EFTA25100018-IE-05-R10V1). Please discard or destroy the previously issued report and dispose of it accordingly.		

Summary of measurement results

Number	Test Case	Clause in IC rules	Verdict
1	-10dB Bandwidth	RSS-220-2	PASS
2	Peak Power	RSS-220-5.3.1g	PASS
3	Transmitter radiated emissions	RSS-Gen 6.13/7.3	PASS
4	AC Power Line Conducted Emissions	RSS-Gen 7.2	PASS
Date of Testing: November 8, 2025 ~ December 18, 2025			
Date of Sample Received: October 10, 2025			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

CAB Identifier: CN0002

ISED Company Number: 8510A

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by **ISED** to perform measurement.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

Applicant	FOCAL JMLab
Applicant address	108 Avenue De l'Avenir ZI Molina la Chazotte, 42350 LA TALAUDIERE, FRANCE
Manufacturer	FOCAL JMLab
Manufacturer address	108 Avenue De l'Avenir ZI Molina la Chazotte, 42350 LA TALAUDIERE, FRANCE

2.2. General information

EUT Description	
Model	DIVA ALTA UTOPIA
Lab internal SN	251010-05-003
Hardware Version	R1
Software Version	6.2.0.11012
Power Supply	Battery / AC Power Supply
Antenna Type	PCB Antenna
Antenna Connector	A permanently attached antenna (meet with the standard RSS-Gen 6.8 requirement)
Max. EIRP	-10.76 dBm
Operating Frequency Range(s)	3.1GHz - 10.6GHz
Operating temperature range	5° C to 35 ° C
Operating voltage range	198 Vac to 264 Vac
State voltage	220-240 Vac
EUT Accessory	
Battery	Manufacturer: Various Model: LR03 / AAA DC 1.5V
Note:	
1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant.	

The difference between DIVAALTA and DIVAALTA2 are show in the below table:

HVIN	DIVAALTA; DIVAALTA2
Describe the non RF boards, and circuitry differences (if applicable).	HW: 1x Power Amplifier Board. This is the same as DIVAALTA. 1x Digital Board. This does not contain any Ethernet related circuitry (Ethernet CLK, Ethernet PHY etc) as there is no streaming capabilities by itself. Does not connect to Bluetooth & Zigbee Module Does not house S1955 Wi-Fi Module 1x EuP Board. This is the same as DIVAALTA. SW: The software that is flashed into DIVAALTA2 is the same as DIVAALTA. The difference being that there is no streaming module on DIVAALTA2, so the firmware for this is not present
Describe the RF boards and circuitry differences (if applicable).	1 RF module: SR1020 UWB Module This is the same as DIVAALTA. Wirelessly connects DIVAALTA & DIVAALTA2 together providing a wired link cable is not inserted between units Both HW & SW are the same version. In the software, DIVAALTA is set to MASTER role and DIVAALTA2 is set to SLAVE role.
Note: 1. DIVAALTA and DIVAALTA2 UWB module is exactly the same, this report only tests DIVAALTA. 2. The detailed product change description please refers to the <i>Difference Declaration Letter</i> .	

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

RSS-Gen Issue 5, April 2018 + Amendment 1 (March 2019) + Amendment 2 (February 2021)

RSS-220 Issue 1, March 2009 + Amendment 1, July 2018

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

Reference standard:

KDB 393764 D01 UWB FAQ v02r01

4. Test Case Results

4.1. -10dB Bandwidth

Ambient condition


Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Method of Measurement

A UWB transmitter is defined as "an intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or great than 500MHz, regardless of the fractional bandwidth.

The frequency at which the maximum power level is measured with the peak detector is designated f_M. The peak power measurements shall be made using a spectrum analyzer or EMI receiver with a 1 MHz resolution bandwidth and a video bandwidth of 1 MHz or greater. The instrument shall be set to peak detection using the maximum-hold trace mode. The outermost 1 MHz segments above and below f_M, where the peak power falls by 10 dB relative to the level at f_M, and designated as f_H and f_L, respectively.

Test Setup

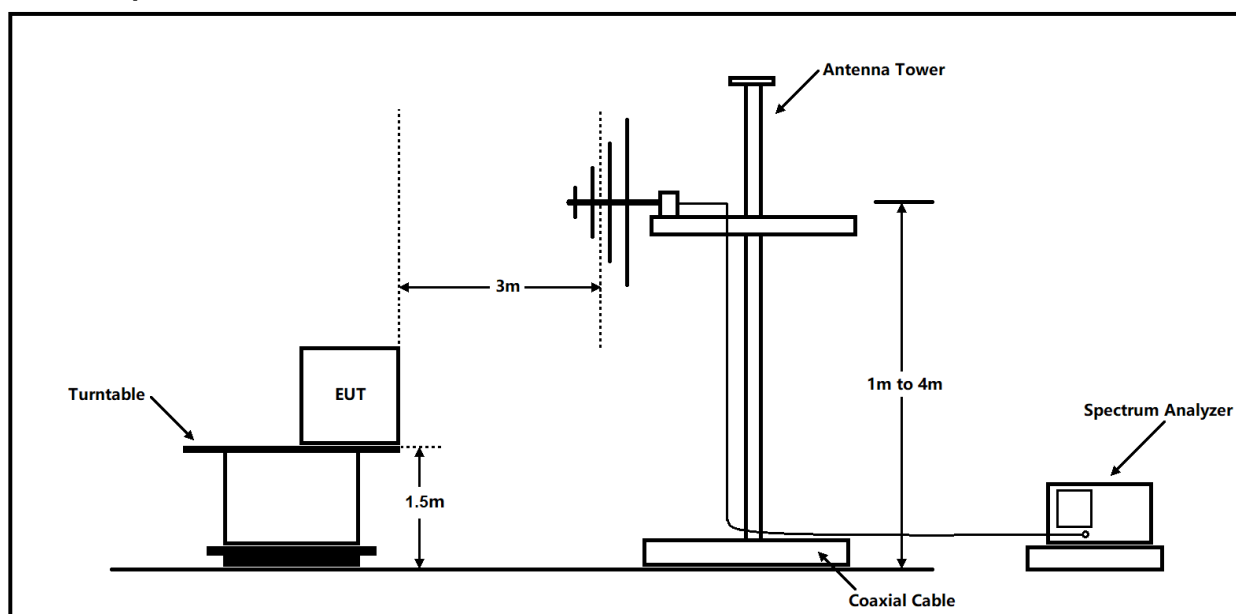

Limits


At least 500 MHz or a -10 dB fractional bandwidth greater than 0.2.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:

Frequency (MHz)	FM (MHz)	FL (MHz)	FH (MHz)	-10dB BW (MHz)	Fractional bandwidth	Limit (MHz)	Conclusion
7293	7139.5	6466.5	7933.5	1467.0	0.204	500	PASS

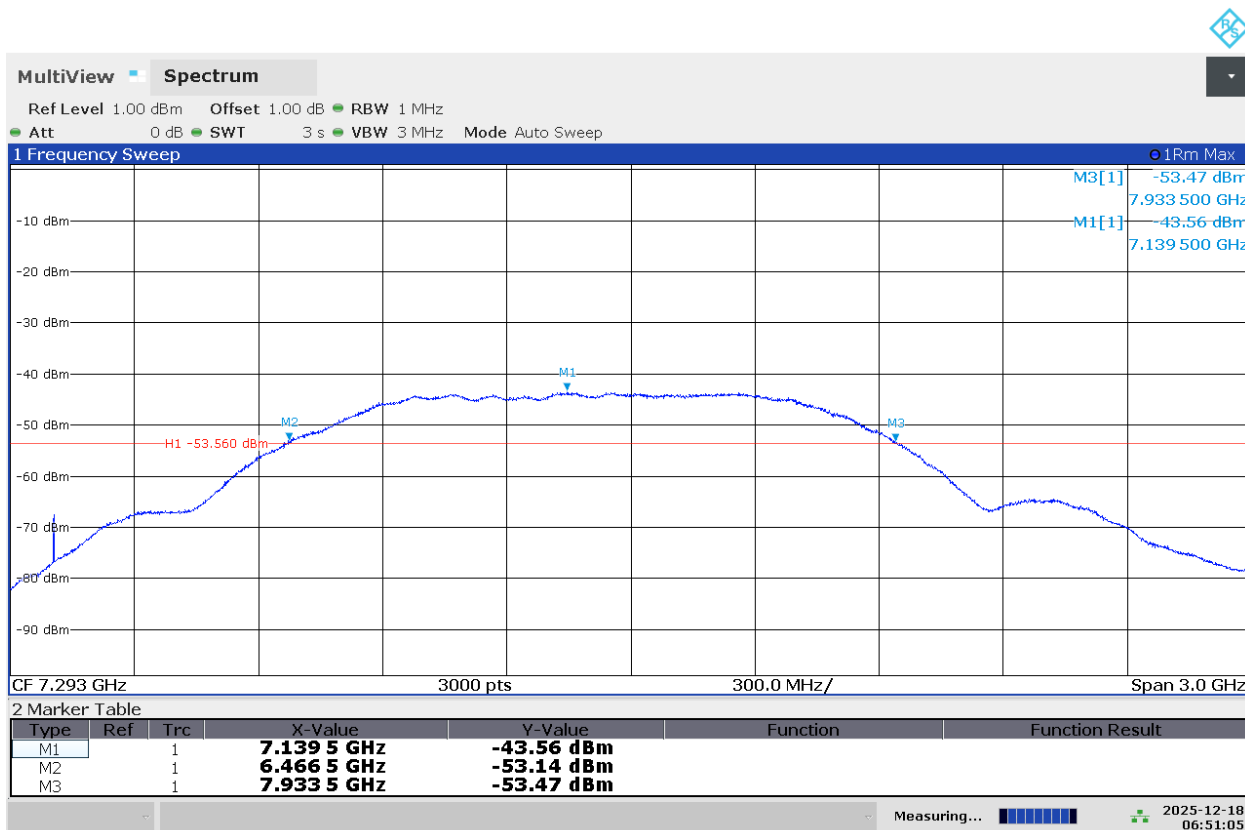

06:51:05 AM 12/18/2025

4.2. Peak Power

Ambient condition


Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Methods of Measurement

During the process of the testing, The EUT was connected to the average power meter through an external attenuator and a known loss cable. The EUT is max power transmission with proper modulation. We use Maximum average Radiated Output Power Level Method for this test.

The peak detector of the instrument is selected and the maximum hold feature activated. The RBW is set to 50 MHz and the VBW is set to at least 50 MHz (3 MHz is recommended).

Test Setup

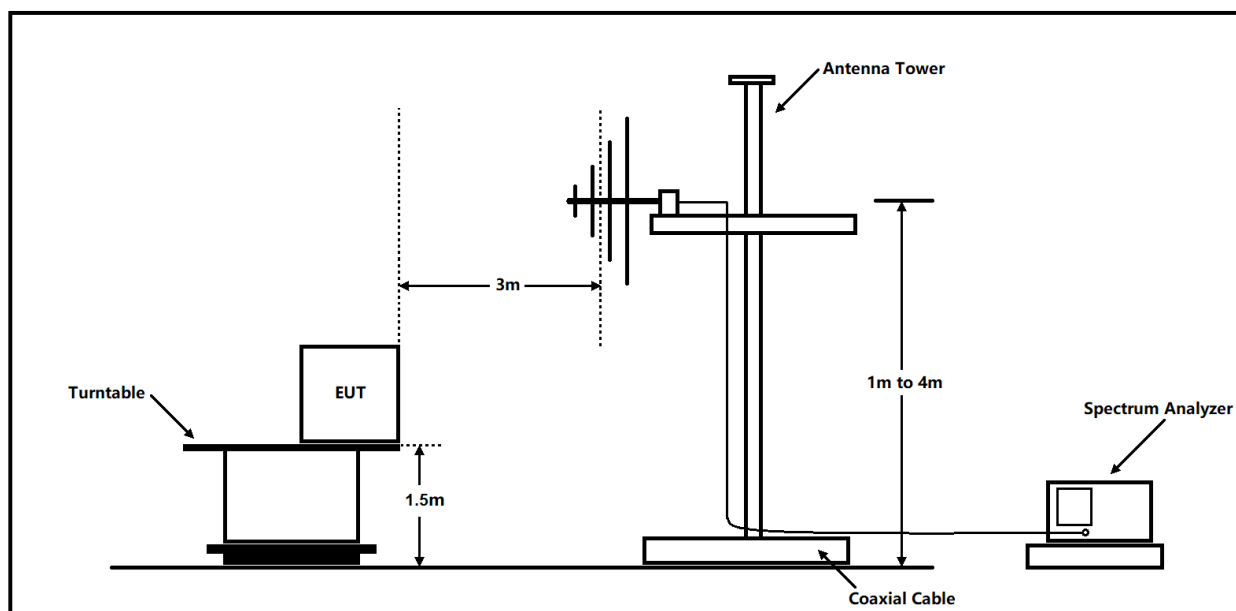

Limits


Transmissions shall not exceed 0 dBm e.i.r.p. in any 50 MHz bandwidth when the average limit is -41.3 dBm/MHz.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

Test Results

Mode	Frequency /MHz	Max EIRP (dBm/50 MHz)	Limit (dBm/50 MHz)
UWB	7293	-10.76	0

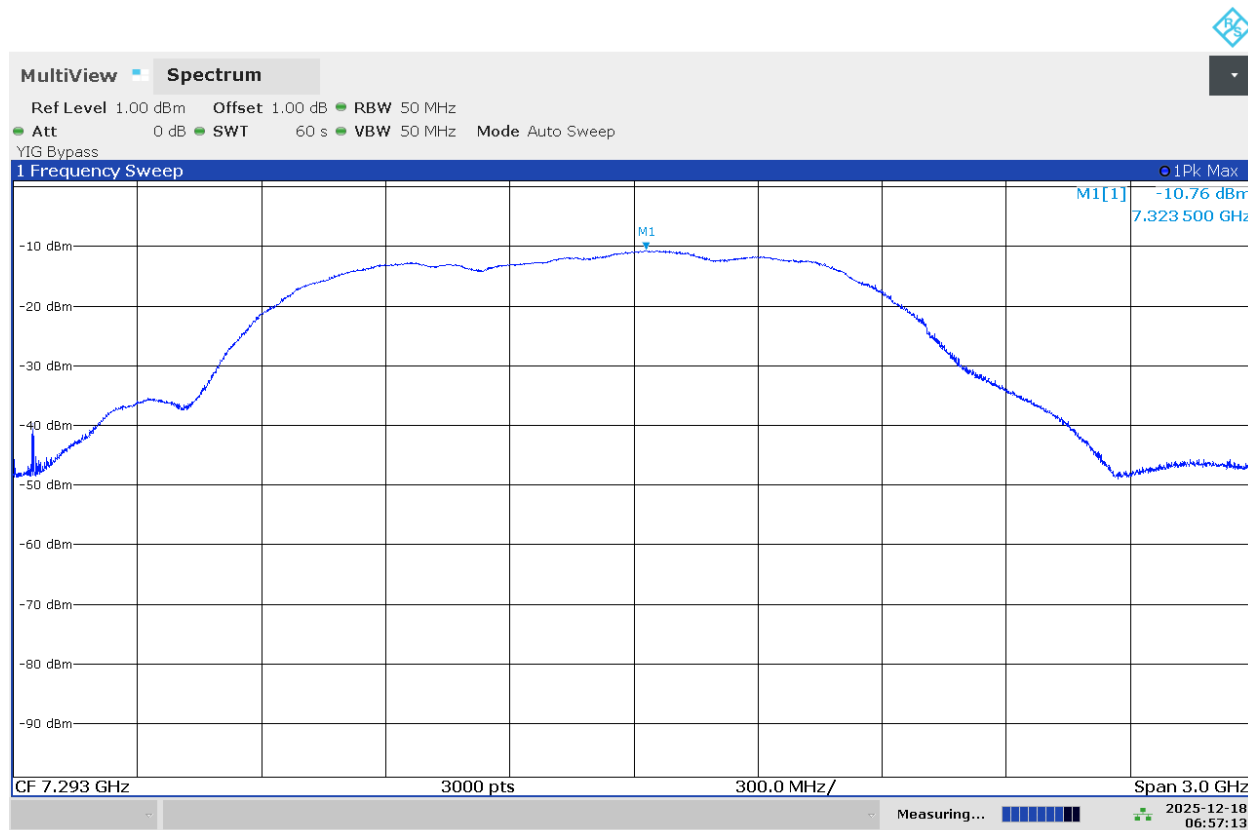

06:57:13 AM 12/18/2025

4.3. Transmitter Radiated Emissions

Ambient condition

Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and

OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.


3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Reduce the video bandwidth until no significant variations in the displayed signal are observed in subsequent traces, provided the video bandwidth is no less than 1 Hz. For regulatory requirements that specify averaging only over the transmit duration (e.g., digital transmission system [DTS] and Unlicensed National Information Infrastructure [U-NII]), the video bandwidth shall be greater than $[1 / (\text{minimum transmitter on time})]$ and no less than 1 Hz.


The test is in transmitting mode.

Test setup


9KHz~ 30MHz

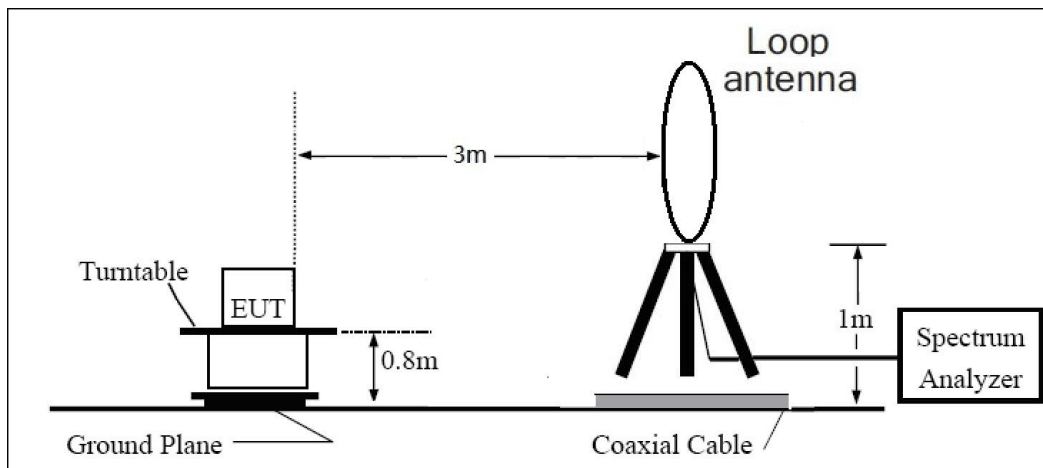

30MHz~ 1GHz

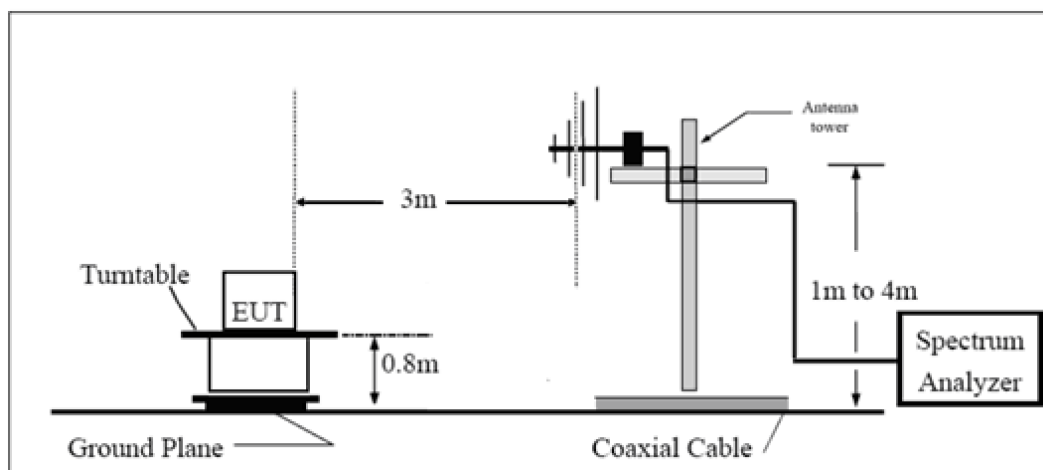

Above 1GHz

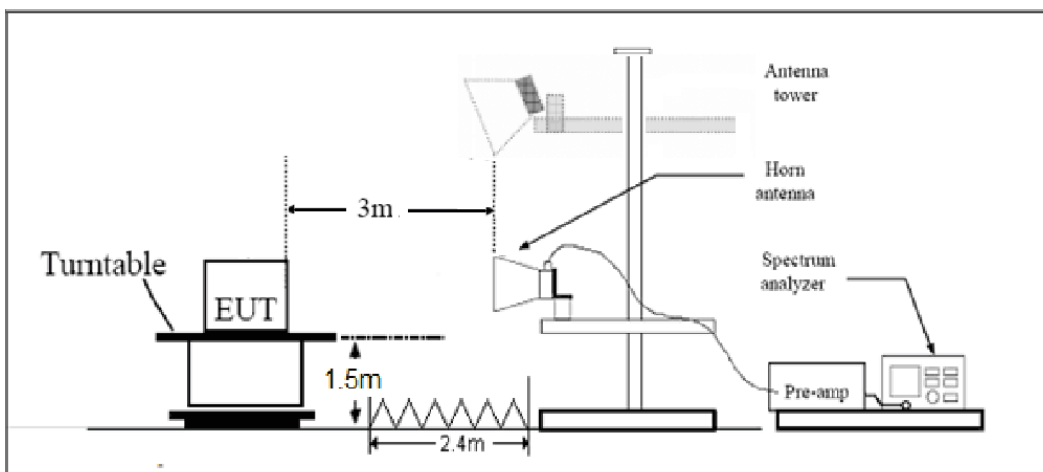

Note: Area side: 2.4mX3.6m

Limits

The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency of emission (MHz)	Field strength(uV/m)	Measurement distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Frequency (MHz)	EIRP in dBm
960-1610	–75.3
1610-1990	–63.3
1990-3100	–61.3
3100-10600	–41.3
Above 10600	–61.3

In addition to the radiated emission limits specified in the table of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency (MHz)	EIRP in dBm
1164-1240	–85.3
1559-1610	–85.3


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB

Test Results:

Mode	Frequency MHz	Average EIRP (dBm/MHz)	Limit (dBm/MHz)
UWB	7293	-43.56	-41.3

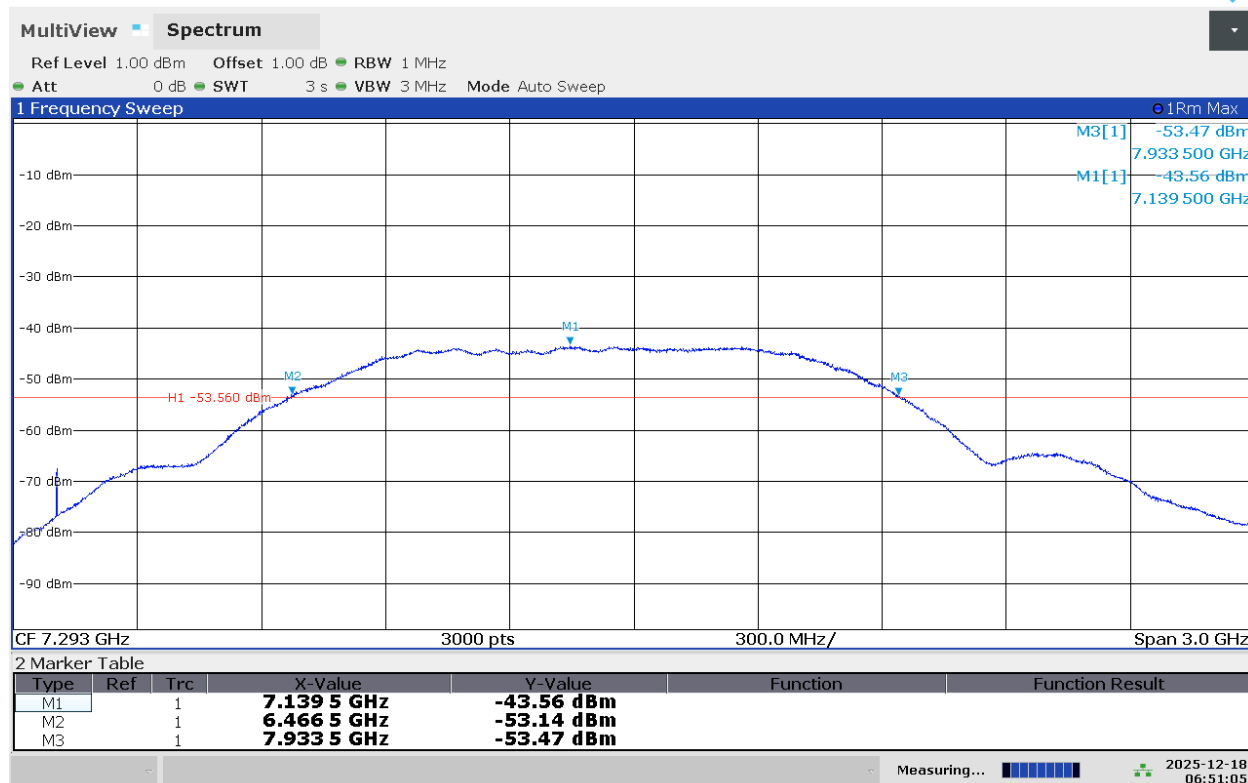

06:51:05 AM 12/18/2025

Others Case

The detailed test data see *EFTA25100018-IE-05-R10-ANNEX A* Test Result.

4.4. AC Power Line Conducted Emissions

Ambient condition


Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Methods of Measurement

The EUT IS placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10. Connect the AC power line of the EUT to the LISN Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9kHz, VBW is set to 30kHz The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

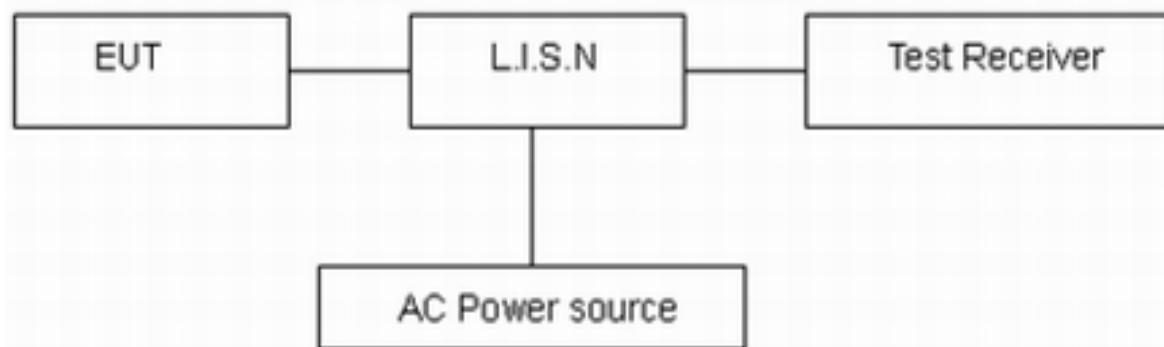

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

Test Results:

The detailed test data see *EFTA25100018-IE-05-R10-ANNEX A* Test Result.

5. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSW26	103495	2025-05-06	2026-05-05
Vector Signal Generator	KEYSIGHT	N5182B-X07	MY51350303	2024-12-02	2025-12-01
				2025-11-24	2026-11-23
EMI Test Receiver	R&S	ESCI3	100948	2025-05-07	2026-05-06
Signal Analyzer	R&S	FSV40	101186	2025-05-06	2026-05-05
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2023-04-16	2026-04-15
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	1023	2023-07-14	2026-07-13
Software	R&S	EMC32	9.26.01	/	/
Artificial main network	R&S	ENV216	102191	2024-12-02	2025-12-01
				2025-11-24	2026-11-23
EMI Test Receiver	R&S	ESR	101667	2025-05-06	2026-05-05
Software	R&S	EMC32	10.35.10	/	/

6. The EUT Appearance

Refer to *EUT Appearance*.

7. Test Setup Photos

Refer to *RSS-220 Test Setup*.

***** END OF REPORT *****