

RF Test Report

Project Number: 4724254**Proposal:** SUW-202101000320**Report Number:** 4724254EMC18**Revision Level:** 0**Client:** Deere & Company**Equipment Under Test:** JDLINK R Modem - 4G**Model Number:** MA4R**FCC ID:** OV5-MA4R**IC ID:** 11137A-MA4R**Applicable Standards:** ANSI C63.26:2014

Part 2, Part 22(H), Part 24(E)

RSS-132 Issue 3



RSS-133 Issue 6

RSS-GEN, Issue 5

Report issued on: 18 April 2022**Test Result:** Compliant

FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER: 3212.01

This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

Prepared by:
Jeremy Pickens, RF Lab Manager**Reviewed by:**
Martin Taylor, Project Engineer

Remarks: This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>. And for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/terms-e-document.aspx>.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for a maximum of 30 days only.

TABLE OF CONTENTS

1	SUMMARY OF TEST RESULTS	4
1.1	MODIFICATIONS REQUIRED TO COMPLIANCE	4
2	GENERAL INFORMATION	5
2.1	CLIENT INFORMATION	5
2.2	TEST LABORATORY	5
2.3	GENERAL INFORMATION OF EUT	5
2.4	DESCRIPTION OF TEST MODES.....	5
3	RF OUTPUT POWER	6
3.1	TEST RESULT.....	6
3.2	TEST METHOD.....	6
3.3	TEST SITE	6
3.4	TEST EQUIPMENT	6
3.5	TEST DATA.....	7
4	PEAK TO AVERAGE RATIO	8
4.1	TEST RESULT.....	8
4.2	TEST METHOD.....	8
4.3	TEST SITE	8
4.4	TEST EQUIPMENT	8
4.5	TEST DATA.....	9
5	OCCUPIED BANDWIDTH	12
5.1	TEST RESULT.....	12
5.2	TEST METHOD.....	12
5.3	TEST SITE	12
5.4	TEST EQUIPMENT	12
5.5	TEST DATA.....	13
6	BAND EDGE AND CONDUCTED SPURIOUS EMISSIONS	16
6.1	TEST RESULT.....	16
6.2	TEST METHOD.....	16
6.3	TEST SITE	16
6.4	TEST EQUIPMENT	16
6.5	TEST DATA – BAND EDGE	17
6.6	TEST DATA - CONDUCTED SPURIOUS EMISSIONS	19
7	EFFECTIVE RADIATED POWER.....	22
7.1	TEST RESULT.....	22
7.2	TEST METHOD.....	22
7.3	TEST SITE	22
7.4	TEST EQUIPMENT	22
7.5	TEST DATA.....	22
8	RADIATED SPURIOUS EMISSIONS.....	23
8.1	TEST RESULT.....	23
8.2	TEST METHOD.....	23
8.3	TEST SITE	23
8.4	TEST EQUIPMENT	24
8.5	TEST DATA – GSM 850.....	25
8.6	TEST DATA – GSM 1900	31



9 FREQUENCY STABILITY 37

9.1 TEST RESULT..... 37

9.2 TEST METHOD..... 37

9.3 TEST SITE..... 37

9.4 TEST EQUIPMENT 37

9.5 TEST DATA..... 38

10 REVISION HISTORY 40

1 Summary of Test Results

Reference Sections		Test Description	Test Limit	Test Condition	Test Result
FCC	IC				
2.1046	RSS-GEN (6.12)	Conducted Output Power	N/A	Conducted	Compliant
24.232(d)	RSS-132 (5.4) RSS-133 (6.4)	Peak-to-Average Ratio	<13 dB		Compliant
2.1049 22.917(a) 24.238(a)	RSS-GEN (6.7) RSS-133 (2.3)	Occupied Bandwidth	N/A		Reported
2.1051 22.917(a) 24.238(a)	RSS-132 (5.5) RSS-133 (6.5.1)	Band Edge / Conducted Spurious Emissions	$< 43 + 10\log_{10}(P_{\text{Watts}})$ at band edge and for all out of band emissions		Compliant
22.913(a)(5)	--	Effective Radiated Power	< 7 Watts max ERP	Radiated	Compliant
--	RSS-132 (5.4)	Equivalent Isotropically Radiated Power	< 11.5 Watts max EIRP		Compliant
24.232(c)	RSS-133 (6.4) SRSP-510 (5.1.2)		< 2 Watts max EIRP		Compliant
2.1053 22.917(a) 24.238(a)	RSS-GEN (6.13) RSS-132 (5.5) RSS-133 (6.5.1)	Radiated Spurious Emissions	$< 43 + 10\log_{10}(P_{\text{Watts}})$ at band edge and for all out of band emissions		Compliant
2.1055 22.355 24.235	RSS-GEN (6.11) RSS-132 (5.3) RSS-133 (6.3)	Frequency Stability	<2.5 ppm		Compliant

1.1 Modifications Required to Compliance

None

2 General Information

2.1 Client Information

Name: Deere & Company
Address: One John Deere Place
City, State, Zip, Country: Moline, IL 61265, USA

2.2 Test Laboratory

Name: SGS North America, Inc.
Address: 620 Old Peachtree Road NW, Suite 100
City, State, Zip, Country: Suwanee, GA 30024, USA

Accrediting Body: A2LA
Type of lab: Testing Laboratory
Certificate Number: 3212.01
Designation Number: US1126
CAB Identifier: US0186

2.3 General Information of EUT

Product Description: JDLINK R Modem - 4G
Model Number: MA4R
Serial Number: PCMA4A200091

Modes of Operation: GSM 850 / 1900

Antenna Type: External Proprietary
IMEI: 004401083921102

Sample Received Date: 10 April 2021
Dates of testing: 22 February – 30 March 2022

2.4 Description of Test Modes

The EUT was tested under normal operating conditions with a base station simulator directly connect to port C2. The base station simulator was set to control the EUT to output maximum power and operate in GSM Bands 850 and 1900. Using the base station simulator, the device was configured for maximum uplink transmit power.

3 RF Output Power

3.1 Test Result

Test Description	Requirements	Test Result
RF Output Power	FCC Part 2.1046 RSS-GEN (6.12)	Reported

3.2 Test Method

A radio link was established between EUT and Radio Communication Tester. The output power of the EUT was set to maximum value by using the maximum power setting on the Radio Communications Tester. The CMW500 was used to measure the output power.

The measurements were conducted at the low, middle, and high channel.

3.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 23.9 °C

Relative Humidity: 59.0%

Atmospheric Pressure: 97.9 kPa

3.4 Test Equipment

Test End Date: 3/31/2022

Tester: JOP

Equipment	Model	Manufacturer	Asset Number	Cal Date	Cal Due Date
RF CABLE SMA TO SMA, 0.01-40GHZ	084-0505-059	TELEDYNE STORM MICROWAVE	20108	16-Mar-2022	16-Mar-2023
ATTENUATOR, 10DB	BW-S10W2	MINI-CIRCUITS	15034	7-Oct-2021	7-Oct-2022
POWER SPLITTER	ZFRSC-123-S+	MINI-CIRCUITS	B101739	8-Jul-2021	8-Jul-2022
RF CABLE (TS8997)	141	HUBER & SUHNER	B095588	1-Jul-2021	1-Jul-2022
WIDEBAND RADIO COMMUNICATION	CMW500	ROHDE & SCHWARZ	B094874	13-Jan-2021	13-Jan-2023

3.5 Test Data

Band	Uplink Channel	UL Freq (MHz)	Mode	Slots	Conducted Power (dBm)
850	128	824.2	1	GPRS	32.1
850	128	824.2	2	GPRS	29.79
850	128	824.2	3	GPRS	27.51
850	128	824.2	4	GPRS	26.12
850	190	836.6	1	GPRS	32.13
850	190	836.6	2	GPRS	29.76
850	190	836.6	3	GPRS	27.67
850	190	836.6	4	GPRS	26.23
850	251	848.8	1	GPRS	32.05
850	251	848.8	2	GPRS	29.88
850	251	848.8	3	GPRS	27.64
850	251	848.8	4	GPRS	26.2
850	128	824.2	1	EGPRS	31.84
850	128	824.2	2	EGPRS	29.74
850	128	824.2	3	EGPRS	27.45
850	128	824.2	4	EGPRS	26.16
850	190	836.6	1	EGPRS	32.16
850	190	836.6	2	EGPRS	29.74
850	190	836.6	3	EGPRS	27.66
850	190	836.6	4	EGPRS	26.22
850	251	848.8	1	EGPRS	32.09
850	251	848.8	2	EGPRS	29.98
850	251	848.8	3	EGPRS	27.76
850	251	848.8	4	EGPRS	26.3
1900	512	1850.2	1	GPRS	29.66
1900	512	1850.2	2	GPRS	26.81
1900	512	1850.2	3	GPRS	25.13
1900	512	1850.2	4	GPRS	23.87
1900	661	1880	1	GPRS	29.69
1900	661	1880	2	GPRS	27.27
1900	661	1880	3	GPRS	25.34
1900	661	1880	4	GPRS	24.17
1900	810	1909.8	1	GPRS	29.24
1900	810	1909.8	2	GPRS	26.79
1900	810	1909.8	3	GPRS	25
1900	810	1909.8	4	GPRS	23.79
1900	512	1850.2	1	EGPRS	29.7
1900	512	1850.2	2	EGPRS	26.97
1900	512	1850.2	3	EGPRS	25.17
1900	512	1850.2	4	EGPRS	23.97
1900	661	1880	1	EGPRS	29.68
1900	661	1880	2	EGPRS	27.32
1900	661	1880	3	EGPRS	25.33
1900	661	1880	4	EGPRS	24.2
1900	810	1909.8	1	EGPRS	29.27
1900	810	1909.8	2	EGPRS	26.79
1900	810	1909.8	3	EGPRS	25.03
1900	810	1909.8	4	EGPRS	23.86

GSM850 Max: 32.13dBm (1.633W)

GSM1900 Max: 29.69dBm (0.931W)

4 Peak to Average Ratio

4.1 Test Result

Test Description	Requirements	Test Result
Peak to Average Ratio	FCC 24.232(d) RSS-132 (5.4) RSS-133 (6.4)	Compliant

4.2 Test Method

KDB document 971168 D01 Power Meas License Digital Systems v03r01 was used to determine peak-to-average ratio. For the measurements, Clause 5.7.1 was used which defined the measurement method using the CCDF function of the spectrum analyzer. Measurements were recorded at the mid channels at the highest power.

4.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 23.9 °C

Relative Humidity: 59.0%

Atmospheric Pressure: 97.9 kPa

4.4 Test Equipment


Test End Date: 3/31/2022

Tester: JOP


Equipment	Model	Manufacturer	Asset Number	Cal Date	Cal Due Date
RF CABLE SMA TO SMA, 0.01-40GHZ	084-0505-059	TELEDYNE STORM MICROWAVE	20108	16-Mar-2022	16-Mar-2023
ATTENUATOR, 10DB	BW-S10W2	MINI-CIRCUITS	15034	7-Oct-2021	7-Oct-2022
POWER SPLITTER	ZFRSC-123-S+	MINI-CIRCUITS	B101739	8-Jul-2021	8-Jul-2022
RF CABLE (TS8997)	141	HUBER & SUHNER	B095588	1-Jul-2021	1-Jul-2022
WIDEBAND RADIO COMMUNICATION	CMW500	ROHDE & SCHWARZ	B094874	13-Jan-2021	13-Jan-2023

4.5 Test Data


GSM 850 GPRS Channel 128

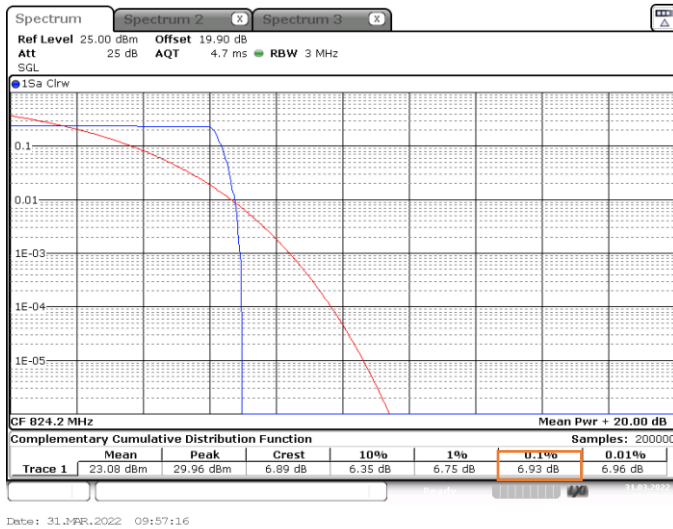


GSM 850 GPRS Channel 190

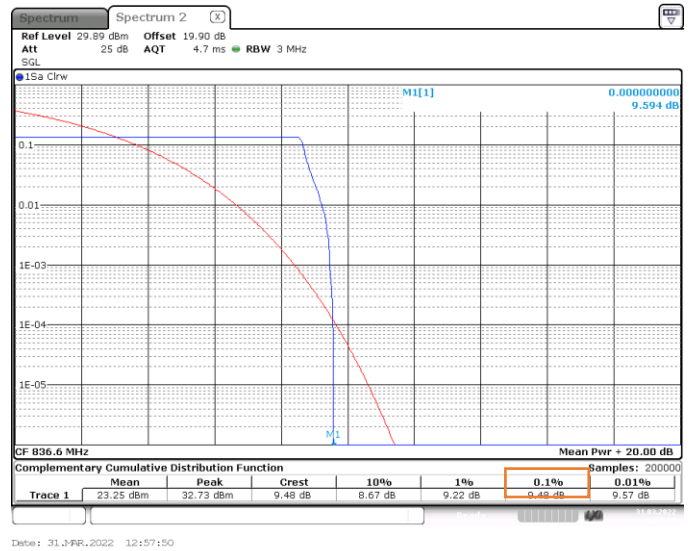


GSM 850 GPRS Channel 251

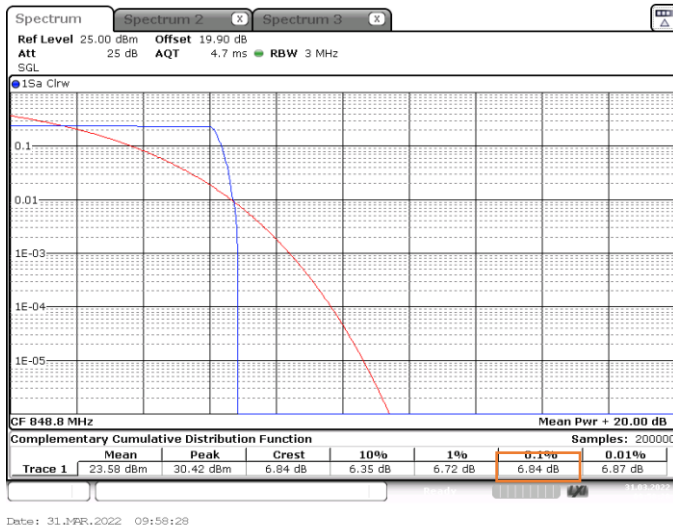


GSM 850 EGPRS Channel 128

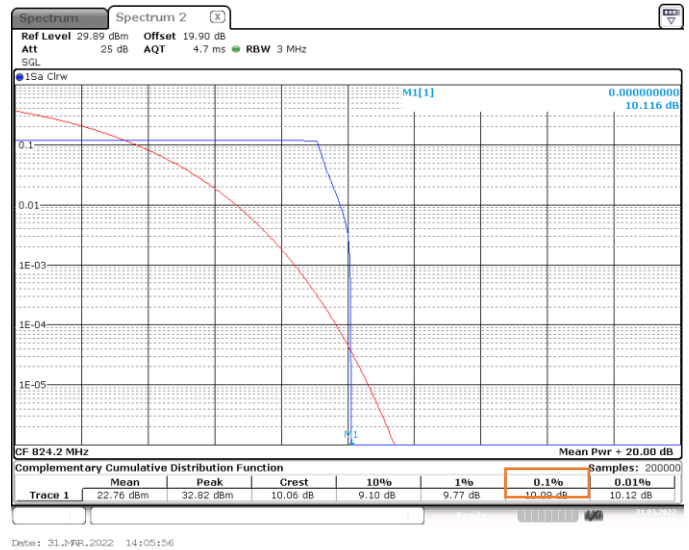


GSM 850 EGPRS Channel 190

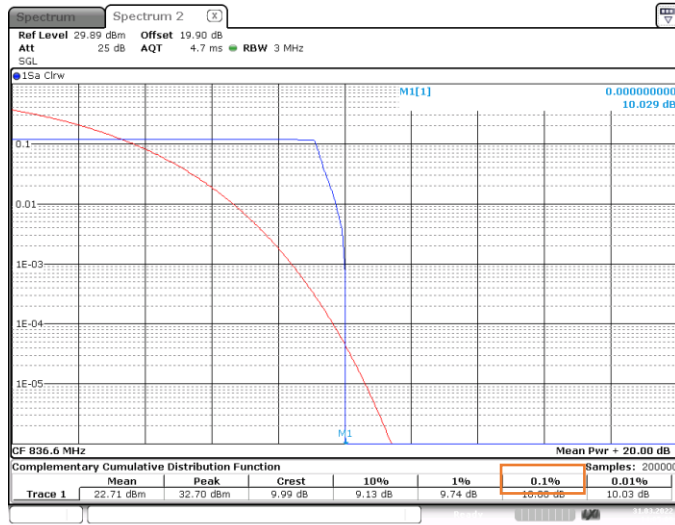


GSM 850 EGPRS Channel 251

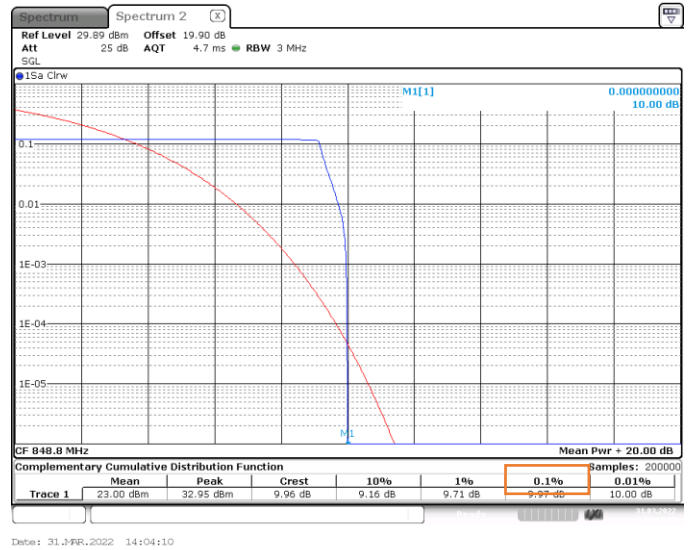


GSM 1900 GPRS Channel 512

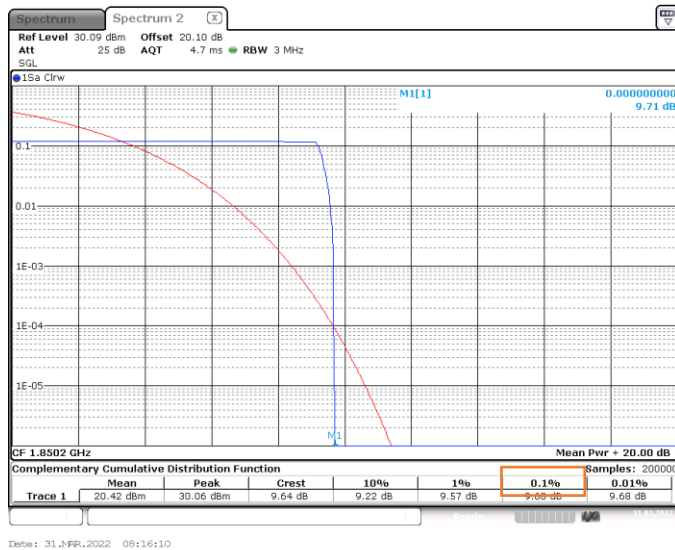

GSM 1900 GPRS Channel 661

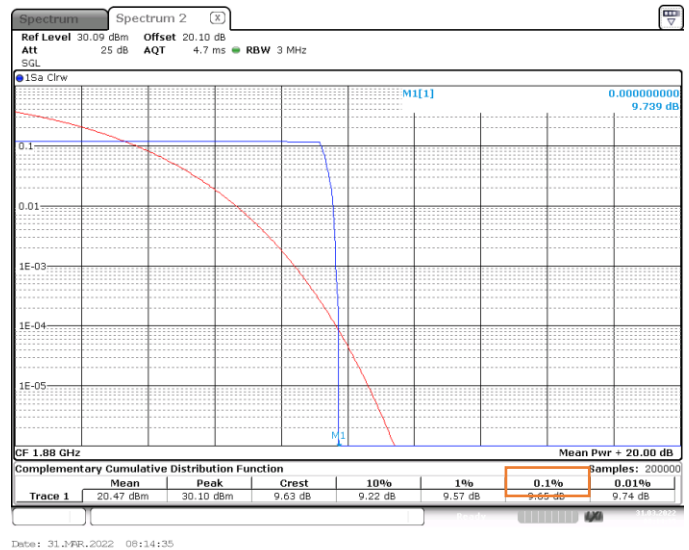


GSM 1900 GPRS Channel 810

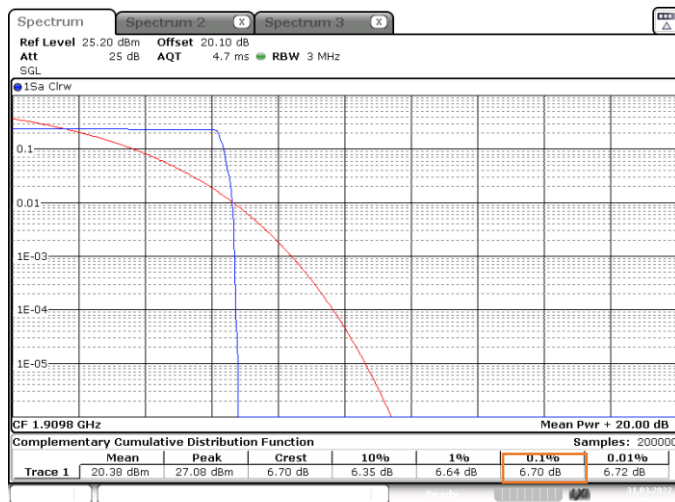


Date: 31-JPR,2022 09:50:39

GSM 1900 EGPRS Channel 512

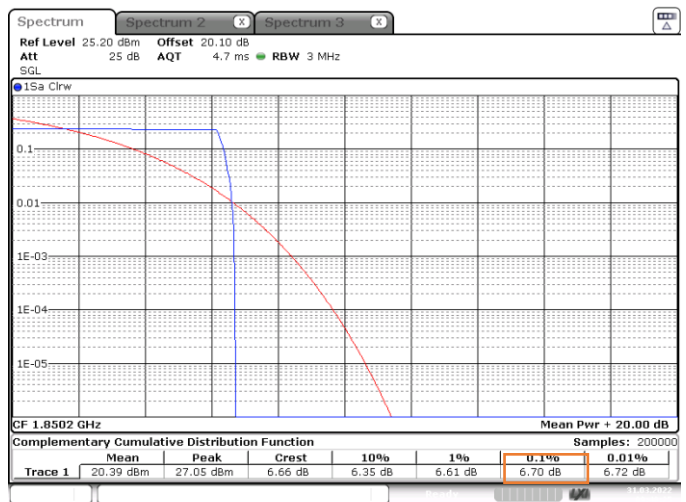


Date: 31-JPR,2022 09:48:25

GSM 1900 EGPRS Channel 661

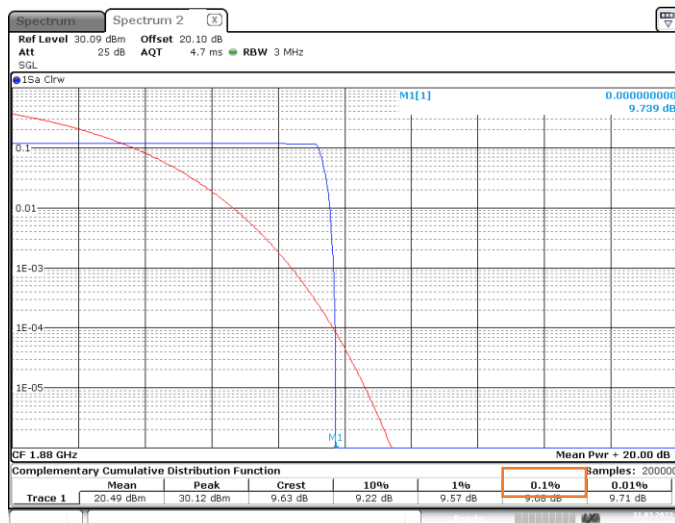

Date: 31-JPR,2022 08:11:39

GSM 1900 EGPRS Channel 810

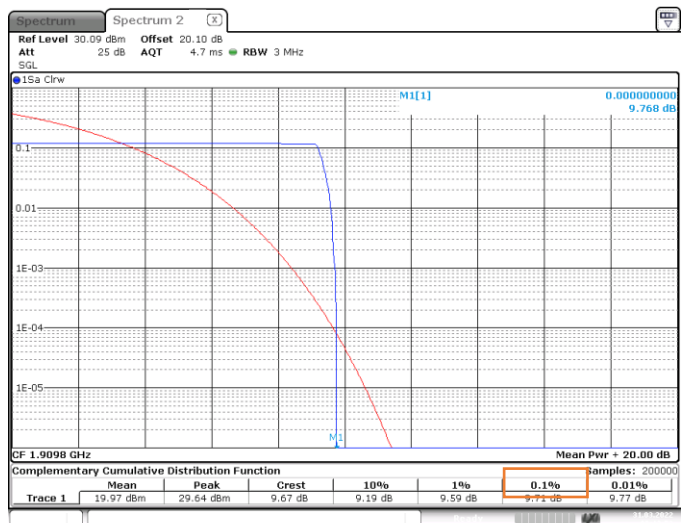

Date: 31-JPR,2022 08:12:52

5 Occupied Bandwidth

5.1 Test Result

Test Description	Requirements	Test Result
Occupied Bandwidth	FCC Part 2.1049 FCC Part 22.917(a) FCC Part 24.238(a) RSS-GEN (6.7) RSS-133 (2.3)	Reported

5.2 Test Method

KDB document 971168 D01 Power Meas License Digital Systems v03r01, Clause 4 was used to determine the occupied measurement.

The 99% measurement function of the spectrum analyzer was used.

The measurement was conducted at the center channel of each band.

5.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 23.9 °C
Relative Humidity: 59.0%
Atmospheric Pressure: 97.9 kPa

5.4 Test Equipment


Test End Date: 3/31/2022

Tester: JOP


Equipment	Model	Manufacturer	Asset Number	Cal Date	Cal Due Date
RF CABLE SMA TO SMA, 0.01-40GHZ	084-0505-059	TELEDYNE STORM MICROWAVE	20108	16-Mar-2022	16-Mar-2023
ATTENUATOR, 10DB	BW-S10W2	MINI-CIRCUITS	15034	7-Oct-2021	7-Oct-2022
POWER SPLITTER	ZFRSC-123-S+	MINI-CIRCUITS	B101739	8-Jul-2021	8-Jul-2022
RF CABLE (TS8997)	141	HUBER & SUHNER	B095588	1-Jul-2021	1-Jul-2022
WIDEBAND RADIO COMMUNICATION	CMW500	ROHDE & SCHWARZ	B094874	13-Jan-2021	13-Jan-2023

5.5 Test Data


GSM 850 GPRS Channel 128

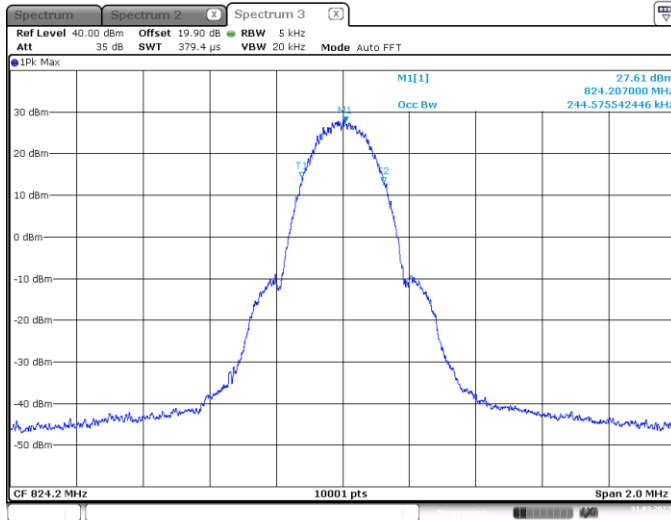


GSM 850 GPRS Channel 190

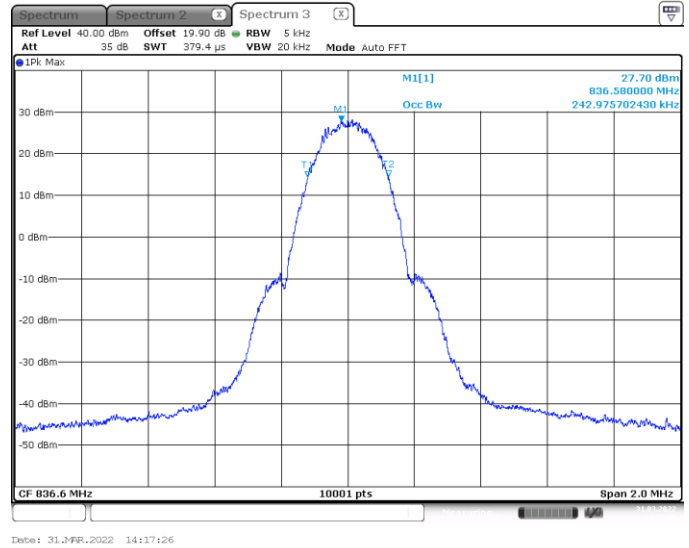


GSM 850 GPRS Channel 251

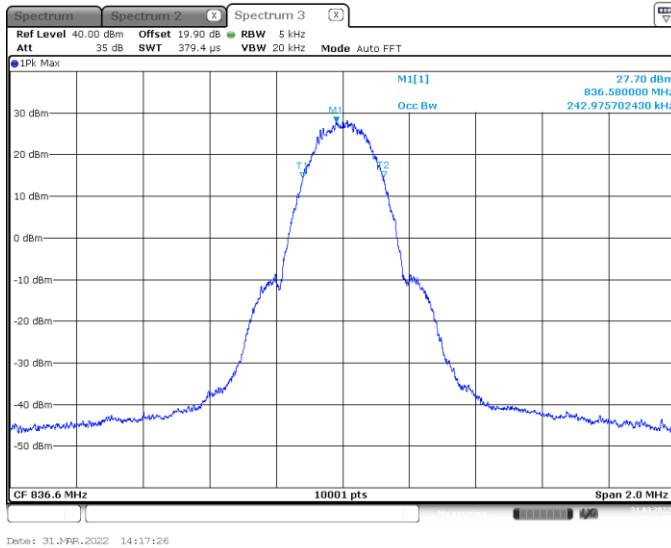

GSM 850 EGPRS Channel 128

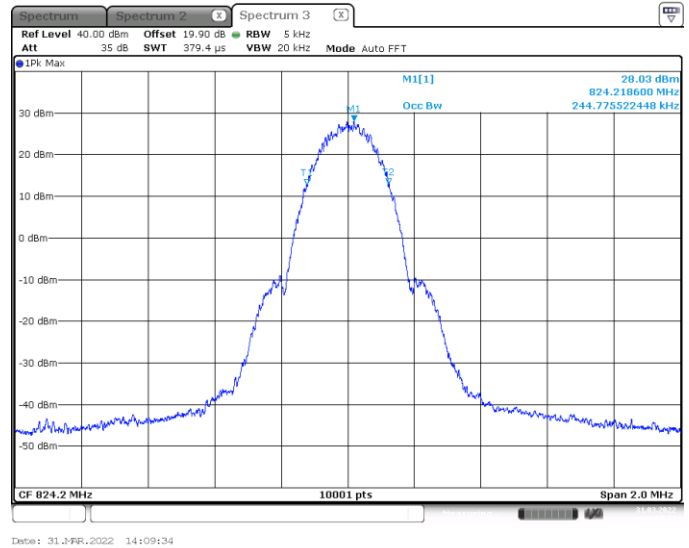


GSM 850 EGPRS Channel 190

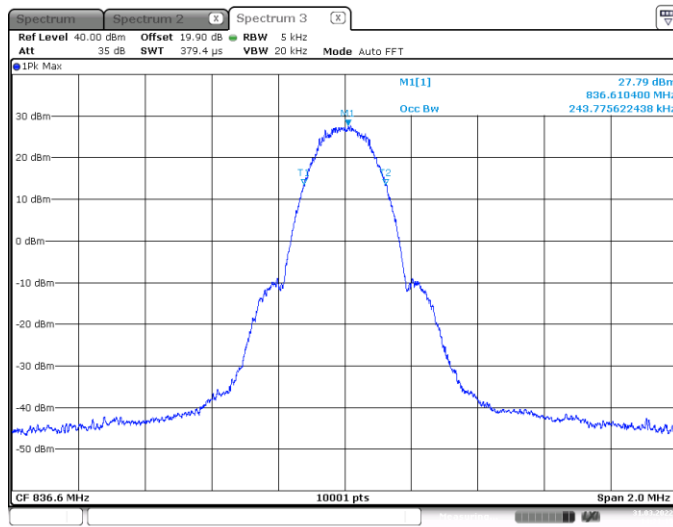


Date: 31-JPR,2022 14:21:15

GSM 850 EGPRS Channel 251

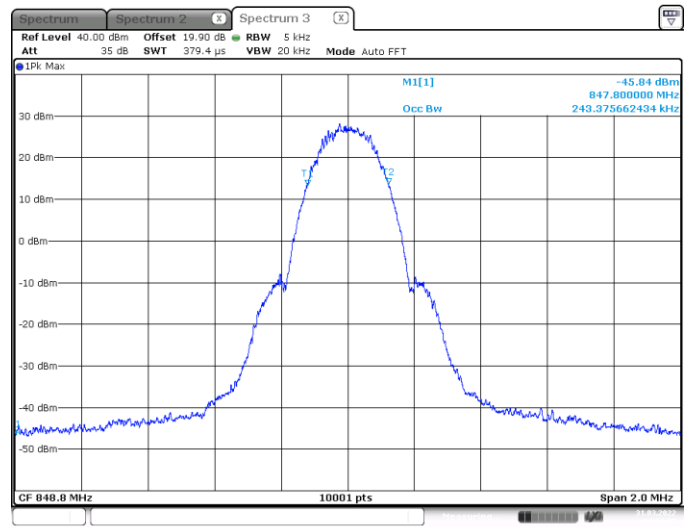


Date: 31-JPR,2022 14:24:17

GSM 1900 GPRS Channel 512

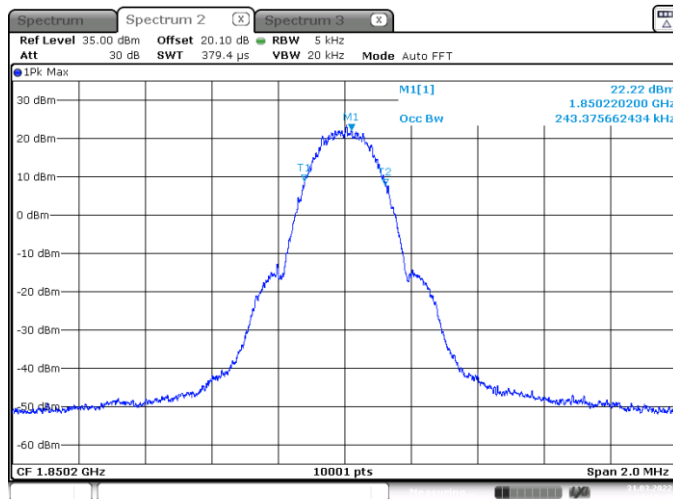


Date: 31-JPR,2022 10:27:35

GSM 1900 GPRS Channel 661

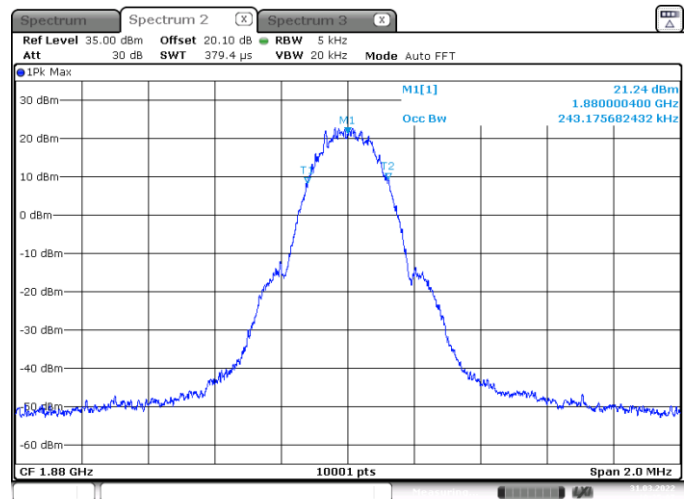


Date: 31-JPR,2022 10:25:07

GSM 1900 GPRS Channel 810

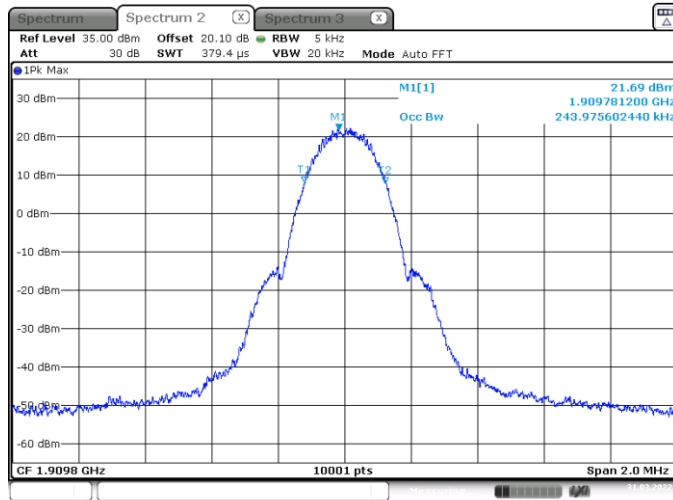


Date: 31-JPR-2022 10:17:13

GSM 1900 EGPRS Channel 512

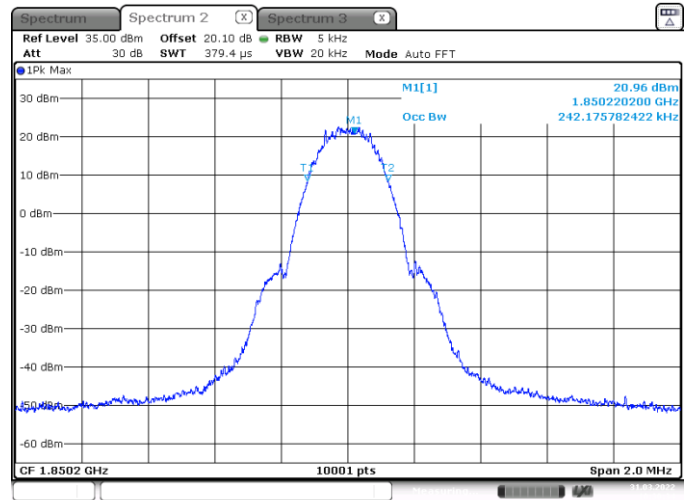


Date: 31-JPR-2022 10:30:34

GSM 1900 EGPRS Channel 661

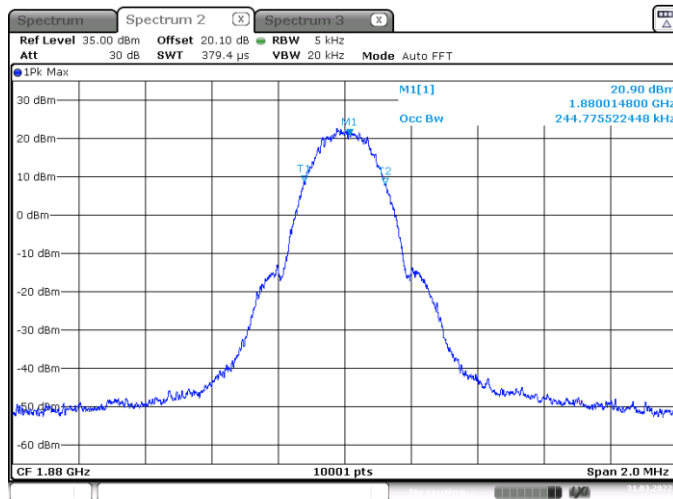

Date: 31-JPR-2022 10:31:38

GSM 1900 EGPRS Channel 810

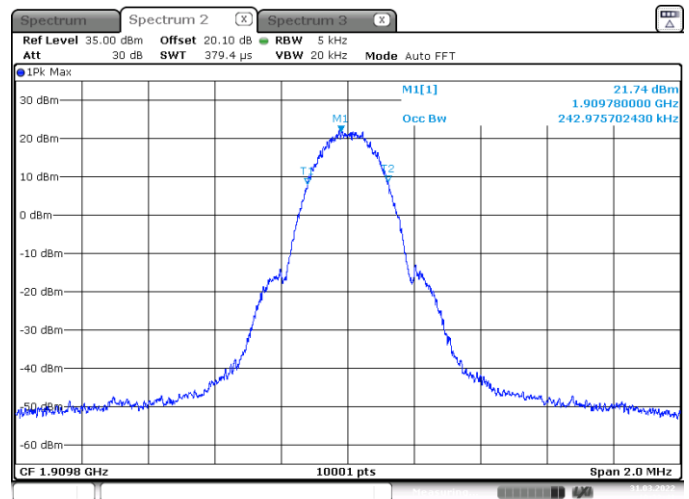

Date: 31-JPR-2022 10:32:41

6 Band Edge and Conducted Spurious Emissions

6.1 Test Result

Test Description	Requirements	Test Result
Conducted spurious emissions and Band Edge	2.1051 22.917(a) 24.238(a) RSS-132 (5.5) RSS-133 (6.5.1)	Compliant

6.2 Test Method

KDB document 971168 D01 Power Meas License Digital Systems v03r01, Clause 6 was used to measure spurious emissions at the antenna terminals.

6.3 Test Site

SGS EMC Laboratory, Suwanee, GA

Environmental Conditions

Temperature: 23.9 °C
Relative Humidity: 59.0%
Atmospheric Pressure: 97.9 kPa

6.4 Test Equipment

Test End Date: 3/31/2022


Tester: JOP

Equipment	Model	Manufacturer	Asset Number	Cal Date	Cal Due Date
RF CABLE SMA TO SMA, 0.01-40GHZ	084-0505-059	TELEDYNE STORM MICROWAVE	20108	16-Mar-2022	16-Mar-2023
ATTENUATOR, 10DB	BW-S10W2	MINI-CIRCUITS	15034	7-Oct-2021	7-Oct-2022
POWER SPLITTER	ZFRSC-123-S+	MINI-CIRCUITS	B101739	8-Jul-2021	8-Jul-2022
RF CABLE (TS8997)	141	HUBER & SUHNER	B095588	1-Jul-2021	1-Jul-2022
WIDEBAND RADIO COMMUNICATION	CMW500	ROHDE & SCHWARZ	B094874	13-Jan-2021	13-Jan-2023


6.5 Test Data – Band Edge

GSM 850 - GPRS

Lower Band Edge (Channel 128, 824.2 MHz)

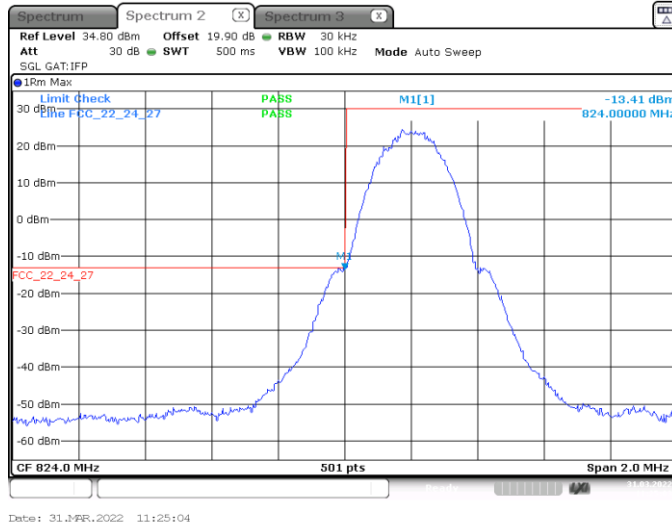


Upper Band Edge (Channel 251, 848.8 MHz)

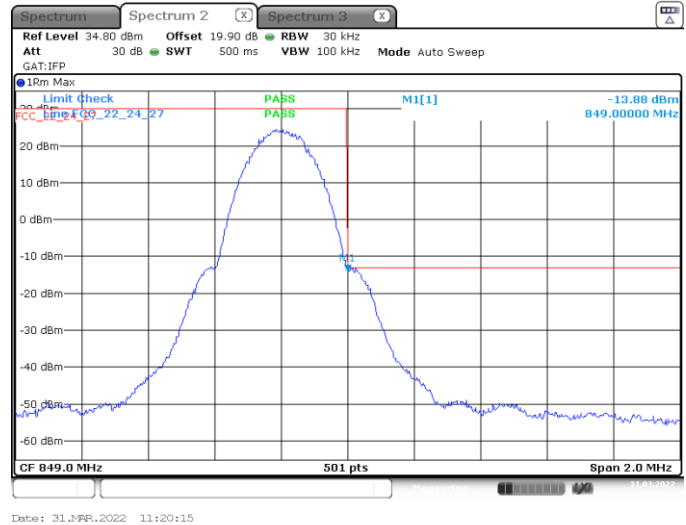


GSM 850 - EGPRS

Lower Band Edge (Channel 128, 824.2 MHz)

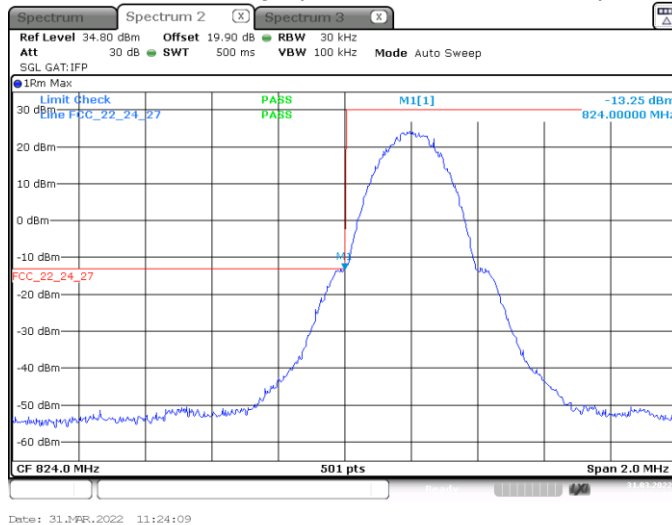


Upper Band Edge (Channel 251, 848.8 MHz)

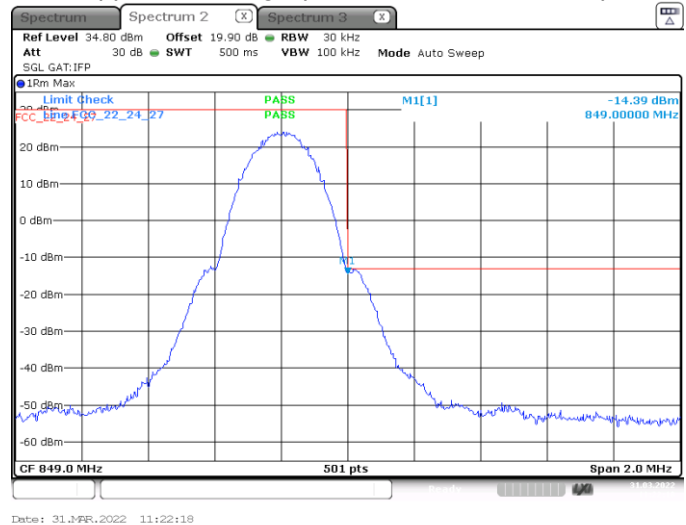


GSM1900 – GPRS

Lower Band Edge (Channel 512, 1850.2 MHz)

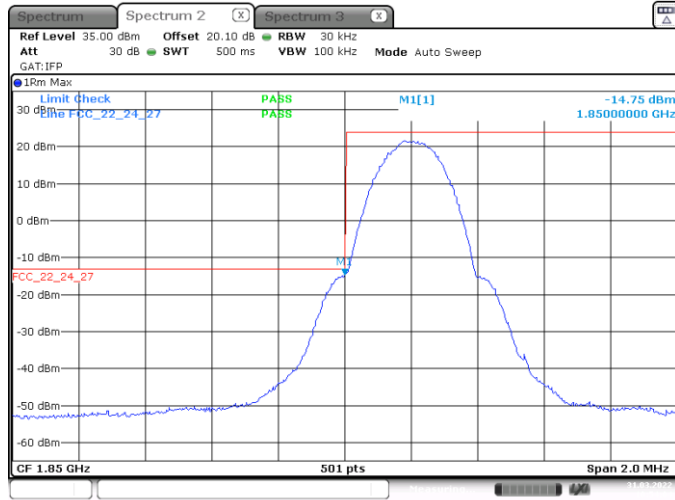

Date: 31-JPR,2022 10:54:04


Upper Band Edge (Channel 810, 1909.8 MHz)

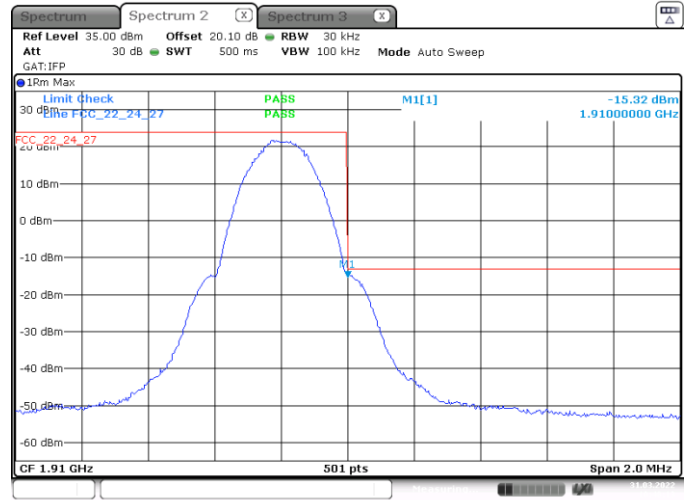

Date: 31-JPR,2022 10:48:14


GSM1900 - EGPRS

Lower Band Edge (Channel 512, 1850.2 MHz)

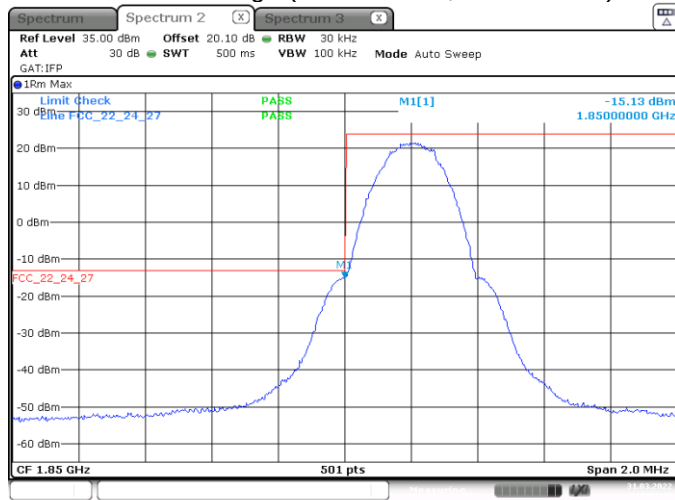

Date: 31-JPR,2022 10:52:41


Upper Band Edge (Channel 810, 1909.8 MHz)

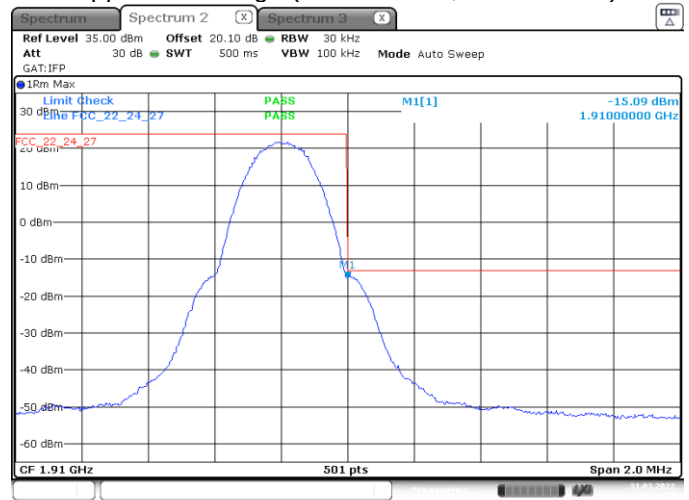

Date: 31-JPR,2022 10:44:59


6.6 Test Data - Conducted Spurious Emissions

GSM 850 GPRS Channel 128

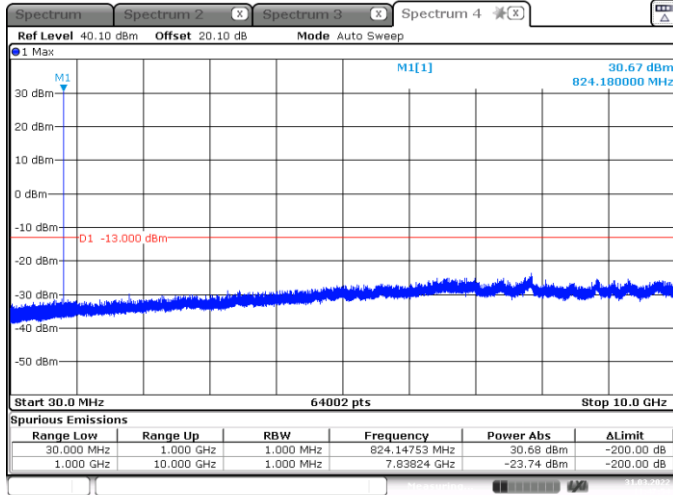


Date: 31-JPR,2022 11:47:54

GSM 850 GPRS Channel 190

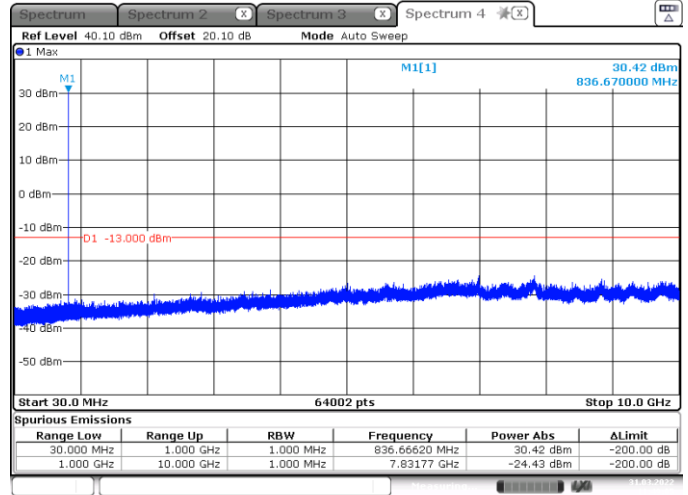


Date: 31-JPR,2022 11:49:05

GSM 850 GPRS Channel 251

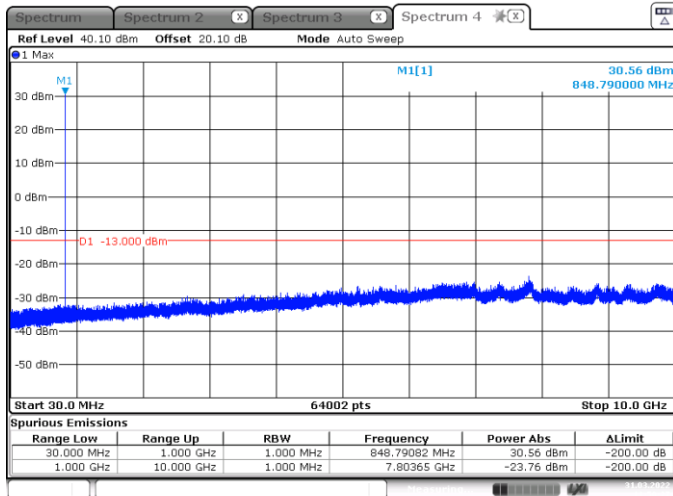


Date: 31-JPR,2022 11:50:28

GSM 850 EGPRS Channel 128

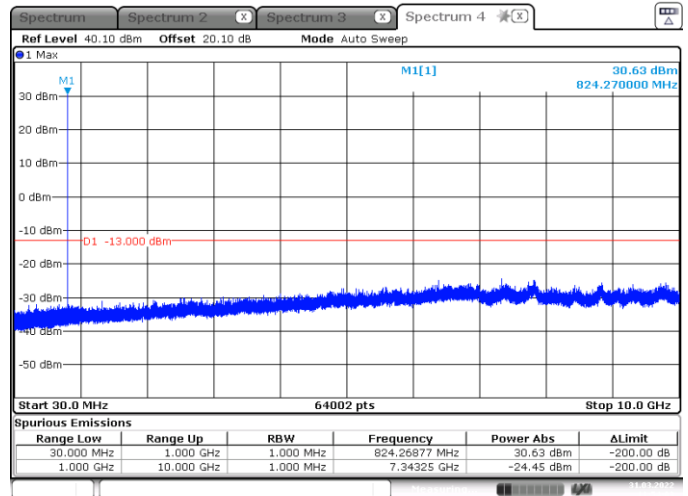


Date: 31-JPR,2022 11:54:03

GSM 850 EGPRS Channel 190

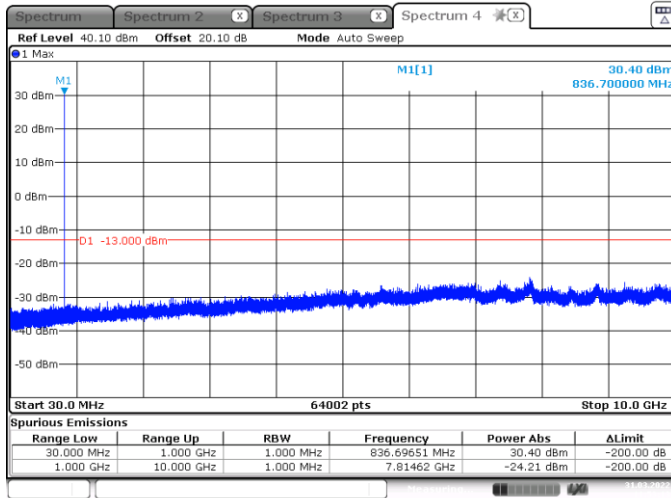


Date: 31-JPR,2022 11:53:13

GSM 850 EGPRS Channel 251

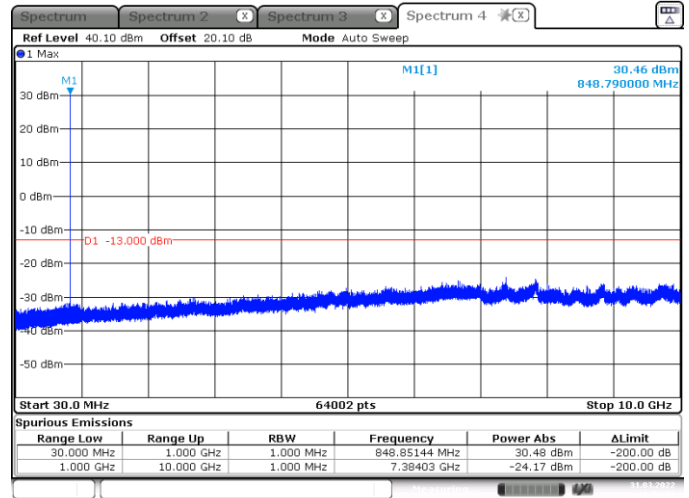


Date: 31-JPR,2022 11:52:21

GSM 1900 GPRS Channel 512

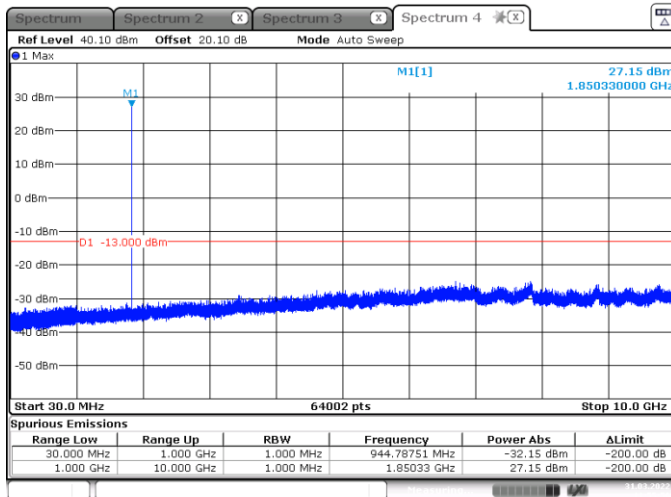


Date: 31-JPR,2022 11:55:57

GSM 1900 GPRS Channel 661

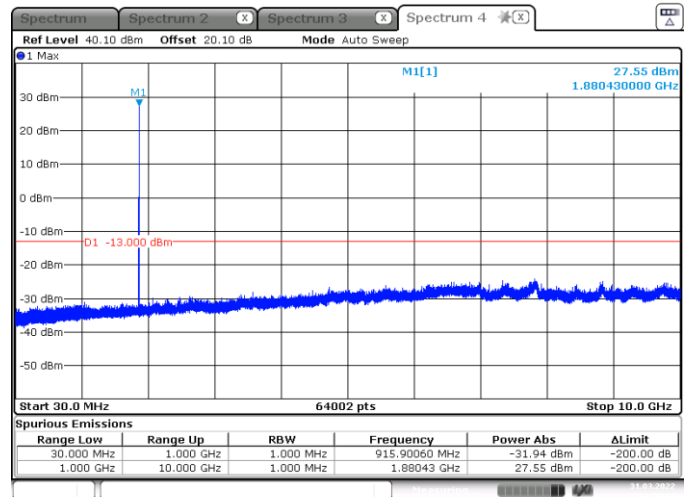


Date: 31-JPR,2022 11:59:14

GSM 1900 GPRS Channel 810

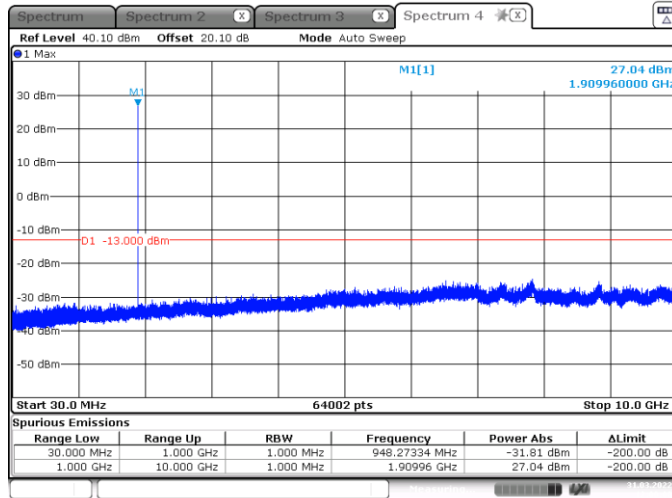


Date: 31-JPR-2022 12:00:08

GSM 1900 EGPRS Channel 512

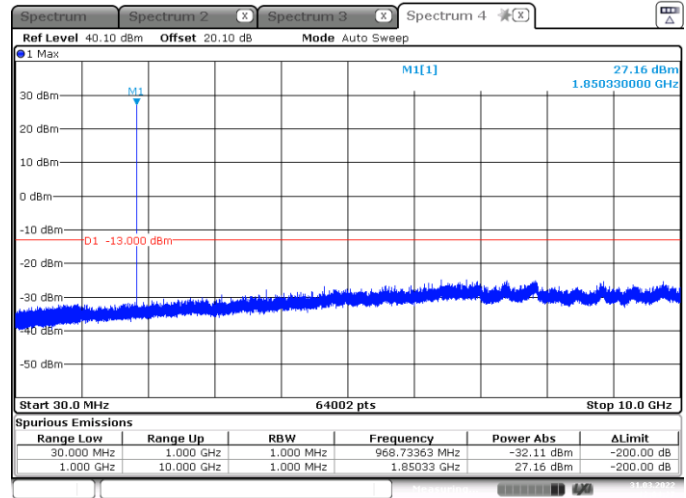


Date: 31-JPR-2022 12:04:28

GSM 1900 EGPRS Channel 661

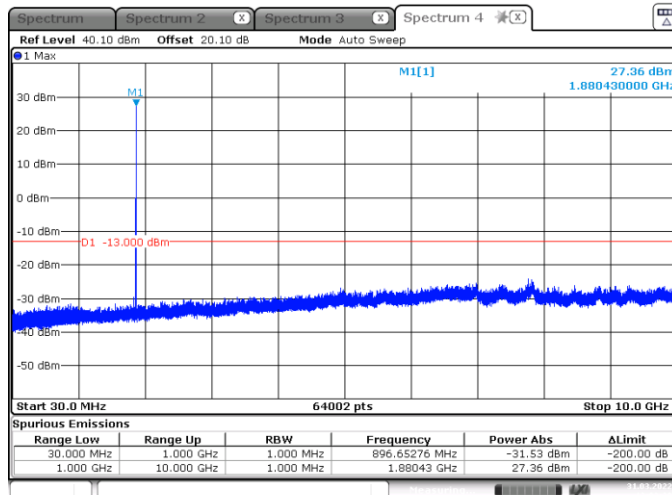

Date: 31-JPR-2022 12:03:28

GSM 1900 EGPRS Channel 810

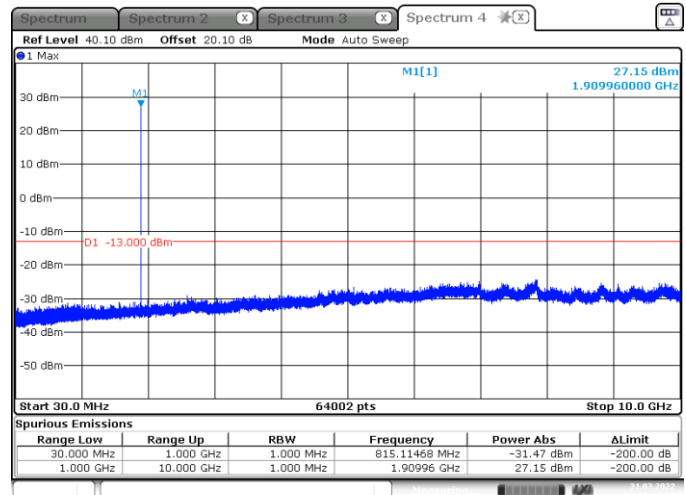

Date: 31-JPR-2022 12:02:29

7 Effective Radiated Power

7.1 Test Result

Test Description	Requirements	Test Result
Effective Radiated Power	FCC Part 22.913(a)(5)	Compliant
Effective Isotropic Radiated Power	24.232(c) RSS-132 (5.4) RSS-133 (6.4)	Compliant

7.2 Test Method

For ERP/EIRP calculations, the highest antenna gain was used for each band.

7.3 Test Site

SGS EMC Laboratory, Suwanee, GA

7.4 Test Equipment

None

7.5 Test Data

Band	Max Power dBm	Antenna Gain dBd/dBi	Cable Loss, dB	ERP/EIRP (dBm)	ERP/EIRP Limit, dBm		Result	
					FCC	IC	FCC	IC
GSM850 / 824.2	32.1	-0.26	0	31.84	38.5	38.5	PASS	PASS
GSM850 / 836.6	32.13	-0.26	0	31.87	38.5	38.5	PASS	PASS
GSM850 / 848.8	32.09	-0.26	0	31.83	38.5	38.5	PASS	PASS
GSM1900 / 1850.2	29.7	2.31	0	32.01	33	33	PASS	PASS
GSM1900 / 1880	29.69	2.31	0	32	33	33	PASS	PASS
GSM1900 / 1909.8	29.27	2.31	0	31.58	33	33	PASS	PASS

8 Radiated Spurious Emissions

8.1 Test Result

Test Description	Specifications		Test Result
Radiated Spurious Emissions	FCC Part 2.1053 FCC Part 22.917(a) FCC Part 24.238(a) ANSI/TIA-603-C-2004	RSS-GEN (6.13) RSS-132 (5.5) RSS-133 (6.5)	Compliant

8.2 Test Method

The levels of the carrier and the various conducted spurious and harmonics frequencies are measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. Compliance is based on the use of a spectrum analyzer employing a resolution bandwidth of 1 MHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of a least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emissions bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The EUT was manipulated through each of its three orthogonal axes with the measurement oriented in both vertical and horizontal polarizations.

A radio link was established between EUT and Radio Communications Tester via direct connection with a coaxial cable. The output power of the EUT was set to maximum value by using the maximum power setting on the Radio Communications Tester. The measurements were conducted at the low, middle, and high channels in BC0/BC1 in the worst-case operating mode.

8.3 Test Site

10m Absorber Lined Shielded Enclosure (ALSE), Suwanee, GA

Environmental Conditions

Temperature: 22.3 °C
Relative Humidity: 36.2 %
Atmospheric Pressure: 97.31 kPa

8.4 Test Equipment

Test End Date: 24-Mar-2022
25-Mar-2022

Tester: AB/ZH

Equipment	Model	Manufacturer	Asset Number	Cal Date	Cal Due Date
ANTENNA, DRG HORN (MEDIUM)	3117	ETS LINDGREN	B079699	15-Jul-2020	15-Jul-2022
RF CABLE, NM TO NM.	90-195-276	TELEDYNE STORM MICROWAVE	21020	16-Mar-2022	16-Mar-2023
LOW NOISE AMPLIFIER	TS-PR18	ROHDE & SCHWARZ	B094463	7-Jul-2021	7-Jul-2022
RF CABLE	104PE	HUBER & SUHNER	B079793	24-Aug-2021	24-Aug-2022
EMI TEST RECEIVER	ESU40	ROHDE & SCHWARZ	B079629	21-Jun-2021	21-Jun-2022
ANTENNA, BILOG	CBL 6143A	TESEQ	B085931	27-Feb-2022	27-Feb-2024
N to N RF Cable	C12-N1N1-27	MEGAPHASE	22001	10-Jan-2022	10-Jan-2023
RF CABLE NM TO NF, 0.01-18GHZ	90-213-118	TELEDYNE STORM MICROWAVE	20117	17-Feb-2022	17-Feb-2023
RF CABLE NM TO NM, 0.01-	90-195-079	TELEDYNE STORM MICROWAVE	20123	14-Feb-2022	14-Feb-2023
RF CABLE	UCOFLEX 10	HUBER & SUHNER	B108523	26-Aug-2021	26-Aug-2022
LOW NOISE AMPLIFIER	ZKL-2+	MINI-CIRCUITS	B079800	18-Oct-2021	18-Oct-2022
EMI TEST RECEIVER	ESU8	ROHDE & SCHWARZ	B085759	9-Jul-2021	9-Jul-2022


Software:

"RSE 30-1000 MHz T7 220318" TILE! profile dated 07October 2020


"RSE 1-18 GHz T7 210212" TILE! profile dated 02 February 2021

8.5 Test Data – GSM 850


GSM 850 – LCH – 30-1000MHz – Vertical

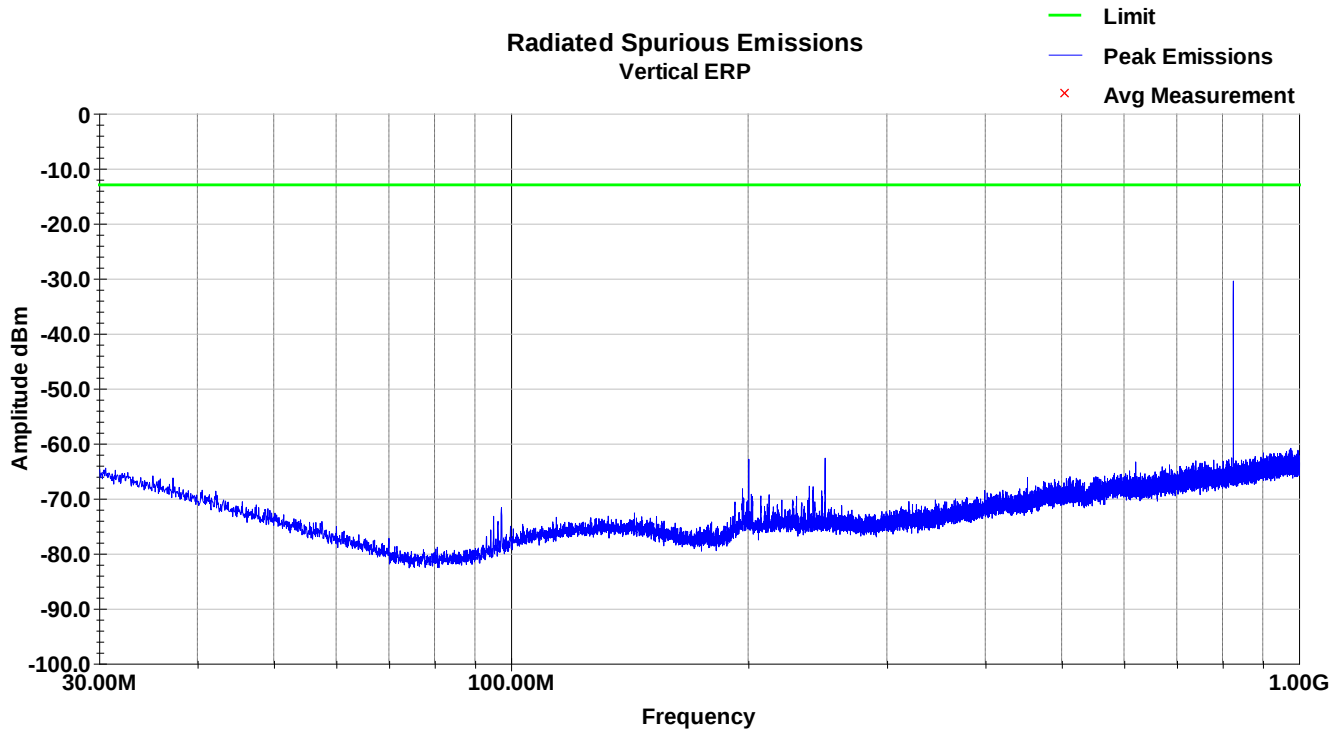


GSM 850 – LCH – 30-1000MHz – Horizontal

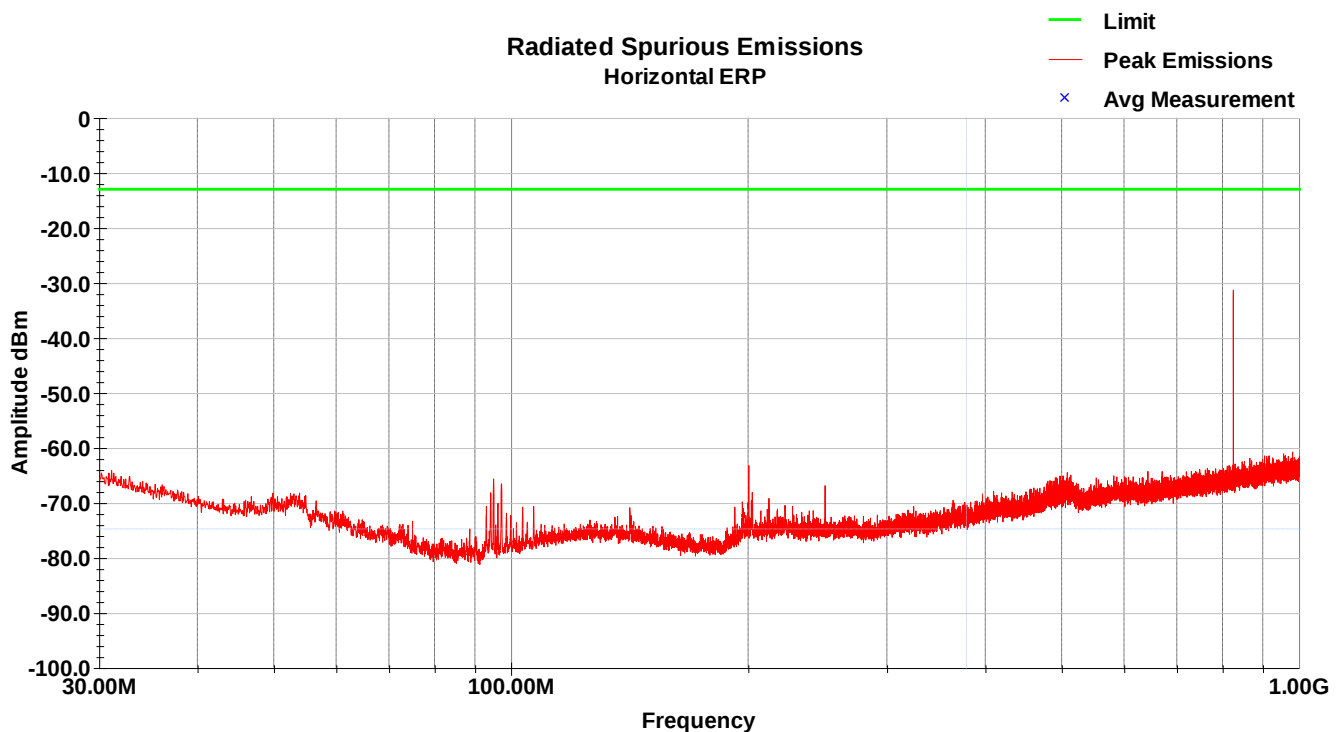


GSM 850 – LCH – 1-12.75GHz – Vertical

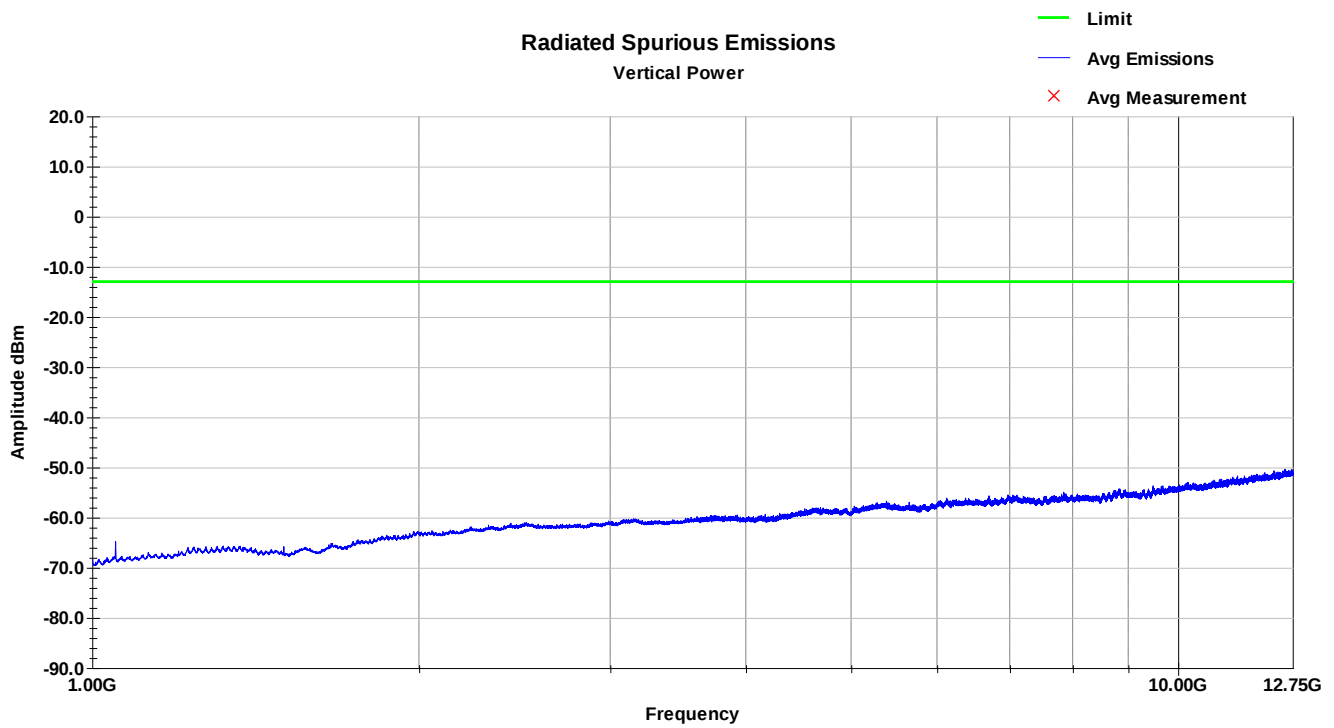


GSM 850 – LCH – 1-12.75G Hz – Horizontal

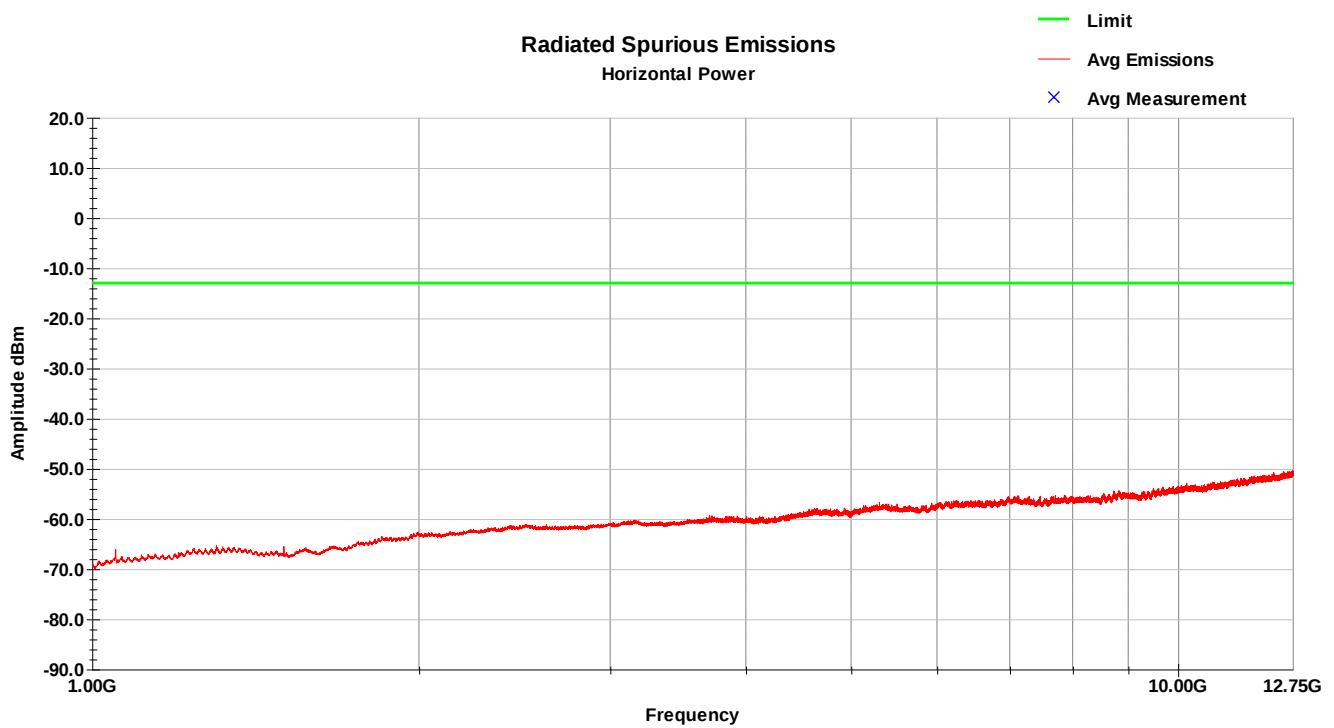


GSM 850 – MCH – 30-1000MHz – Vertical

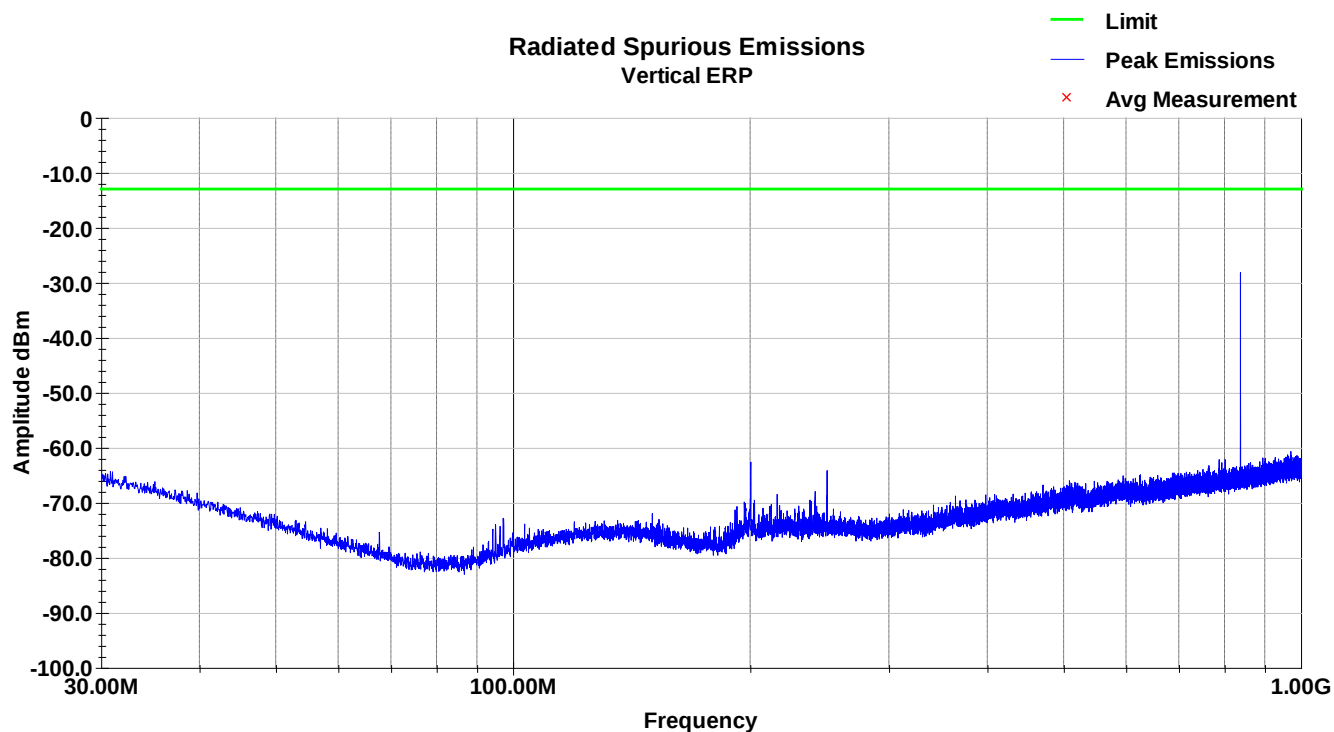


GSM 850 – MCH – 30-1000MHz – Horizontal

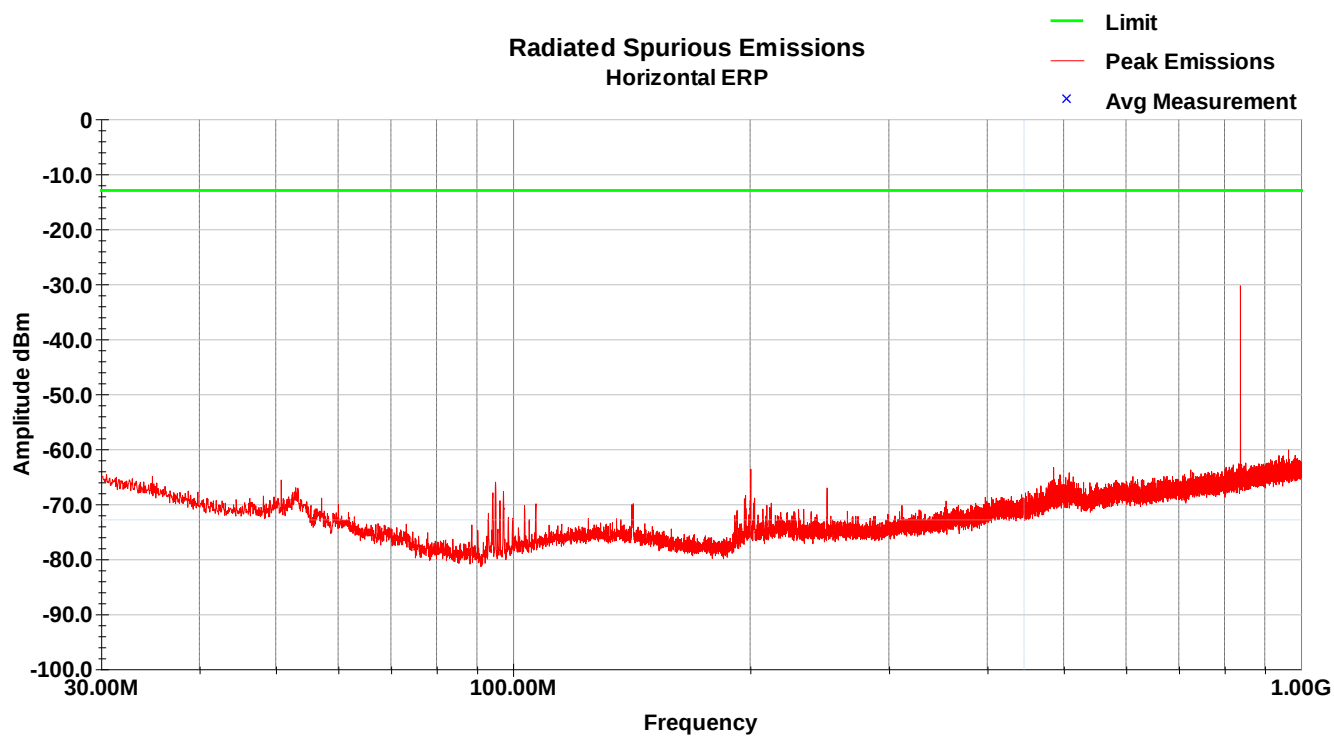


GSM 850 – MCH – 1-18GHz – Vertical

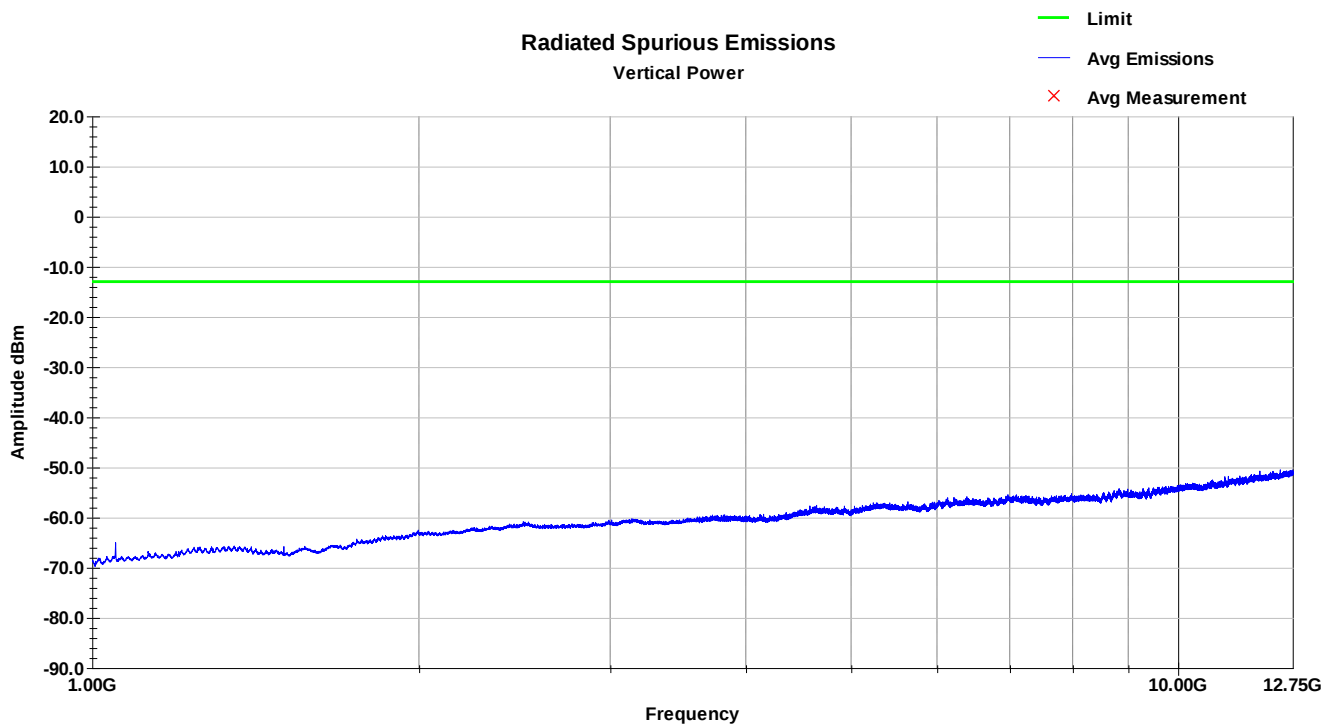


GSM 850 – MCH – 1-18G Hz – Horizontal

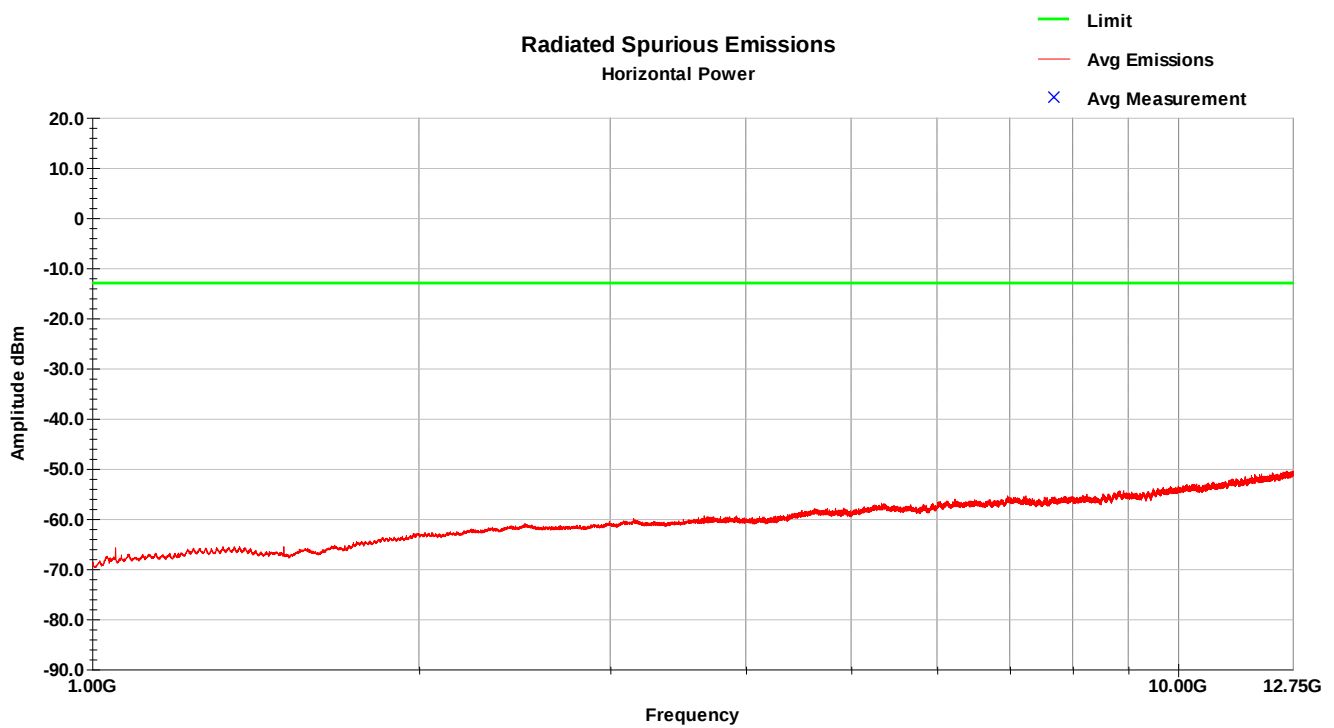


GSM 850 – HCH – 30-1000MHz – Vertical

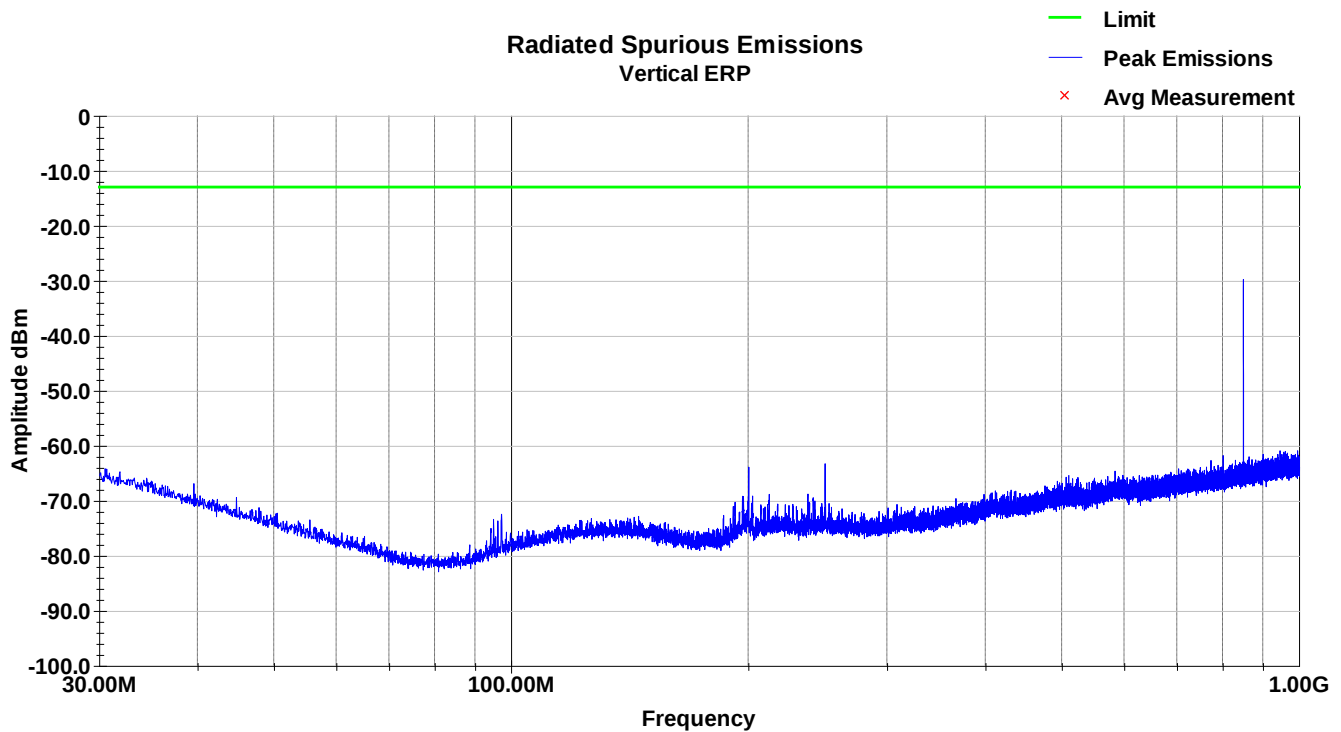


GSM 850 – HCH – 30-1000MHz – Horizontal

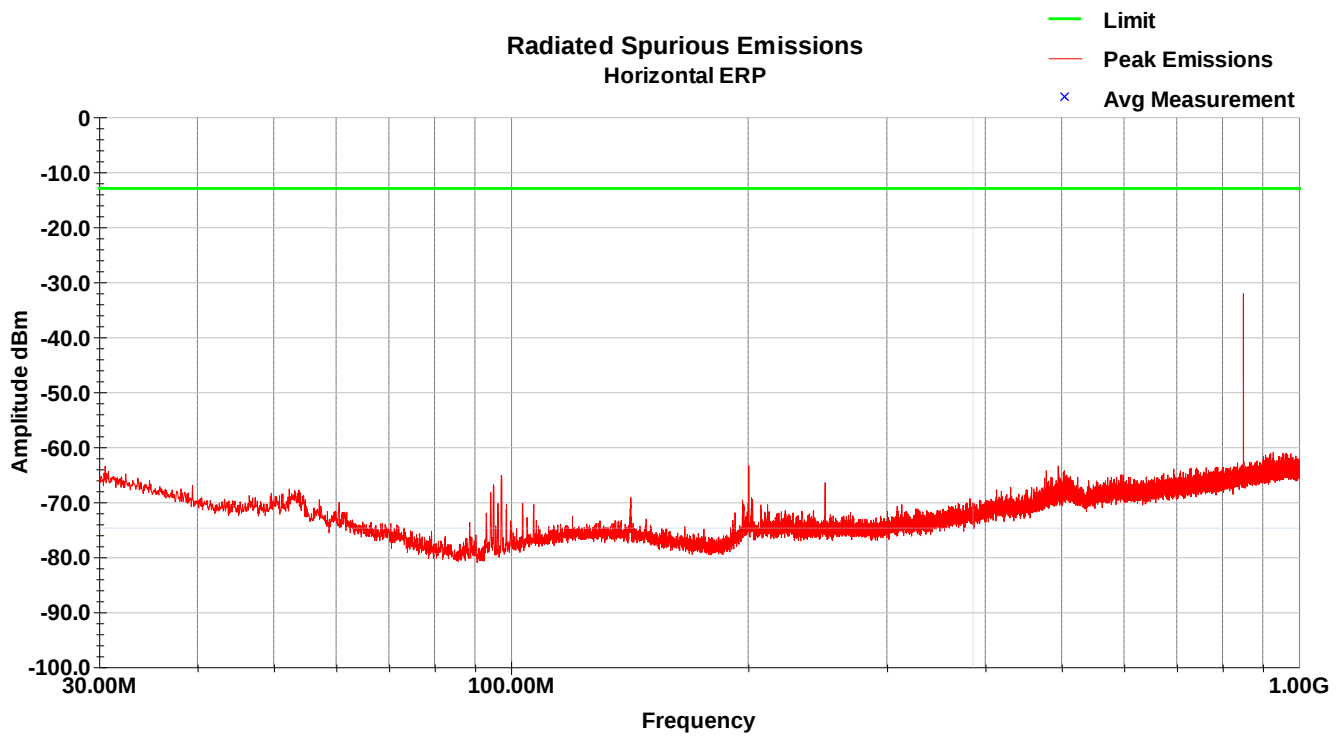

GSM 850 – HCH – 1-18GHz – Vertical

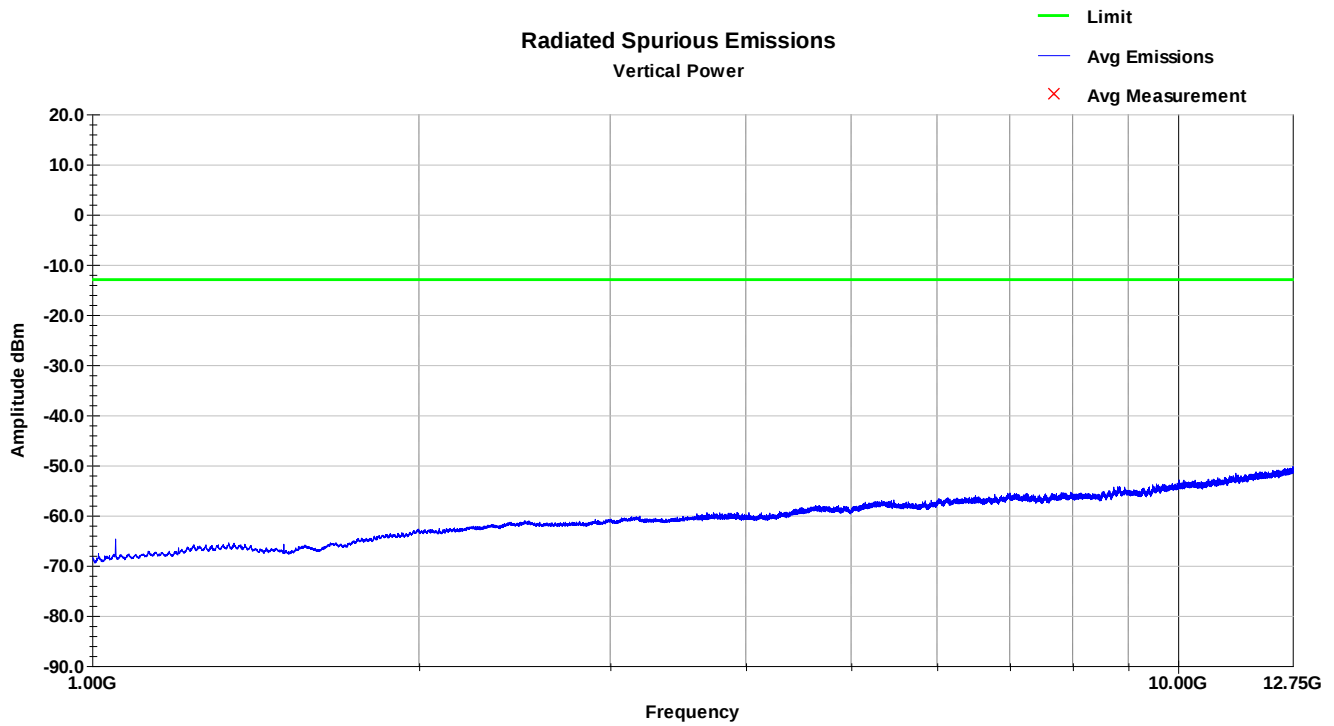


GSM 850 – HCH – 1-18G Hz – Horizontal

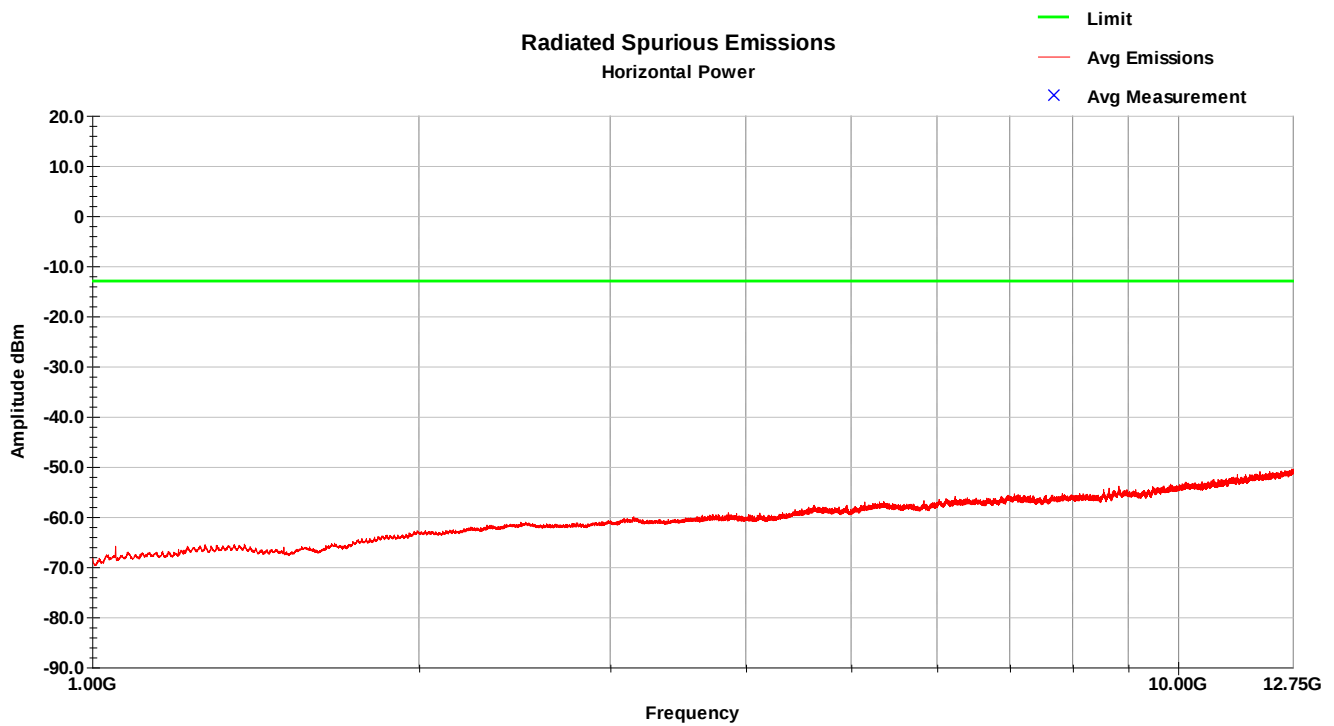


No emissions associated with the radio were detected other than the fundamental

8.6 Test Data – GSM 1900


GSM 1900 – LCH – 30-1000MHz – Vertical

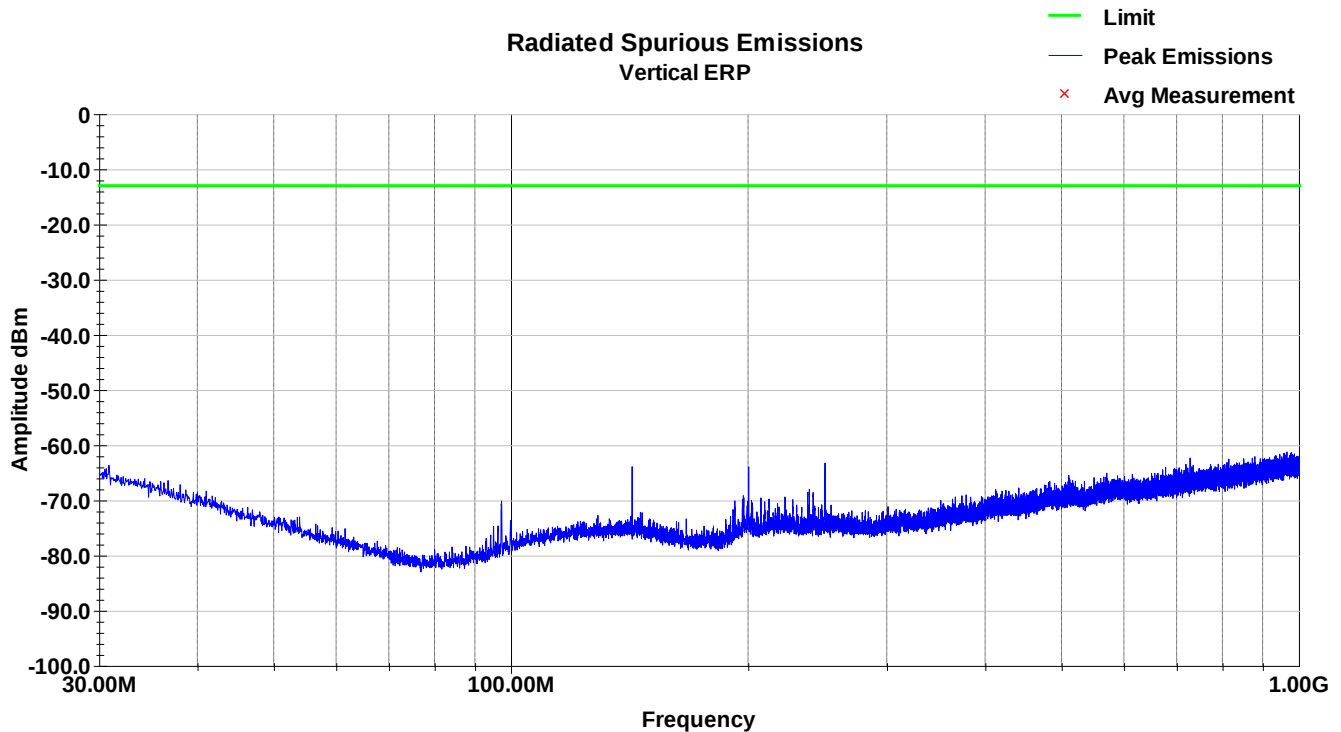


GSM 1900 – LCH – 30-1000MHz – Horizontal

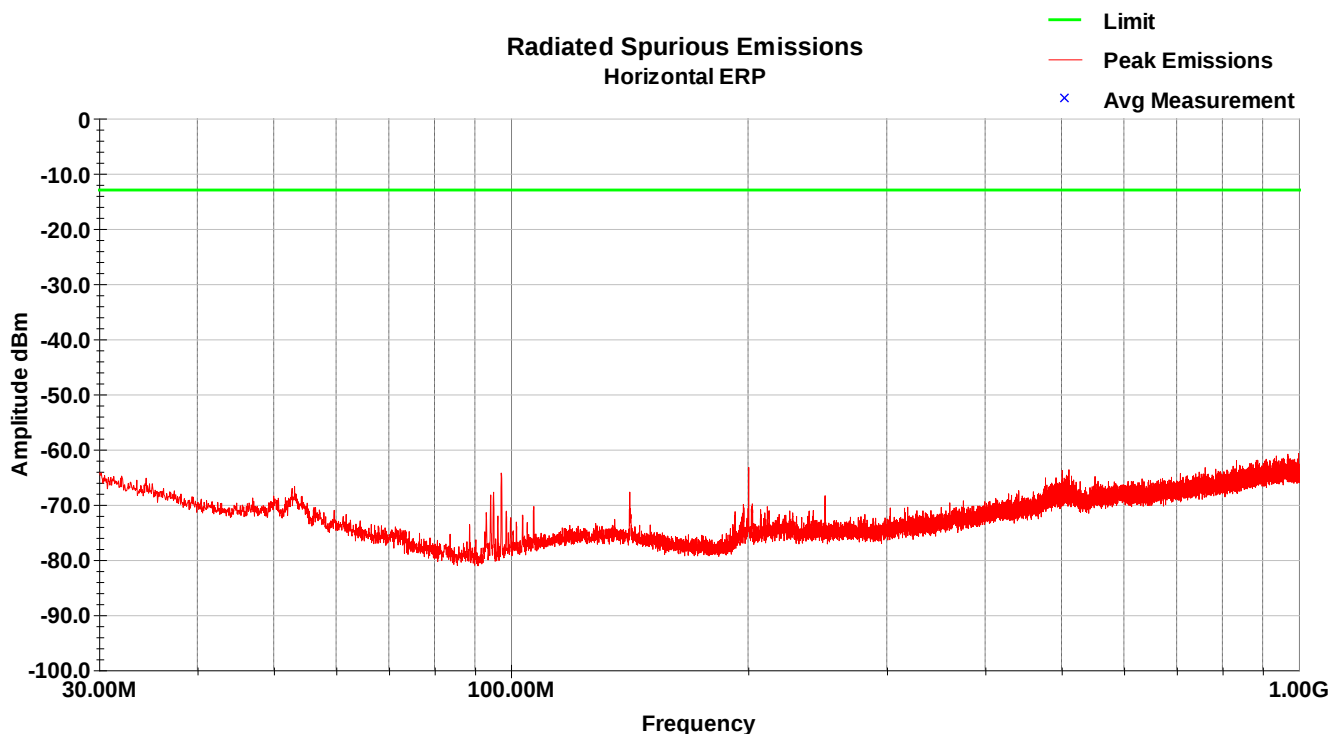


GSM 1900 – LCH – 1-18GHz – Vertical

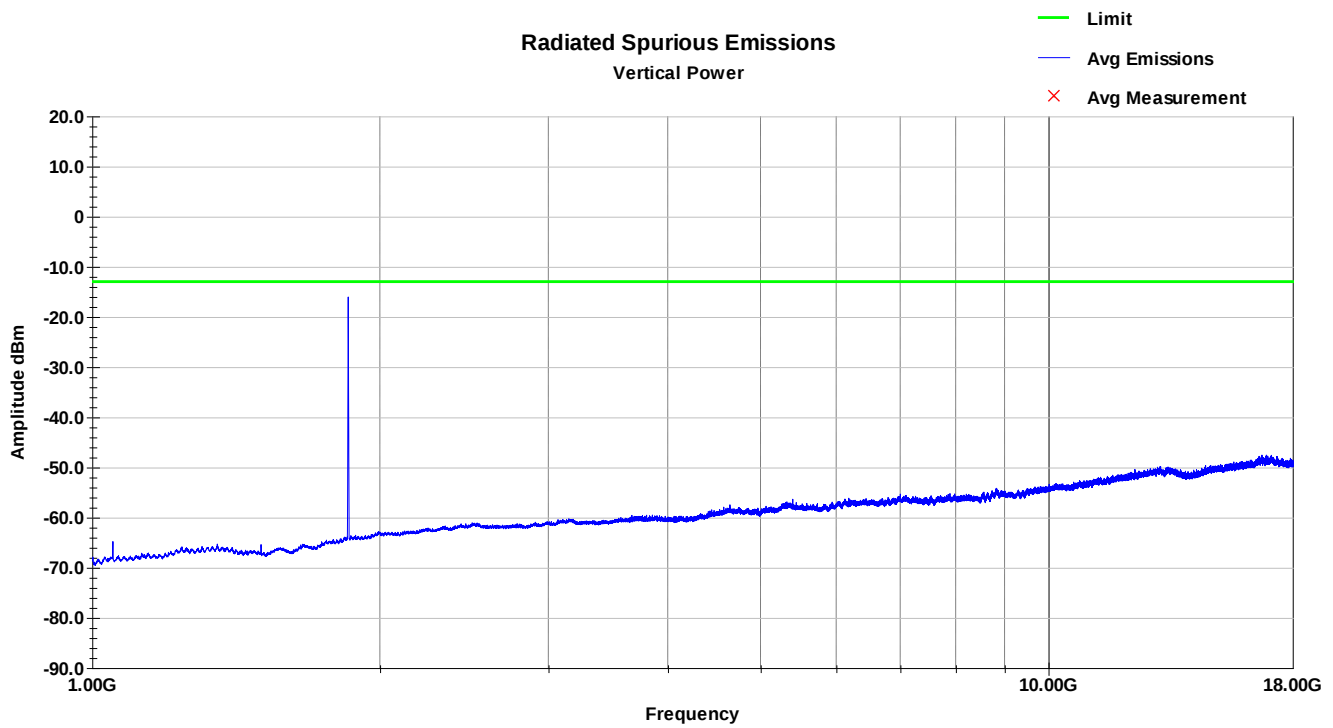


GSM 1900 – LCH – 1-18G Hz – Horizontal

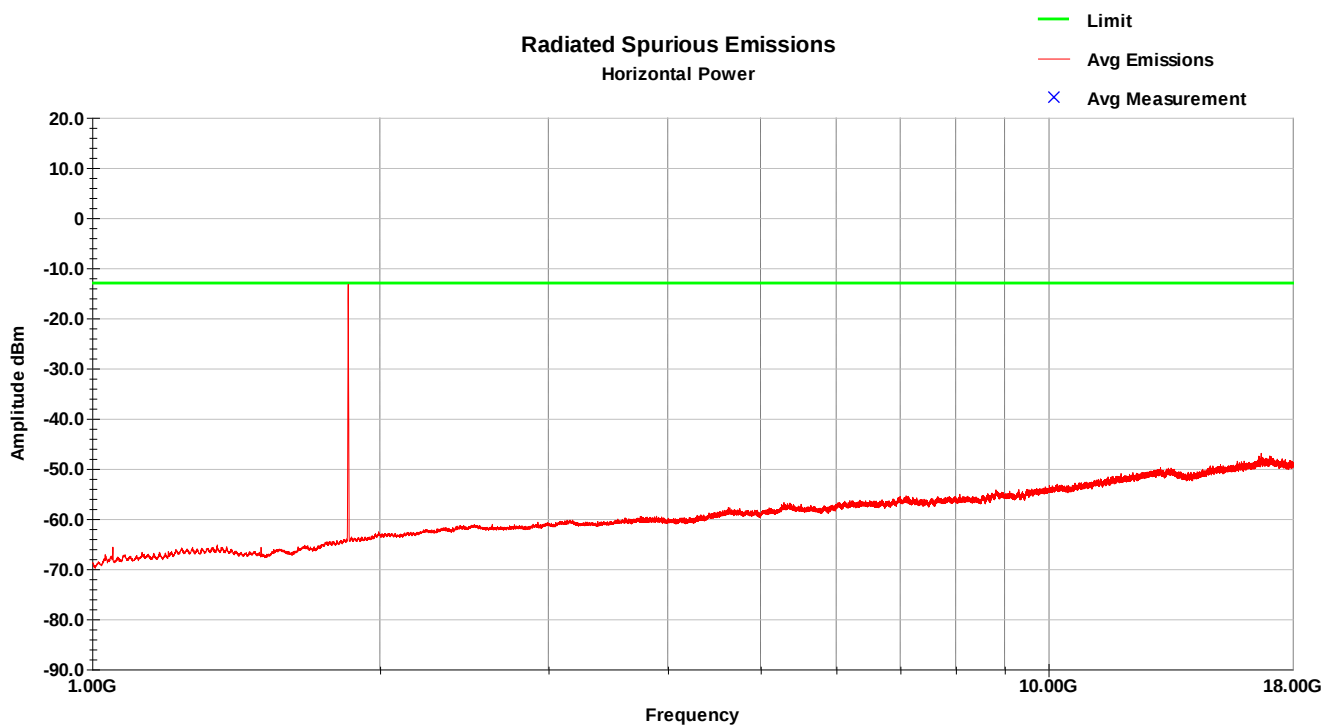


GSM 1900 – MCH – 30-1000MHz – Vertical

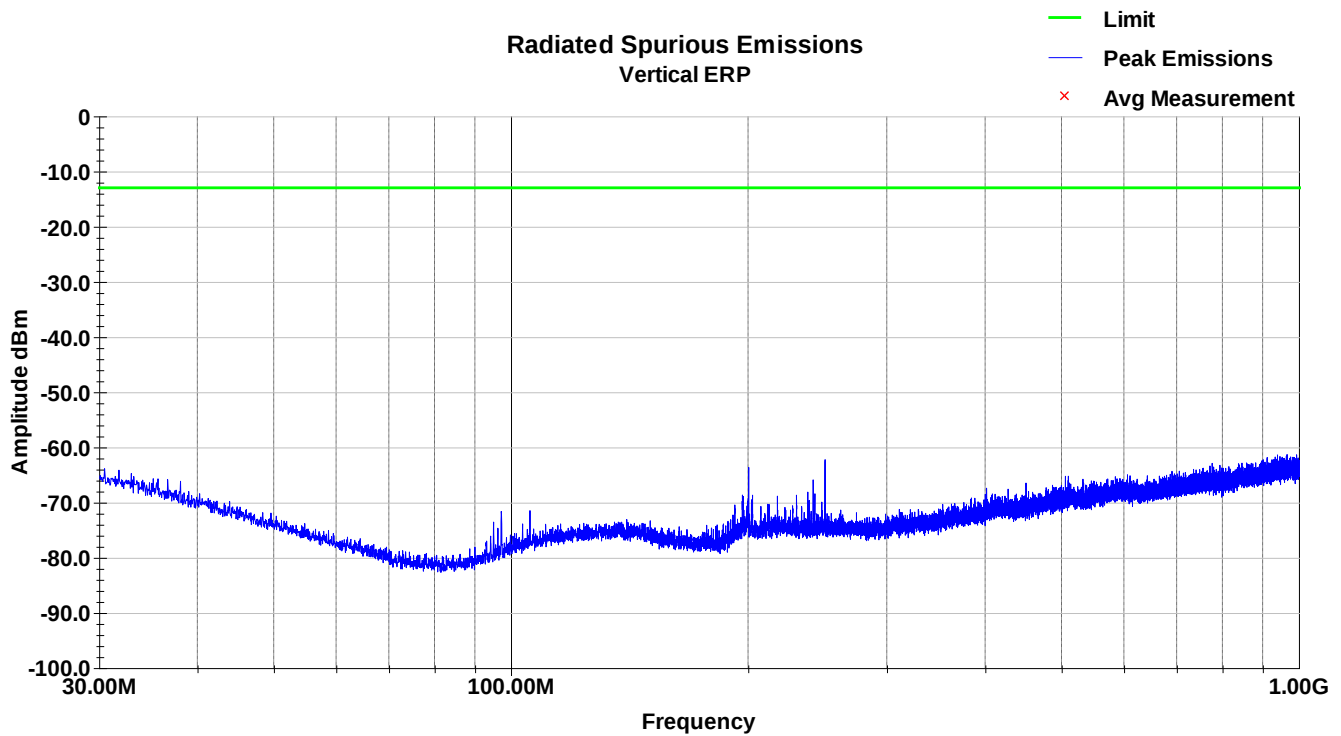


GSM 1900 – MCH – 30-1000MHz – Horizontal

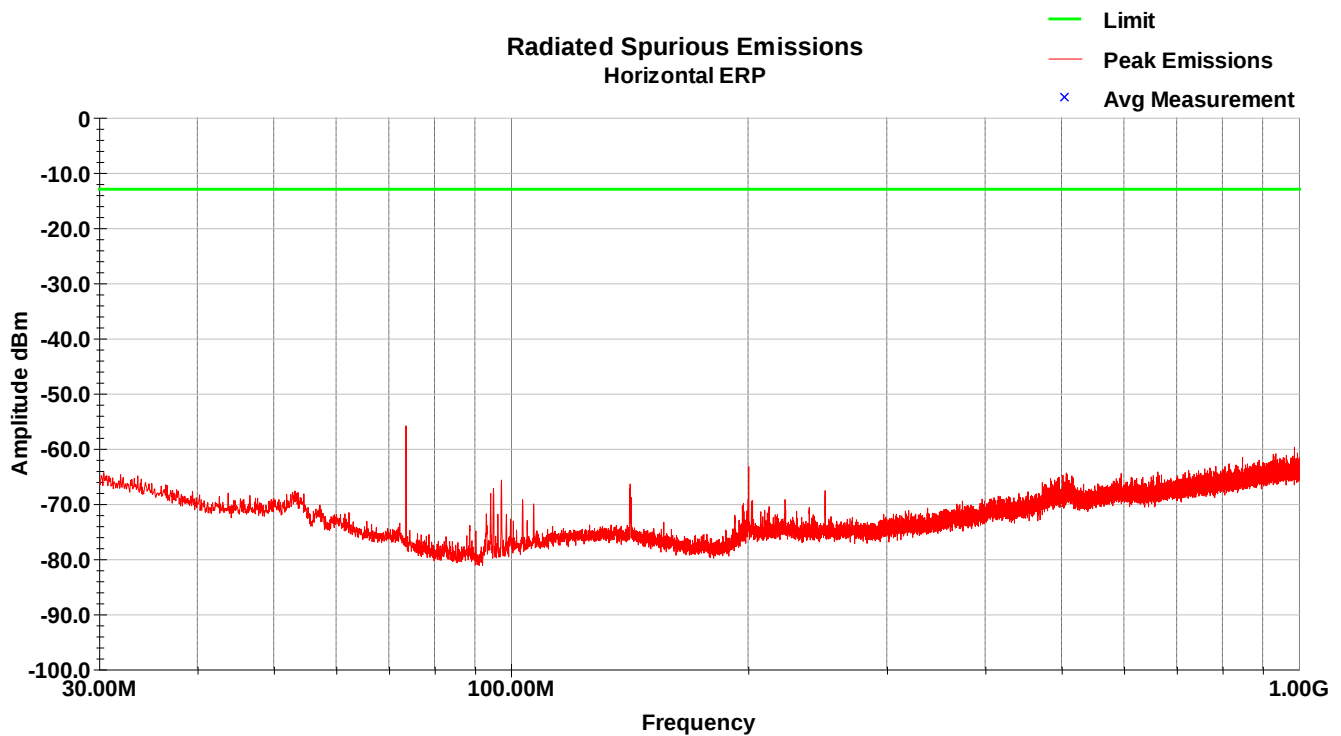


GSM 1900 – MCH – 1-18GHz – Vertical

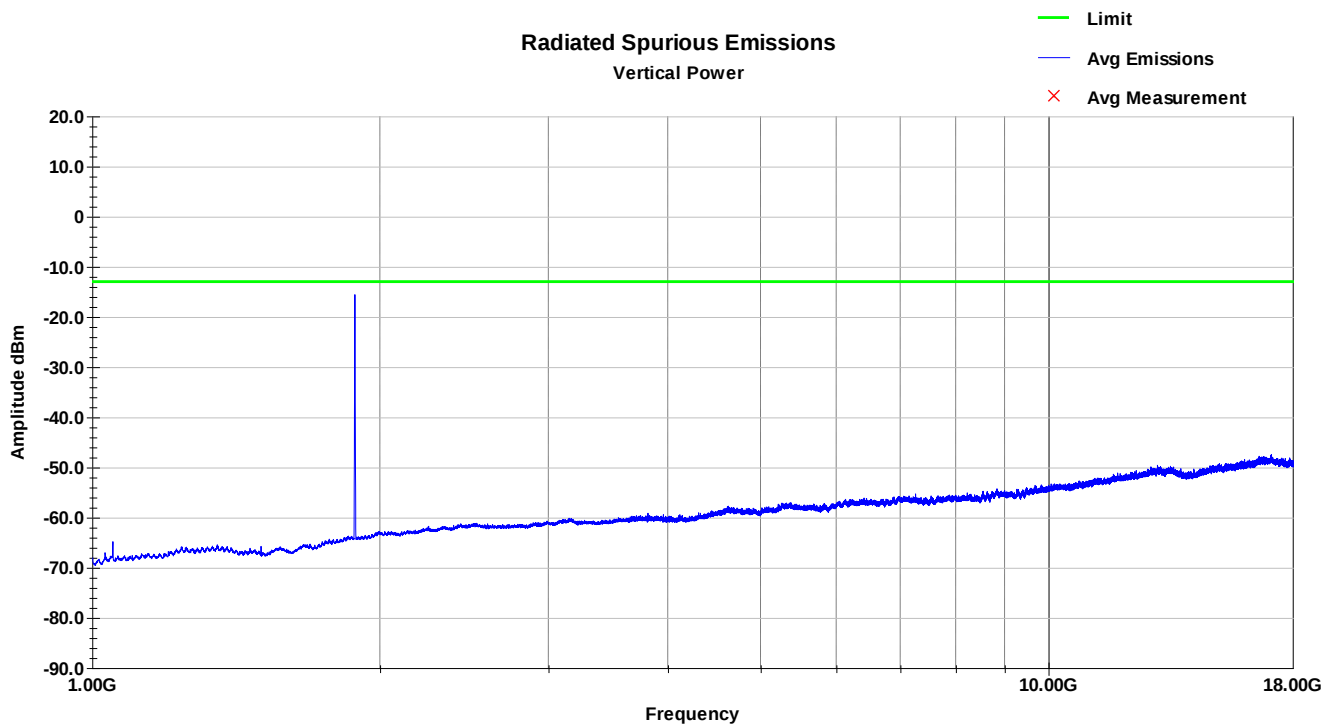


GSM 1900 – MCH – 1-18G Hz – Horizontal

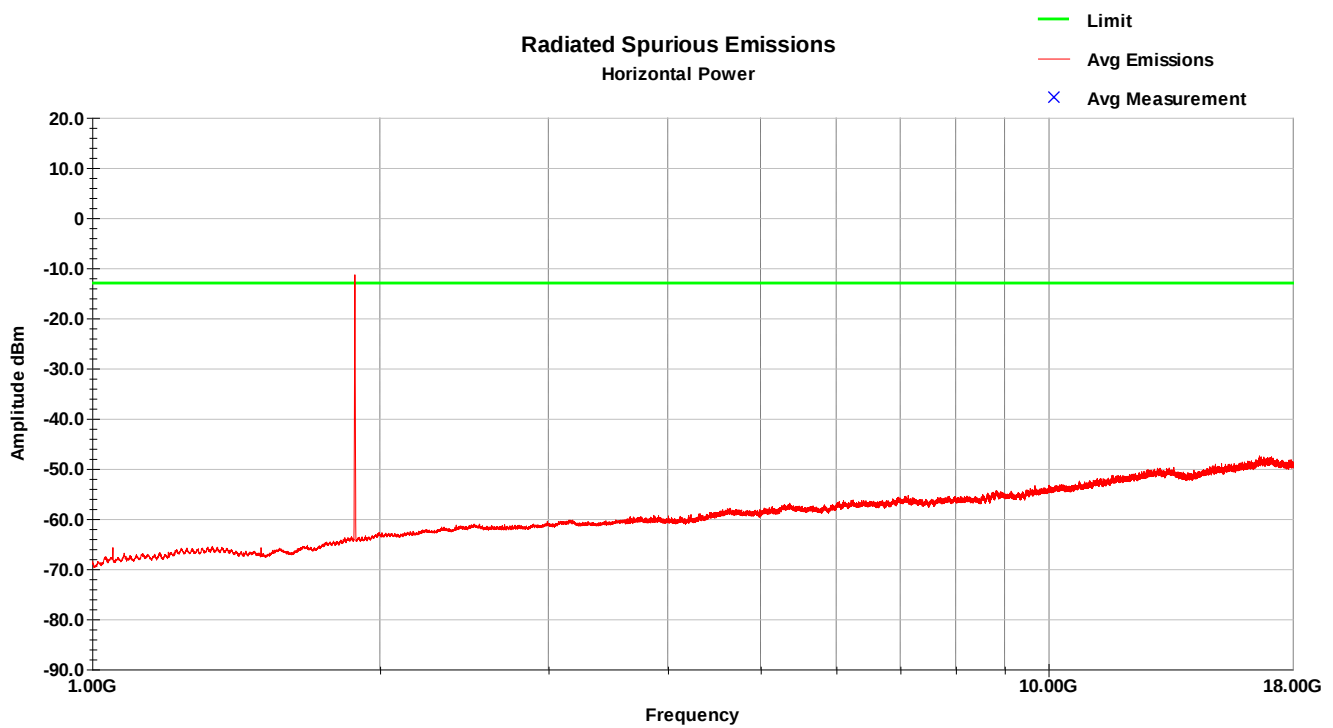


GSM 1900 – HCH – 30-1000MHz – Vertical

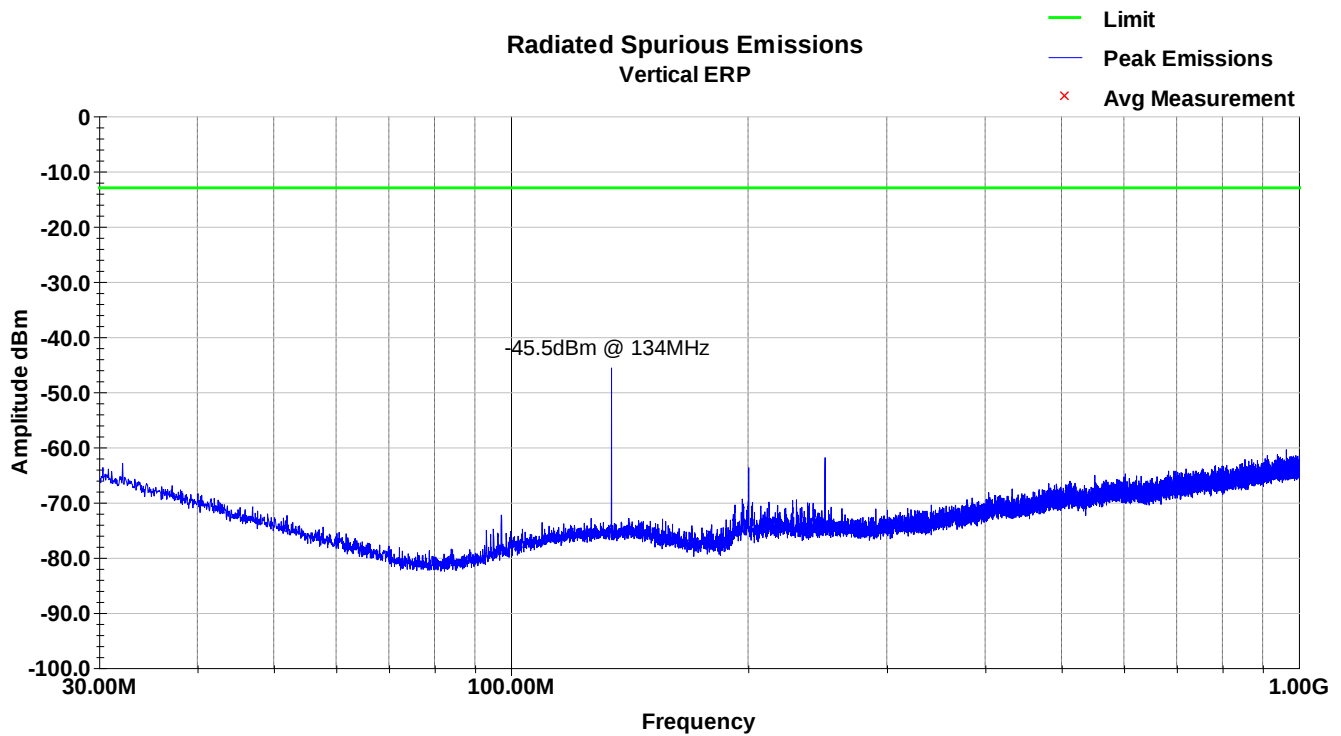


GSM 1900 – HCH – 30-1000MHz – Horizontal

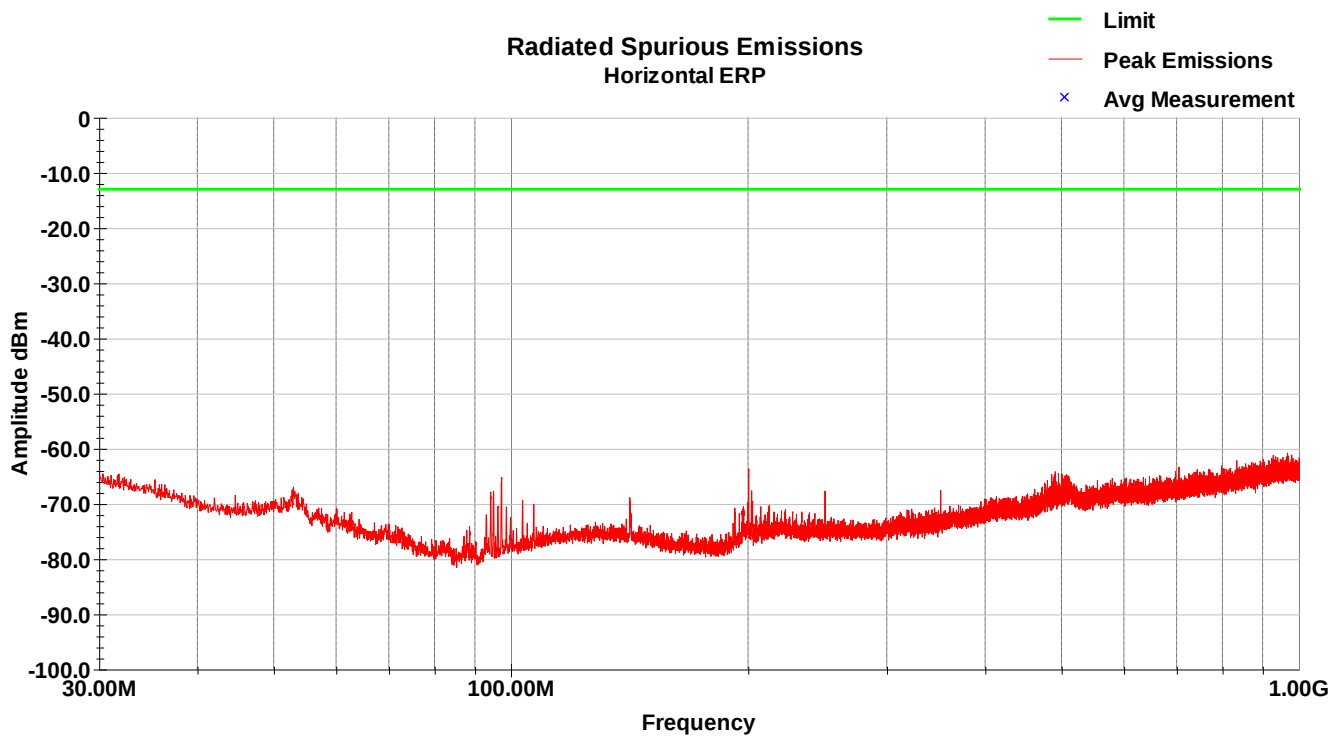

GSM 1900 – HCH – 1-18GHz – Vertical

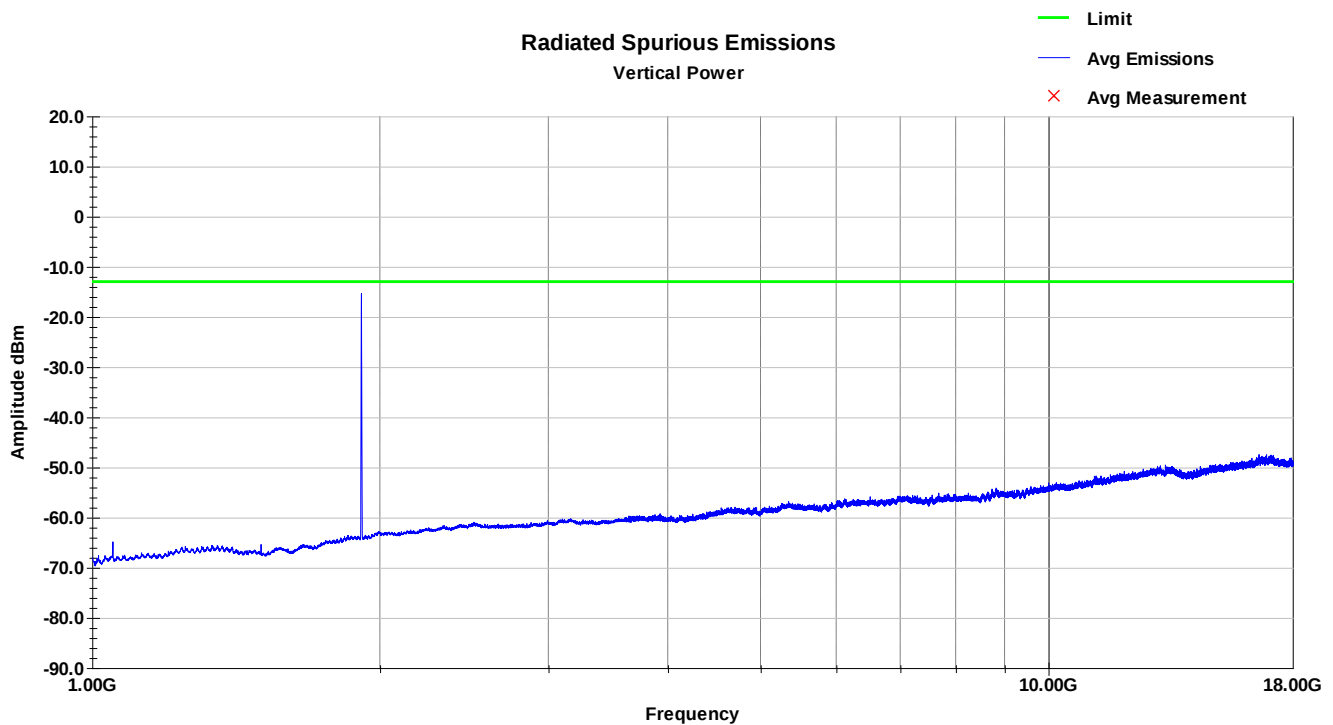

GSM 1900 – HCH – 1-18G Hz – Horizontal

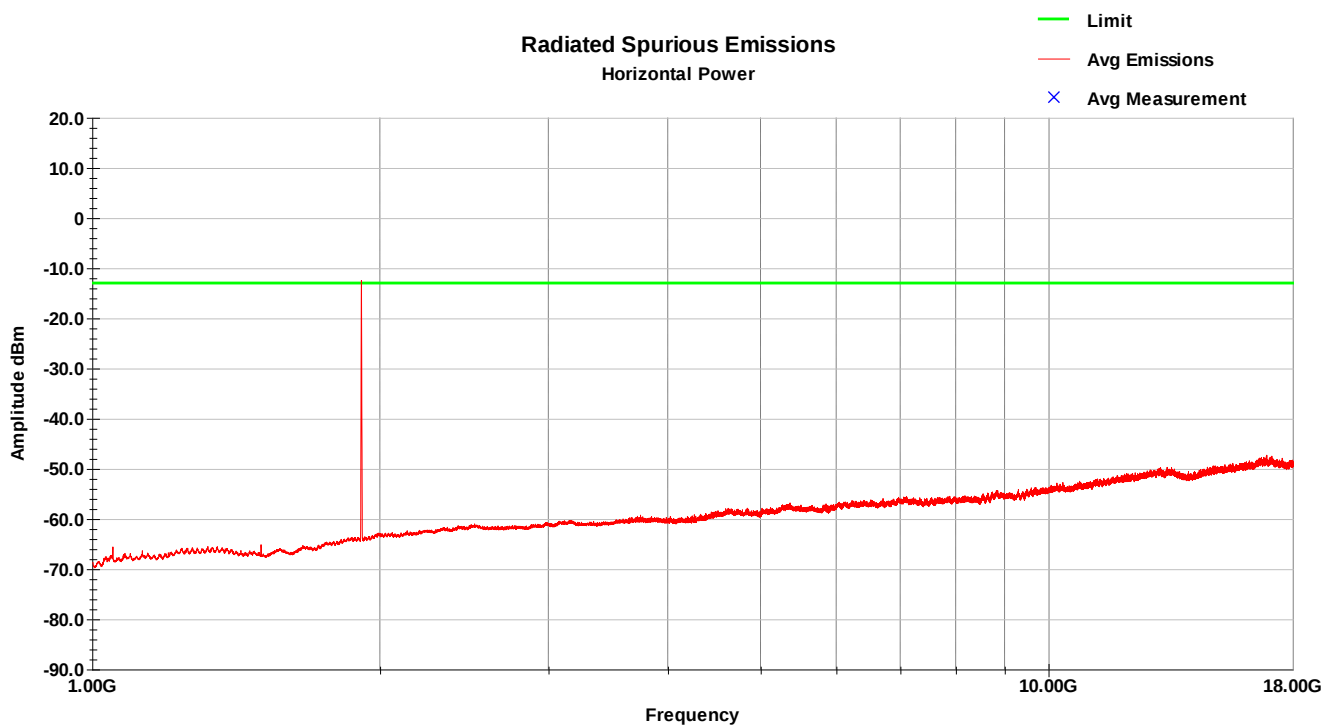

No emissions associated with the radio were detected other than the fundamental

9 Frequency Stability

9.1 Test Result

Test Description	Requirements	Test Result
Frequency Stability	FCC Part 2.1055 FCC Part 22.355 FCC Part 24.235 RSS-GEN (6.11) RSS-132 (5.3) RSS-133 (6.3)	Compliant

9.2 Test Method

The EUT was placed inside the Environmental Chamber and was left inside chamber to stabilize to set temperature for minimum of thirty minutes before any measurements were made. The EUT was tested at BC0 channel 190 and BC1 channel 661.

9.3 Test Site

SGS EMC Laboratory, Suwanee, GA

9.4 Test Equipment

Test End Date: 1/31/2022


Tester: JOP

Equipment	Model	Manufacturer	Asset Number	Cal Date	Cal Due Date
RF CABLE SMA TO SMA, 0.01-40GHZ	084-0505-059	TELEDYNE STORM	20107	16-Mar-2022	16-Mar-2023
MULTIMETER	87V	FLUKE	B079677	18-Aug-2021	18-Aug-2022
WIDEBAND RADIO COMMUNICATION	CMW500	ROHDE & SCHWARZ	B094874	13-Jan-2021	13-Jan-2023
ENVIRONMENTAL TEST CHAMBER	T2RC	TENNEY	B094877	CNR	CNR

9.5 Test Data


GSM 850, Channel 190 (836.6MHz)

Voltage %	Power V _{DC}	Temp °C	Frequency Hz	Freq Dev Hz	Freq Dev ppm	Deviation %
100%	12.00	+20 (Ref)	836,600,017	+17	+0.02	+0.000002
100%	12.00	-30	836,600,018	+18	+0.02	+0.000002
100%	12.00	-20	836,600,016	+16	+0.02	+0.000002
100%	12.00	-10	836,600,017	+17	+0.02	+0.000002
100%	12.00	0	836,600,016	+16	+0.02	+0.000002
100%	12.00	+10	836,600,012	+12	+0.01	+0.000001
100%	12.00	+20	836,600,017	+17	+0.02	+0.000002
100%	12.00	+30	836,600,022	+22	+0.03	+0.000003
100%	12.00	+40	836,600,019	+19	+0.02	+0.000002
100%	12.00	+50	836,600,021	+21	+0.02	+0.000002
100%	12.00	+55	836,600,021	+21	+0.03	+0.000003
115%	13.80	+20	836,600,014	+14	+0.02	+0.000002
85%	10.20	+20	836,600,012	+12	+0.01	+0.000001

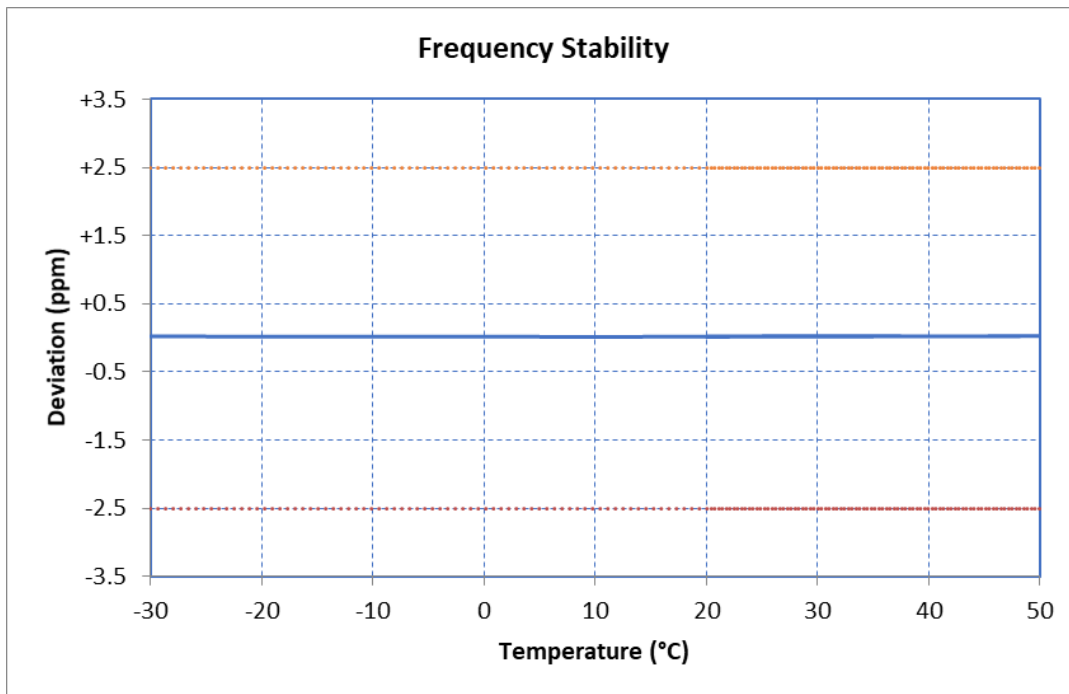

GSM 1900, Channel 661 (1880MHz)

Voltage %	Power V _{DC}	Temp °C	Frequency Hz	Freq Dev Hz	Freq Dev ppm	Deviation %
100%	12.00	+20 (Ref)	1,880,000,017	+17	+0.01	+0.000001
100%	12.00	-30	1,880,000,038	+38	+0.02	+0.000002
100%	12.00	-20	1,880,000,031	+31	+0.02	+0.000002
100%	12.00	-10	1,880,000,011	+11	+0.01	+0.000001
100%	12.00	0	1,880,000,019	+19	+0.01	+0.000001
100%	12.00	+10	1,880,000,011	+11	+0.01	+0.000001
100%	12.00	+20	1,880,000,017	+17	+0.01	+0.000001
100%	12.00	+30	1,880,000,017	+17	+0.01	+0.000001
100%	12.00	+40	1,880,000,015	+15	+0.01	+0.000001
100%	12.00	+50	1,880,000,027	+27	+0.01	+0.000001
100%	12.00	+55	1,880,000,025	+25	+0.01	+0.000001
115%	13.80	+20	1,880,000,016	+16	+0.01	+0.000001
85%	10.20	+20	1,880,000,018	+18	+0.01	+0.000001

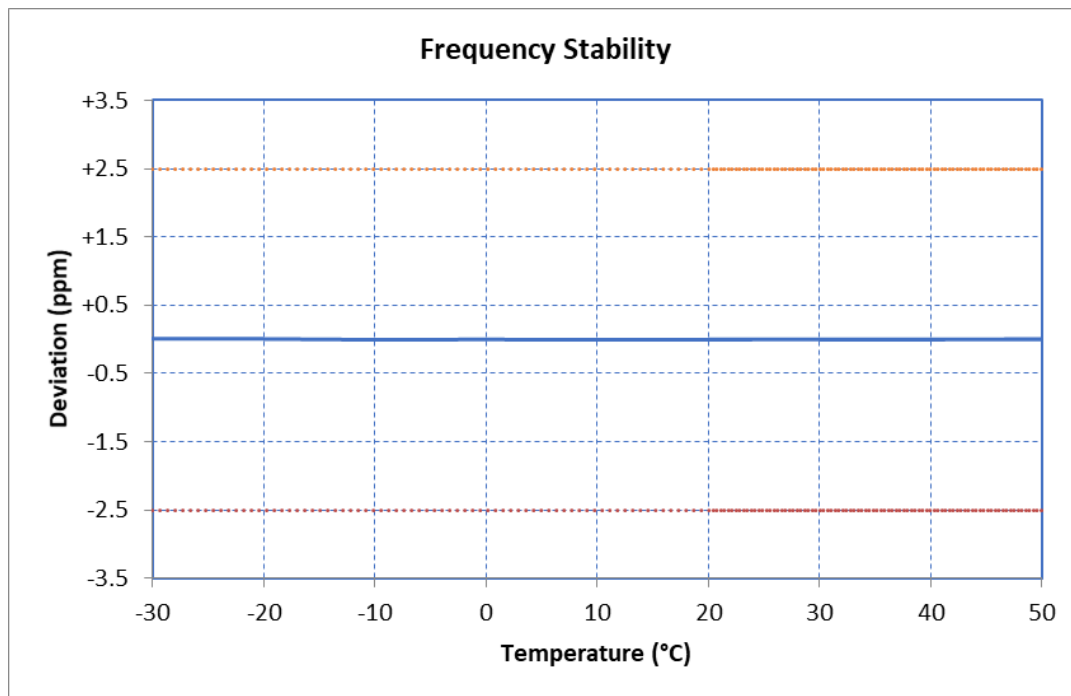

10 Revision History

Revision Level	Description of changes	Revision Date
0	Initial release	18 April 2022