

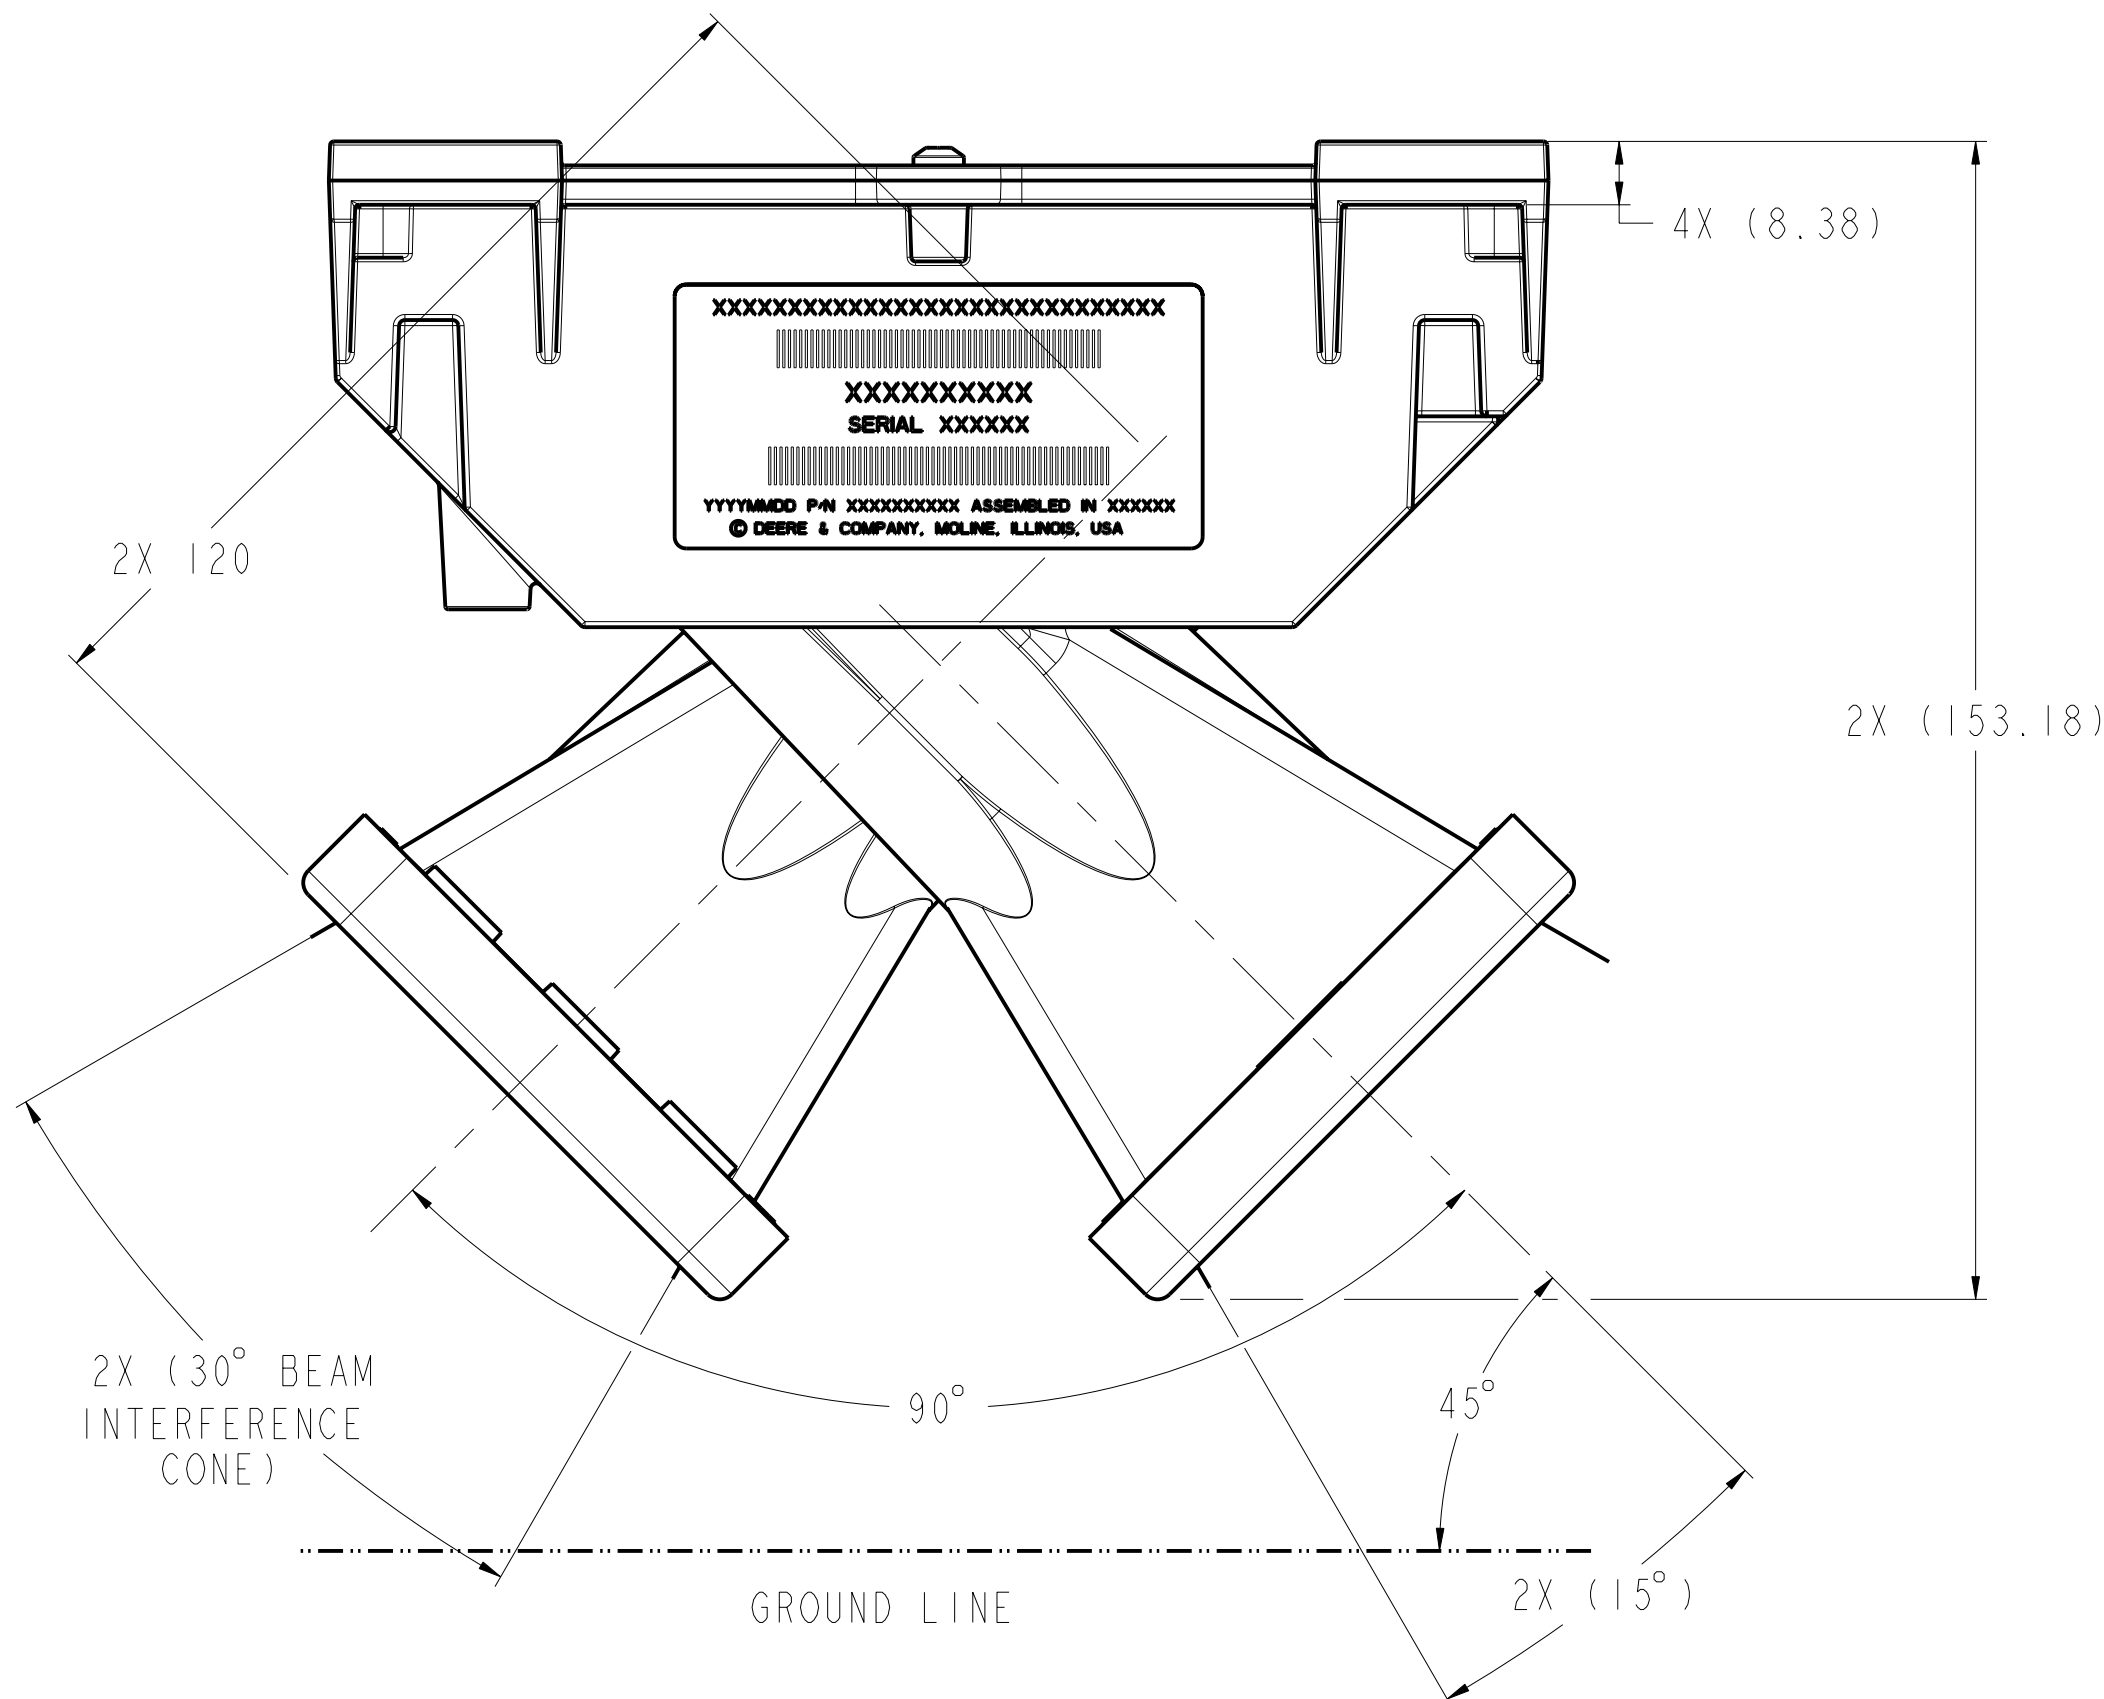
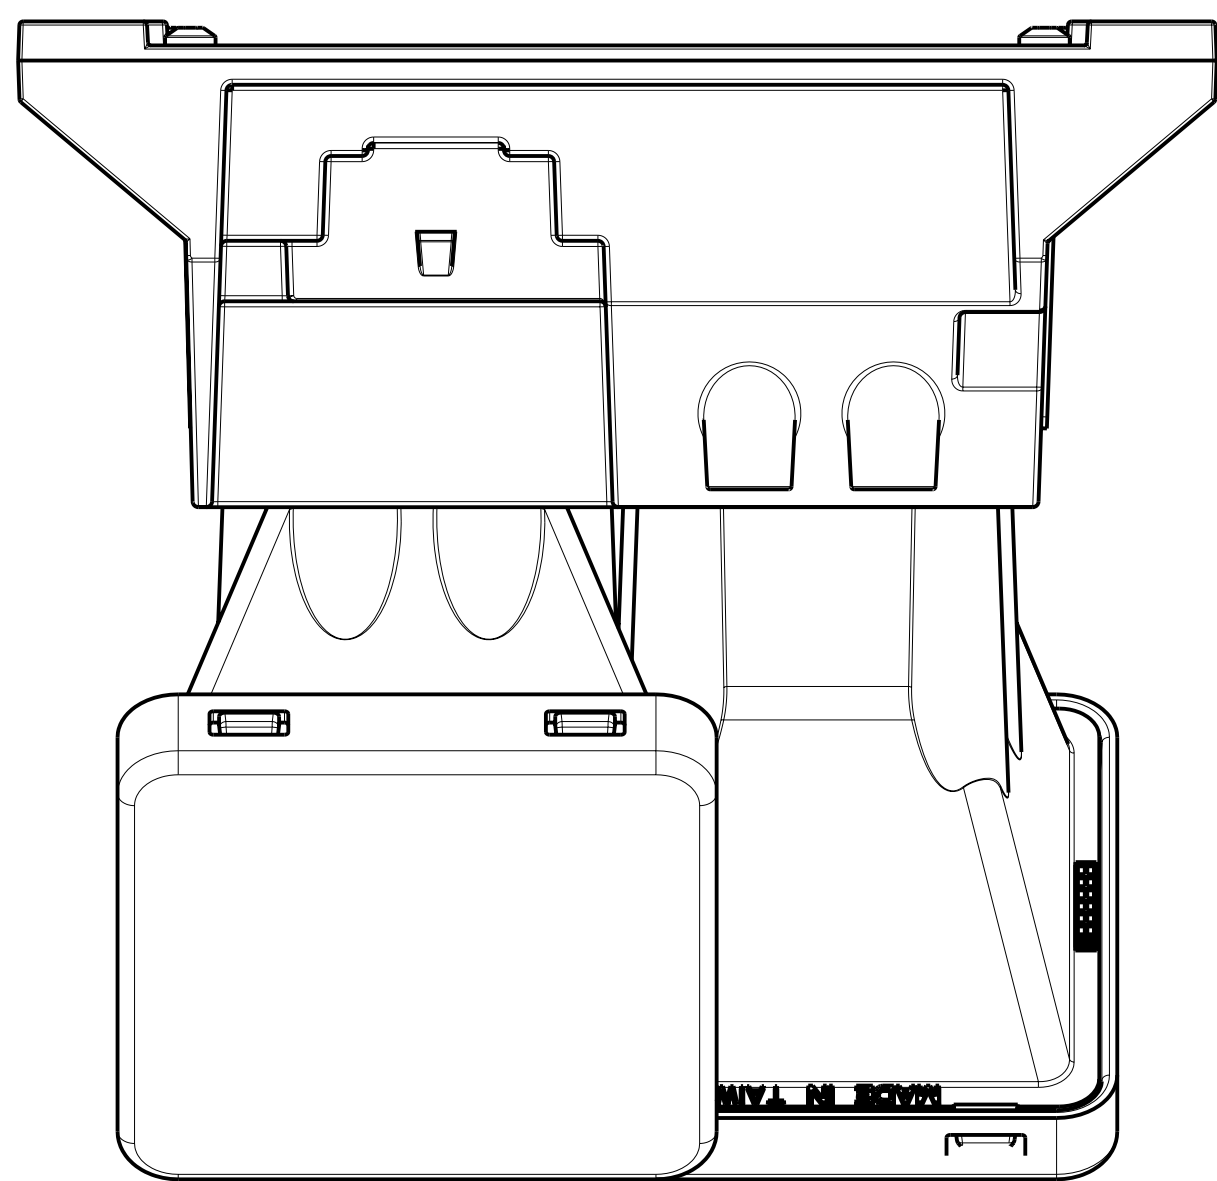
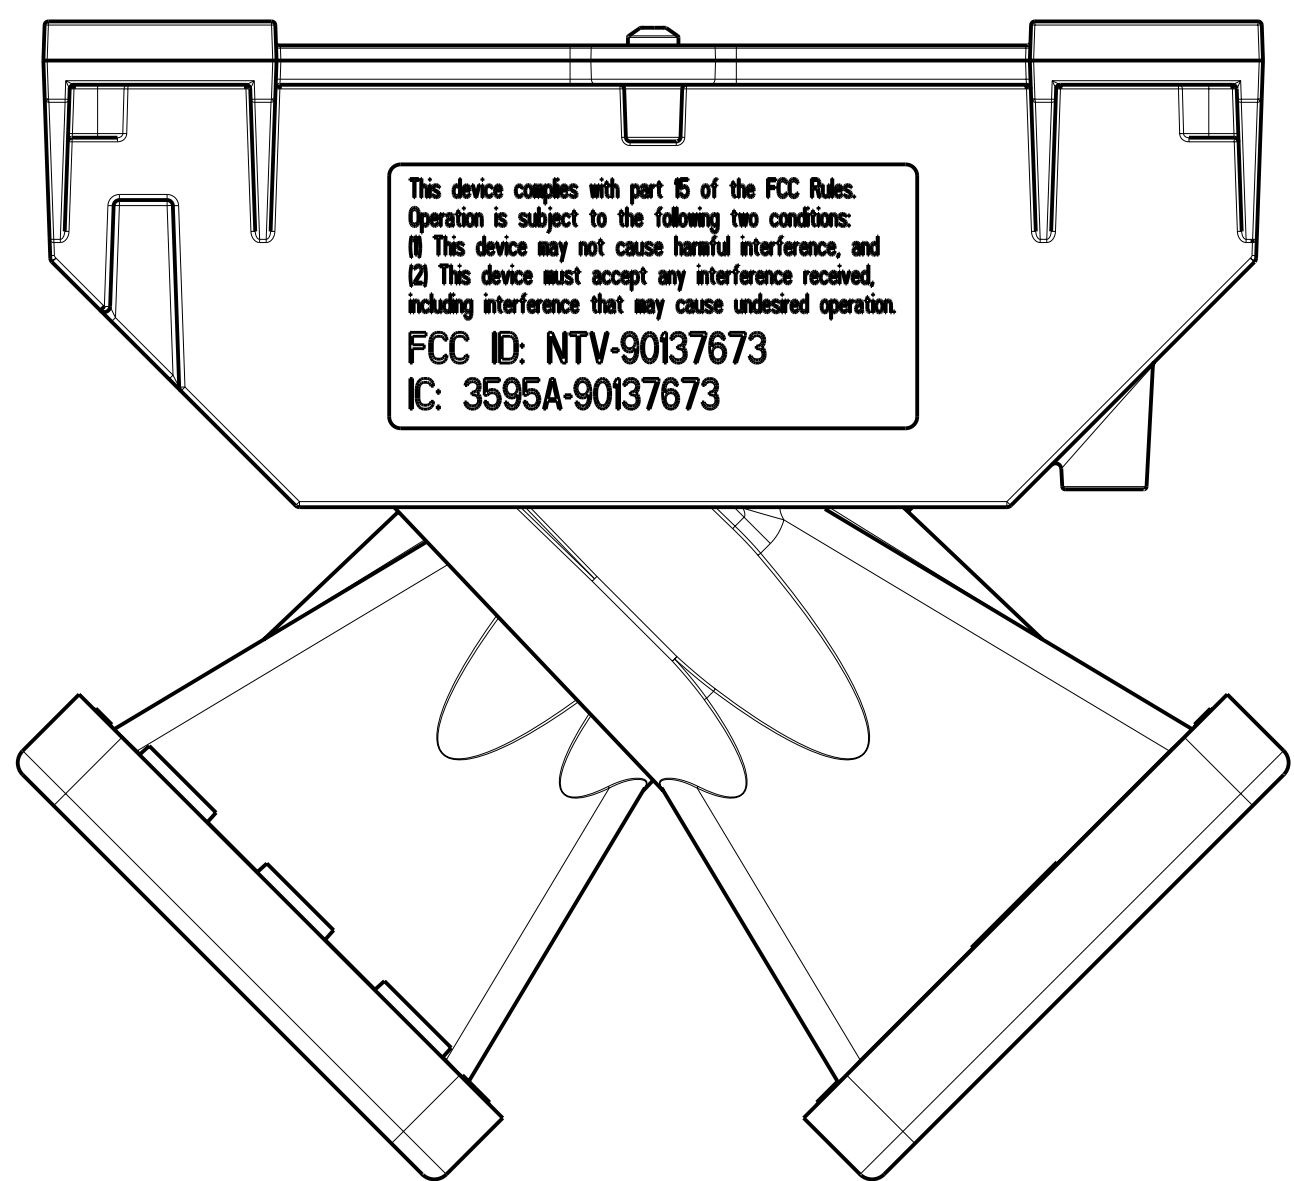



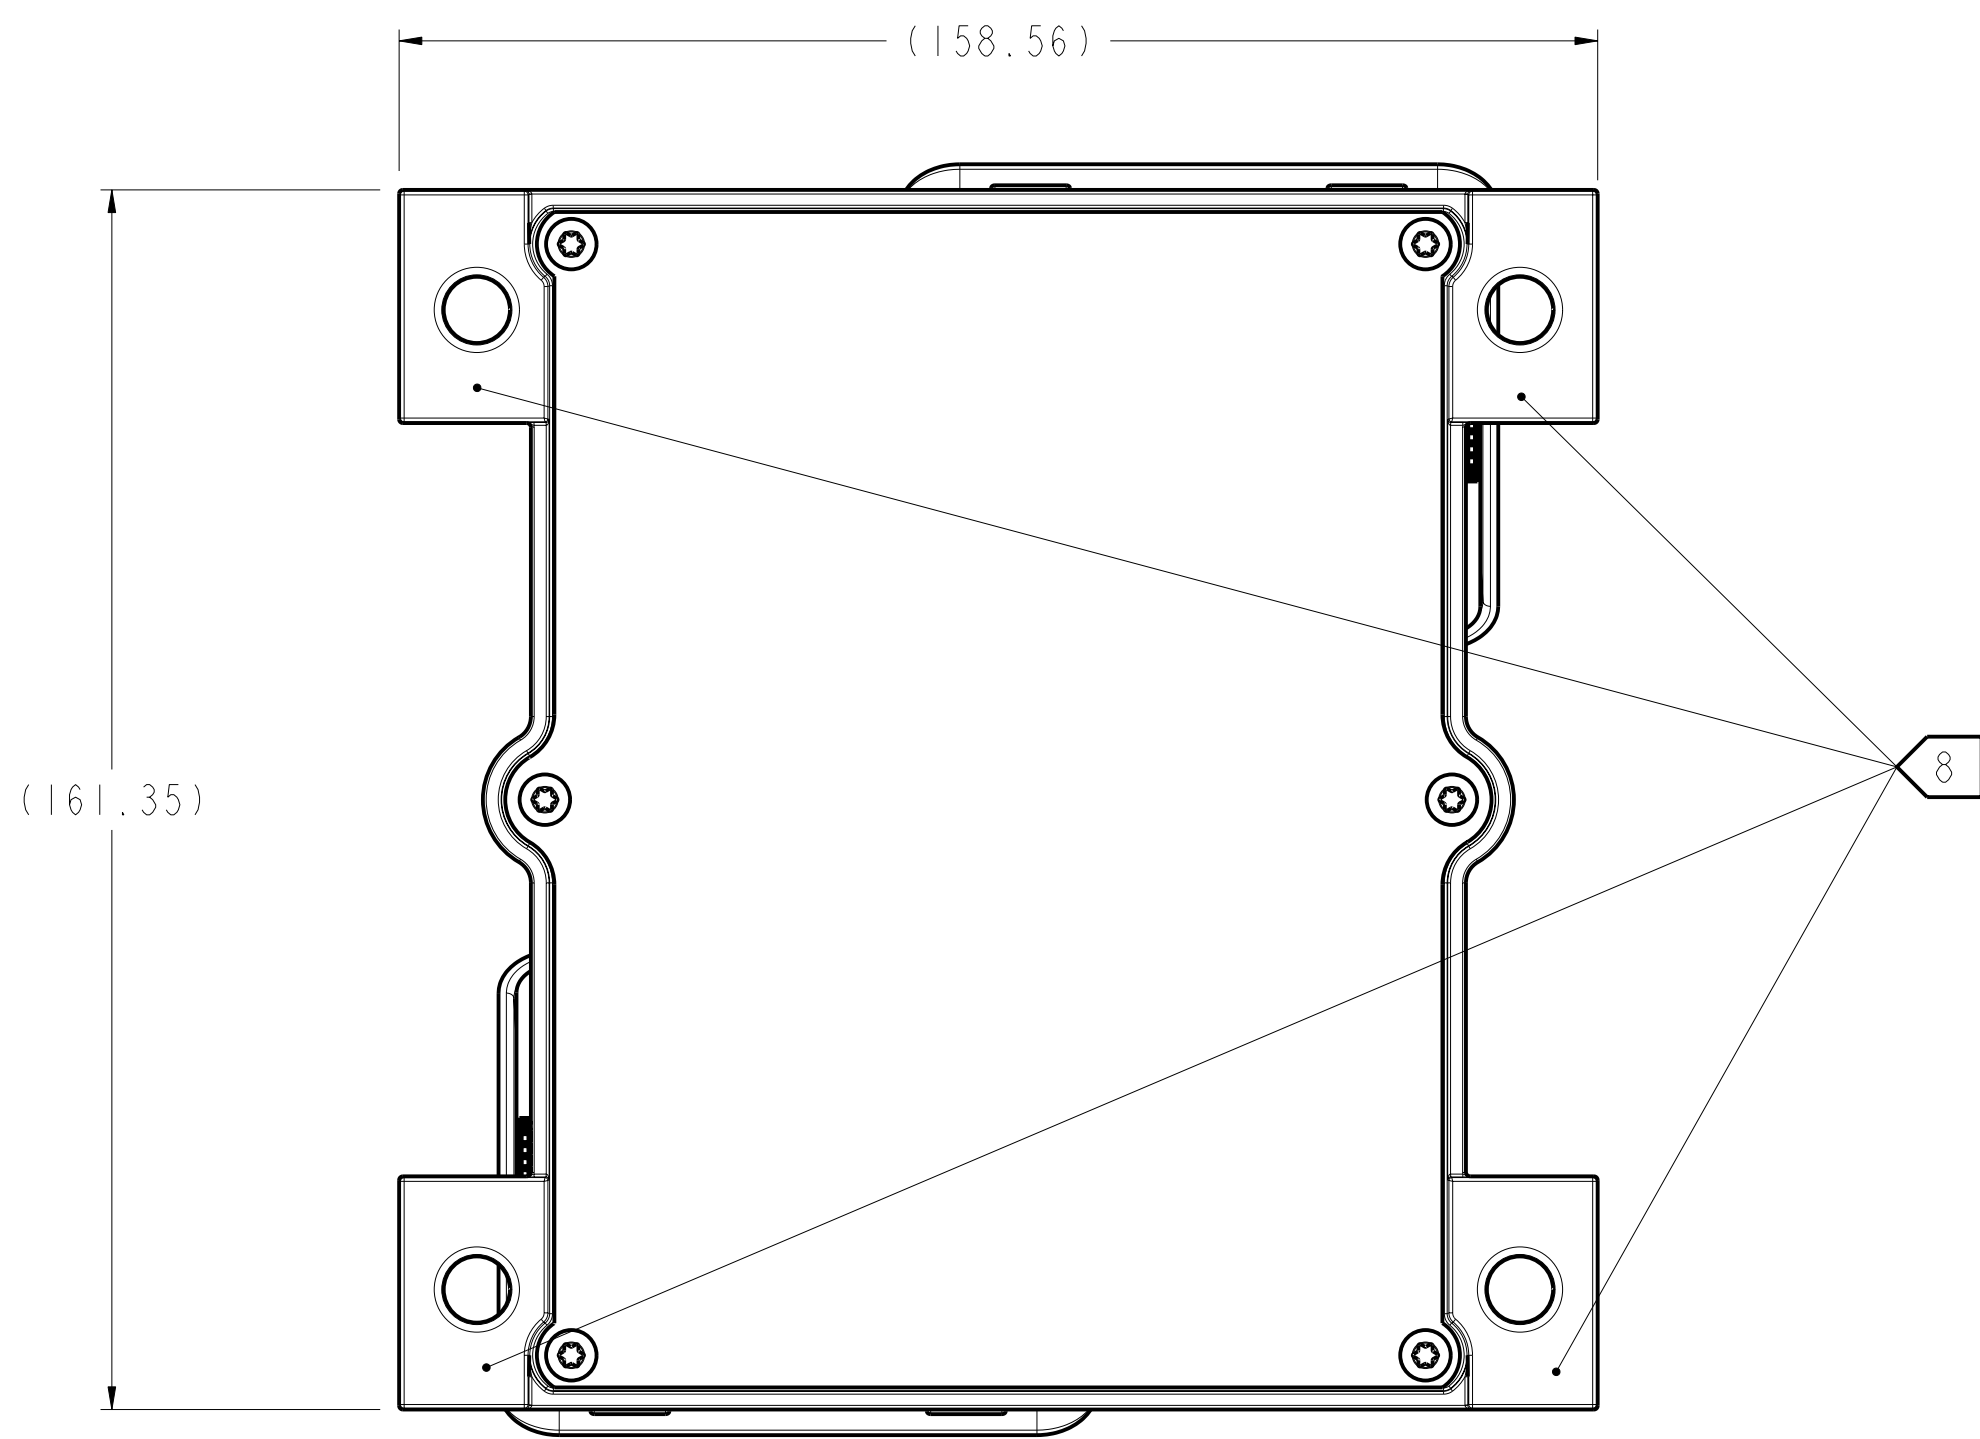


CONNECTOR PIN-OUT	
PIN	SIGNAL
A	"RESERVED" FOR ADDRESS 0
B	"RESERVED" FOR /BOOTSTRAP ENABLE
C	FREQUENCY OUTPUT (SPEED)
D	"RESERVED" FOR CAN_H
E	GROUND
F	SWITCHED BATTERY
G	"RESERVED" FOR CAN_L
H	"RESERVED" FOR SERIAL Rx
J	"RESERVED" FOR SERIAL Tx
K	"RESERVED" FOR ADDRESS 1

ALL "RESERVED" PIN-OUTS MUST HAVE A CAVITY PLUG INSTALLED IN MATING CONNECTOR

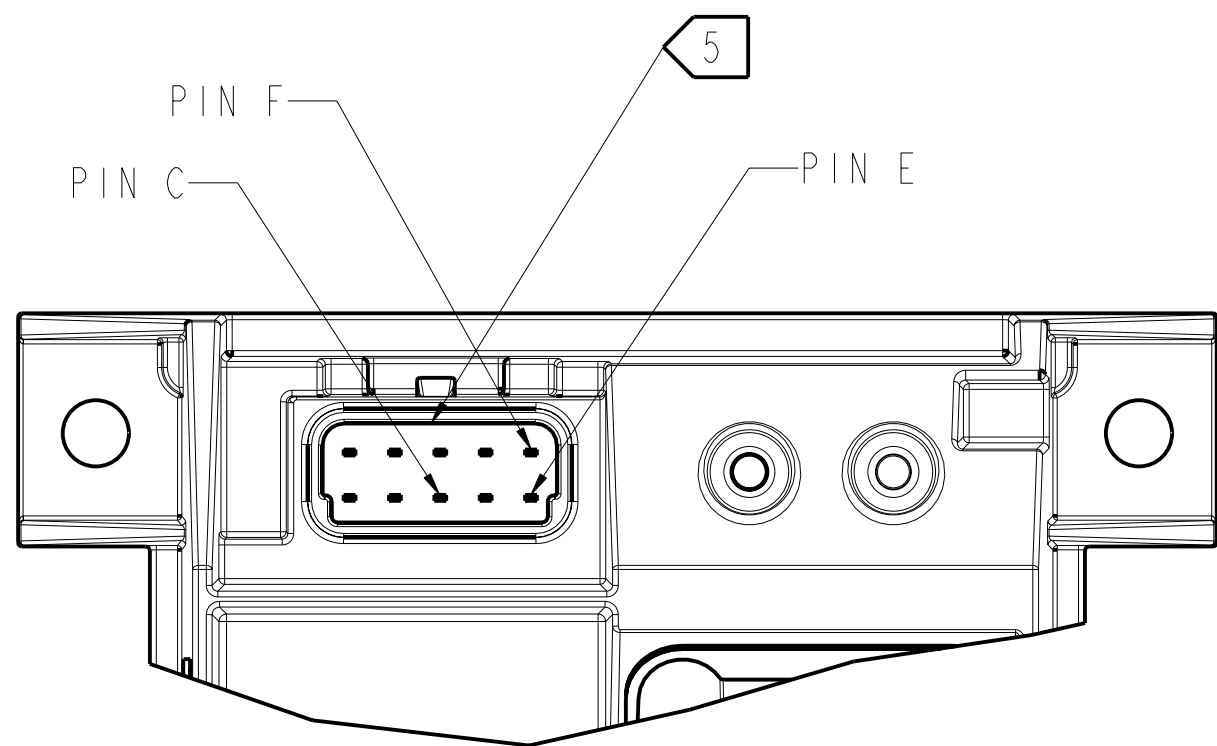

PARTIAL VIEW WITH COMPONENTS REMOVED TO SHOW CONNECTOR PIN-OUT

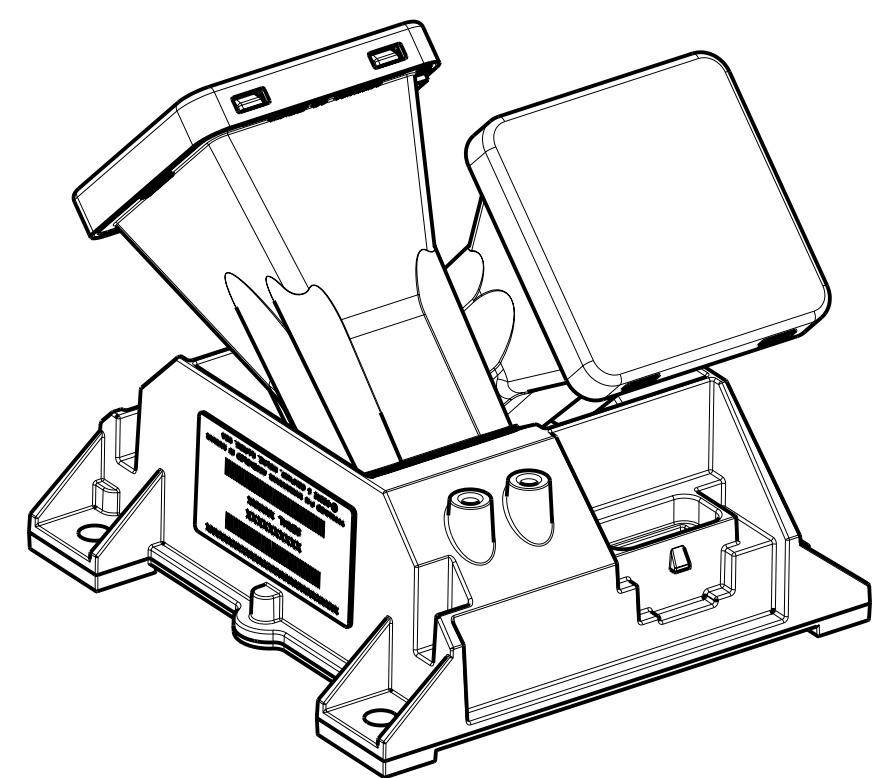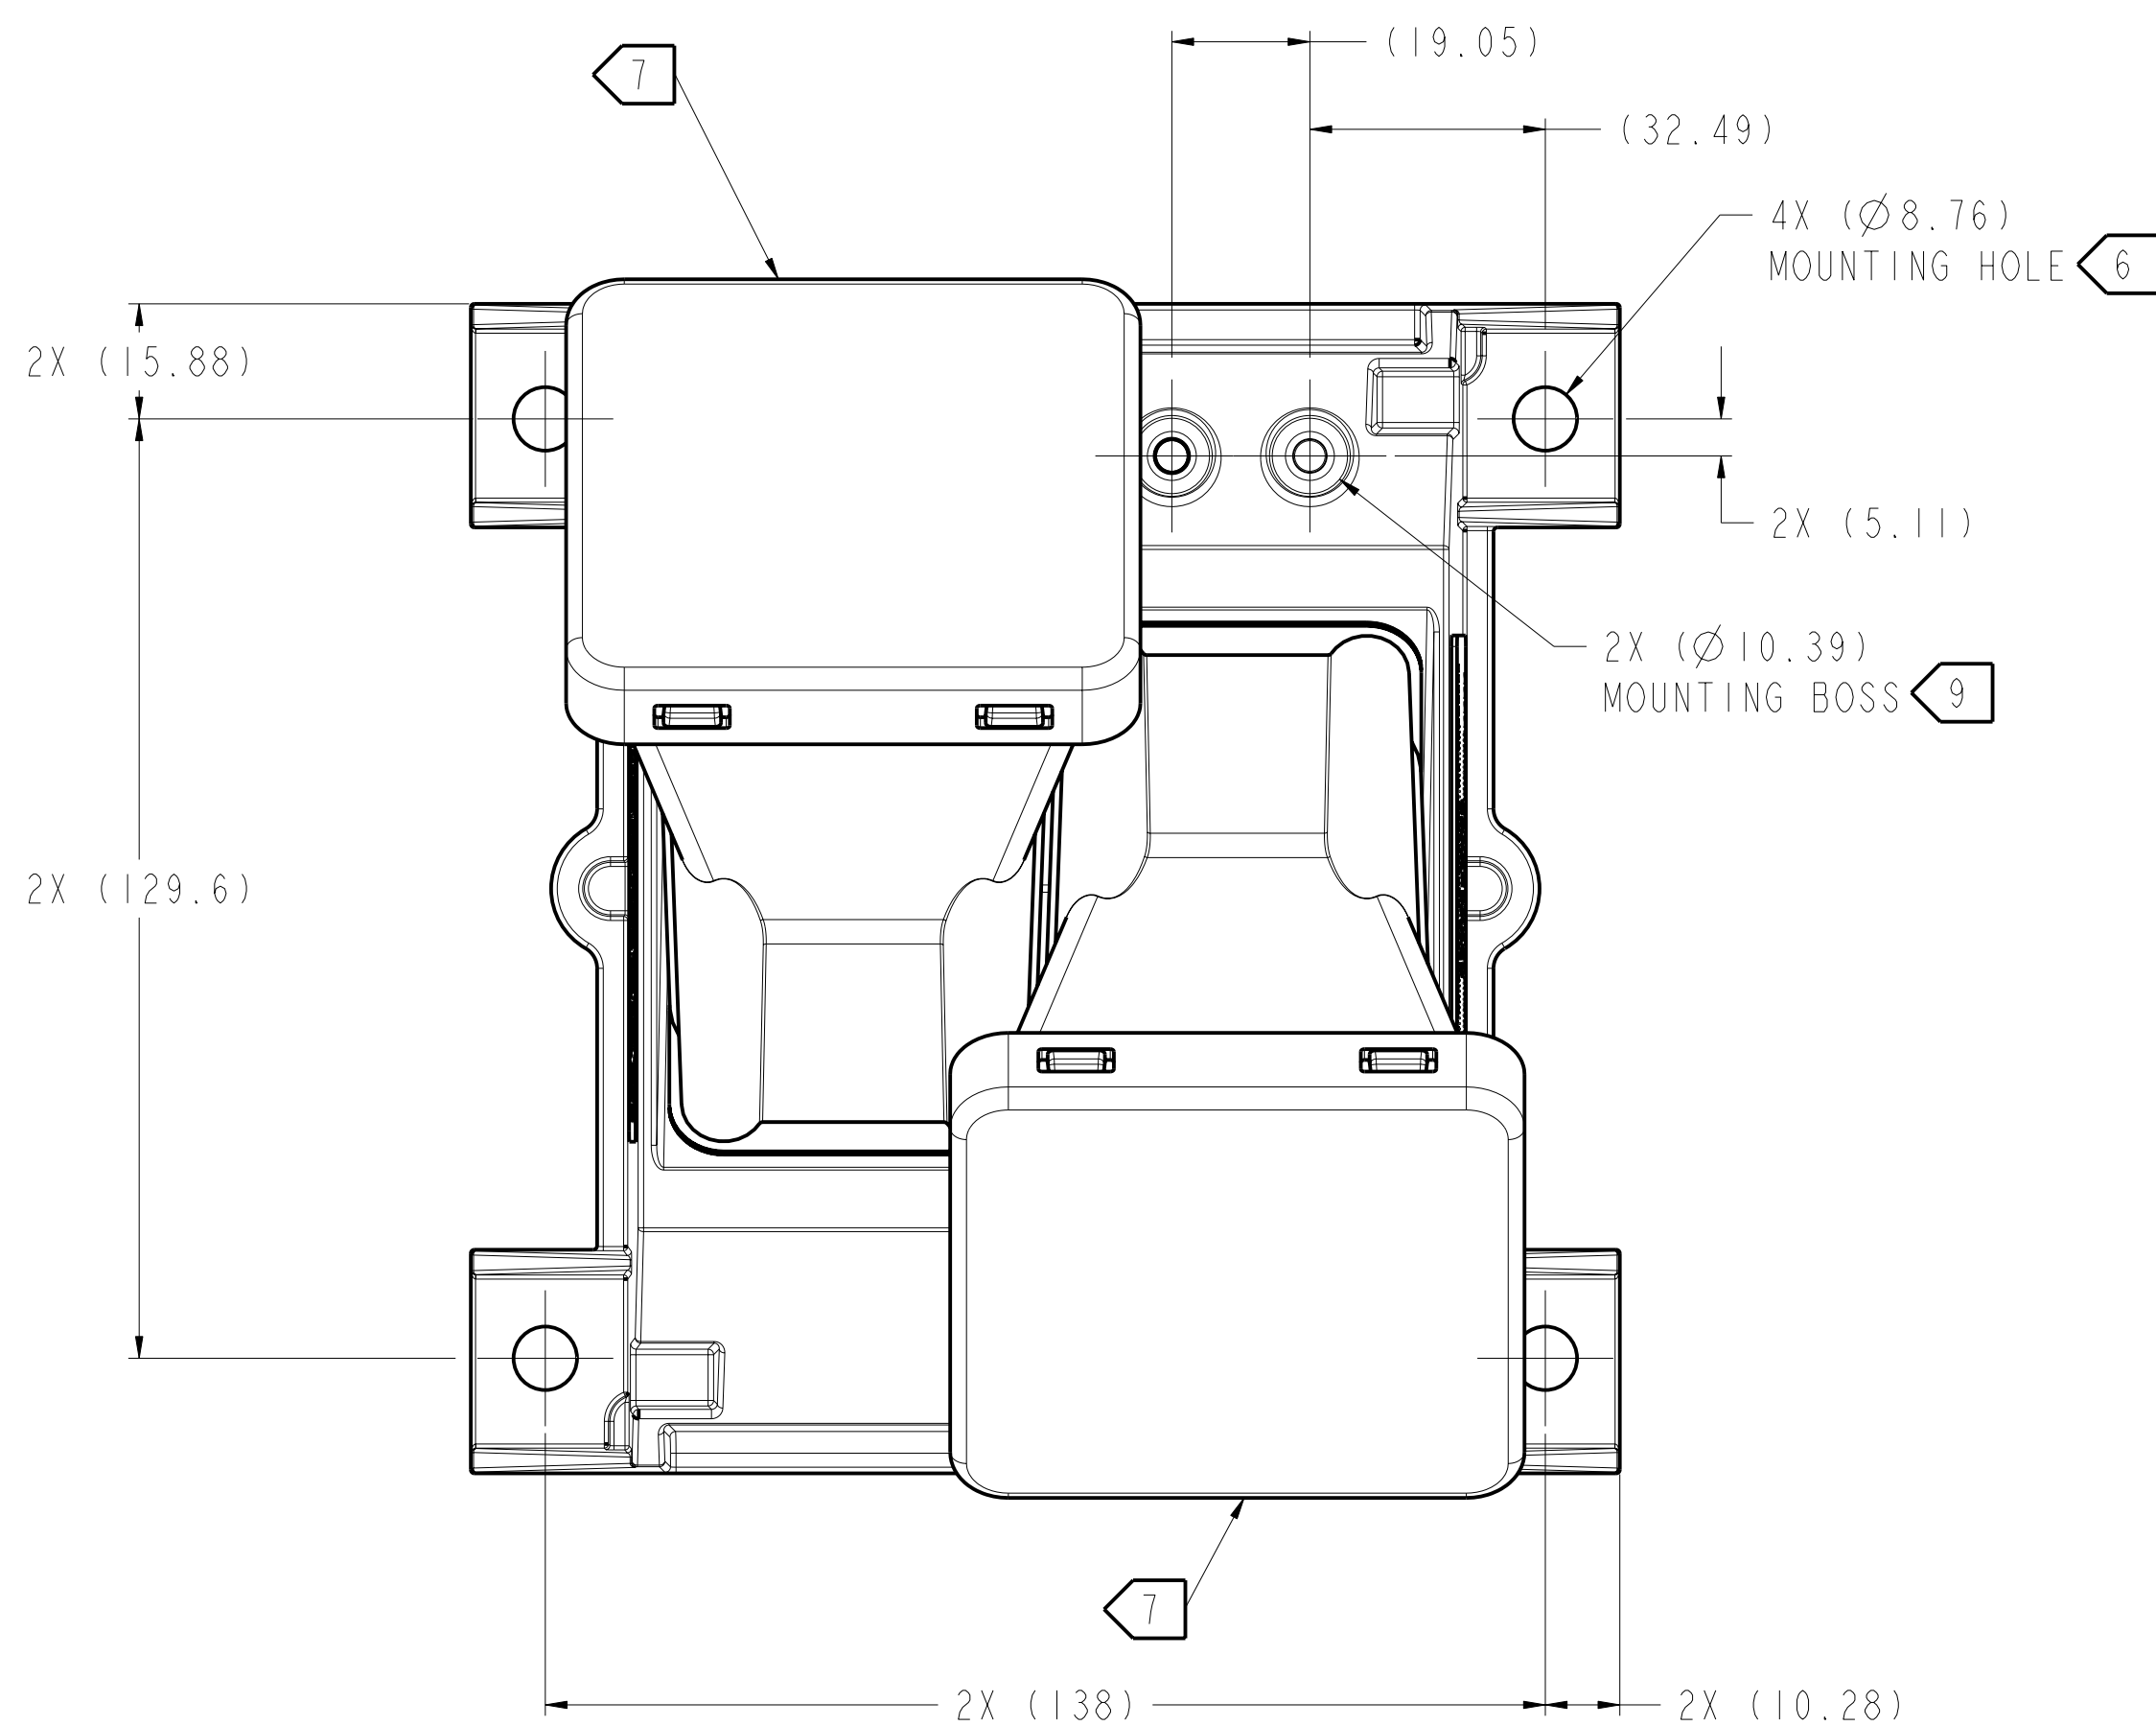

SCALE 1:2
VIEW FOR REFERENCE ONLY

1. THIS DRAWING DESCRIBES THE CUSTOMER INTERFACE TO AT340252, JOHN DEERE ASSEMBLY NUMBER PH90241191 AND PH90242441.
2. THE AUTHORITY FOR ASSEMBLY CONTENT IS THE RELEASED BILL OF MATERIAL (BOM). REFER TO THE BOM FOR ASSEMBLY CONTENT AND DETAIL PART NUMBER REVISION LEVEL.
3. THE AUTHORITY FOR EACH DETAIL PART IS THE DETAIL PART DRAWING. REFER TO THE DETAIL PART DRAWING AND DATASET (AS APPLICABLE) FOR COMPLETE DETAIL PART DEFINITION.
4. ALL DIMENSIONS ARE FOR REFERENCE ONLY, SEE DETAIL PART DRAWING FOR DETAIL DIMENSIONS AND TOLERANCES.
5. CONNECTOR TERMINAL FINISH IS TIN. MATING CONNECTOR IS DELPHI METRI-PACK 150 SERIES SEALED P/N - 12065425 OR 12065426.
6. RECOMMENDED ATTACHMENT: START ALL (4X) 8mm CAPSCREWS, THEN TORQUE TO 19-28 Nm.
7. COVERS MAY BE PLACED 180° FROM ORIENTATION SHOWN.
8. MOUNTING PLANE DEFINED BY (4X) SURFACES - HORIZONTAL TOLERANCE ±5°
9. MOUNTING BOSS TO ACCEPT M5 X 0.8 X 10 THREAD FORMING FASTENER. TORQUE TO 7.9 Nm MAX

<CC> 10. COMPLIANCE WITH EUROPEAN REGULATION 1907/2006 (EU REACH), INCLUDING ITS ANNEX XVII BAN OF CERTAIN SUBSTANCES AND DISCLOSURE OF SUBSTANCES OF VERY HIGH CONCERN ARE REQUIRED FOR THIS PART.

11. <CC> PER JDS-6266.

E1 MATERIALS PER JDM H31

INTERFACE DRAWING

CONFIDENTIAL AND PROPRIETARY TO DEERE & COMPANY. UNAUTHORIZED USE, DISCLOSURE, OR REPRODUCTION PROHIBITED. COPYRIGHT © DEERE & COMPANY. ALL RIGHTS RESERVED.		AUTHOR GREG K. HARMEL LNK		DATE 2020-05-17 JDS-6113	REVISION 1
SEE DETAILS		ITEM RADAR SENSOR CFD GND SPEED (AT340252)		UNIT IN	SCALE 1:1
		DEERE & COMPANY MOLINE, ILLINOIS 61265		VERSION JD90	DATE 17/1
		PART NUMBER PH85241196		UNLESS NOTED (1.856)	REVISION E

MODEL RL	MODEL REV	REV REV	REV RL	UNLESS NOTED
Completed	E.3	E.3	Completed	(1.856)