

Test Report**From****Kyocera Wireless Corp****Dual-Band Tri-mode AMPS/CDMA Cellular Phone**

FCC Part 22 & 24 Certification IC RSS-129 & 133	
FCC ID:	OVFKWC-K4X4
Models:	K404A, K430 Family, K450 Family, K480 Family, and K490 Family

STATEMENT OF CERTIFICATION

The data, data evaluation and equipment configuration represented herein are a true and accurate representation of the measurements of the sample's radio frequency interference emissions characteristics as of the dates and at the times of the test under the conditions herein specified.

STATEMENT OF COMPLIANCE

This product has been shown to be capable of compliance with the applicable technical standards as indicted in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

Test performed by:	Patrick Bowen Staff Engineer	Date of Test:	6/2/2004 – 6/10/2004
Report Prepared by:	Patrick Bowen Staff Engineer	Date of Report:	6/11/2004
Report Reviewed by:	C. K. Li Engineer, Senior Staff/Manager	Date of Review:	6/30/2004
Tests that required an OATS site were performed by TUV Product Services.			

TABLE OF CONTENTS

1	General Information	3
2	Product Description	4
3	Electronic Serial Numbers (ESN) Protection	5
4	FCC Compliance Emergency 911	5
5	TTY compliance	5
6	Transmitter RF Power Output.....	6
6.1	Conducted Power	6
6.2	Radiated Power	7
7	Transmitter Modulation Requirement	8
7.1	Transmitter Audio Frequency Response.....	8
7.2	Transmitter Modulation Deviation Limiting	10
8	Occupied Bandwidth.....	11
9	Spurious Emissions At Antenna Terminals	19
10	Transmitter Radiated Spurious Emissions Measured Data	32
11	Receiver Spurious Emissions	32
12	Transmitter RF Carrier Frequency Stability	32
12.1	AMPS Mode.....	33
12.2	CDMA 800 Mode	34
12.3	CDMA 1900 Mode	35
13	Exposure of Humans to RF Fields (SAR)	36
14	Test Equipment	36

1 General Information

Applicant:	Kyocera Wireless Corp 10300 Campus Point Drive San Diego CA 92121			
FCC ID:	OVFKWC-K4X4			
Product:	Dual-Band Tri-mode Cellular Phone			
Model Numbers:	K454L, K454N, K454LC, K454XLC, K454NC, K454XNC, K454MC, K454XMC, K404A, K434L, K434N, K434LC, K434XLC, K434NC, K434XNC, K434MC, K434XMC, K484L, K484N, K484LC, K484XLC, K484NC, K484XNC, K484MC, K484XMC, K494LC, K494XLC, K494NC, K494XNC, K494MC, K494XMC			
EUT Serial Number:	7A-X---0W9LTF (model K494LC)			
Type:	☐ Prototype, ☒ Pre-Production, ☐ Production			
Device Category:	Portable			
RF Exposure Environment:	General Population / Uncontrolled			
Antenna:	Fixed Stubby			
Detachable Antenna:	Yes			
External Input:	Audio/Digital Data			
Quantity:	Quantity production is planned			
FCC Rule Parts:	§22H	§22H	§22.901(d)	§24E
Modes:	800 AMPS	800 CDMA	800 CDMA1X	1900 CDMA
Multiple Access Scheme:	FDMA	CDMA	CDMA	CDMA
TX Frequency (MHz):	824 - 849	824 – 849	824 – 849	1850 - 1910
Emission Designators:	40K0F8W, 40K0F1D, 1M25F9W			
Max. Output Power (W)	0.302 ERP	0.288 ERP		0.437 EIRP

2 Product Description

The phones OVFKWC-K4X4 are Tri-mode Dual-Band 1XRTT products. Models that contain the letter “L” have integrated Assisted GPS software feature enabled to meet the emergency location requirements of the FCC’s E911 Phase II mandate. The Tri-mode architecture is defined as 1900MHz (PCS CDMA), 800MHz (cellular CDMA and AMPS).

All models included in the OVFKWC-K4X4 filing use the same antenna and have identical PCB layouts in regards to the RF Circuitry, Basic Frequency Determining and Stabilization Circuitry, Basic Modulator Circuit, Transmitter Active Devices, and Tuning Targets. The only differences between models are the mechanical design of each model family’s front housings, choice of color or greyscale LCD, and software applications supported (GPS, Brew, WAP, etc.). See product matrix in Figure 2.1 below.

The phone is designed in compliance with the technical specifications for compatibility of mobile and base stations in the Cellular Radio telephone service contained in “Cellular System Mobile Station -Land Station Compatibility Specification” as specified in OET Bulletin 53 and TIA Standards

The phone will support certain CDMA2000 radio-configurations (RC) as describes in Exhibit 1 (operation description).

					
	Phantom K450	Rave K404	Rave K430	Aktiv K480	Energi K490
	Non-BREW / BREW		Non-BREW / BREW	Non-BREW / BREW	Non-BREW / BREW
KWC Trimode/GPS/Greyscale	K454L		K434L	K484L	
KWC Trimode/no GPS/Greyscale	K454N		K434N	K484N	
KWC Trimode/GPS/Color	K454LC / K454XLC	K404A	K434LC / K434XLC	K484LC / K484XLC	K494LC / K494XLC
KWC Trimode/no GPS/Color	K454NC / K454XNC		K434NC / K434XNC	K484NC / K484XNC	K494NC / K494XNC
KWC Trimode/GPS/WAP 2.0	K454MC / K454XMC		K434MC / K434XMC	K484MC / K484XMC	K494MC / K494XMC

Figure 2.1 OVFKWC-K4X4 Product Matrix

3 Electronic Serial Numbers (ESN) Protection

The Tri-mode Phone, FCC ID: OVFKWC-K4X4 uses ESN. The ESN is a unique identification number to each phone, which is contained in the Numeric Assignment Module and is automatically transmitted to the base station whenever a call is placed. The ESN is stored in an EPROM and is isolated from fraudulent contact and tampering. Any attempt to change the ESN will render the portable phone inoperative.

The phone complies with all requirements for ESN under Part 22.919.

4 FCC Compliance Emergency 911

FCC § 22.921
When an emergency 911 call is originated by the user, the mobile will attempt to acquire any available system and originate the emergency call on that system, disregarding restrictions set by the roaming list. The FCC NPRM WT99-13, CC94-102 automatic analog A/B roaming option has been implemented for 911 emergency calls. Note that the models that contain the letter "L" have Global Positioning System (GPS) support.

5 TTY compliance

FCC § 255 of the Telecom Act
The OVFKWC-K4X4 phone models have been designed for TTY Compliance with Cellular Compatibility Standard.


6 Transmitter RF Power Output

6.1 Conducted Power

FCC: § 2.1046	IC: RSS-129 §7.1, RSS-133 §6.2
Measurement Procedures: The RF output power was measured using a Giga-tronics 8541C Universal Power Meter and HP 8594E Spectrum Analyzer that has the CDMA personality option. Terminated to a resistive coaxial load of 50 ohms.	

Mode	Frequency (MHz)	Channel	Power (dBm)
AMPS	824.04	991	25.00
	836.49	383	25.00
	848.97	799	25.05
CDMA 800	824.70	1013	24.98
	836.52	384	25.05
	848.31	777	25.03
CDMA 1900	1851.25	25	22.98
	1880.00	600	23.06
	1908.75	1175	23.07

6.2 Radiated Power

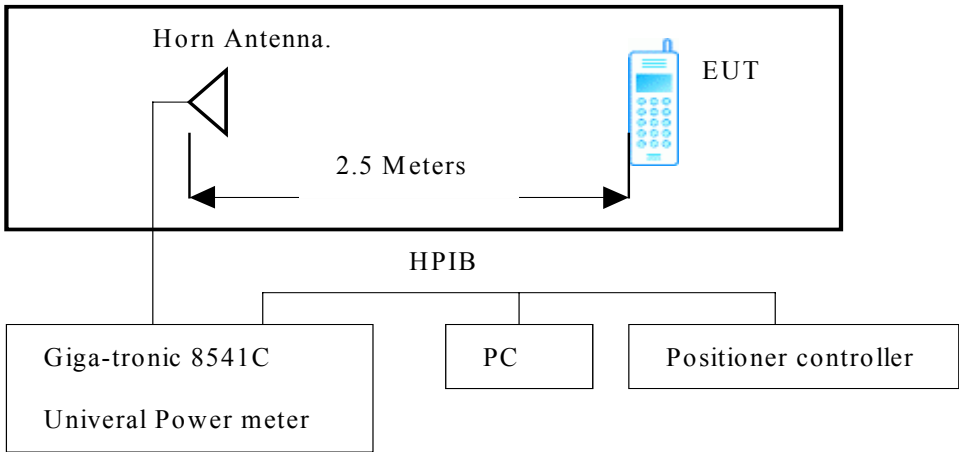FCC: § 22.913, § 24.232	IC: RSS-129 §7.1 and §9.1, RSS-133 §6.2
Measurement Procedures: The EUT (SN: 7A-X---0W9L8L) was positioned on a 2-axis non-conductive positioner inside an anechoic chamber. The EUT conducted power was set by the phone control software. During tests, the phone was rotated 360 degree in azimuth and elevation by an automated antenna measurement workstation. Maximum radiated power was recorded using a Giga-tronics 8541C Universal Power Meter. All measurement results are EIRP in dBm. For ERP, subtract 2.1 dB from the EIRP data.	
Anechonic Chamber 	

Mode	Frequency (MHz)	Channel	Max. Power (dBm)	Ref.
AMPS	824.04	991	24.5	ERP
	836.49	383	24.8	
	848.97	799	24.2	
CDMA 800	824.70	1013	24.0	ERP
	836.52	384	24.6	
	848.31	777	24.3	
CDMA 1900	1851.25	25	25.8	EIRP
	1880.00	600	26.4	
	1908.75	1175	25.5	

7 Transmitter Modulation Requirement

7.1 Transmitter Audio Frequency Response

FCC: § 2.1047, § 22.915	IC: RSS-129 §6.2
Measurement Procedures:	
Measured with HP8924 RF communication test set & HP 3588A spectrum analyzer.	
- Operate the transmitter with the compressor disabled, and monitor the output with HP8924 test receiver without de-emphasis. Apply a sine wave audio input to the transmitter external audio input port, vary the modulating frequency from 100 to 3000 Hz, and observe the input levels necessary to maintain a constant ± 2.9 kHz system deviation. - Adjust the audio input level to 20 dB greater than that required to produce ± 8 kHz deviation with 1 kHz tone. Vary the modulation frequency from 3 kHz to 30 kHz and observe the deviation while maintaining a constant audio input level. Use the audio spectrum analyzer to measure the output deviation at the same frequency as the input signal.	

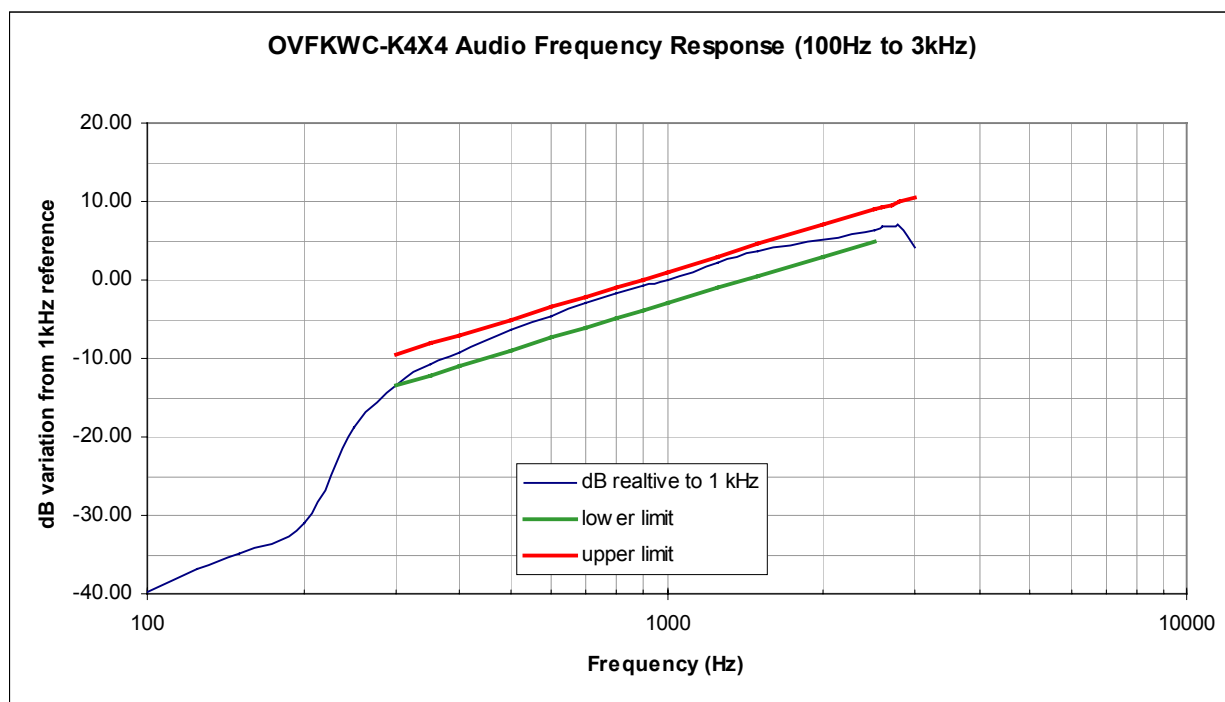


Figure 7.1 Audio Filter Characteristics (100-3000Hz)

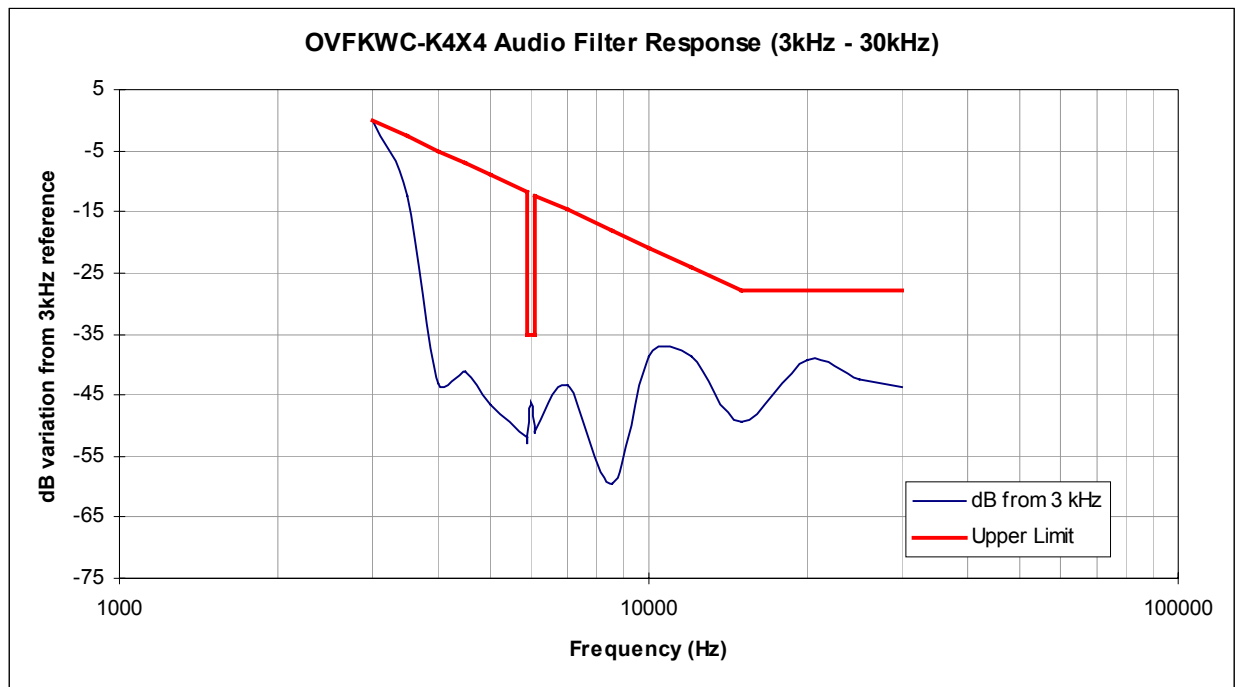


Figure 7.2 Post Limiter Filter Attenuation

7.2 Transmitter Modulation Deviation Limiting

FCC: § 2.1047(b), § 22.915(b)(c)	IC: RSS-129 §6.1
Measurement Procedures:	
Measured with HP8924 RF communication test set as an audio signal generator.	
With the compressor enabled and the SAT disabled, and at three different modulating frequencies (300Hz, 1kHz and 3kHz), adjust the audio input level from -20 dB to +20 dB in reference to the level required to generate 8kHz deviation at 1KHz.	

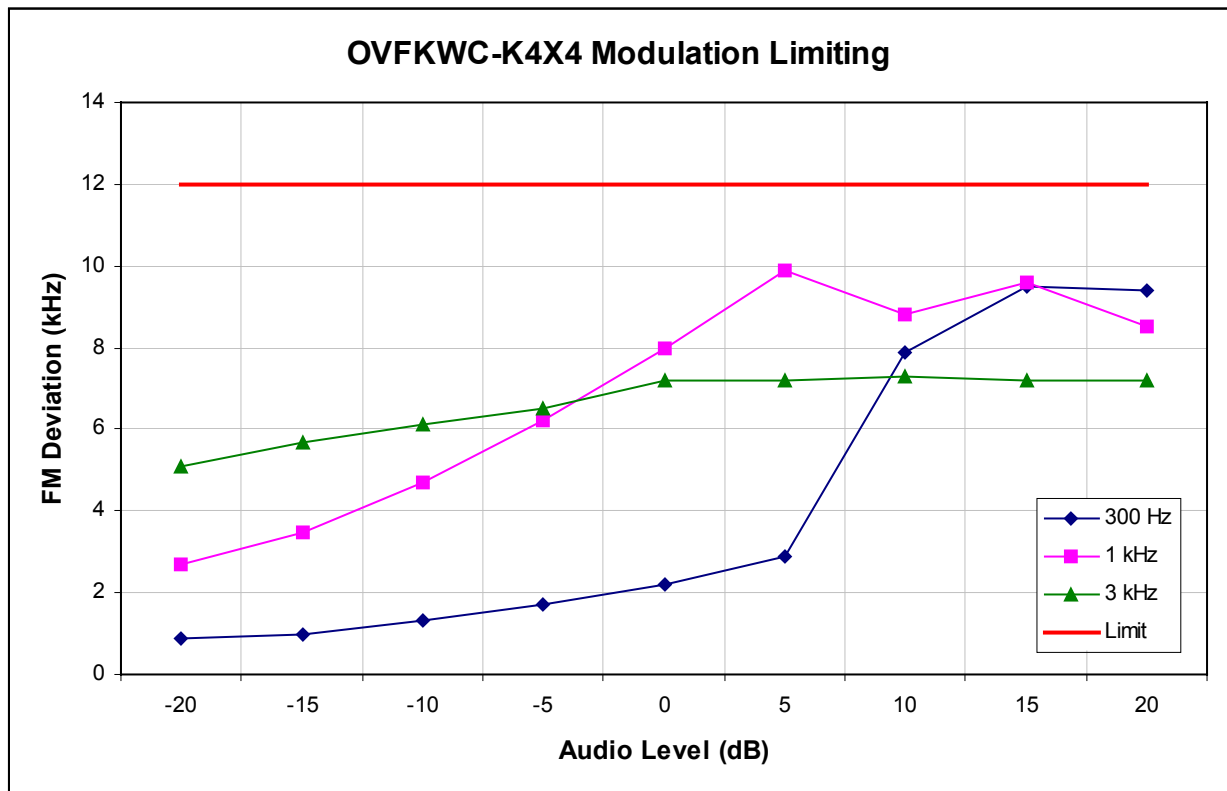


Figure 7.3 Modulation Deviation Limiting

8 Occupied Bandwidth

FCC: § 2.1049, § 22.917(b)(d), § 24.238	IC: RSS-129 §6.3, §8.1
Measurement Procedures: The RF output of the EUT was connected to the input of the spectrum analyzer with sufficient attenuation. The spectrum with no modulation was recorded. For Analog: The audio input signal was adjusted to as followings: (1) For combined voice and SAT, disable the compressor, modulate with a 2500 Hz sine wave 13.5 dB greater than that required to produce ± 8 kHz peak deviation at 1000 Hz and a 6000 Hz SAT with ± 2.0 kHz peak deviation. (2) For combined Signaling Tone and SAT, modulate with a 10 kHz ST with ± 8 kHz peak deviation and a 6000 Hz SAT with ± 2.0 kHz peak deviation. (3) For wideband data, modulate with a quasi-random 10 kbps data pattern with ± 8 kHz peak deviation. (4) For voice only, disable the compressor, modulate with a 2500 Hz sine wave 13.5 dB greater than that required to produce ± 8 kHz peak deviation at 1000 Hz. (5) For SAT only, modulate with a 6000 Hz SAT with ± 2.0 kHz peak deviation. (6) For ST only, modulate with a 10 kHz ST with ± 8 kHz peak deviation. (7) For combined SAT and DTMF, modulate with a 6000 Hz SAT with ± 2.0 kHz peak deviation and one of the DTMF tones. All measurements were performed on middle channel. For Digital: Modulate with full rate.	

List of Figures

Figure	Mode	Description
8-1	AMPS	Voice
8-2		SAT
8-3		Voice + SAT
8-4		ST
8-5		SAT+ST
8-6		SAT + DTMF_9
8-7		10kb Wideband Data
8-8	CDMA 800	CDMA at RC1
8-9		CDMA 1X, at RC3
8-10	CDMA 1900	CDMA at RC1
8-11		CDMA 1X, at RC3
8-12		Lower Band Edge @ CH 25
8-13		Upper Band Edge @ CH 1175

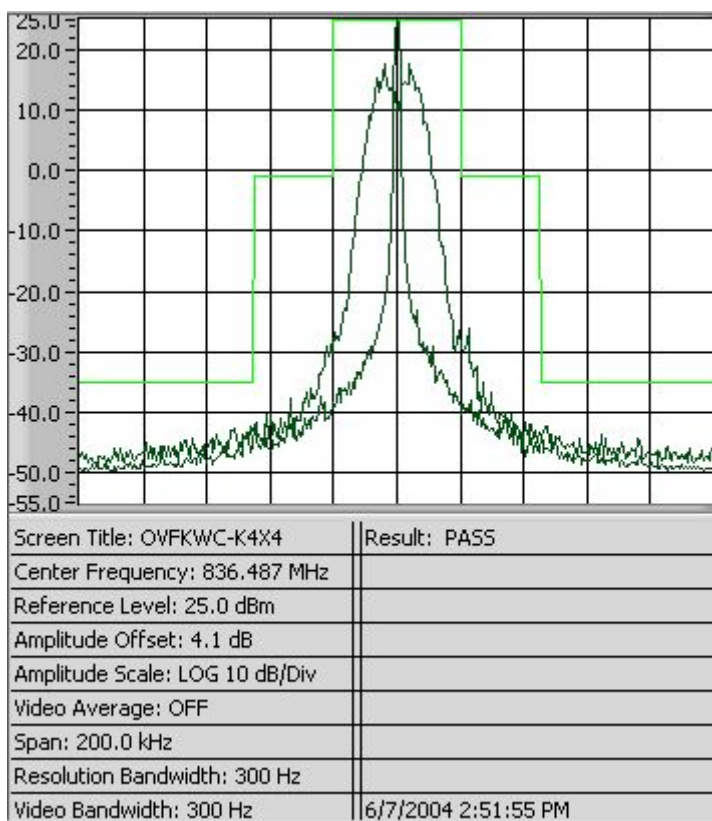


Figure 8-1 AMPS Voice

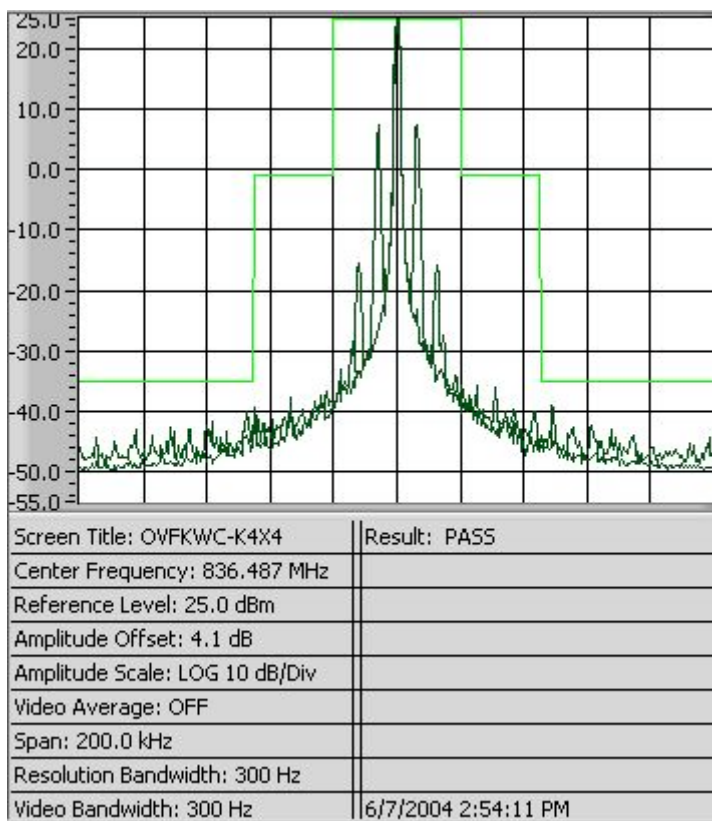


Figure 8-2 AMPS SAT

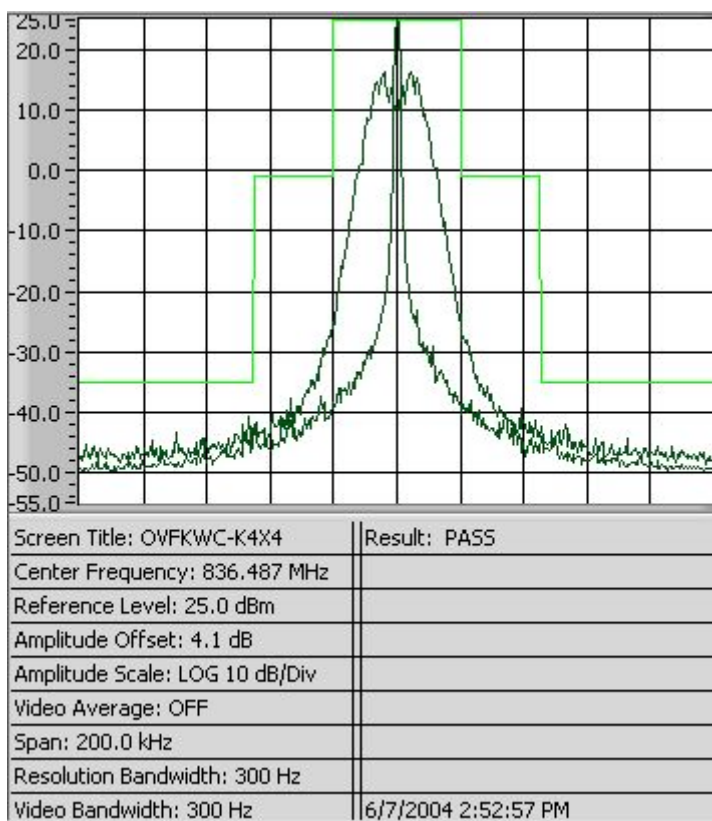


Figure 8-3 AMPS Voice + SAT

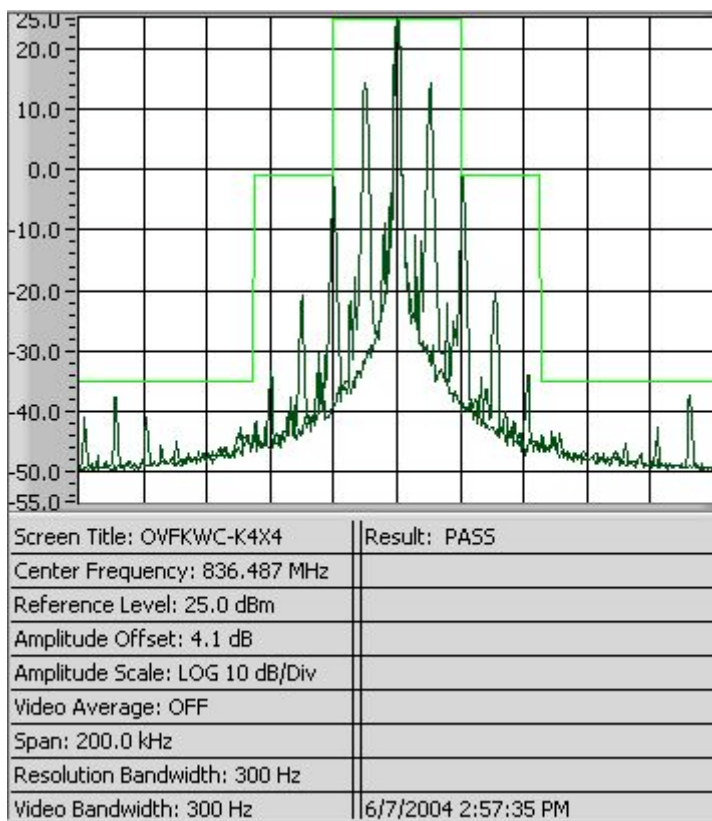


Figure 8-4 AMPS ST

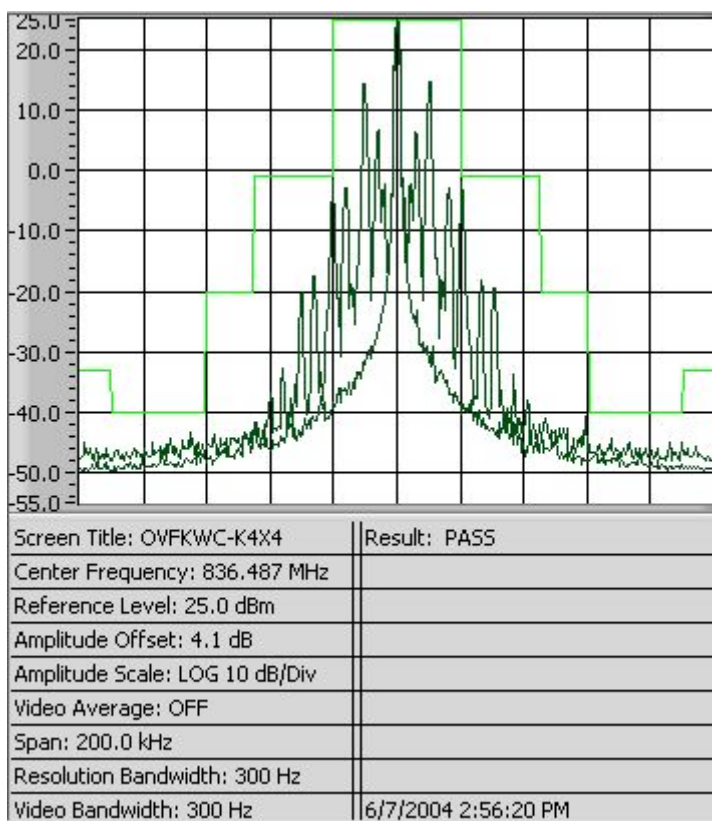


Figure 8-5 AMPS ST + SAT

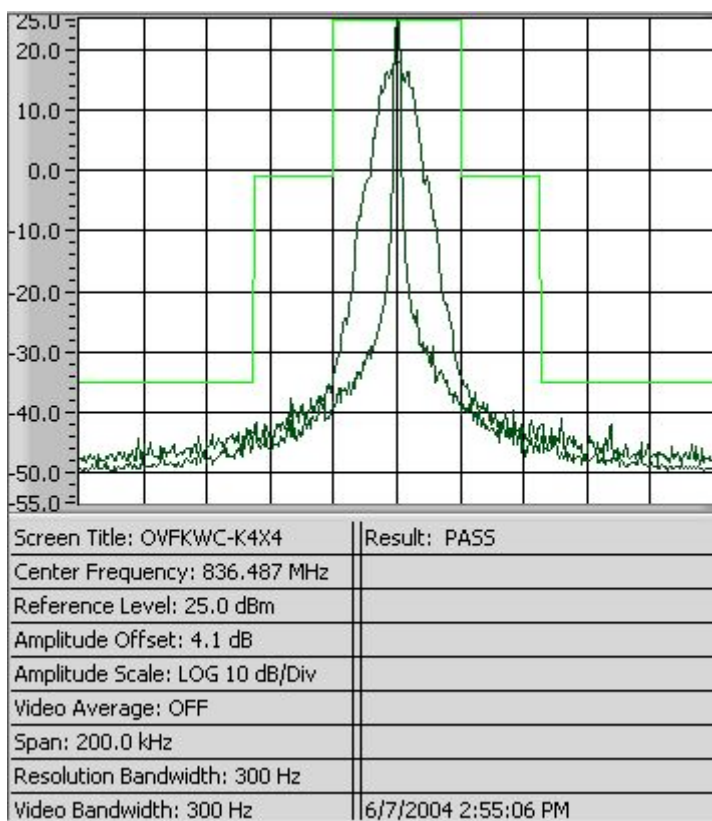


Figure 8-6 SAT + DTMF_9

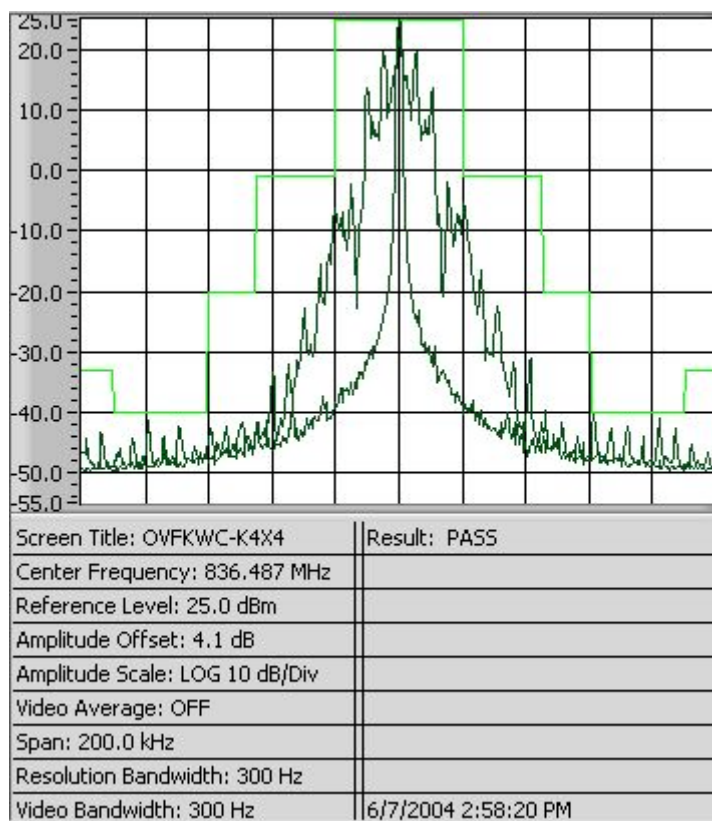


Figure 8-7 AMPS WIDEBAND

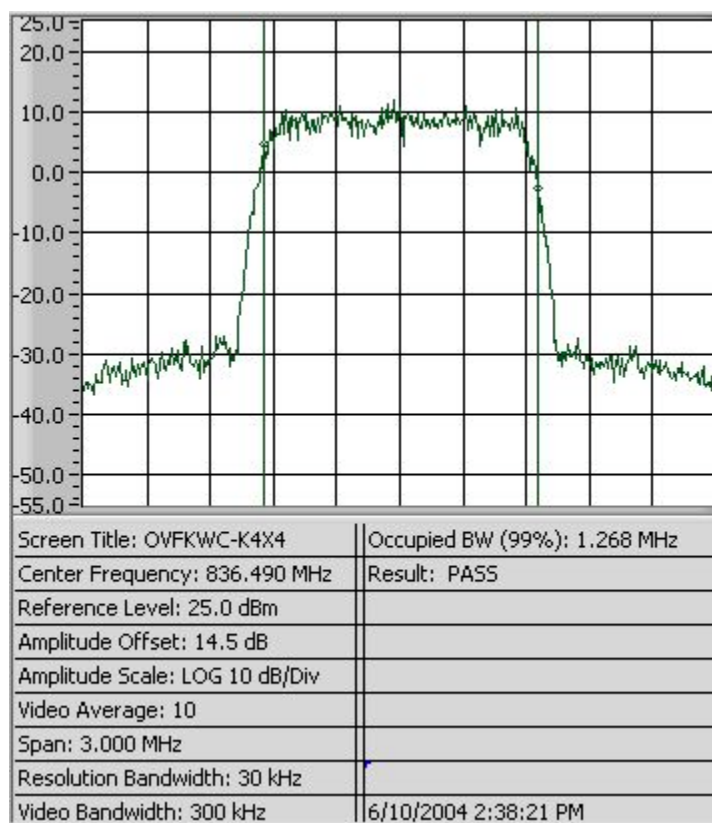


Figure 8-8 CDMA 800 at RC1

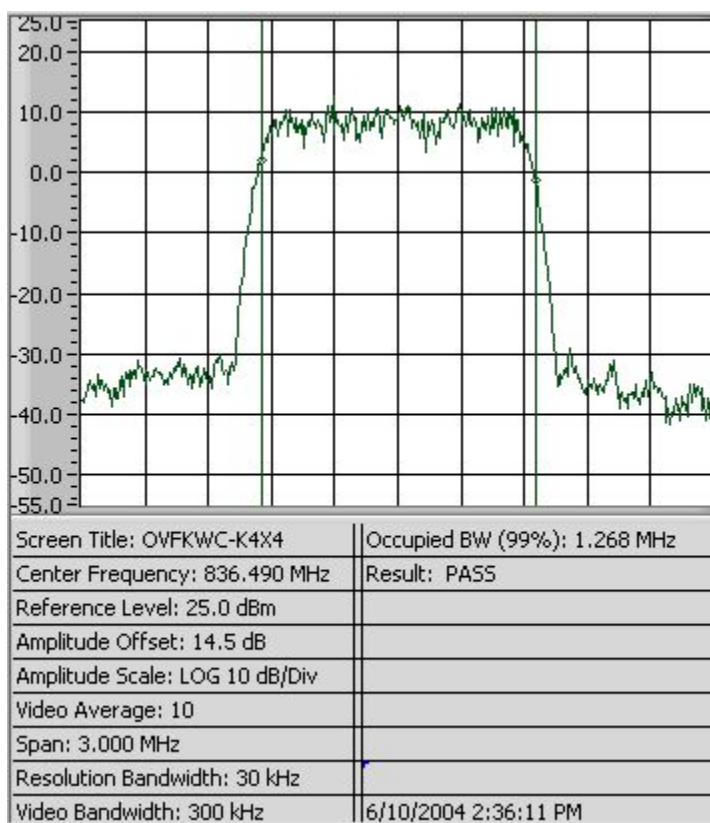


Figure 8-9 CDMA 800 1X at RC3

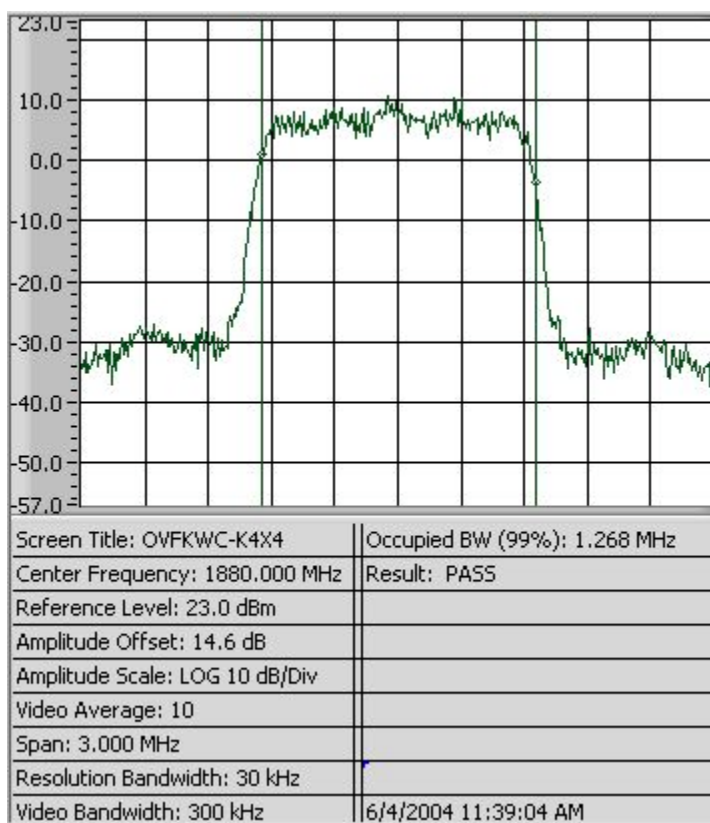


Figure 8-10 CDMA 1900 at RC1

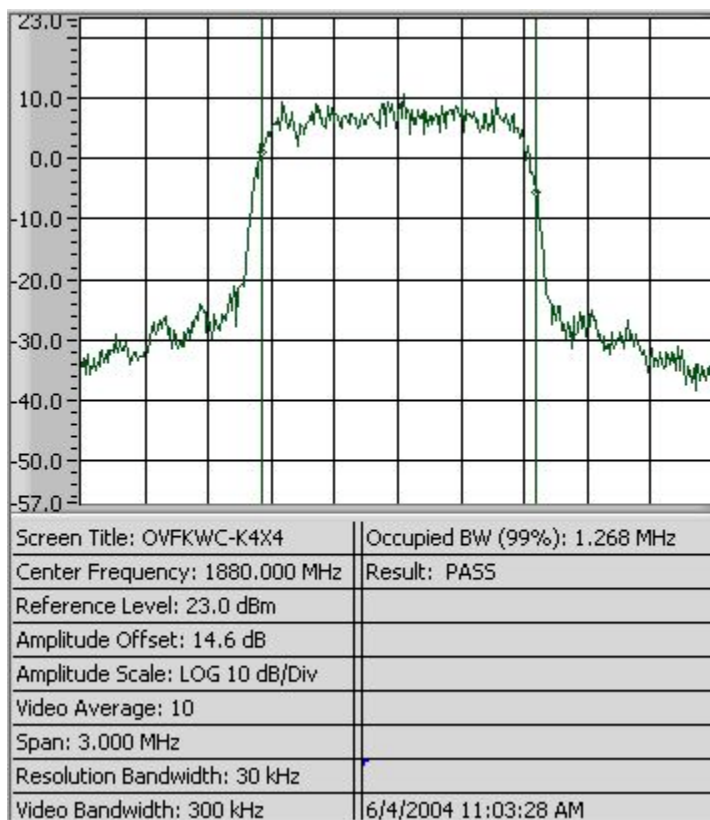


Figure 8-11 CDMA 1900 1X at RC3

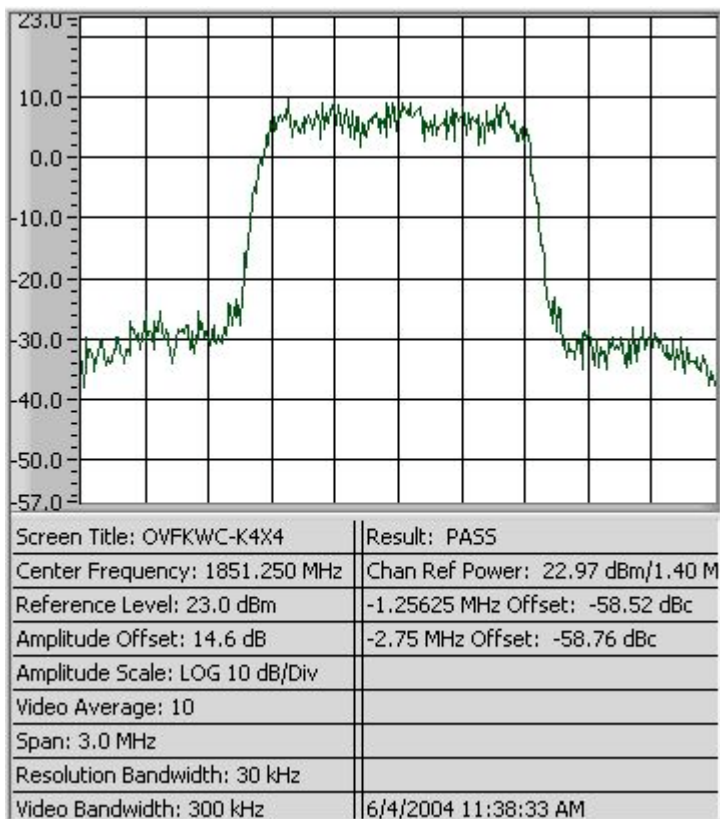


Figure 8-12 CDMA 1900 Lower Band Edge

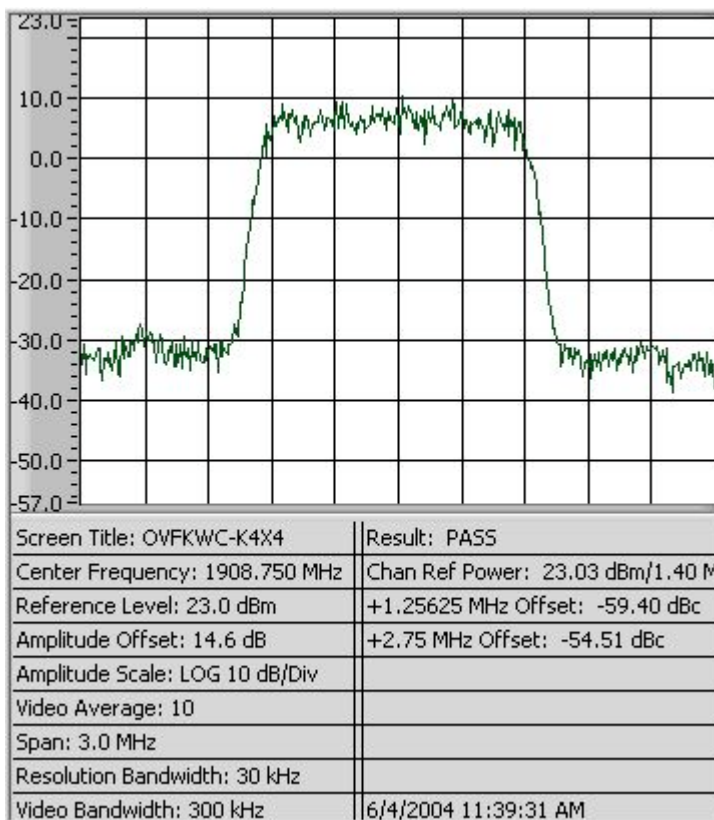


Figure 8-13 CDMA 1900 Upper Band Edge

9 Spurious Emissions At Antenna Terminals

FCC:	§ 2.1051, § 22.917(e)(f), § 24.238	IC:	RSS-129 §6.3, §8.1, RSS-133 §6.3
Measurement Procedures:			
<u>Out of Band:</u> The RF output of the EUT was connected to the input of the spectrum analyzer with sufficient attenuation. The modulating signal was applied accordingly. The frequency spectrum was investigated from the lowest frequency signal generated up to at least the tenth harmonic of the fundamental. <u>Base Band:</u> Spectrum was investigated from 869-894 MHz for Cellular.			

List of Figures:

Figure	Mode	Channel	Plot Description
9-1	AMPS	991	Emissions in base station frequency range, 869 - 894 MHz
9-2			Conducted spurious emissions, 9kHz to 10GHz
9-3		383	Emissions in base station frequency range, 869 - 894 MHz
9-4			Conducted spurious emissions, 9kHz to 10GHz
9-5		799	Emissions in base station frequency range, 869 - 894 MHz
9-6			Conducted spurious emissions, 9kHz to 10GHz
9-7	CDMA 800	1013	Emissions in base station frequency range, 869 - 894 MHz
9-8			Conducted spurious emissions, 9kHz to 10GHz
9-9		383	Emissions in base station frequency range, 869 - 894 MHz
9-10			Conducted spurious emissions, 9kHz to 10GHz
9-11		777	Emissions in base station frequency range, 869 - 894 MHz
9-12			Conducted spurious emissions, 9kHz to 10GHz
9-13	CDMA 1900	25	Conducted spurious emissions, 9kHz to 20GHz
9-14		600	Conducted spurious emissions, 9kHz to 20GHz
9-15		1175	Conducted spurious emissions, 9kHz to 20GHz

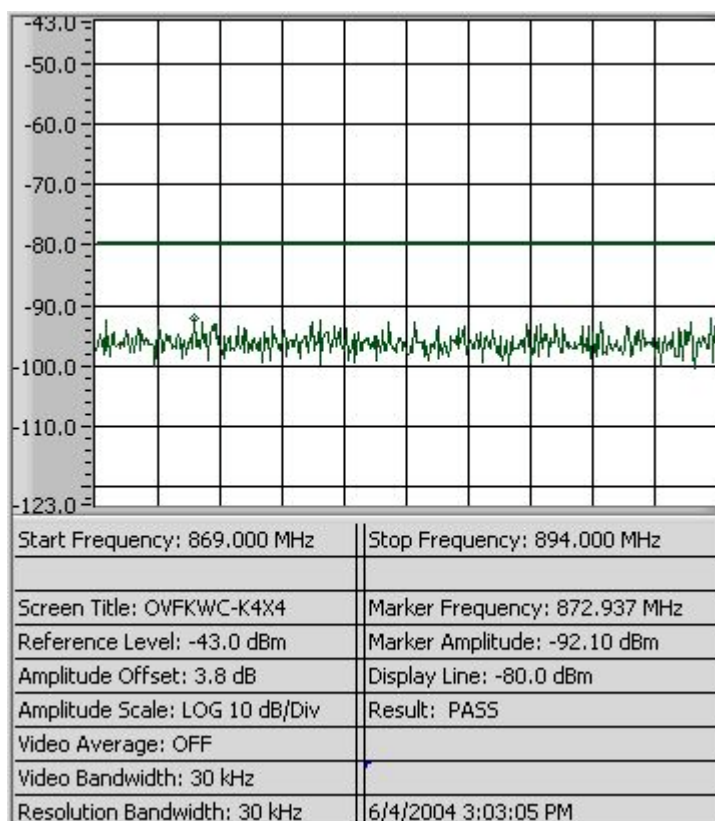


Figure 9-1 AMPS - Emissions in base station frequency range (CH 991)

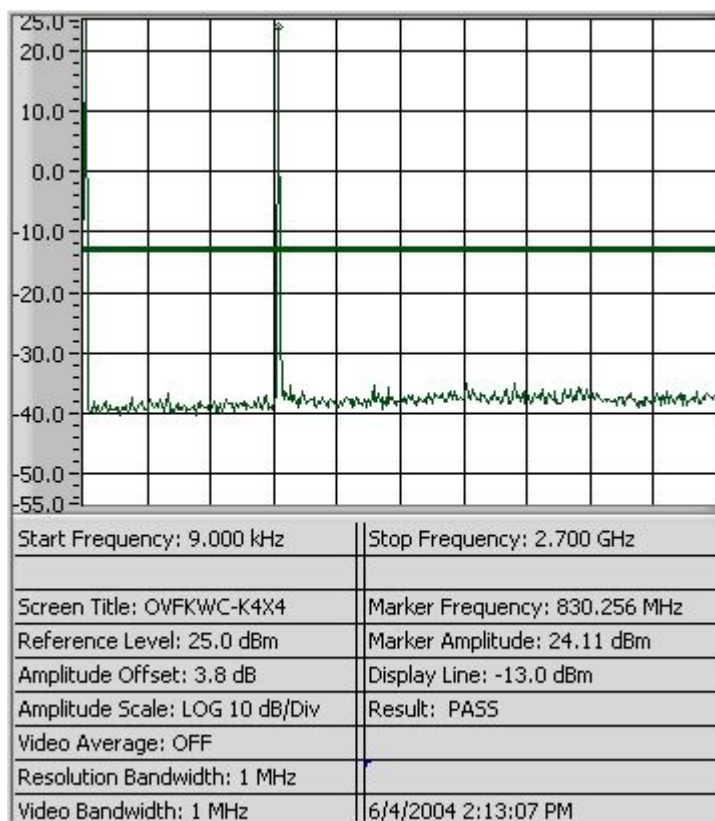


Figure 9-2a AMPS – Conducted Spurious Emission (CH 991)

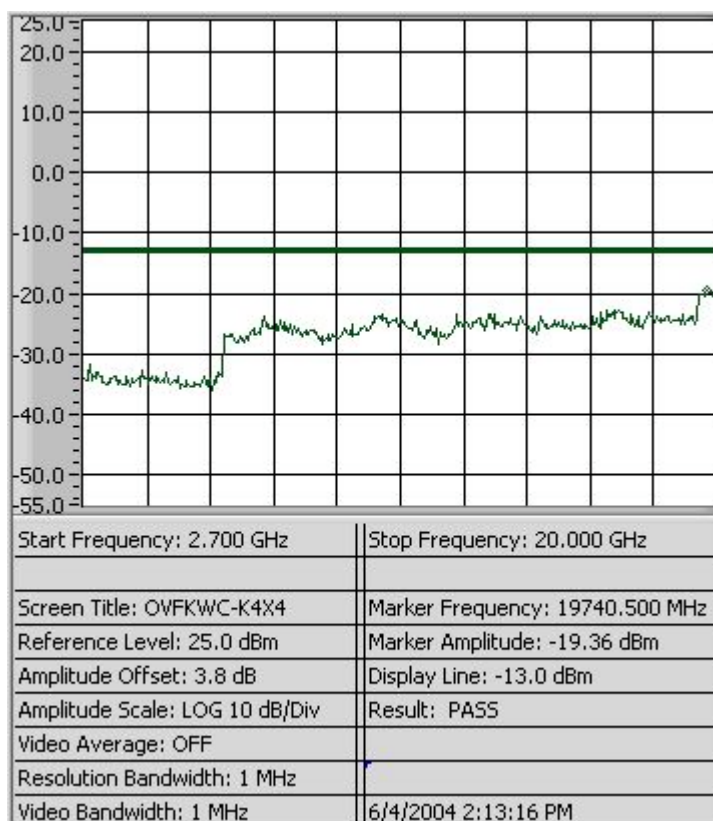


Figure 9-2b AMPS – Conducted Spurious Emission (CH 991)

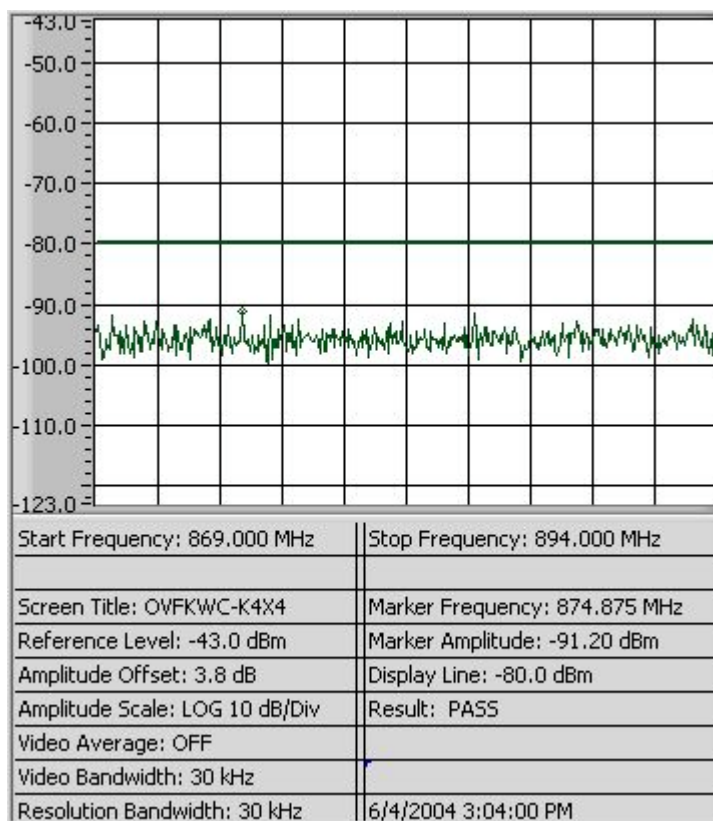


Figure 9-3 AMPS - Emissions in base station frequency range (CH 383)

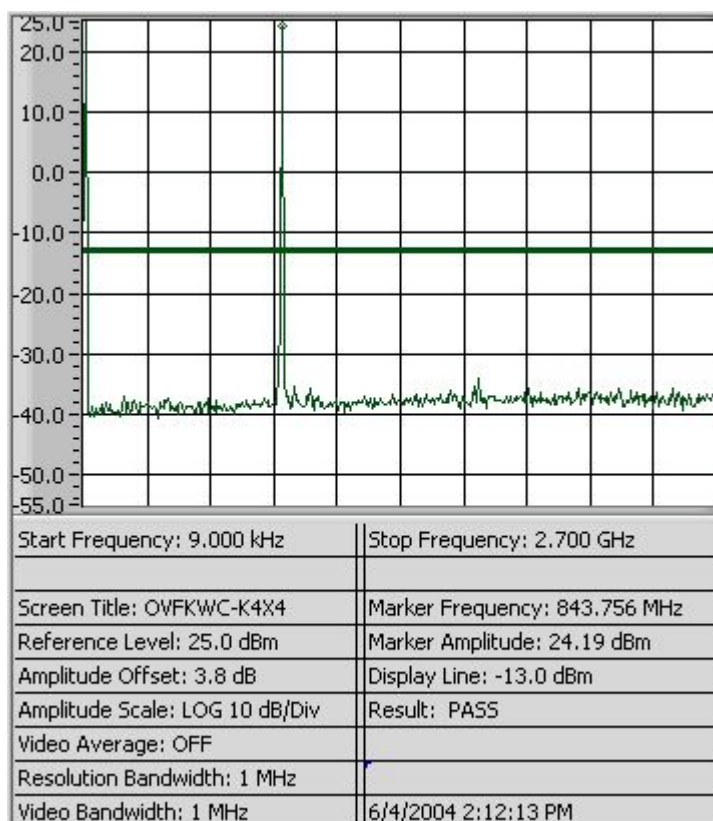


Figure 9-4a AMPS – Conducted Spurious Emission (CH 383)

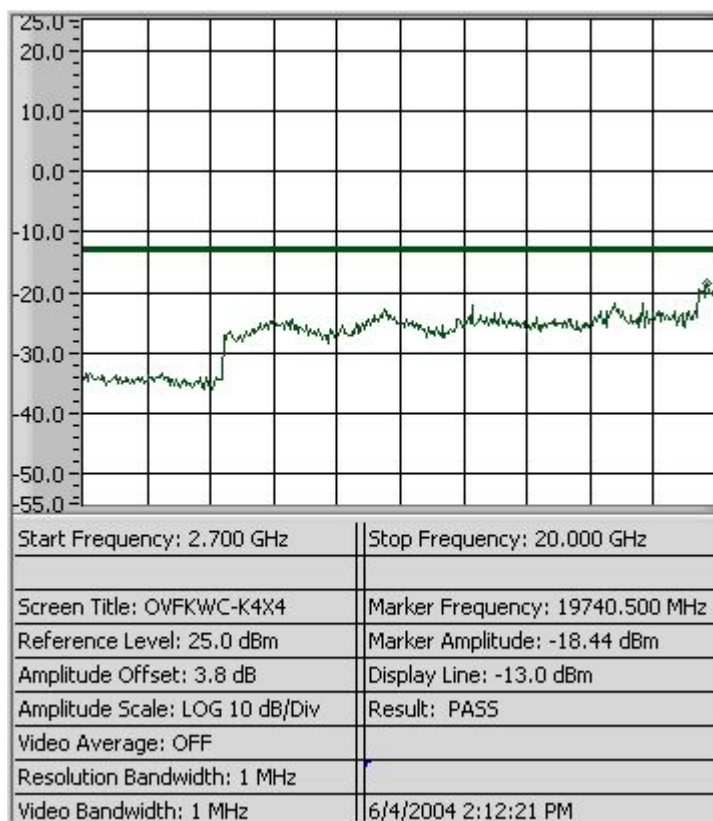


Figure 9-4b AMPS – Conducted Spurious Emission (CH 383)

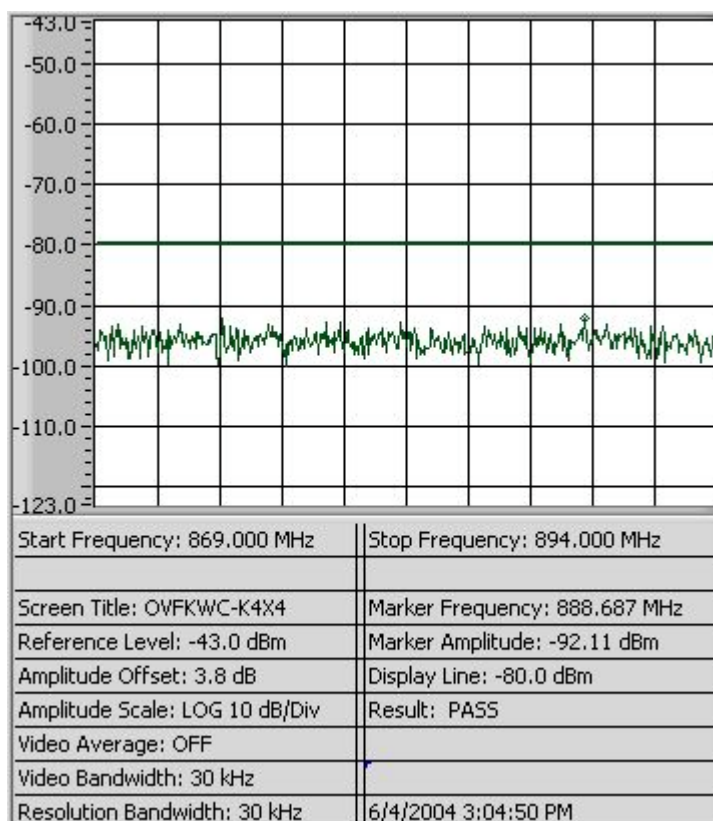


Figure 9-5 AMPS - Emissions in base station frequency range (CH 799)

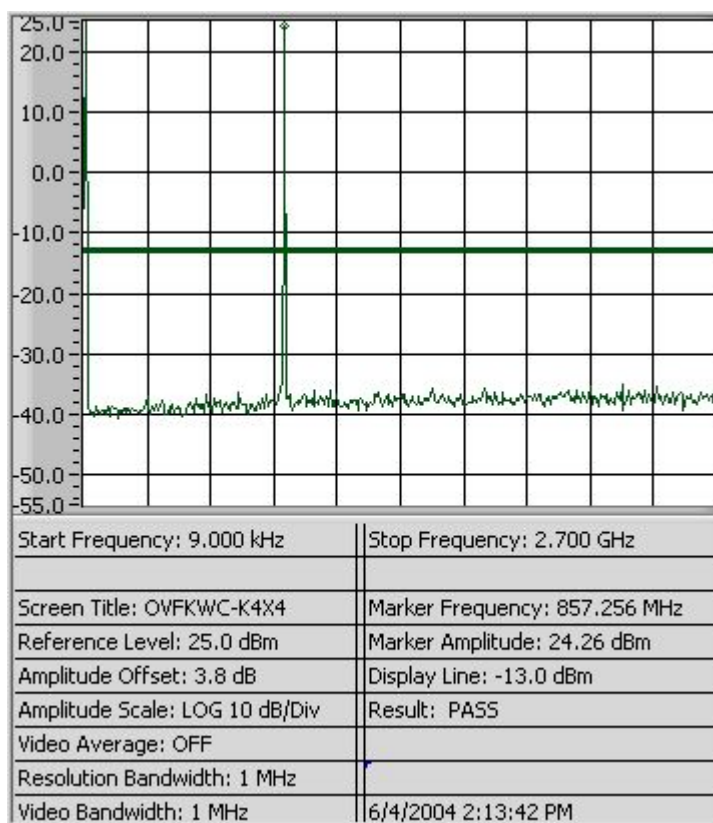


Figure 9-6a AMPS – Conducted Spurious Emission (CH 799)

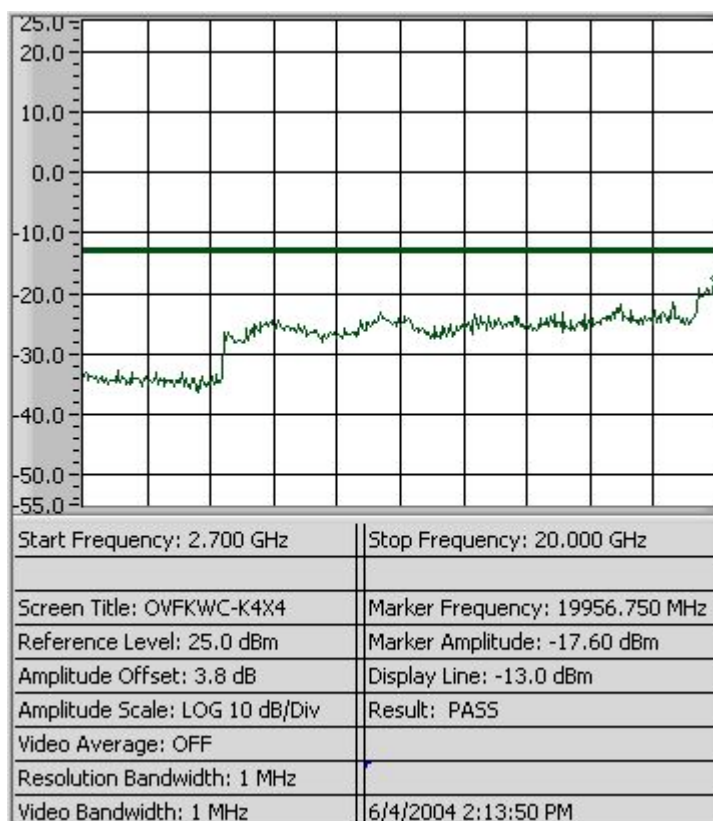


Figure 9-6b AMPS – Conducted Spurious Emission (CH 799)

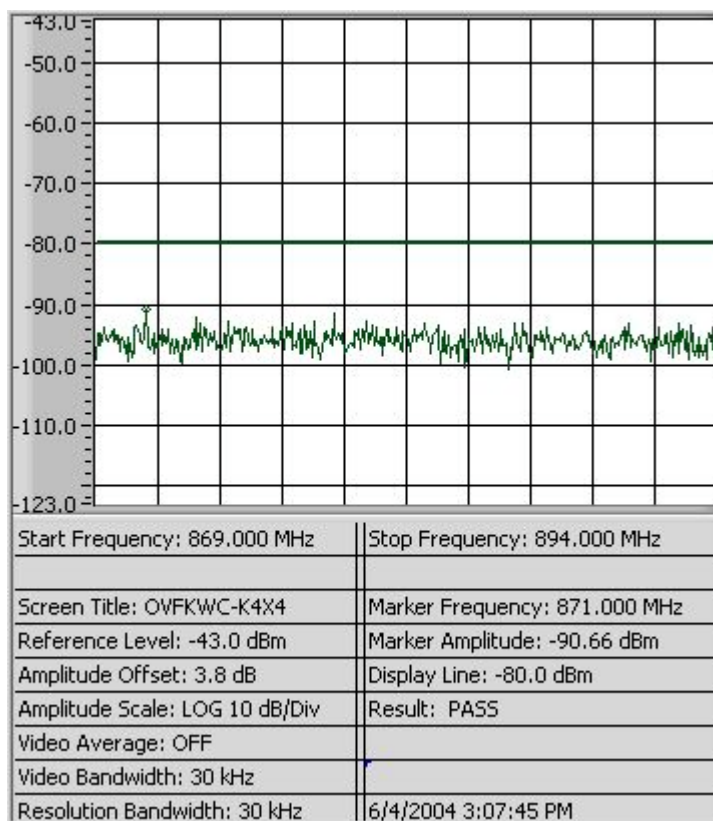


Figure 9-7 CDMA 800 - Emissions in base station frequency range (CH 1013)

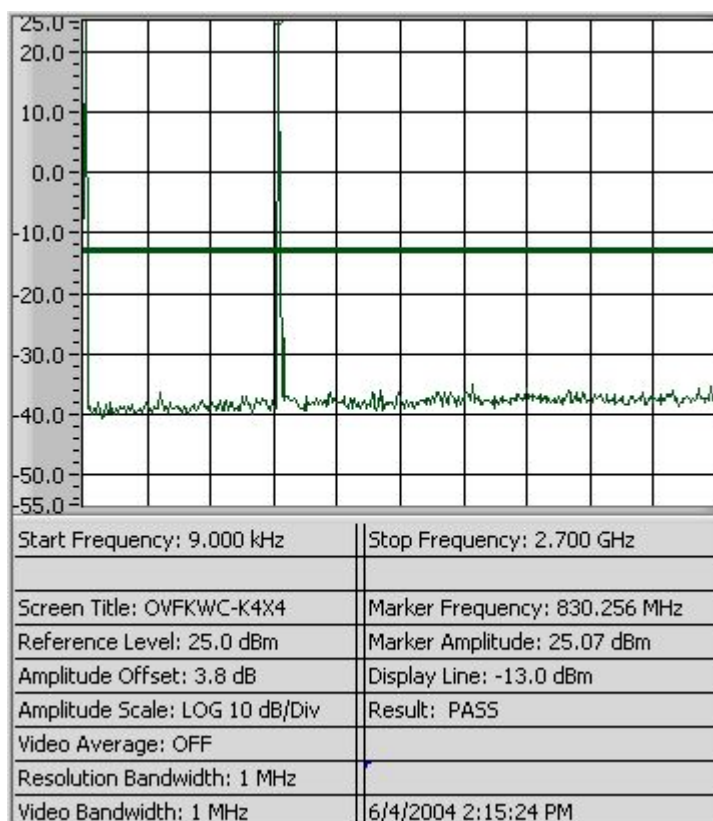


Figure 9-8a CDMA 800 – Conducted Spurious Emission (CH 1013)

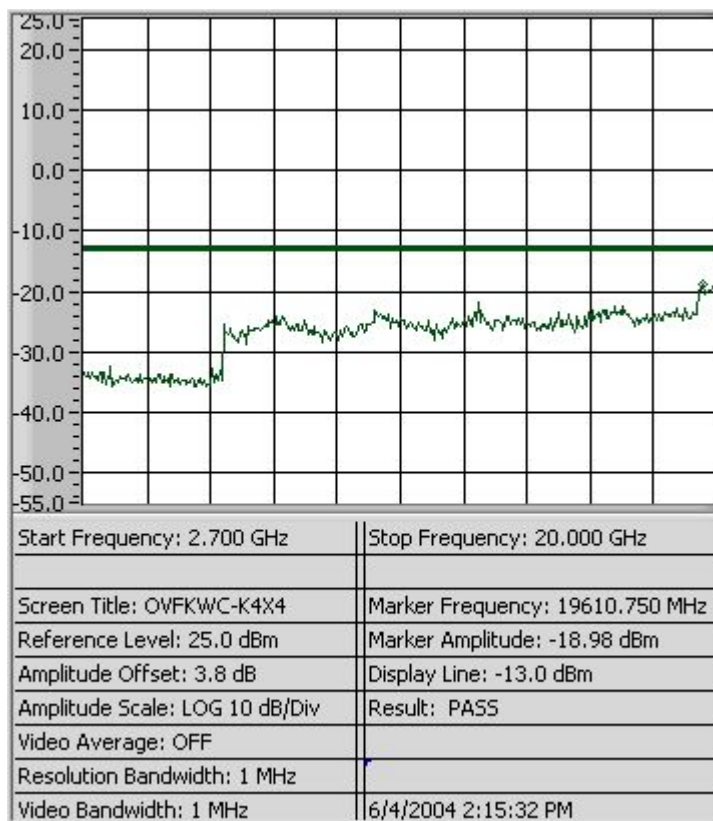


Figure 9-8b CDMA 800 – Conducted Spurious Emission (CH 1013)

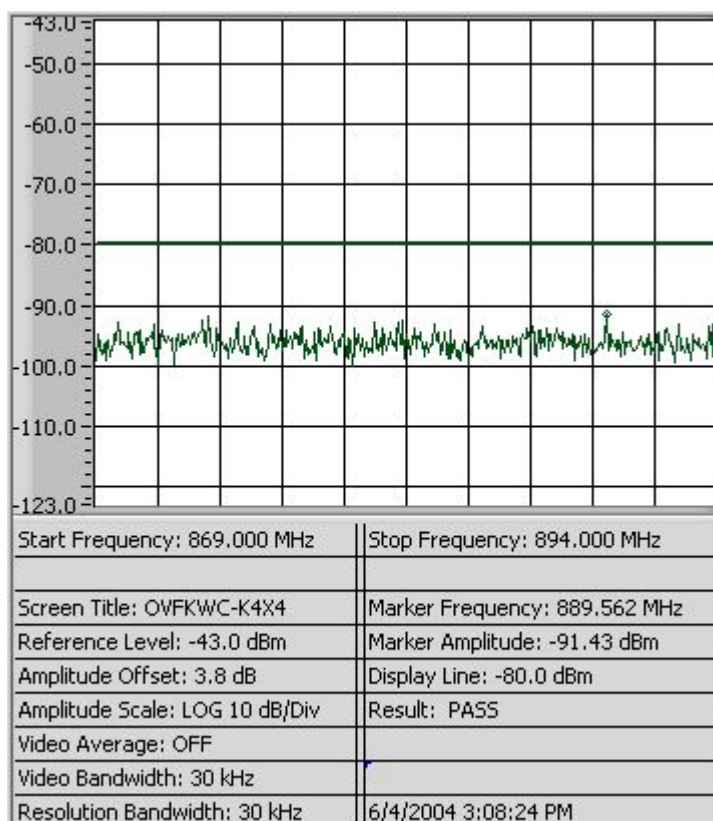


Figure 9-9 CDMA 800 - Emissions in base station frequency range (CH 383)

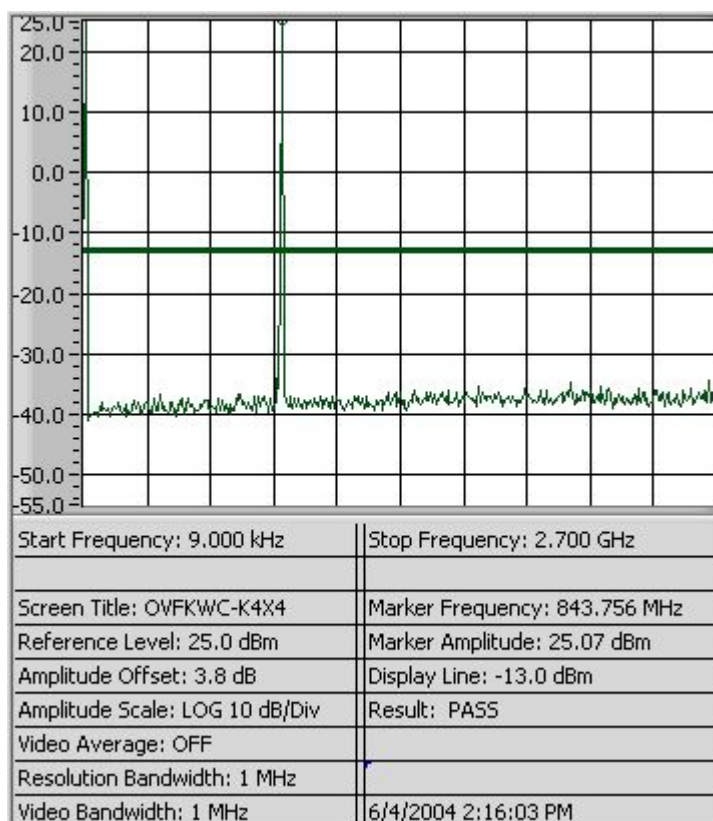


Figure 9-10a CDMA 800 – Conducted Spurious Emission (CH 383)

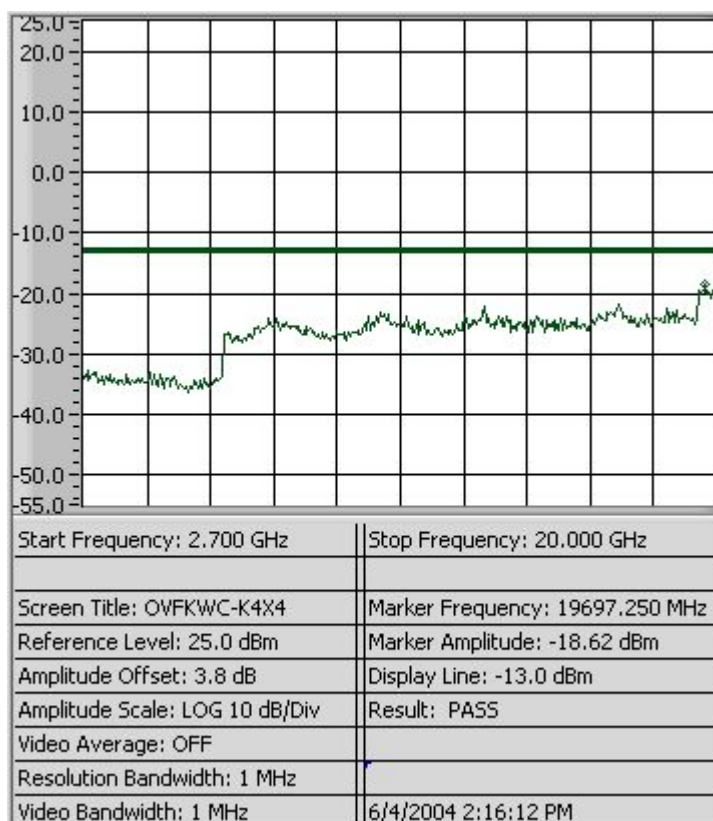


Figure 9-10b CDMA 800 – Conducted Spurious Emission (CH 383)

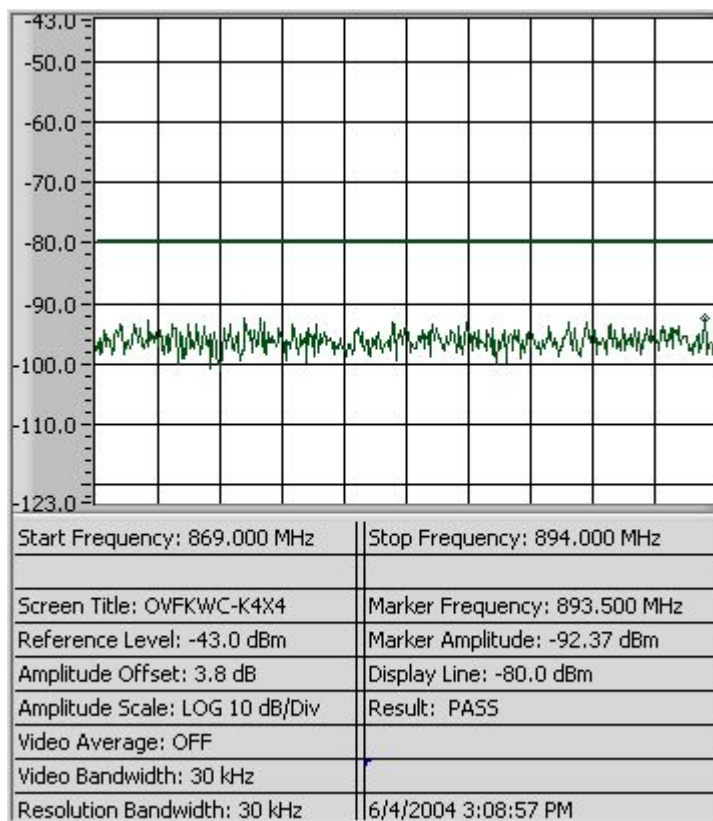


Figure 9-11 CDMA 800 - Emissions in base station frequency range (CH 777)

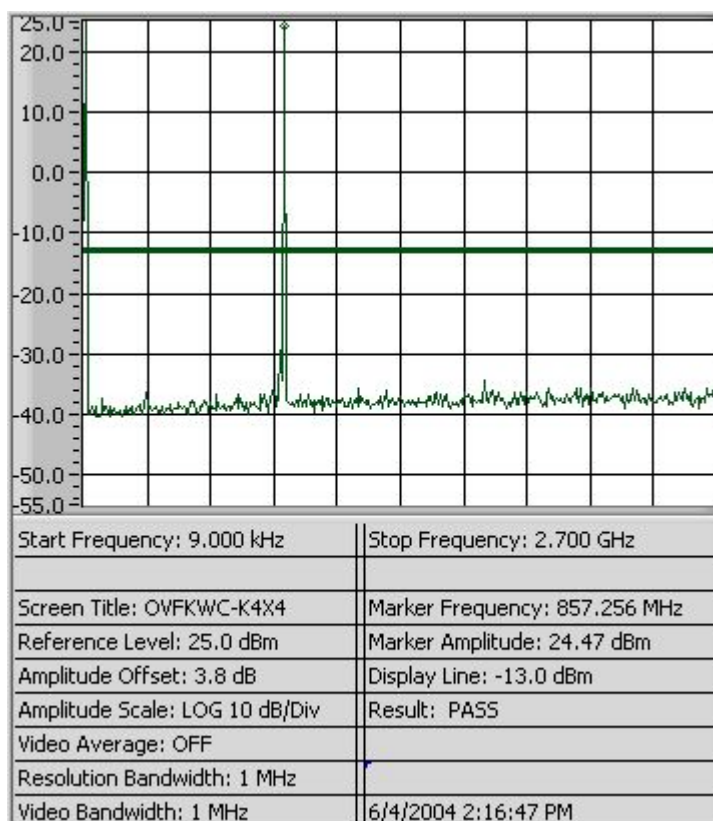


Figure 9-12a CDMA 800 – Conducted Spurious Emission (CH 777)

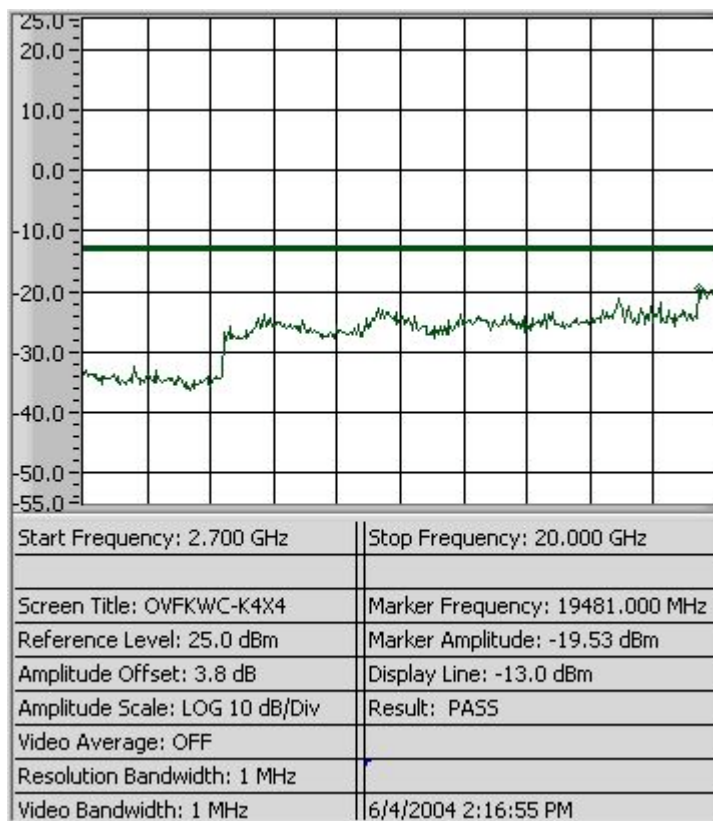


Figure 9-12b CDMA 800 – Conducted Spurious Emission (CH 777)

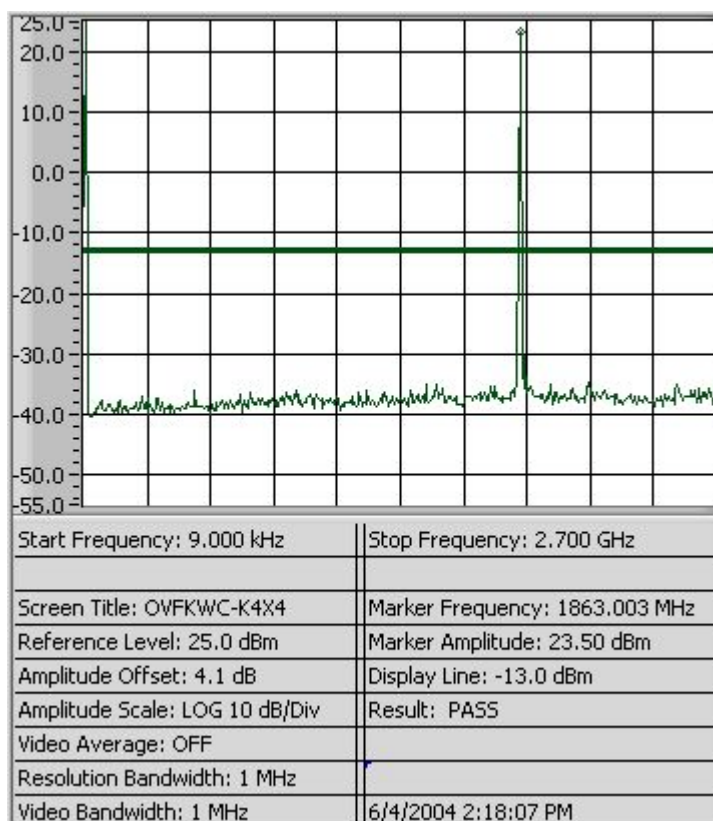


Figure 9-13a CDMA 1900 - Conducted Spurious Emission (CH 25)

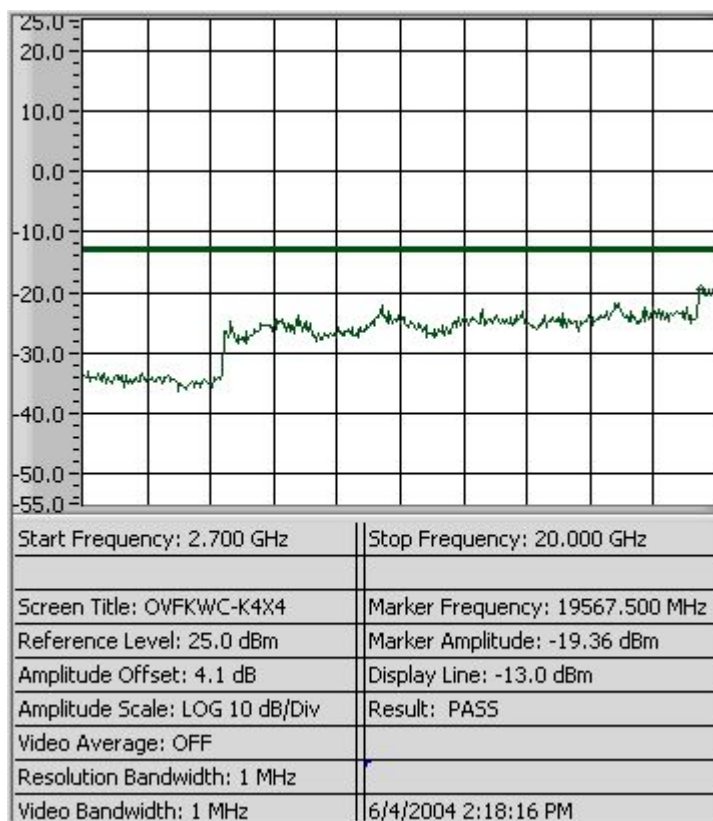


Figure 9-13b CDMA 1900 - Conducted Spurious Emission (CH 25)

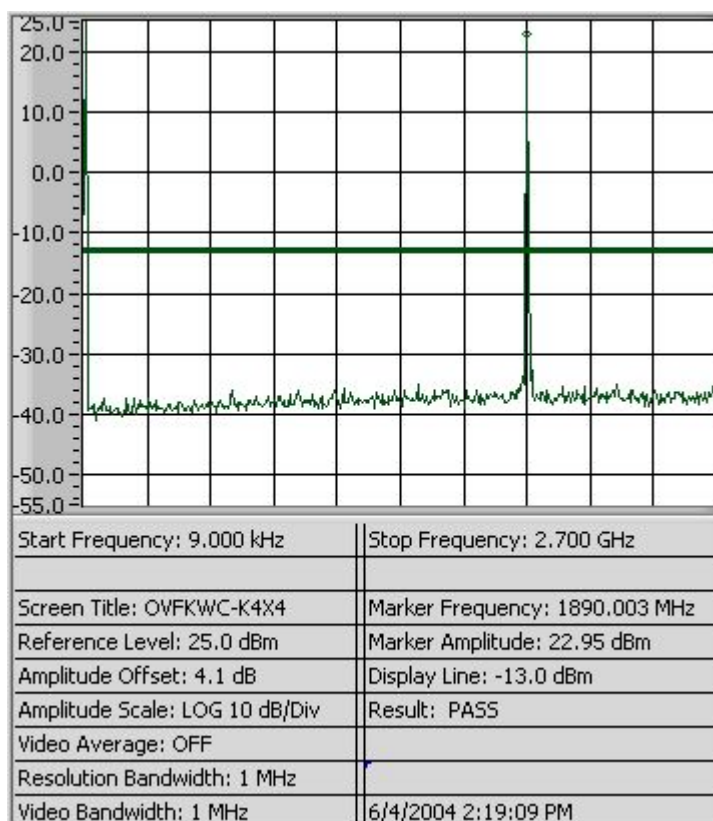


Figure 9-14a CDMA 1900 - Conducted Spurious Emission (CH 600)

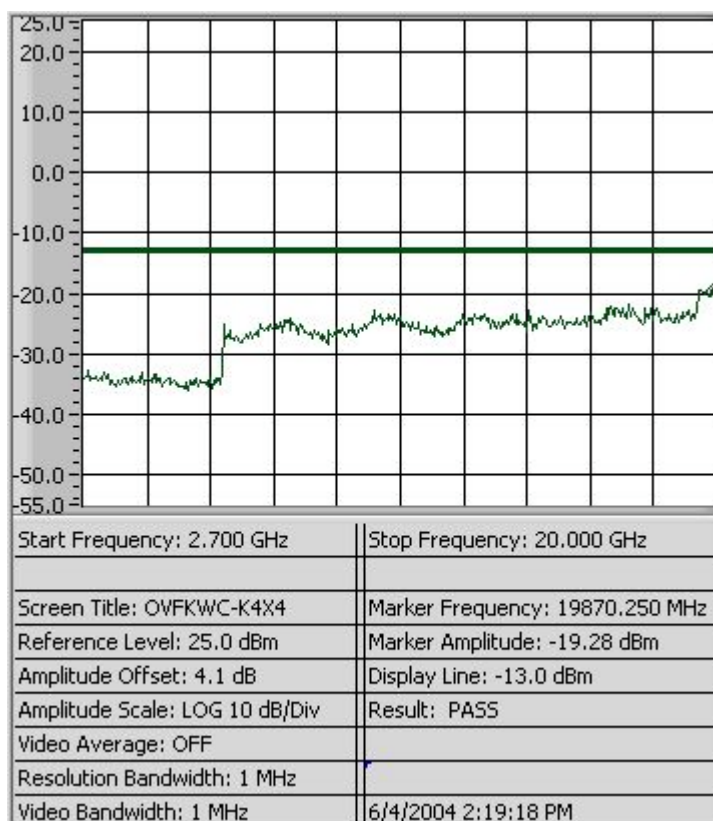


Figure 9-14b CDMA 1900 - Conducted Spurious Emission (CH 600)

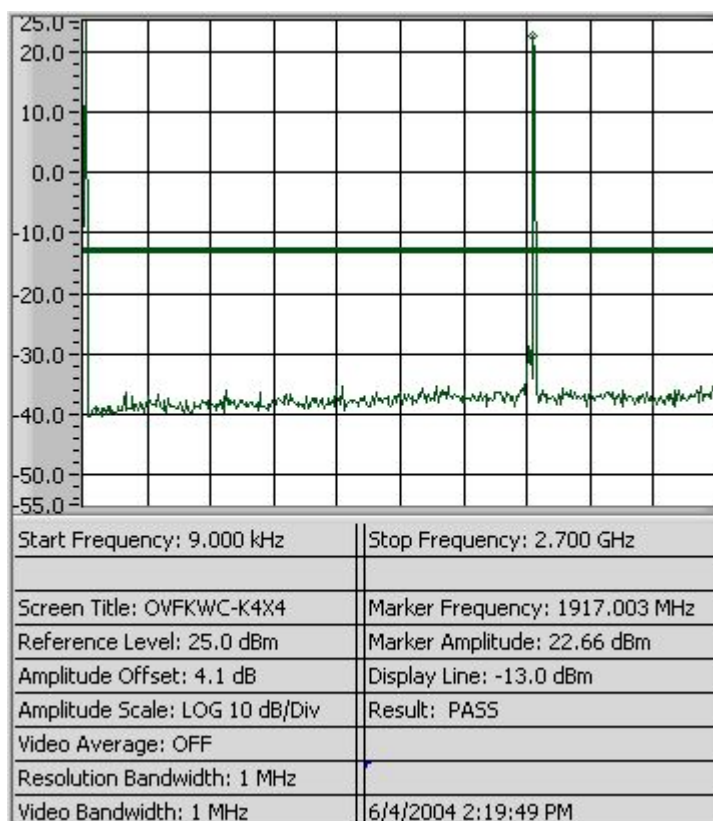


Figure 9-15a CDMA 1900 - Conducted Spurious Emission (CH 1175)

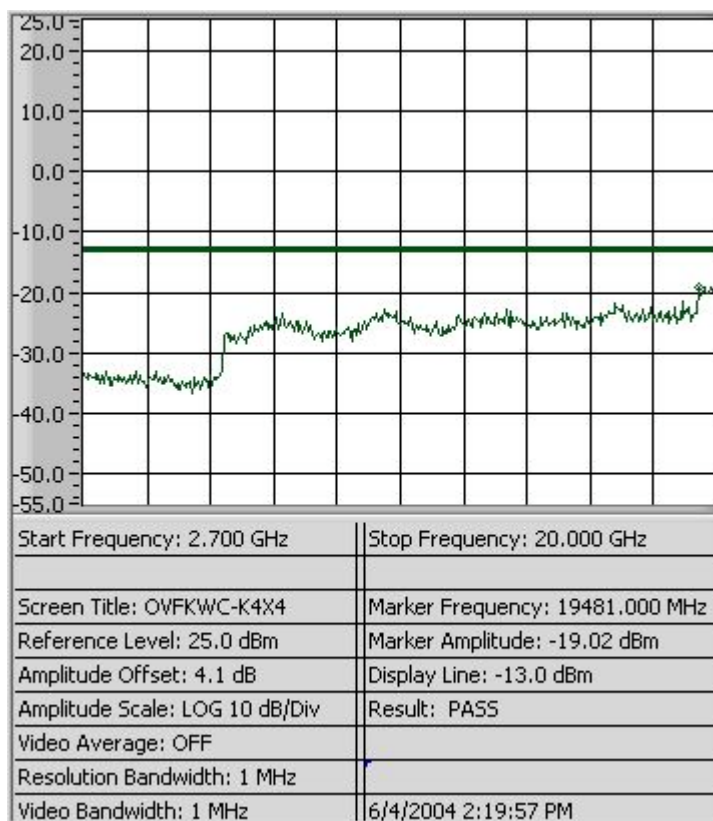


Figure 9-15b CDMA 1900 - Conducted Spurious Emission (CH 1175)

10 Transmitter Radiated Spurious Emissions Measured Data

FCC: § 2.1053, § 22.91, § 24.238	IC: RSS-129 §8.1, RSS-133 §6.3
Measurement Procedures: The radiated spurious emission test was performed at TUV in San Diego, California. The test report is attached in a separate attachment.	

11 Receiver Spurious Emissions

FCC: § 15.109	IC: RSS-129 §10, RSS-133 §9
Measurement Procedures: The receiver radiated spurious emission test was performed at TUV in San Diego, California. The test report is attached in a separate attachment.	

12 Transmitter RF Carrier Frequency Stability


FCC: § 2.1055, § 22.355, § 24.235	IC: RSS-129 §7.2 and §9.2, RSS-133 §7
Measurement Procedures: The EUT was placed in an environmental chamber. The RF output of the EUT was connected to Agilent 8960 Series 10 E5515C. A power supplier was connected as primary voltage supply.	

12.1 AMPS Mode

Tx Frequency:	836.49 MHz	Voltage :	3.7V
Tolerance:	+/- 2.5 Ppm (+/- 2091 Hz)	Ch:	383

Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)	
	3.2V (Battery endpoint)	3.7V	4.26V (115%)	Lower limit	Upper limit
-30		51.00		-2091	2091
-20		50.00		-2091	2091
-10		51.00		-2091	2091
0		51.00		-2091	2091
10		51.00		-2091	2091
20	50	49.00	49.00	-2091	2091
30		49.00		-2091	2091
40		50.00		-2091	2091
50		50.00		-2091	2091
60		49.00		-2091	2091


OVFKWC-K4X4 AMPS 800 MHz Transmit RF Carrier Stability Over Temperature and Voltage

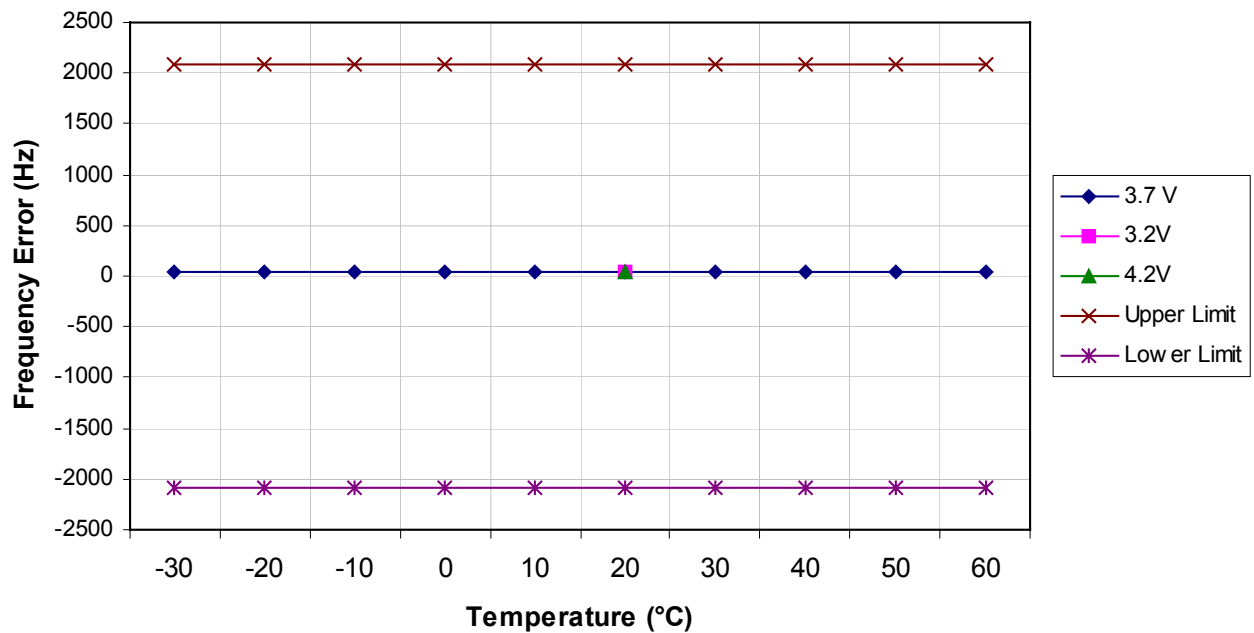

12.2 CDMA 800 Mode

Tx Frequency:	836.49 MHz	Voltage :	3.7V
Tolerance:	+/- 2.5 Ppm (+/- 2091 Hz)	Ch:	383

Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)	
	3.2V (Battery endpoint)	3.7V	4.26V (115%)	Lower limit	Upper limit
-30		-0.28		-2091	2091
-20		0.88		-2091	2091
-10		-0.05		-2091	2091
0		0.06		-2091	2091
10		0.31		-2091	2091
20	29.9	-0.58	0.45	-2091	2091
30		0.50		-2091	2091
40		-0.27		-2091	2091
50		-0.20		-2091	2091
60		0.01		-2091	2091

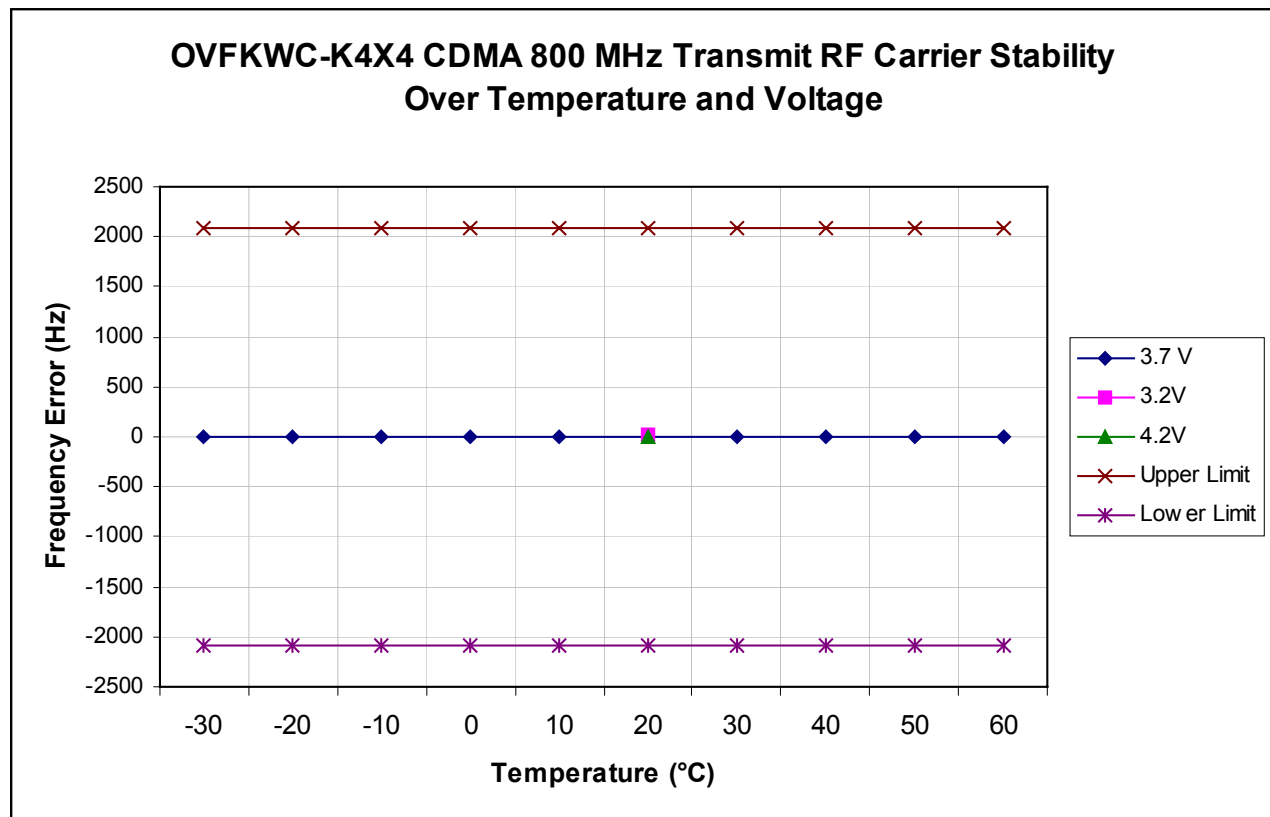


12.3 CDMA 1900 Mode

Tx Frequency:	1880.00 MHz	Voltage :	3.7V
Tolerance:	+/- 2.5 Ppm (+/-4700 Hz)	Ch:	600

Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)	
	3.2V (Battery endpoint)	3.7V	4.26V (115%)	Lower limit	Upper limit
-30		1.05		-4700	4700
-20		-0.58		-4700	4700
-10		1.40		-4700	4700
0		1.08		-4700	4700
10		1.33		-4700	4700
20	25.68	1.49	1.04	-4700	4700
30		-0.77		-4700	4700
40		0.70		-4700	4700
50		-0.65		-4700	4700
60		0.17		-4700	4700

OVFKWC-K4X4 CDMA 1900 MHz Transmit RF Carrier Stability Over Temperature and Voltage

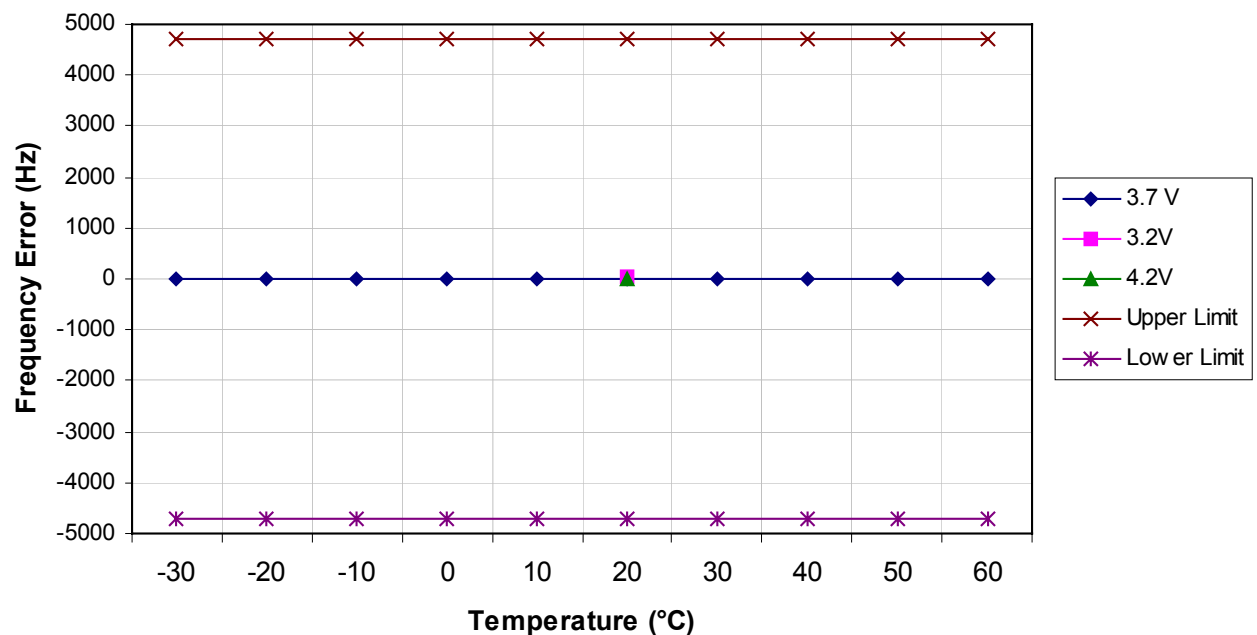

13 Exposure of Humans to RF Fields (SAR)

The SAR Test Report is showed in a separate attachment as Exhibit 9.

14 Test Equipment

Description	Manufacturer	Model Number	Serial Number	Cal Due Date
Power Meter	Giga-tronics	8541C	1835203	11/09/04
Power Meter Sensor	Giga-tronics	80601A	1830321	06/21/04
Spectrum Analyzer	Hewlett Packard	8593EM	3710A00203	04/30/05
Spectrum Analyzer	Hewlett Packard	8594E	3810A04238	04/16/06
Spectrum Analyzer	Hewlett Packard	3588A	3005A00111	02/19/05
Wireless Communications Test Set	Agilent	8960	US41140252	05/17/06
CDMA Mobile Station Test Set	Hewlett Packard	8924C	US37482647	04/22/06
PCS Interface	Hewlett Packard	83236B	3711303798	06/28/04
Temperature Chamber	CSZ	Z2033	Z9343034	04/02/05