

Appendix A:

Validation Test Plots

FCC 835MHz Validation@20.00dBm, Probe#1713, DAE#602, Dipole#454

Communication System: CW, Frequency: 835 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C


Validation Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.9 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.666 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

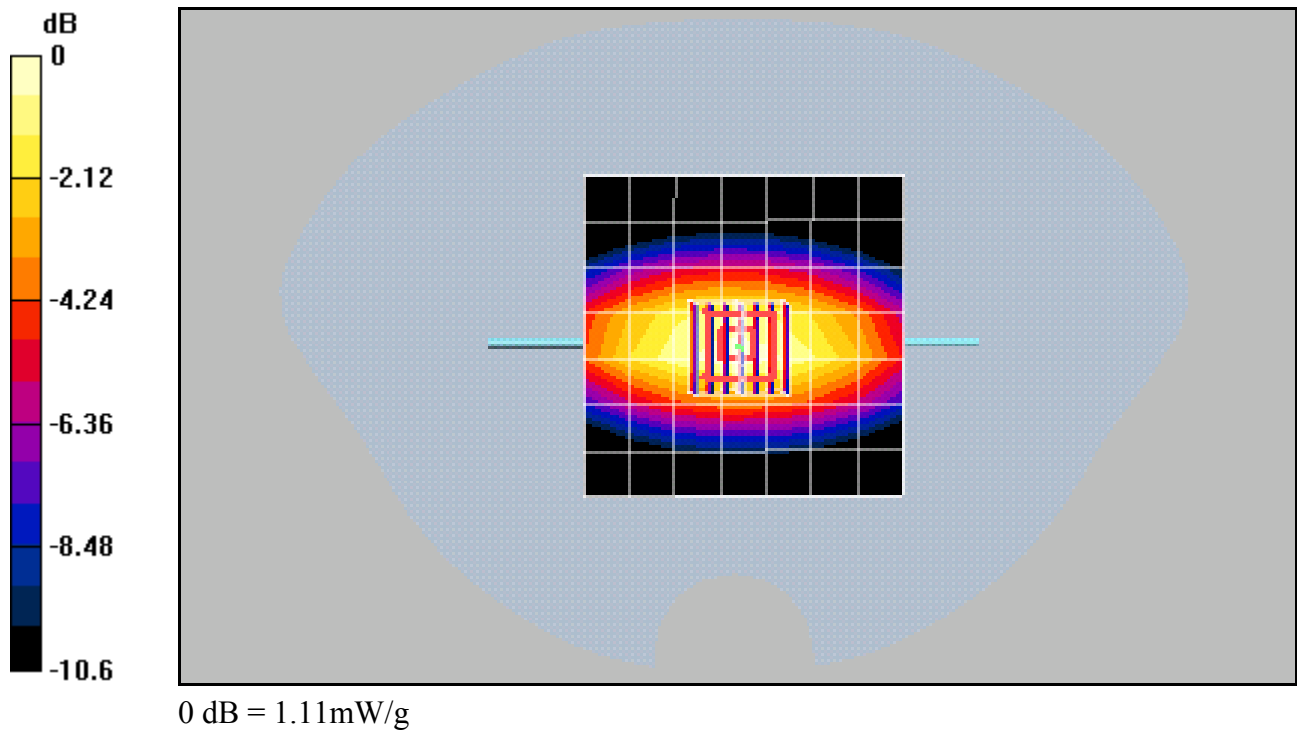

FCC 835MHz Validation@20.00dBm, Probe#1713, DAE#602, Dipole#454

Communication System: CW, Frequency: 835 MHz, Duty Cycle: 1:1

Medium: HSL900,Medium parameters used: $f = 835$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C


Validation Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.1 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.655 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

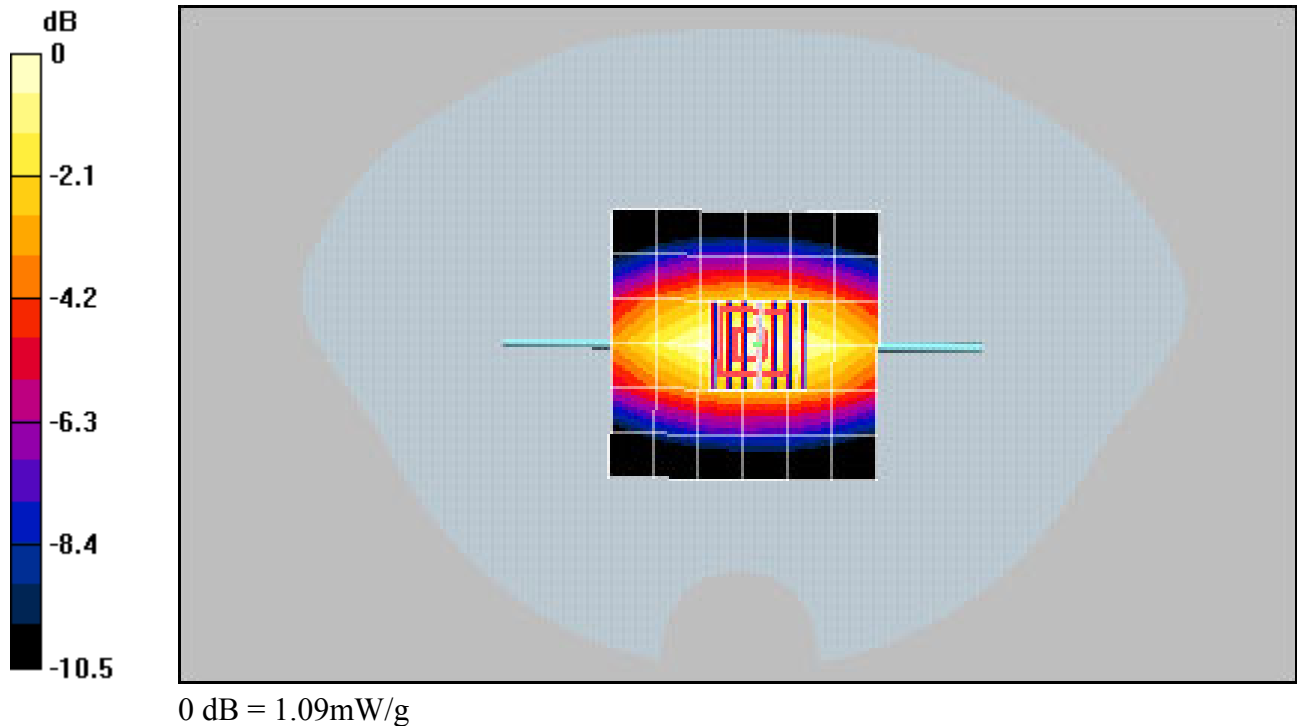

FCC 835MHz Validation@20.00dBm, Probe#1713, DAE#602, Dipole#454

Communication System: CW, Frequency: 835 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C


Validation Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.9 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 1.5 W/kg

SAR(1 g) = 0.997 mW/g; SAR(10 g) = 0.649 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

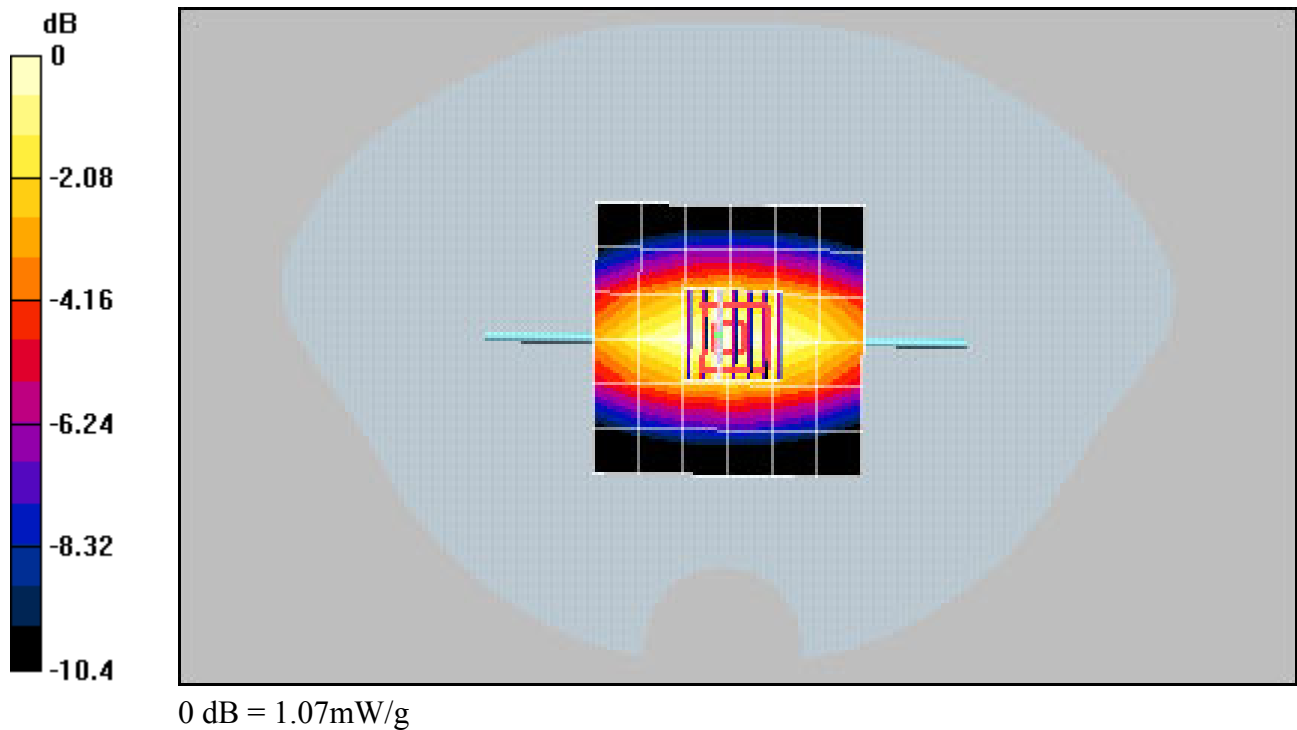

FCC 835MHz Validation@20.00dBm, Probe#1713, DAE#602, Dipole#454

Communication System: CW, Frequency: 835 MHz, Duty Cycle: 1:1

Medium: HSL900,Medium parameters used: $f = 835$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C


Validation Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.4 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.674 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

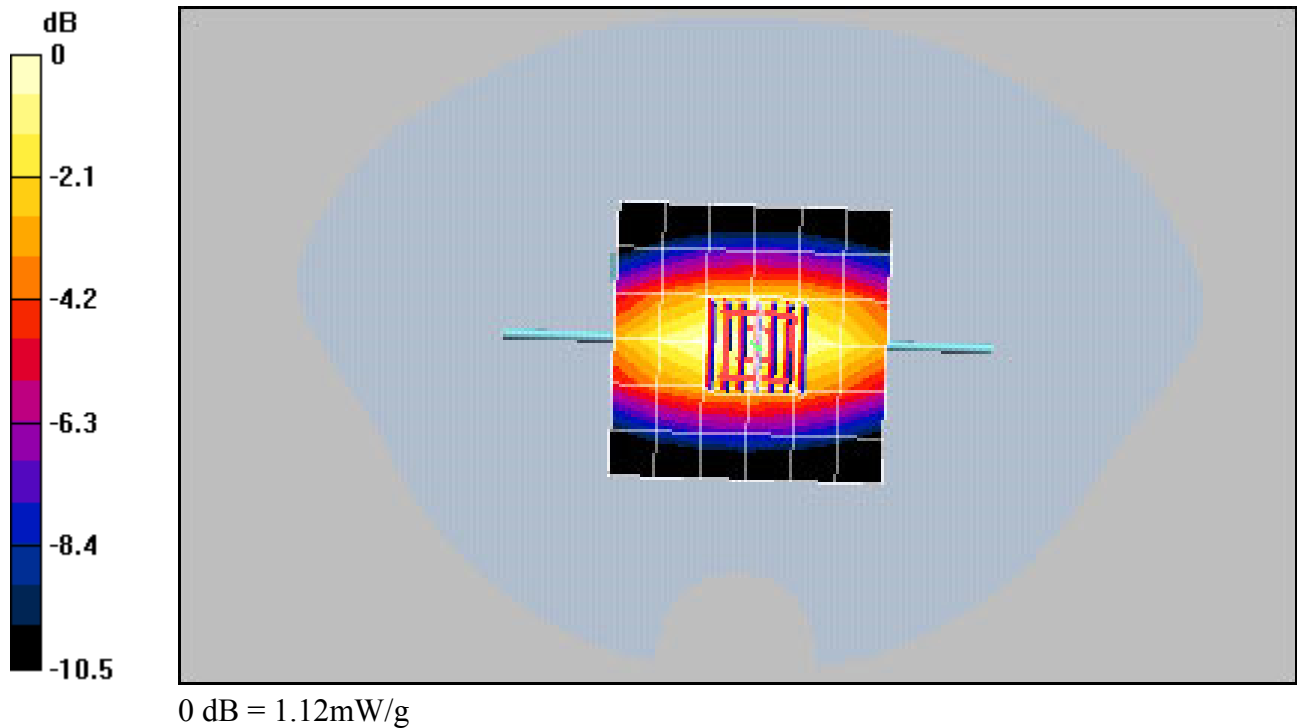

FCC 1900MHz Validation@20.00dBm, Probe#1713, DAE#602, Dipole#5d005

Communication System: CW 1900, Frequency: 1900 MHz, Duty Cycle: 1:1

Medium: HSL1800, Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.18, 5.18, 5.18), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:


Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

1900Mhz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.6 V/m; Power Drift = 0.0002 dB

Peak SAR (extrapolated) = 7.37 W/kg

SAR(1 g) = 4.24 mW/g; SAR(10 g) = 2.24 mW/g

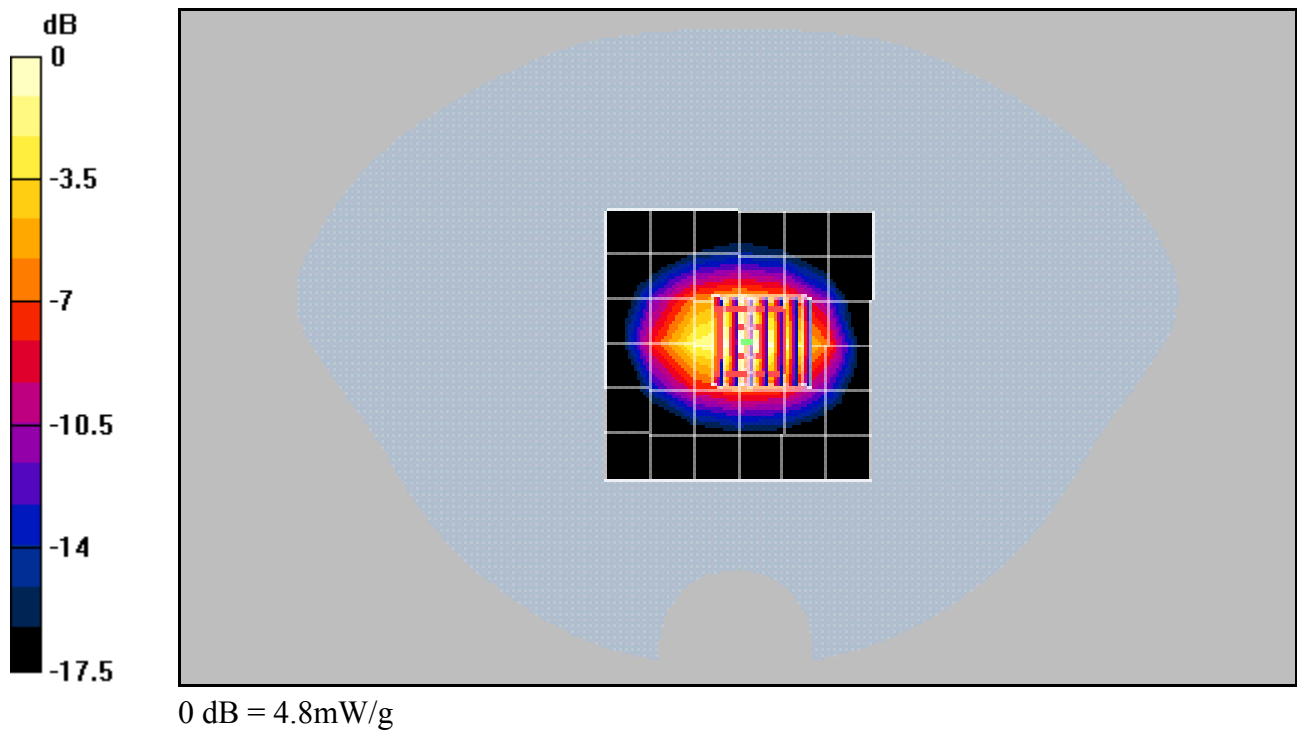

FCC 1900MHz Validation@20.00dBm, Probe#1713, DAE#602, Dipole#5d005

Communication System: CW 1900, Frequency: 1900 MHz, Duty Cycle: 1:1

Medium: HSL1800, Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.18, 5.18, 5.18), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:


Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

1900Mhz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.2 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 7.36 W/kg

SAR(1 g) = 4.21 mW/g; SAR(10 g) = 2.22 mW/g

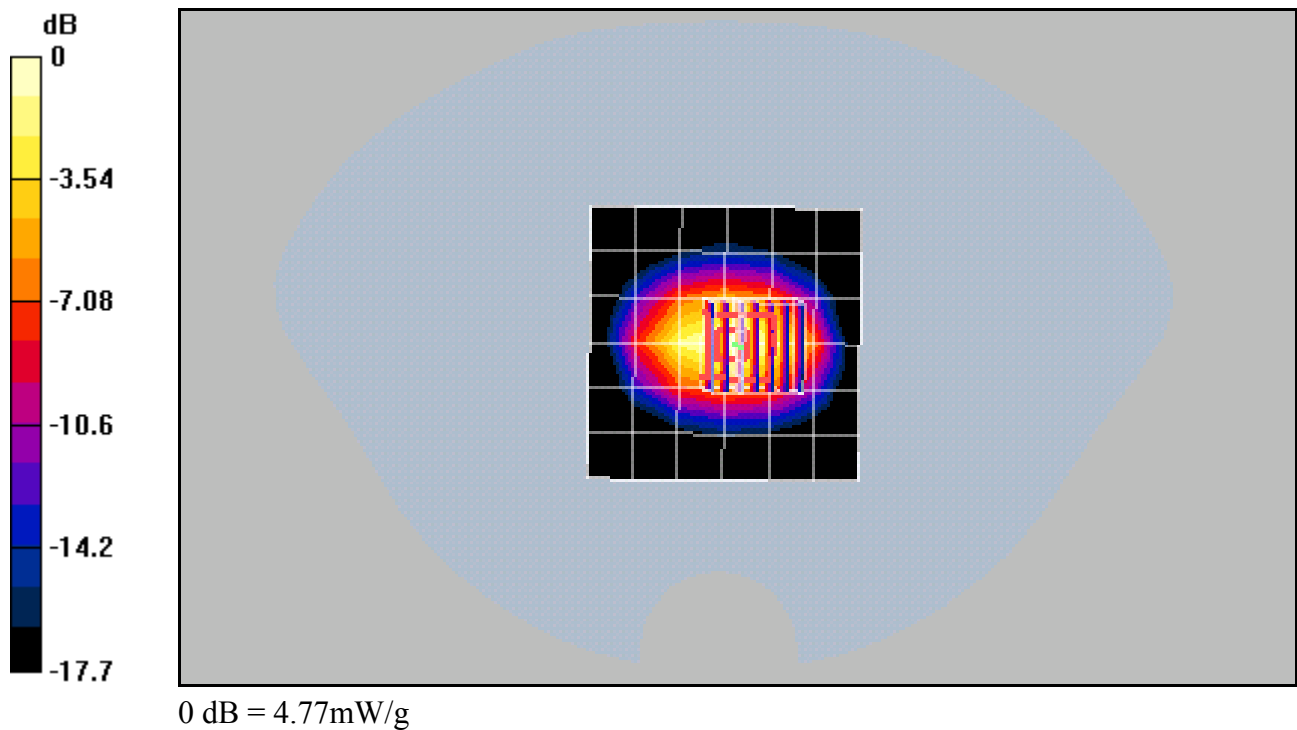

FCC 1900MHz Validation@20.00dBm, Probe#1713, DAE#602, Dipole#5d005

Communication System: CW 1900, Frequency: 1900 MHz, Duty Cycle: 1:1

Medium: HSL1800, Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.18, 5.18, 5.18), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

1900Mhz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.5 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 7.28 W/kg

SAR(1 g) = 4.2 mW/g; SAR(10 g) = 2.24 mW/g

