

TEST REPORT #300699

STANDARD: FCC PART 15

**SUBPART C--INTENTIONAL RADIATORS
SECTION 15.231 PERIODIC OPERATION IN
THE BAND 40.66-40.70 MHZ AND ABOVE 70 MHZ.**


EQUIPMENT TESTED:

ANALOG TECHNOLOGIES CORP

MODEL: 916.5 MHZ TRANSMITTER

TEST DATE: 30 JUNE 1999

1100 Falcon Avenue
Glencoe, MN 55336

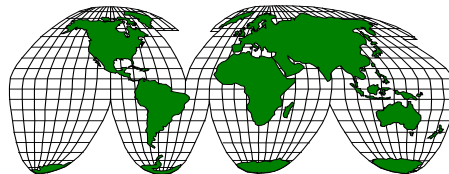

INTERNATIONAL
CERTIFICATION SERVICES, INC.

Tele: 320-864-4444
Fax: 320-864-6611

Prepared for:

Analog Technologies, Corp.
12140 12th Avenue South
Burnsville, MN 55337

Test agent:

International Certification Services, Inc.
1100 Falcon Avenue
Glencoe, MN 55336
Tele: 320-864-4444
Fax: 320-864-6611

Test location:

International Certification Services, Inc.
1100 Falcon Avenue
Glencoe, MN 55336
Tele: 320-864-4444
Fax: 320-864-6611

Prepared by:

International Certification Services, Inc.
1100 Falcon Avenue
Glencoe, MN 55336

International Certification Services represents to the client that testing is done in accordance with standard procedures applicable and that reported test results are accurate within generally accepted commercial ranges of accuracy.

This report only applies to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. International Certification Services shall have no liability for any deductions, inferences or generalizations drawn by the client or others from this report.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

INTERNATIONAL



CERTIFICATION SERVICES, INC.

1.0 TEST SUMMARY

TEST REPORT: #300699

COMPANY: Analog Technologies, Corp

AGENT: International Certification Services, Inc.

PHONE: 320-864-4444

TEST DATE: 30 June, 1999

EQUIPMENT UNDER TEST: 916.5 Mhz Hand Held battery powered Intentional Radiator.

GENERAL TEST SUMMARY: The testing was performed at International Certification Services, Inc. at 1100 Falcon Ave, Glencoe, MN 55336

VERIFICATION / CERTIFICATION STATUS: The 916.5 Mhz Transmitter was found to be in compliance with the FCC Part 15 Subpart C, Section 15.231 requirements.

MODIFICATIONS NECESSARY: None

TESTED BY

Gerald Heinen

WRITTEN BY

Duane R. Bagdons

INTERNATIONAL



CERTIFICATION SERVICES, INC.

Applicable Standards

47 CFR Ch.1 (10-1-98 Edition)

FCC Part 15 Radio Frequency Devices

Subpart C Intentional Radiators

Section 15.231 Periodic operation in the band 40.66-40.70 Mhz
and above 70 Mhz.

2.1 Referenced Standards

ANSI C63.4-1992 Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40 Ghz.

2.2 Equipment Units Tested

The equipment tested was a 916.5 Mhz ON-OFF KEYED (OOK) modulated hand held battery powered transmitter. This device is a hand held unit with no attached cables or protruding antenna. The antenna is a permanent component and is part of the internal PC board assembly. The unit is programmed to transmit a burst of OOK modulated signal of 35 mS when activated. This device is used as an alarm signal transmitter. When a disturbance is sensed, it will automatically transmit this above burst for 7 to 10 seconds before automatically shutting OFF. If a disturbance continues, it will remain OFF until the disturbance is removed for at least 30 seconds. This timing is controlled by firmware in the internal microprocessor.

2.3 Equipment and Cable Configuration

See photos of the EUT pc board and schematic and test configuration setup in Attachment A

2.4 List of Test Equipment

<u>Test Equipment</u>	<u>Model</u>	<u>S/N</u>	<u>Calibration Date</u>
Spectrum Analyzer	Hewlett-Packard 8566B	2421A00458	3/10/99
Preamp	MiniCircuits ZKL-2R7	N/A	6/1/99
Biconical Antenna	AH Systems Model SAS-200/540	328	6/16/99
Log Periodic Antenna (200-1000 MHz)	EMCO 3146	9111-3280	6/16/99
Horn Antenna (1-18 Ghz)	EMCO 3115	5697	3/5/99

Measurement cable losses, and antenna correction factors are included in the data sheets. Average detection methods were used in the measurements. The Resolution BW was set at 1 Mhz and the Video BW was set at 1 Hz with a Span of 0 Hz to perform the correct average detected measurements.

INTERNATIONAL



CERTIFICATION SERVICES, INC.

2.5 Units of Measurement.

All measurements were taken in dBuV/m with the antenna located at 3 meters distance from the EUT. Frequency measurements are recorded in Mhz. Input power to the intentional radiator was not recorded---only the radiated emissions with the internal transmitting antenna were recorded.

2.6 Location of Test Site

The open area test site (OATS) measurement facility used to collect the data was International Certification Services, Inc. at 1100 Falcon Ave in Glencoe, MN 55336. This site has been certified to be in spec of the normalized site attenuation per ANSI C63.4-1992. See letter of compliance from FCC dated July 23, 1998. (FCC 31040/SIT 1300F2)

2.7 Measurement Procedures

The antenna was placed at a distance of 3 meters from the EUT. The EUT was set on an insulating table in the OATS site and rotated through 360 degrees to determine the worst case EUT orientation. The antenna was then positioned vertical and horizontal to determine which antenna polarity orientation was worst case. Then certification data was recorded at all the transmitter frequencies from the fundamental to the 10th harmonic at an antenna height variation of from 1-4 meters.

2.8 Reporting Measurement Data

See data sheets and plots in Attachment B.

2.9 Radiated Emissions Data

The frequency and amplitude of the tuned frequency of the EUT along with the frequencies and amplitudes of the harmonics up to the 5th harmonic are reported in the data sheets in Attachment B. Signal frequencies above 5499.598 Mhz were below the noise floor of the measurement system. This information is plotted against the limit of section 15.231 of FCC Part 15 subpart C. Both Horizontal and Vertical antenna polarities as well as antenna heights of 1 to 4 meters were observed but all maximum signal strengths occurred in the Horizontal antenna polarity and at 1 meter antenna height.

The Final Level, expressed in dBuV/m, is arrived at by taking the reading from the spectrum analyzer (Level dBuV) and adding the antenna correction factor and cable loss factor (Factor dB) and subtracting the preamp gain. This result then has the FCC limit subtracted from it to provide the margin which gives the tabular data as shown in the data sheets in Attachment B.

Example:

Frequency Level + Factor = Corr Data - FCC Limit = Margin

INTERNATIONAL



CERTIFICATION SERVICES, INC.

$$\frac{\text{(MHz)}}{100.0} \quad \frac{\text{(dBuV)}}{20.6} + \frac{\text{(dB)}}{11.0} = \frac{\text{(dBuV/m)}}{31.6} - \frac{\text{(dBuV/m)}}{43.5} = \frac{\text{(dB)}}{-11.9}$$

2.10 Operating Frequency Data for Intentional Radiators

All operating frequencies and harmonic frequencies and ambient temperature at which all data was taken at is recorded in the data sheets in Attachment B.

2.11 Occupied Bandwidth Data for Intentional Radiators

The occupied BW data for the EUT is listed in the data sheets in Attachment B.

2.12 Summary of Results

The EUT passed the requirements of FCC Part 15 Subpart C, Section 15.231 with a minimum passing margin of –5.17457 dB (Average Detected signal) at the fundamental frequency of 916.587 Mhz. No modifications were necessary to accomplish this compliance.

INTERNATIONAL



CERTIFICATION SERVICES, INC.

ATTACHMENT A

RADIATED MEASUREMENT SCHEMATIC AND PHOTOS

INTERNATIONAL



CERTIFICATION SERVICES, INC.

**Model: 916.5 Mhz Transmitter Radiated Emissions
Test Configuration**




INTERNATIONAL



CERTIFICATION SERVICES, INC.

916.5 Mhz Transmitter Electrical Schematic

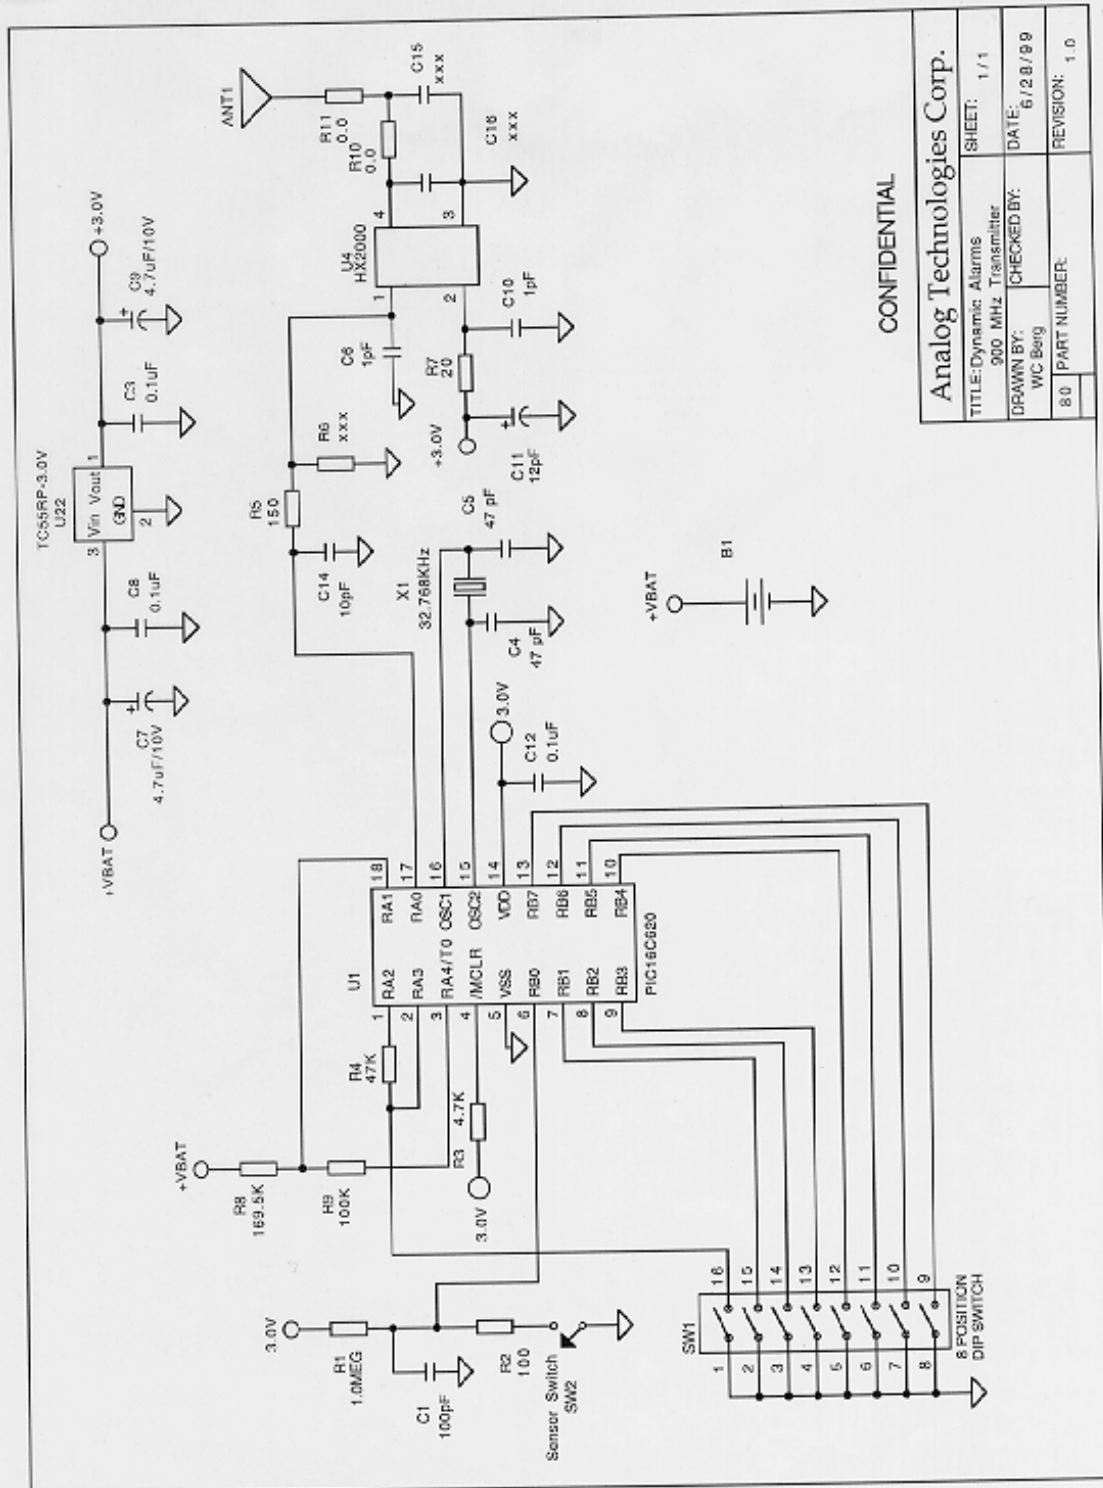

CONFIDENTIAL

Analog Technologies Corp.	
TITLE: Dynamic Alarms 900 MHz Transmitter	SHEET: 1 / 1
DRAWN BY: WC Berg	CHECKED BY: DATE: 6/28/99
80 PART NUMBER:	REVISION: 1.0

INTERNATIONAL



CERTIFICATION SERVICES, INC.

ATTACHMENT B

DETAILED TEST DATA SHEETS

Each radiated emissions plot indicates the receiving antenna measurement distance in meters and the emission amplitudes with respect to their applicable limits. The associated tabulation for each radiated plot lists the emission frequency, the final emission level, and the margin from the limit.

INTERNATIONAL




CERTIFICATION SERVICES, INC.

Analog Technologies, Corp
Model: 916.5 Mhz Transmitter
Temperature: 73 Deg F.
Humidity: 52 % R.H.

Test Technician: Gerald Heinen

Center Frequency: 916.5 Mhz

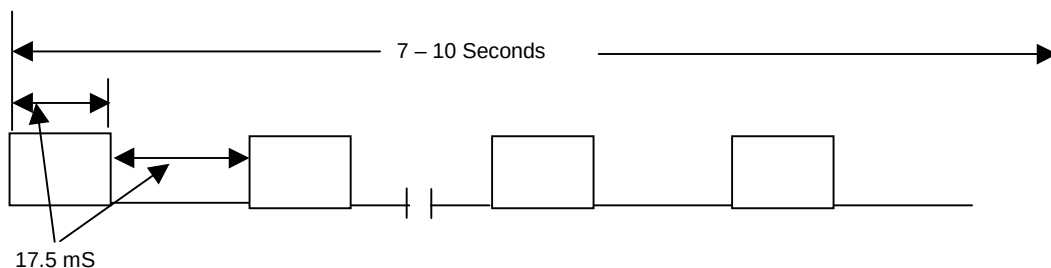

Transmit Burst Sequence Timing

INTERNATIONAL



CERTIFICATION SERVICES, INC.

Preliminary testing was done to determine what antenna polarity and antenna height generated the highest signal levels. Tests were performed at this test configuration and then each frequency was maximized to 0-360 degrees orientation and antenna height of 1-4 meters.

Transmit signal total BW = 946.6 KHz at 20 dBuV down from peak carrier amplitude

Initial testing was performed in the anechoic shield room to determine if there were any other spurious emissions other than the fundamental and its harmonics. No other emissions were found.

Certification testing was performed at the OATS site with an antenna distance of 3 meters and the EUT at 90 Degrees to the antenna.

The limit for section 15.231 is 12,500 uV/m with an Average Detector. This converted to dBuV is 81.938 dBuV/m which is the limit shown in the next table.

Freq (Mhz)	Avg Det	Preamp gain	Cable loss	Ant Corr Fac	Corr Data	FCC Limit (15.231)	Margin
	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB
916.587	85.343	33	1.32	23.1	76.763	81.938	-5.175
1833.191	38.201	33	1.55	26.6	33.351	81.938	-48.587
2798.04	34.082	33	1.68	30	32.762	81.938	-49.176
3666.381	25.296	33	1.83	32.7	26.826	81.938	-55.112
4582.994	28.818	33	2	32.6	30.418	81.938	-51.52
5499.598	20.749	33	2.18	34.8	24.729	81.938	-57.209
6416.095		33	2.27	35.3		81.938	
7332.877		33	2.4	36.6		81.938	
8249.32		33	2.55	37.55		81.938	
9165.514		33	2.7	38.3		81.938	


Signal frequencies above 5499.598 Mhz were in the ground floor noise and could not be recorded.

INTERNATIONAL



CERTIFICATION SERVICES, INC.

916.5 Mhz Transmitter

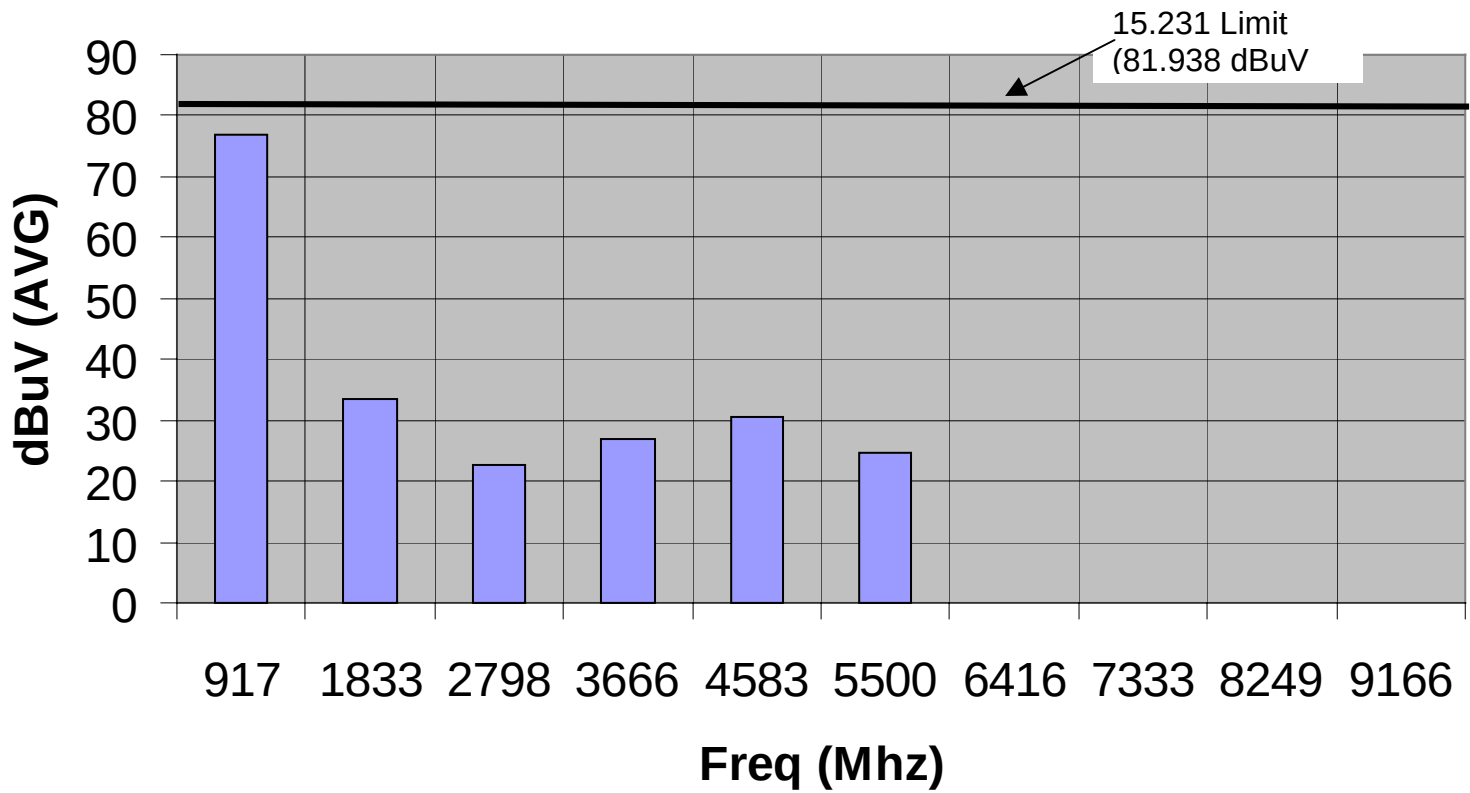

Transmitter Harmonic output levels at 3 meters

INTERNATIONAL



CERTIFICATION SERVICES, INC.

ATTACHMENT C

**PRODUCT DATA SHEET OR PRODUCT INFORMATION FORM AS
SUPPLIED BY THE CUSTOMER**

INTERNATIONAL



CERTIFICATION SERVICES, INC.

COMPANY NAME: Analog Technologies, Corp

CUSTOMER REPRESENTATIVE: International Certification Services, Inc.

EQUIPMENT DESCRIPTION: 916.5 Mhz hand held (ON- OFF KEYED OOK)
modulated Transmitter

MODEL NUMBER:

SERIAL NUMBER: Engineering Unit

TYPE OF TEST: ☐ Development
☐ Initial Design Verification
☐ Design Change (Please describe exact changes below)
☒ Production Sample (Audit Test)

Changes made: NONE

OSCILLATOR FREQUENCIES:

916.5 Mhz

PRODUCT SHIELDING PROVISION:

Plastic enclosure

SOFTWARE AND / OR OPERATING MODES:

The unit tested automatically transmitted a burst of pulses for 17.5 mS every 35 mS for a period of 7 to 10 seconds.

I/O CABLES: NONE

INTERNATIONAL



CERTIFICATION SERVICES, INC.