
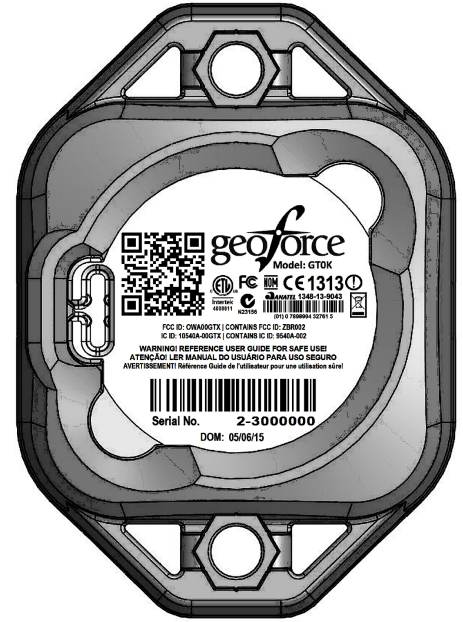


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
150402a	Initial release for certification	04/02/2015	BCT

Product Safety and Identification Markings shall be applied indelibly on a normally visible surface of the GT0. The following markings are required:

1. The Geoforce trademark
2. Geoforce type identification or model code
3. GT0 serial number (Human-readable and 1D barcode)
4. Trademark of the certificate issuer and respective filing number
5. Certifying body marks according to recognized standards
6. Specific customer warnings as applicable



APPLICABLE PRODUCT	PRODUCT REVISION LEVEL		NAME	DATE	 750 Canyon Drive, Suite 140 Coppell, TX 75019, USA 972-546-3878		
GT0	K		DRAWN	BCT			4/2/2015
			CHECKED	XXX			1/2/1901
			ENG APPR.	XXX			1/3/1901
			MFG APPR.	XXX			1/4/1901
UNTOLERANCED DIMENSIONS ARE BASIC			Q.A.	XXX	1/5/1901	TITLE: GT0 Product Markings	
			COMMENTS:				
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL $\pm 1/64$ ANGULAR: MACH $\pm 0.5\text{deg}$ BEND $\pm 2.0\text{deg}$ TWO PLACE DECIMAL ± 0.010 THREE PLACE DECIMAL ± 0.005			DO NOT SCALE DRAWING				
INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-2009			GEOFORCE PART NO.		GT0K	MANUF. PART NO. UNASSIGNED	
MATERIAL							
FINISH			SHEET FORMAT REVISION LEVEL: 1.0		SCALE: 1:1	WEIGHT:	
					SHEET 1 OF 1		

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
150402a	Initial release for certification	04/02/2015	BCT



EX/Safety Markings shall be applied indelibly on a normally visible surface of the GT1. The following markings are required:

1. The Geoforce trademark
2. Geoforce type identification or model code
3. GT1 serial number
4. Trademark of the certificate issuer and respective filing number
5. Certificate reference IDs from applicable certificate references (i.e. IECEx, ATEX, INMETRO) with required "X" for special conditions.
6. Explosive marking described below
7. Specific customer warnings as applicable



GT1K EX Marking

IECEX: EX ia IIC T4 Ga

ATEX: **CE** 0359 **Ex** II 1 G

INMETRO: Shares the IECEx marking

US NEC 500: Class I, Division 1 | Groups A-D T4


US NEC 505: Class I, Zone 0 | AEx ia IIC T4 Ga

CAN CSA: Class I, Zone 0 | Ex ia IIC T4 Ga

IECEX CERTIFICATE TEMPLATE: IECEx ETL99.9999X

ATEX CERTIFICATE TEMPLATE: ITS99ATEX99999

INMETRO CERTIFICATE TEMPLATE: NCCXX.99999X

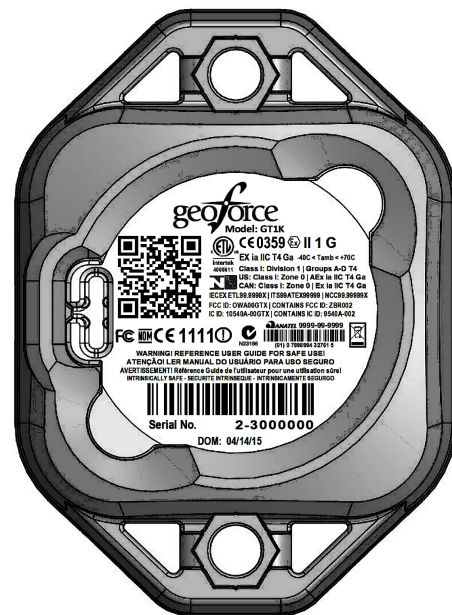

For INMETRO:

Placement of the INMETRO trademark and NCC certifying body mark required.

REQUIRED USER SAFETY WARNING ON PRODUCT:

English: WARNING! REFERENCE USER GUIDE FOR SAFE USE!

Portuguese: ATENÇÃO! LER MANUAL DO USUÁRIO PARA USO SEGURO

French Canadian: AVERTISSEMENT! Référence Guide de l'utilisateur pour une utilisation sûre!

REQUIRED USER SAFETY WARNINGS AND EX CONDITIONS IN USER GUIDE:

- WARNING! : ENSURE THIS PRODUCT IS PROPERLY EARTHED AND ELECTRICALLY BONDED TO ITS MOUNTING SURFACE DURING INSTALLATION.
- WARNING!: DO NOT MAKE USE OF THIS PRODUCT'S PASSIVE RFID FEATURES WHEN AN EXPLOSIVE OR HAZARDOUS ENVIRONMENT IS PRESENT.
- WARNING! : SUBSTITUTION OF COMPONENTS MAY IMPAIR INTRINSIC SAFETY
- ESD WARNING!: RISK OF ELECTRO-STATIC DISCHARGE! PERSONNEL SHOULD PROPERLY GROUND THEMSELVES PRIOR TO TOUCHING SURFACES OF THIS PRODUCT WHILE AN EXPLOSIVE OR HAZARDOUS ENVIRONMENT IS PRESENT.

APPLICABLE PRODUCT	PRODUCT REVISION LEVEL	NAME		DATE	 750 Canyon Drive, Suite 140 Coppell, TX 75019, USA 972-546-3878		
GT1	K	DRAWN	BCT	4/2/2015			
		CHECKED	XXX	1/2/1901			
		ENG APPR.	XXX	1/3/1901			
		MFG APPR.	XXX	1/4/1901	TITLE: GT1 Safety and EX Markings		
UNTOLERANCED DIMENSIONS ARE BASIC		Q.A.	XXX	1/5/1901			
 0.010 A B C		COMMENTS:					
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/64 ANGULAR: MACH ±0.5deg BEND ±2.0deg TWO PLACE DECIMAL ±0.010 THREE PLACE DECIMAL ±0.005							
INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-2009		DO NOT SCALE DRAWING			SIZE	DWG. NO.	DWG. REV
MATERIAL		GEOFORCE PART NO.			A	HW-2P-2-0046	150402a
FINISH		GT1K			MANUF. PART NO.		UNASSIGNED
		SHEET FORMAT REVISION LEVEL: 1.0			SCALE:1:1	WEIGHT:	SHEET 1 OF 1