



TEST REPORT

Report Reference No. : TRE1708023501 R/C.....: 46703

FCC ID..... : OWI-KW6515

Applicant's name : Kasda Networks inc

Address..... : 3/F, Building No.2, South No.2 Honghualing Industry Zone,
Tao Yuan Street, Nanshan, Shenzhen, China

Manufacturer..... : Kasda Networks inc

Address..... : 3/F, Building No.2, South No.2 Honghualing Industry Zone,
Tao Yuan Street, Nanshan, Shenzhen, China

Test item description : AC 1200Mbps Dual Band Wireless Router

Trade Mark : 

Model/Type reference..... : KW6515

Listed Model(s) : -

Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of receipt of test sample..... : Aug. 31, 2017

Date of testing..... : Sep. 05, 2017~ Oct. 20, 2017

Date of issue..... : Oct. 20, 2017

Result..... : PASS

Compiled by
(position+printedname+signature).... : File administrators Becky Liang



Supervised by
(position+printedname+signature).... : Project Engineer Jeff Sun



Approved by
(position+printedname+signature).... : RF Manager Hans Hu



Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,
Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report Version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation State	6
3.4.	EUT Configuration	6
3.5.	Modifications	6
<u>4.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental Conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
5.1.	Antenna Requirement	10
5.2.	Conducted Emissions (AC Main)	11
5.3.	Conducted Peak Output Power	14
5.4.	Power Spectral Density	15
5.5.	6dB Bandwidth	25
5.6.	Restricted Band	31
5.7.	Band Edge and Spurious Emissions (Conducted)	35
5.8.	Spurious Emissions (Radiated)	68
<u>6.</u>	<u>TEST SETUP PHOTOS</u>	<u>75</u>
<u>7.</u>	<u>EXTERANAL AND INTERNAL PHOTOS</u>	<u>77</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 DTS Meas Guidance v04](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating under §15.247

[KDB662911 D01 Multiple Transmitter Output v02r01](#): Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

[KDB662911 D02 MIMO with Cross-Polarized Antennas v01](#): MIMO with Cross-Polarized Antenna

1.2. Report Version

Version No.	Date of issue	Description
00	Oct. 20, 2017	Original

2. TEST DESCRIPTION

Test Item	FCC Rule	Result	Test Engineer
Antenna requirement	15.203/15.247(c)	Pass	William Wang
Line Conducted Emissions (AC Main)	15.207	Pass	William Wang
Conducted Peak Output Power	15.247(b)(3)	Pass	William Wang
Power Spectral Density	15.247(e)	Pass	William Wang
6dB Bandwidth	15.247(a)(2)	Pass	William Wang
Restricted band	15.247(d)/15.205	Pass	William Wang
Spurious Emissions	15.247(d)/15.209	Pass	William Wang

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	Kasda Networks inc
Address:	3/F, Building No.2, South No.2 Honghualing Industry Zone, Taoyuan Street, Nanshan, Shenzhen, China
Manufacturer:	Kasda Networks inc
Address:	3/F, Building No.2, South No.2 Honghualing Industry Zone, Taoyuan Street, Nanshan, Shenzhen, China

3.2. Product Description

Name of EUT:	AC 1200Mbps Dual Band Wireless Router
Trade Mark:	
Model No.:	KW6515
Listed Model(s):	-
Power supply:	DC 12V, 1A
Adapter information:	Model No.: RD1201000-C55-26MG Input: AC 100-240V, 50/60Hz, 0.6A Max Output: DC 12V, 1A
Hardware version:	Rev1.1
Software version:	-
WIFI	
Supported type:	802.11b/802.11g/802.11n(HT20)/802.11n(HT40)
Modulation:	DSSS for 802.11b OFDM for 802.11g/802.11n(HT20)/802.11n(HT40)
Operation frequency:	2412MHz~2462MHz for 802.11b/802.11g/802.11n(HT20) 2422MHz~2452MHz for 802.11n(HT40)
Channel number:	11 for 802.11b/802.11g/802.11n(HT20) 7 for 802.11n(HT40)
Channel separation:	5MHz
Antenna number:	2 Transmit 2 Receive
Antenna gain:	5 dBi

Note: 802.11b/802.11g is SISO mode only

802.11n(HT20)/802.11n(HT40) is MIMO mode only

Directional gain of MIMO mode is $5+10\log 2=8\text{dBi}$

3.3. Operation State

➤ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

802.11b/g/n(HT20)		802.11n(HT40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	01	-
02	2417	02	-
03	2422	03	2422
04	2427	04	2427
05	2432	05	2432
06	2437	06	2437
07	2442	07	2442
08	2447	08	2447
09	2452	09	2452
10	2457	10	-
11	2462	11	-

➤ Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For RF test axis
EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

3.4. EUT Configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	/	Manufacturer:	/
		Model No.:	/
○	/	Manufacturer:	/
		Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.39 dB	(1)
Radiated Emissions 30~1000MHz	4.24 dB	(1)
Radiated Emissions 1~18GHz	5.16 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.5. Equipments Used during the Test

Line Conducted Emission (AC Main)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	R&S	ESCI	101247	2016/11/13
2	Artificial Mains	Shwarzbeck	NNLK 8121	573	2016/11/13
3	Pulse Limiter	R&S	ESH3-Z2	101488	2016/11/13
4	Test Software	R&S	ES-K1	N/A	N/A
5	Test cable	ENVIROFLEX	3651	1101902	2016/11/13

Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2016/11/13
2	Power Meter	Anritsu	ML2480B	100798	2016/11/13
3	Power Sensor	Anritsu	MA2411B	100258	2016/11/13
4	Test cable	FARPU	MCX-J	N/A	2016/11/13
5	Temporary antenna connector	D-LENP	NJ-SMAK	N/A	2016/11/13

NOTE: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	Rohde&Schwarz	ESI 26	100009	2016/11/13
2	RF Test Panel	Rohde&Schwarz	TS / RSP	335015/0017	N/A
3	EMI Test Software	Rohde&Schwarz	ESK1	N/A	N/A
4	Loop Antenna	Rohde&Schwarz	HZ-9	838622\013	2016/11/13
5	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2016/11/13
6	Horn Antenna	ShwarzBeck	9120D	1011	2016/11/13
7	Broadband Horn Antenna	Shwarzbeck	BBHA9170	BBHA9170472	2016/11/13
8	Preamplifier	Shwarzbeck	BBV9742	9742-196	2016/11/13
9	Broadband Preamplifier	Shwarzbeck	BBV 9721	9721-102	2016/11/13
10	Broadband Preamplifier	Shwarzbeck	BBV 9718	9718-247	2016/11/13
11	Turn Table	MATURO	TT2.0	/	N/A
12	Antenna Mast	MATURO	TAM-4.0-P	/	N/A
13	EMI Test Software	Audix	E3	N/A	N/A
14	Test Software	R&S	ES-K1	N/A	N/A
15	Test cable	Siva Cables Italy	RG 58A/U	W14.02	2016/11/13

The Cal.Interval was one year.

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

REQUIREMENT:

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

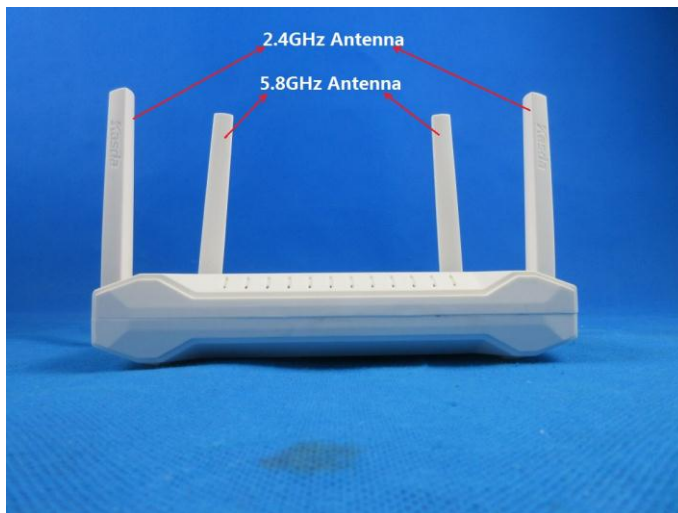
FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



5.2. Conducted Emissions (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

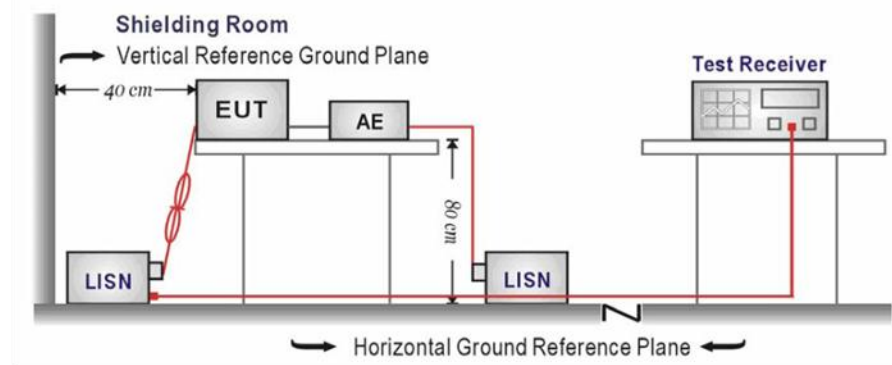TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

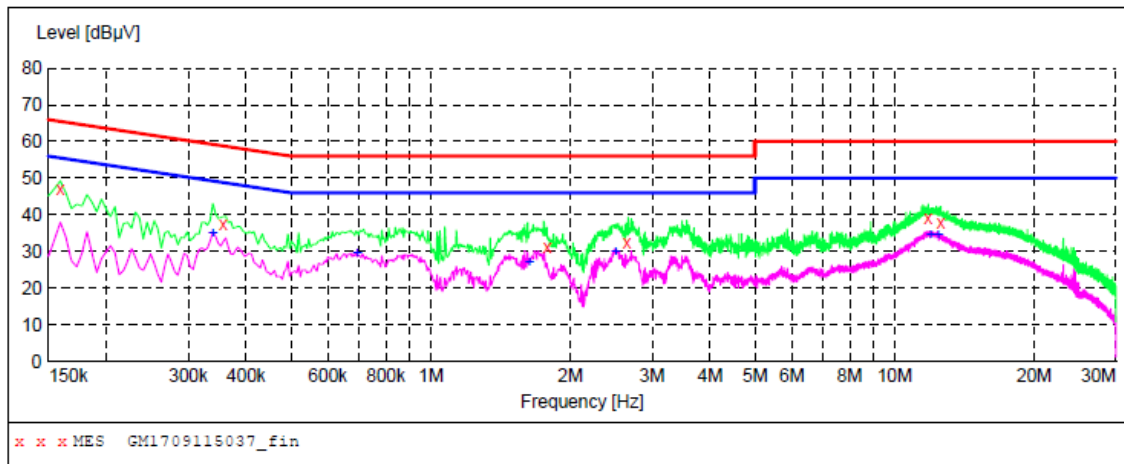
☒ Passed ☐ Not Applicable

Note:

- 1) Transd=Cable lose+ Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit -Level

Test Line:

L

**MEASUREMENT RESULT: "GM1709115037_fin"**

9/11/2017 3:08PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.159000	47.10	10.4	66	18.4	QP	L1	GND
0.357000	37.40	10.2	59	21.4	QP	L1	GND
1.783500	31.20	10.2	56	24.8	QP	L1	GND
2.647500	32.50	10.2	56	23.5	QP	L1	GND
11.818500	39.00	10.6	60	21.0	QP	L1	GND
12.592500	38.00	10.5	60	22.0	QP	L1	GND


MEASUREMENT RESULT: "GM1709115037_fin2"

9/11/2017 3:08PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.339000	35.00	10.2	49	14.2	AV	L1	GND
0.694500	29.30	10.2	46	16.7	AV	L1	GND
1.630500	27.10	10.2	46	18.9	AV	L1	GND
2.503500	30.00	10.2	46	16.0	AV	L1	GND
11.944500	34.60	10.6	50	15.4	AV	L1	GND
12.403500	34.50	10.5	50	15.5	AV	L1	GND

Test Line:

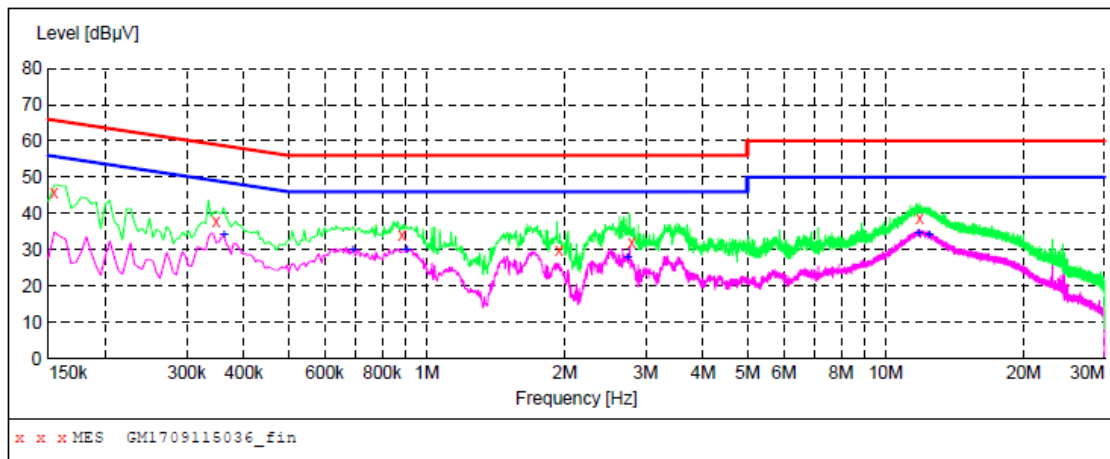N

**MEASUREMENT RESULT: "GM1709115036_fin"**

9/11/2017 3:05PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154500	46.00	10.4	66	19.8	QP	N	GND
0.348000	37.90	10.2	59	21.1	QP	N	GND
0.883500	34.10	10.1	56	21.9	QP	N	GND
1.945500	30.00	10.2	56	26.0	QP	N	GND
2.800500	32.20	10.2	56	23.8	QP	N	GND
11.872500	38.80	10.6	60	21.2	QP	N	GND

MEASUREMENT RESULT: "GM1709115036_fin2"

9/11/2017 3:05PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.361500	33.90	10.2	49	14.8	AV	N	GND
0.690000	30.00	10.2	46	16.0	AV	N	GND
0.906000	29.70	10.1	46	16.3	AV	N	GND
2.737500	27.90	10.2	46	18.1	AV	N	GND
11.805000	34.60	10.6	50	15.4	AV	N	GND
12.435000	34.20	10.5	50	15.8	AV	N	GND

5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): **30dBm**:

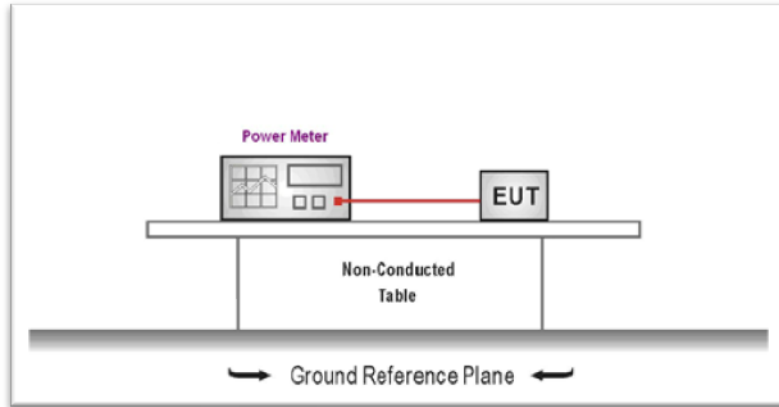TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10: 2013 and KDB 558074 D01 for compliance to FCC 47 CFR 15.247 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector
4. Record the measurement data.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable


Type	Channel	Output power (dBm)		Total Power (dBm)	Limit (dBm)	Result
		Antenna 0	Antenna 1			
802.11b	01	14.12	12.98	/	≤30.00	Pass
	06	14.12	12.98	/		
	11	14.12	12.98	/		
802.11g	01	16.19	15.10	/	≤30.00	Pass
	06	16.19	15.10	/		
	11	16.19	15.10	/		
802.11n(HT20)	01	14.33	14.95	17.66	≤30.00	Pass
	06	14.43	14.58	17.52		
	11	14.49	14.85	17.68		
802.11n(HT40)	03	15.73	12.94	17.57	≤30.00	Pass
	06	15.80	12.80	17.56		
	09	15.88	12.81	17.62		

5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

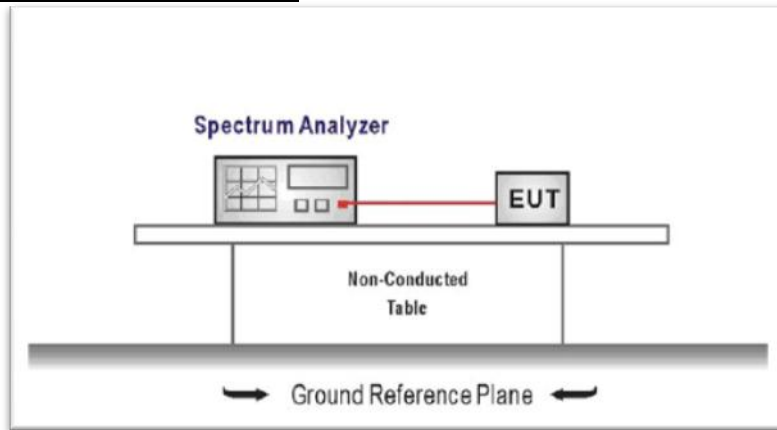TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span =1.5 times the DTS bandwidth
 $RBW = 3\text{ kHz} \leq RBW \leq 100\text{ kHz}$, $VBW \geq 3 \times RBW$
Sweep time = auto couple
Detector = peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST MODE:




Please refer to the clause 3.3


TEST RESULTS


☒ Passed ☐ Not Applicable


Type	Channel	Power Spectral Density (dBm/RBW)		Total Power Spectral Density (dBm/RBW)	Limit (dBm/3KHz)	Result
		Antenna 0	Antenna 1			
802.11b	01	0.431	-2.787	/	≤8.00	Pass
	06	0.475	-3.114	/		
	11	0.658	-2.765	/		
802.11g	01	-7.130	-7.211	/	≤8.00	Pass
	06	-6.510	-8.292	/		
	11	-6.961	-7.212	/		
802.11n(HT20)	01	-7.976	-6.976	-4.437	≤8.00	Pass
	06	-7.952	-7.762	-4.846		
	11	-3.994	-8.130	-2.577		
802.11n(HT40)	03	-10.562	-12.944	-8.581	≤8.00	Pass
	06	-10.194	-13.321	-8.472		
	09	-10.579	-13.551	-8.805		

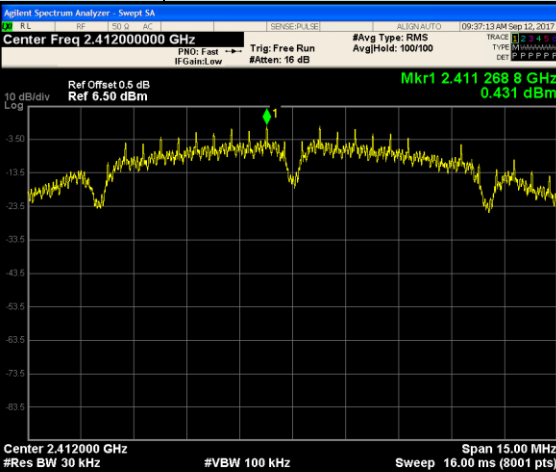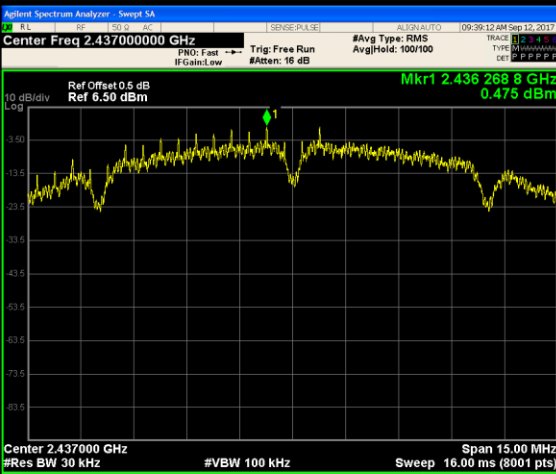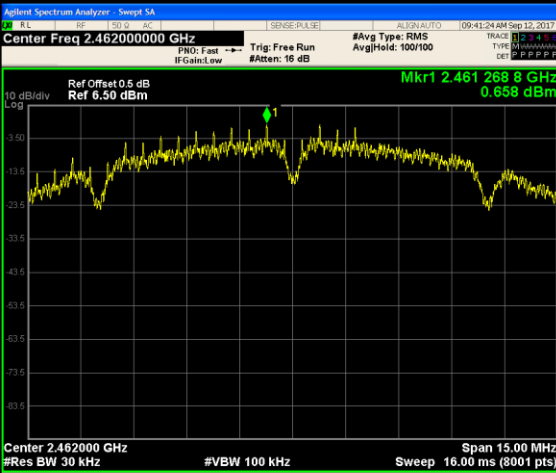
Test plot as follows:


802.11 b		Antenna 0	
CH01			Frequency Auto Tune Center Freq 2.412000000 GHz Start Freq 2.404500000 GHz Stop Freq 2.419500000 GHz CF Step 1.500000 MHz Auto Man Freq Offset 0 Hz
CH06			Frequency Auto Tune Center Freq 2.437000000 GHz Start Freq 2.429500000 GHz Stop Freq 2.444500000 GHz CF Step 1.500000 MHz Auto Man Freq Offset 0 Hz
CH11			Frequency Auto Tune Center Freq 2.462000000 GHz Start Freq 2.454500000 GHz Stop Freq 2.469500000 GHz CF Step 1.500000 MHz Auto Man Freq Offset 0 Hz

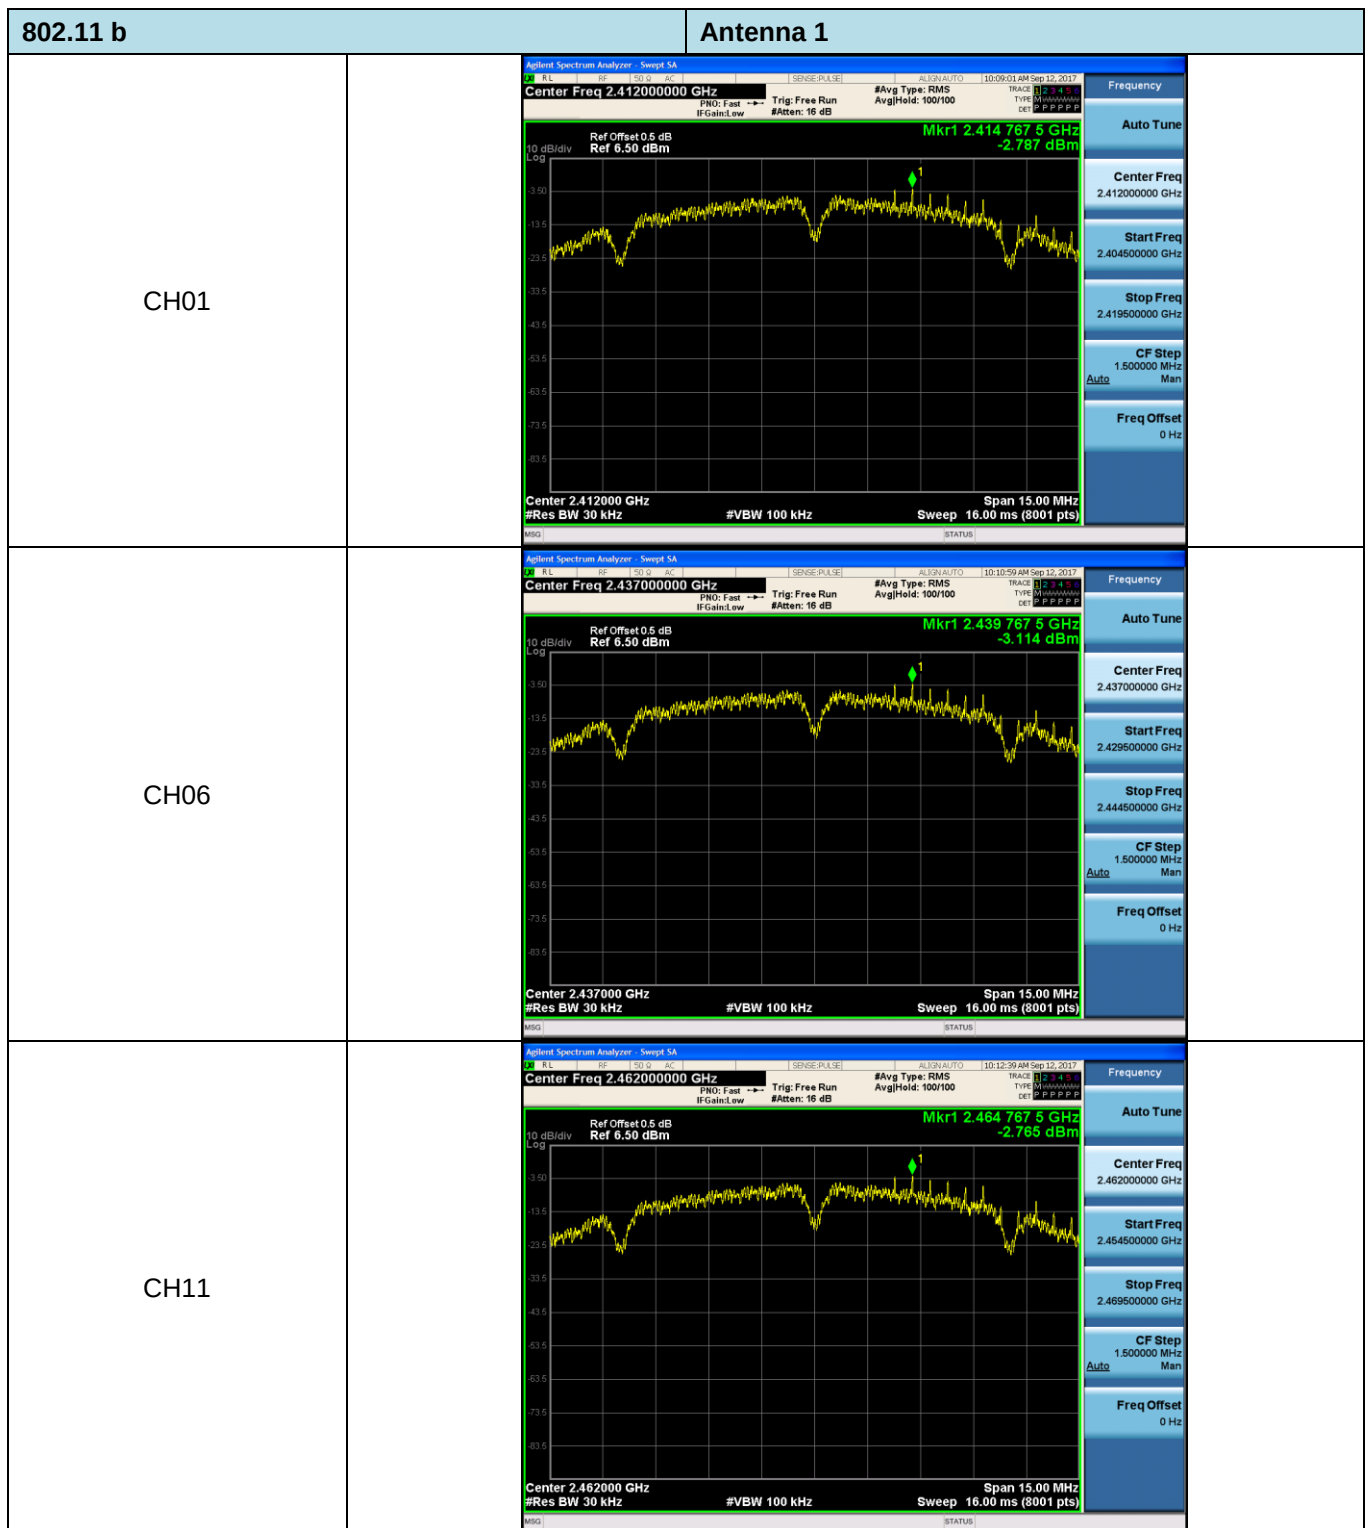




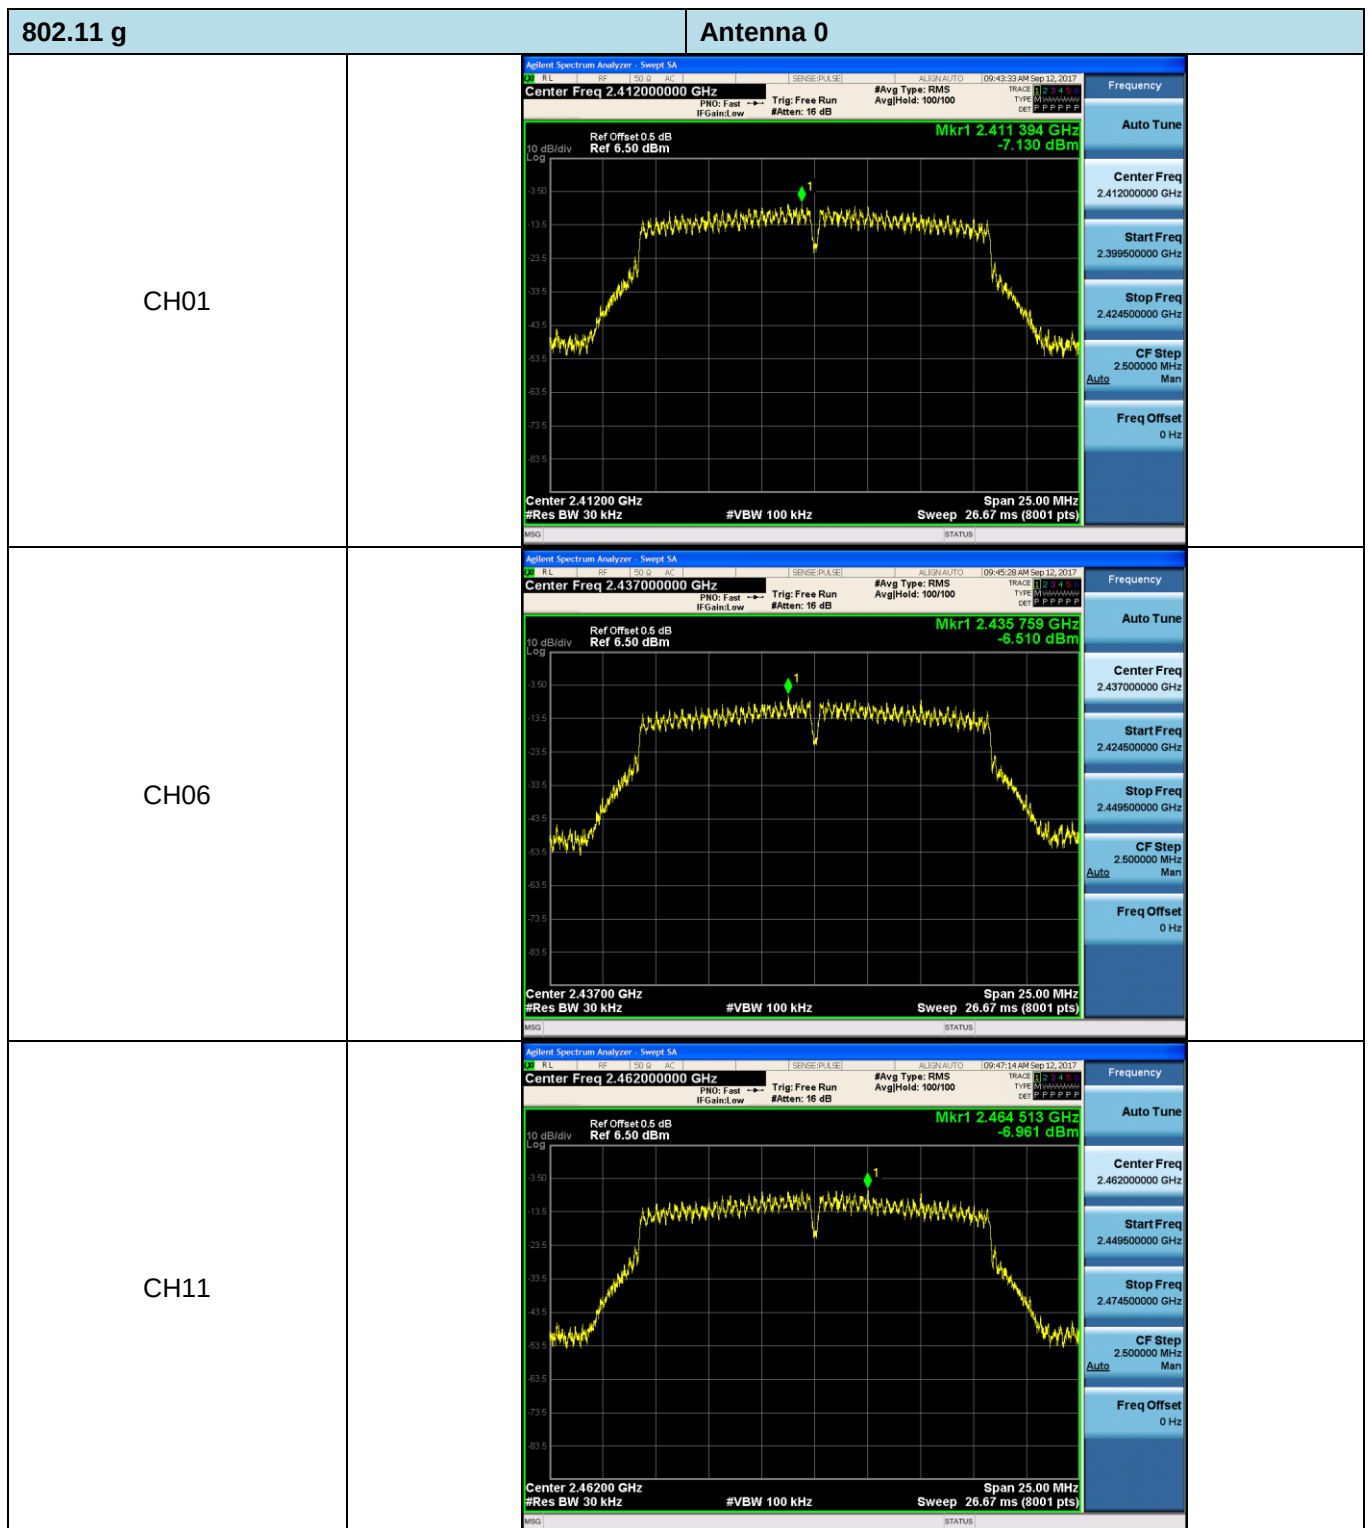


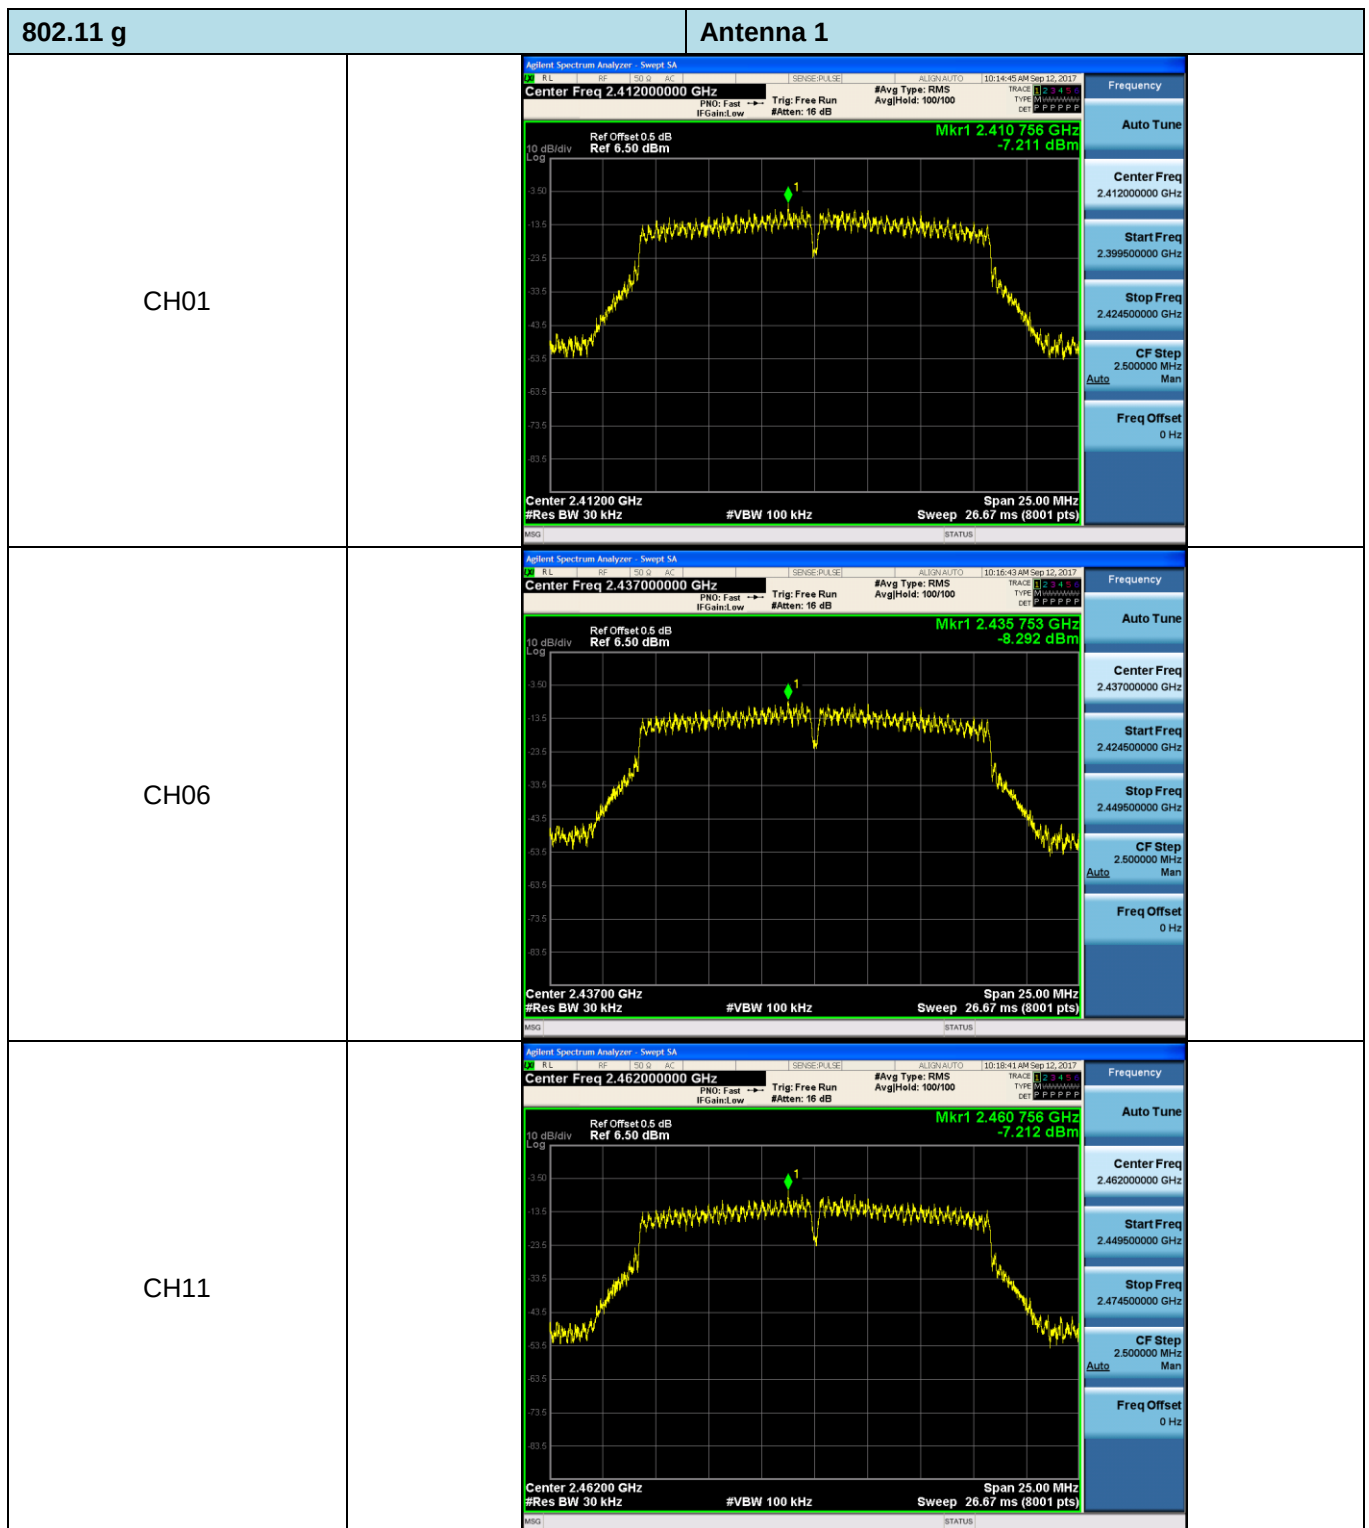

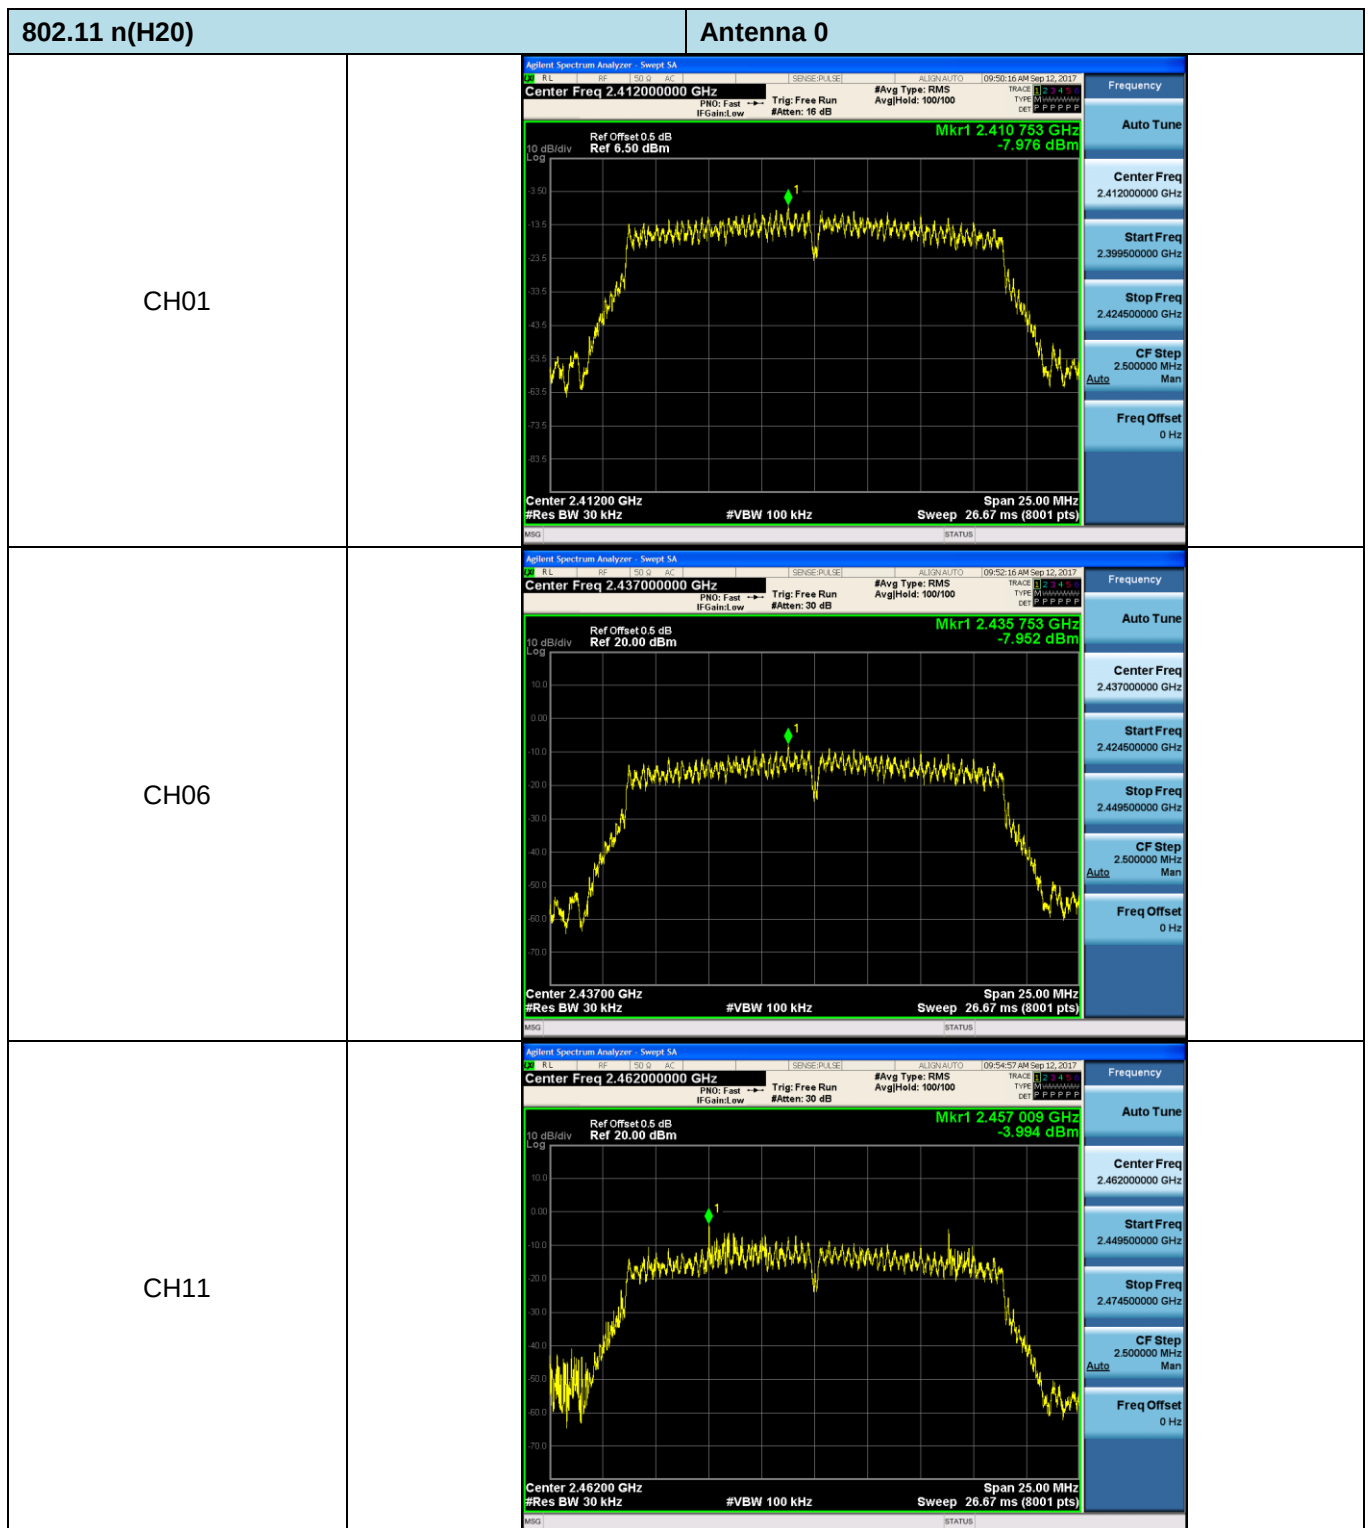

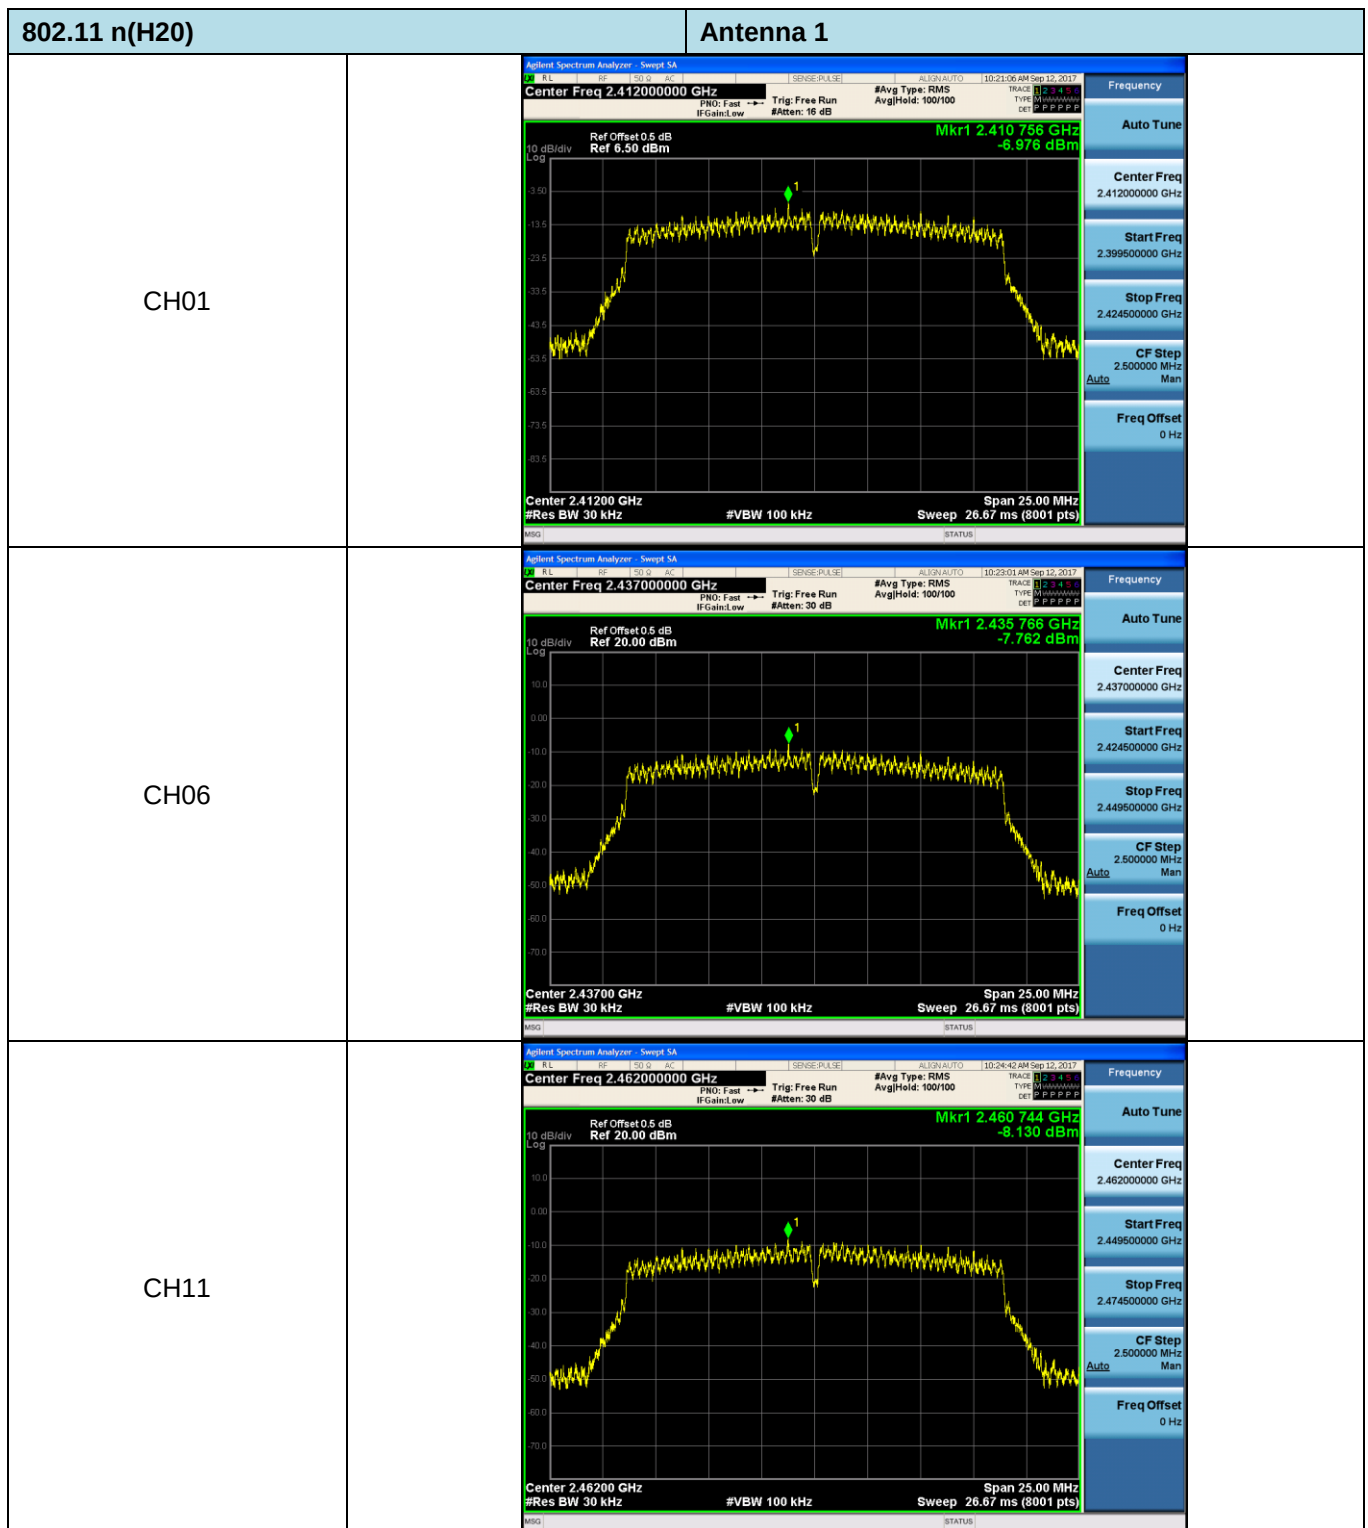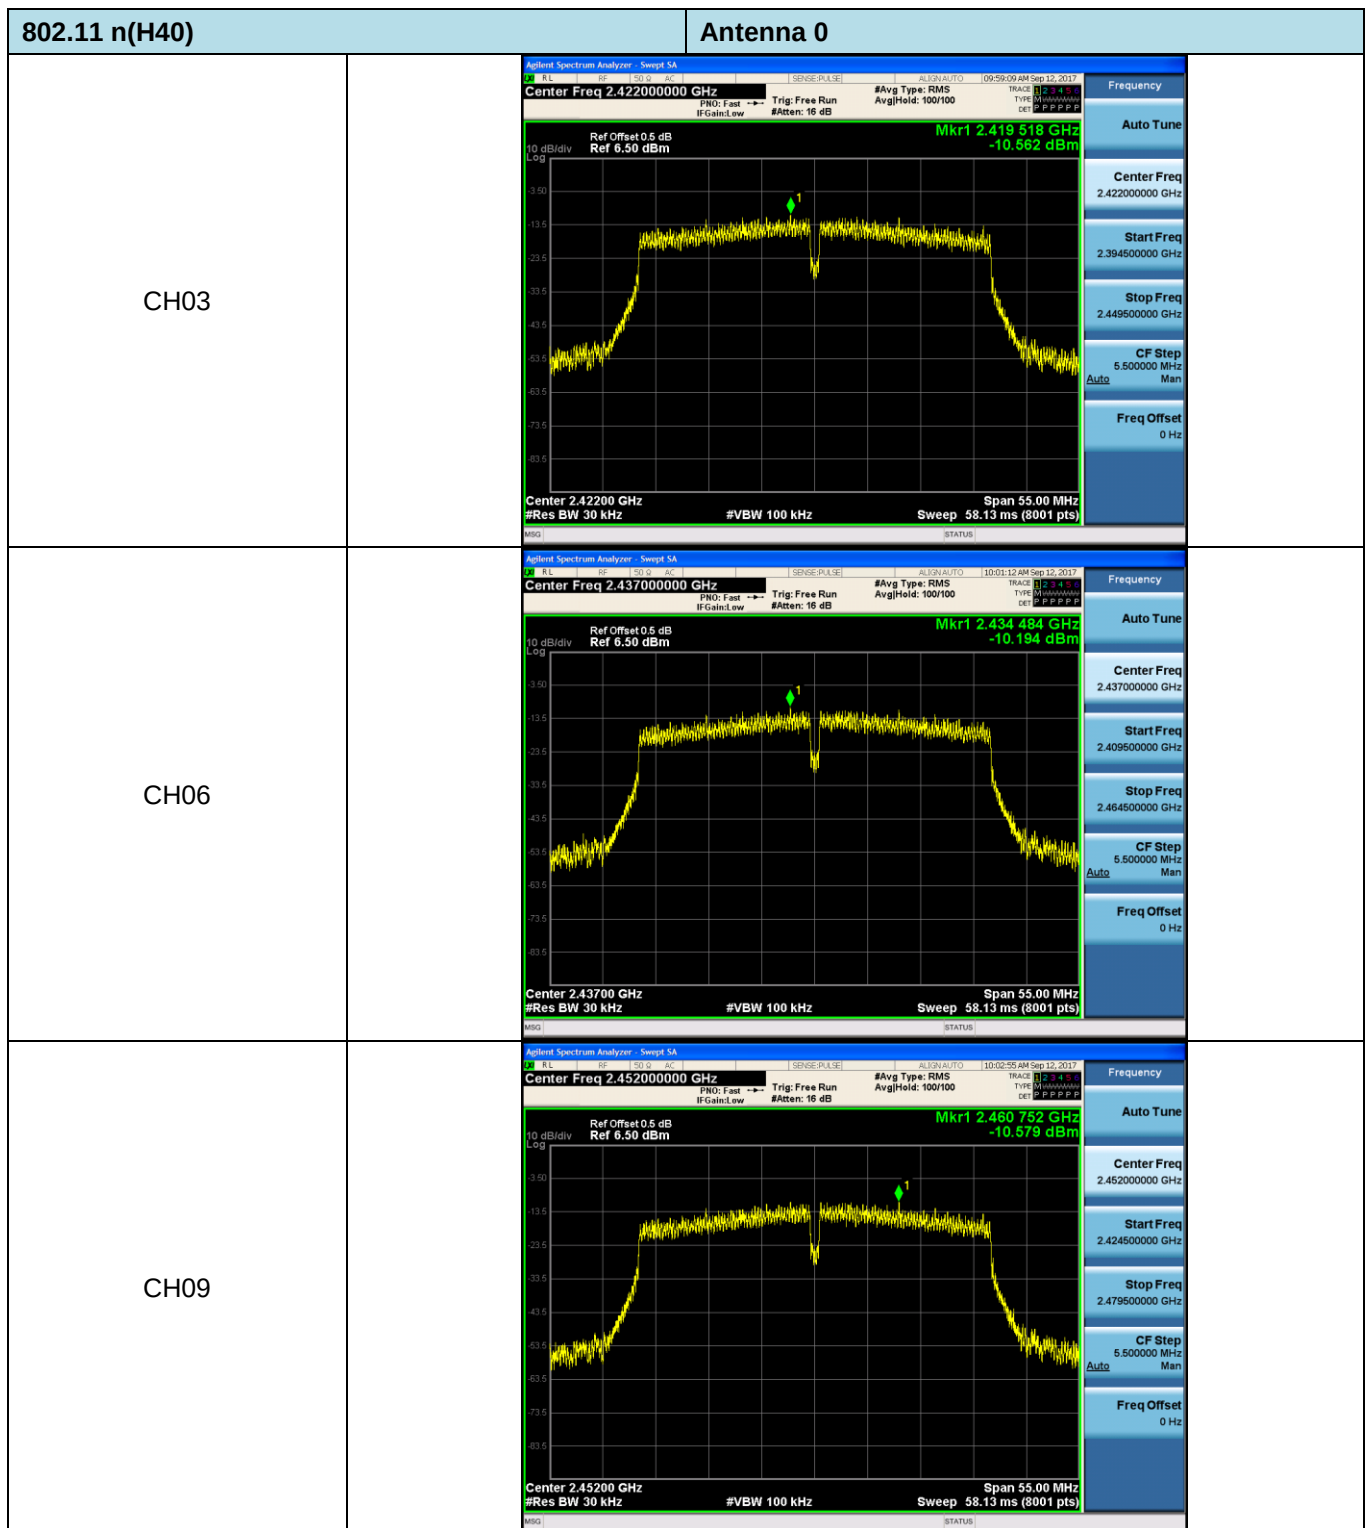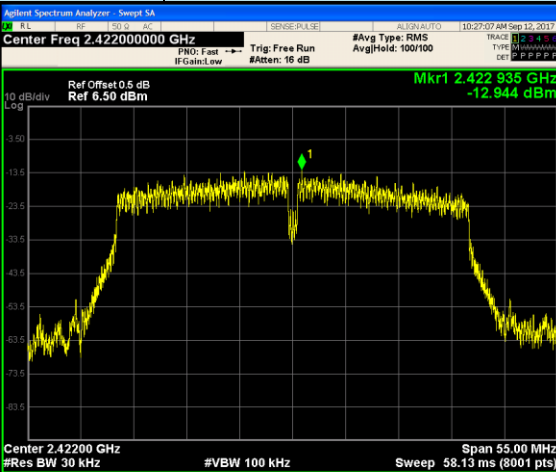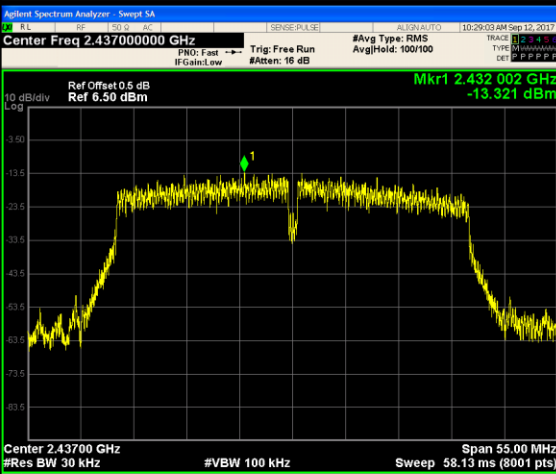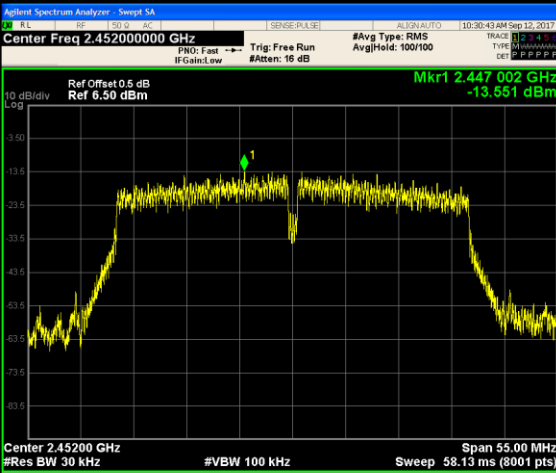




802.11 n(H40)		Antenna 1	
CH03			Frequency Auto Tune Center Freq 2.422000000 GHz Start Freq 2.394500000 GHz Stop Freq 2.449500000 GHz CF Step 5.500000 MHz Auto Man Freq Offset 0 Hz
CH06			Frequency Auto Tune Center Freq 2.437000000 GHz Start Freq 2.409500000 GHz Stop Freq 2.464500000 GHz CF Step 5.500000 MHz Auto Man Freq Offset 0 Hz
CH09			Frequency Auto Tune Center Freq 2.452000000 GHz Start Freq 2.424500000 GHz Stop Freq 2.479500000 GHz CF Step 5.500000 MHz Auto Man Freq Offset 0 Hz

5.5. 6dB Bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

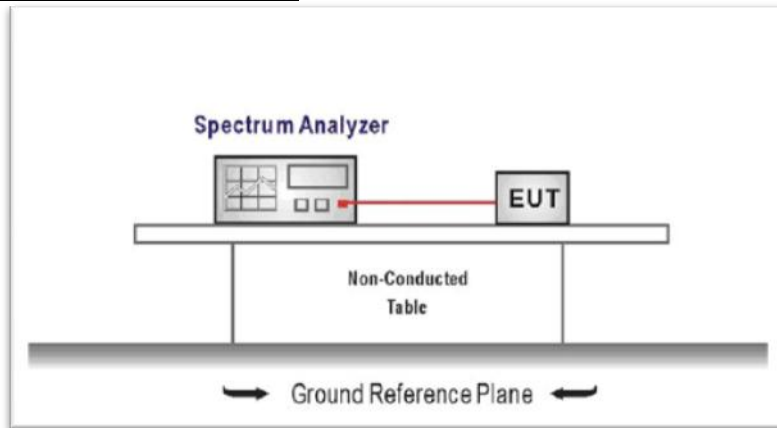TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = DTS channel center frequency
Span = 2 × DTS bandwidth
RBW = 100 kHz, VBW ≥ 3 × RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE:

Please refer to the clause 3.3




TEST RESULTS




☒ Passed ☐ Not Applicable

Prescan Ant0 and Ant1, found Ant0 which it is worse case mode, so only show the Ant0 data.

Type	Channel	6dB Bandwidth (MHz)	Limit (kHz)	Result
802.11b	01	9.039	≥500	Pass
	06	9.032		
	11	9.517		
802.11g	01	13.79	≥500	Pass
	06	16.31		
	11	16.30		
802.11n(HT20)	01	15.11	≥500	Pass
	06	14.01		
	11	13.17		
802.11n(HT40)	03	29.07	≥500	Pass
	06	30.23		
	09	33.84		

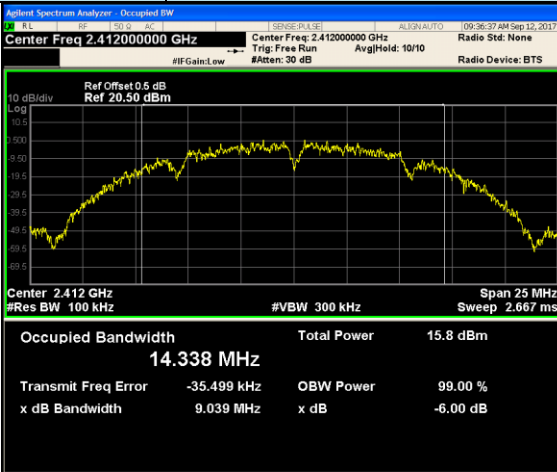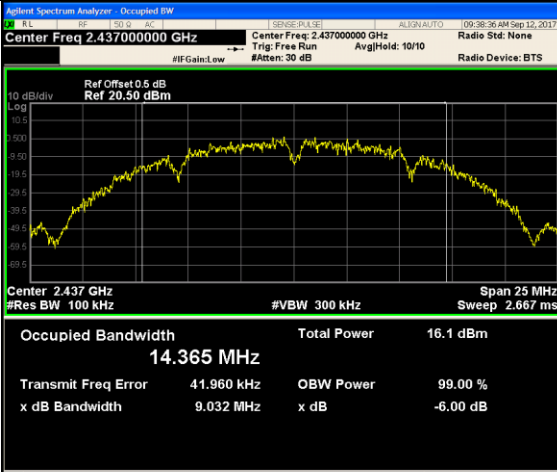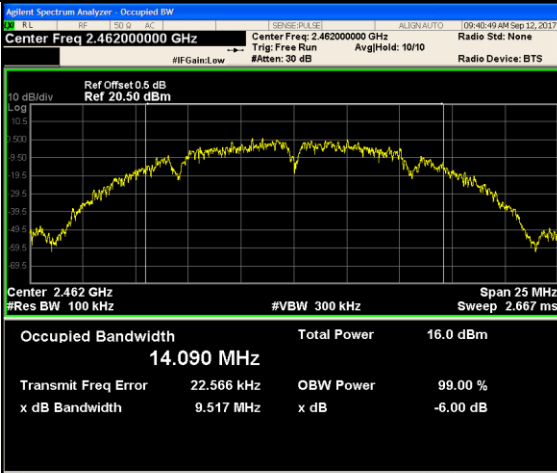Test plot as follows:

802.11 b		Ant0
CH01	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 0.5 dB Ref 20.50 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 25 MHz Sweep 2.667 ms Occupied Bandwidth 14.338 MHz Total Power 15.8 dBm Transmit Freq Error -35.499 kHz OBW Power 99.00 % x dB Bandwidth 9.039 MHz x dB -6.00 dB Frequency Center Freq 2.412000000 GHz CF Step 2.500000 MHz Auto Man Freq Offset 0 Hz	
CH06	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 0.5 dB Ref 20.50 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 25 MHz Sweep 2.667 ms Occupied Bandwidth 14.365 MHz Total Power 16.1 dBm Transmit Freq Error 41.960 kHz OBW Power 99.00 % x dB Bandwidth 9.032 MHz x dB -6.00 dB Frequency Center Freq 2.437000000 GHz CF Step 2.500000 MHz Auto Man Freq Offset 0 Hz	
CH11	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 0.5 dB Ref 20.50 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 25 MHz Sweep 2.667 ms Occupied Bandwidth 14.090 MHz Total Power 16.0 dBm Transmit Freq Error 22.566 kHz OBW Power 99.00 % x dB Bandwidth 9.517 MHz x dB -6.00 dB Frequency Center Freq 2.462000000 GHz CF Step 2.500000 MHz Auto Man Freq Offset 0 Hz	

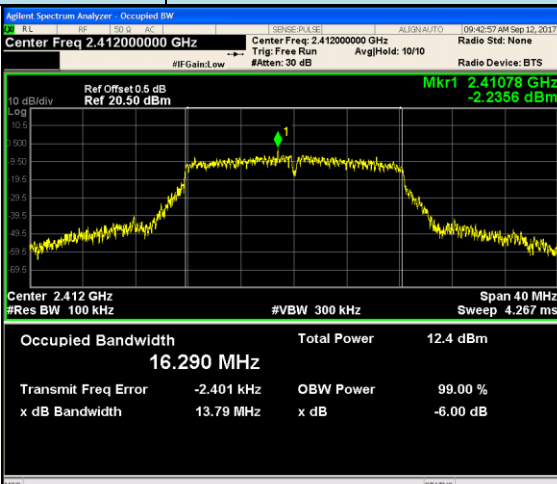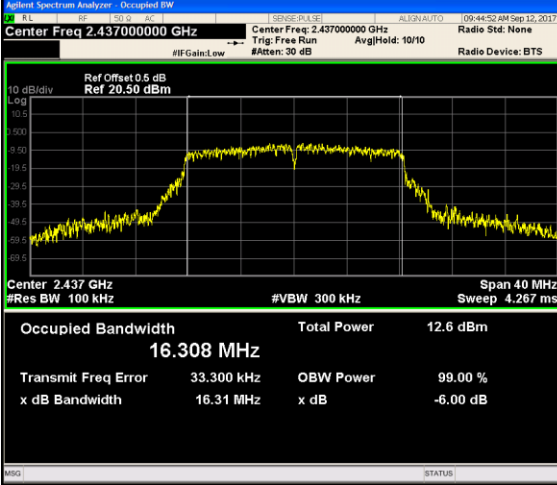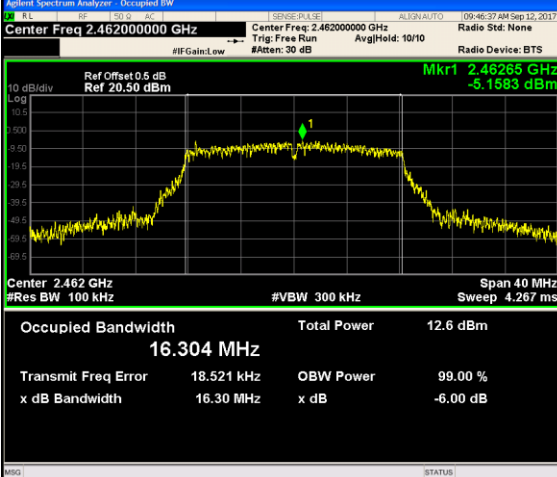802.11 g		Ant0
CH01	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 0.5 dB Ref 20.50 dBm Occupied Bandwidth 16.290 MHz Total Power 12.4 dBm Transmit Freq Error -2.401 kHz OBW Power 99.00 % x dB Bandwidth 13.79 MHz x dB -6.00 dB	
CH06	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 0.5 dB Ref 20.50 dBm Occupied Bandwidth 16.308 MHz Total Power 12.6 dBm Transmit Freq Error 33.300 kHz OBW Power 99.00 % x dB Bandwidth 16.31 MHz x dB -6.00 dB	
CH11	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 0.5 dB Ref 20.50 dBm Occupied Bandwidth 16.304 MHz Total Power 12.6 dBm Transmit Freq Error 18.521 kHz OBW Power 99.00 % x dB Bandwidth 16.30 MHz x dB -6.00 dB	

802.11n(HT20)

Ant0

CH01

Agilent Spectrum Analyzer - Occupied BW

RL

SP

100 kHz

AC

SENSE PULSE

ALIGN AUTO

09:49:30 AM Sep 12, 2017

Center Freq 2.412000000 GHz

Center Freq: 2.412000000 GHz

Radio Std: None

#IF Gain: Low

Trig: Free Run

Avg/Hold: 10/10

#Atten: 30 dB


Radio Device: BTS

10 dB/div

Log

Ref Offset 0.5 dB

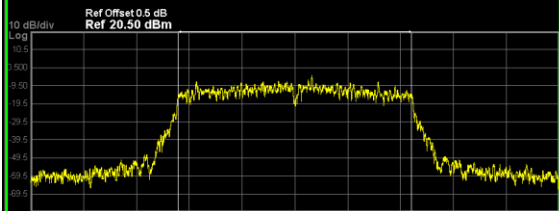Ref 20.50 dBm



Center 2.412 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 40 MHz

Sweep 4.267 ms

Occupied Bandwidth

17.524 MHz

Total Power

10.4 dBm

Transmit Freq Error

16.466 kHz

OBW Power

99.00 %

x dB Bandwidth

15.11 MHz

x dB

-6.00 dB

MAG

STATUS

Frequency

Center Freq
2.412000000 GHz

CF Step
4.000000 MHz

Auto

Man

Freq Offset
0 Hz

CH06

Agilent Spectrum Analyzer - Occupied BW

RL

SP

100 kHz

AC

SENSE PULSE

ALIGN AUTO

09:53:20 AM Sep 12, 2017

Center Freq 2.437000000 GHz

Center Freq: 2.437000000 GHz

Radio Std: None

#IF Gain: Low

Trig: Free Run

Avg/Hold: 10/10

#Atten: 30 dB


Radio Device: BTS

10 dB/div

Log

Ref Offset 0.5 dB

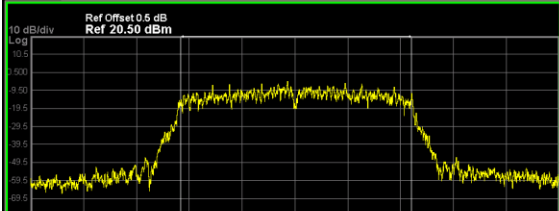Ref 20.50 dBm



Center 2.437 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 40 MHz

Sweep 4.267 ms

Occupied Bandwidth

17.469 MHz

Total Power

10.7 dBm

Transmit Freq Error

89.748 kHz

OBW Power

99.00 %

x dB Bandwidth

14.01 MHz

x dB

-6.00 dB

MAG

STATUS

Frequency

Center Freq
2.437000000 GHz

CF Step
4.000000 MHz

Auto

Man

Freq Offset
0 Hz

CH11

Agilent Spectrum Analyzer - Occupied BW

RL

SP

100 kHz

AC

SENSE PULSE

ALIGN AUTO

09:53:20 AM Sep 12, 2017

Center Freq 2.462000000 GHz

Center Freq: 2.462000000 GHz

Radio Std: None

#IF Gain: Low

Trig: Free Run

Avg/Hold: 10/10

#Atten: 30 dB


Radio Device: BTS

10 dB/div

Log

Ref Offset 0.5 dB

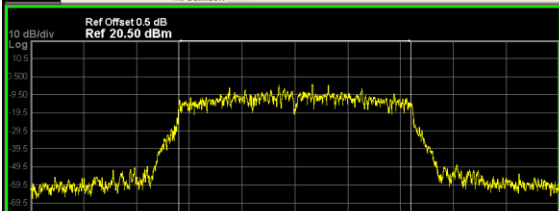Ref 20.50 dBm



Center 2.462 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 40 MHz

Sweep 4.267 ms

Occupied Bandwidth

17.436 MHz

Total Power

10.8 dBm

Transmit Freq Error

23.437 kHz

OBW Power

99.00 %

x dB Bandwidth

13.17 MHz

x dB

-6.00 dB

MAG

STATUS

Frequency

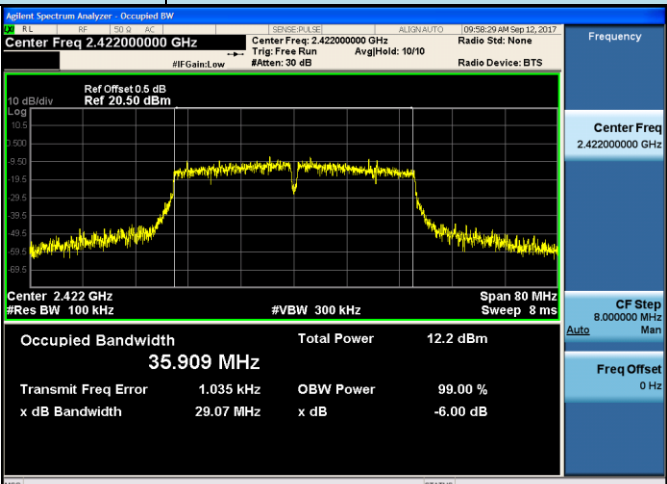
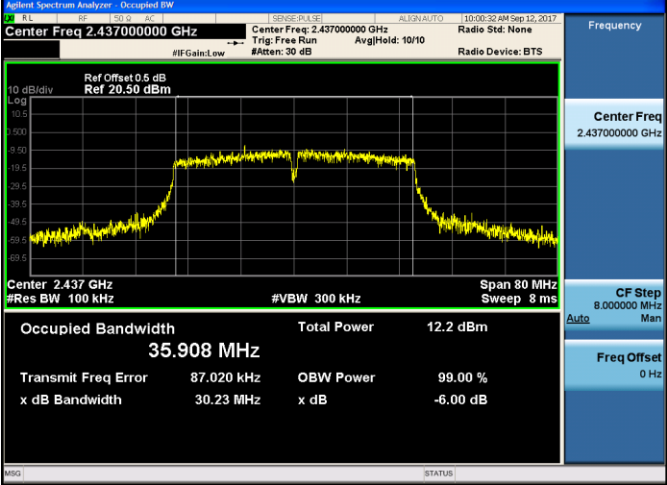
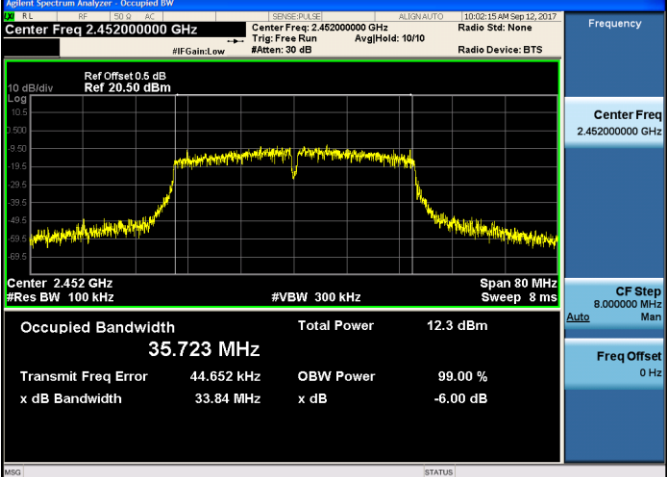
Center Freq
2.462000000 GHz

CF Step
4.000000 MHz

Auto

Man

Freq Offset
0 Hz


802.11n(HT40)		Ant0
CH03		
CH06		
CH09		

5.6. Restricted Band

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

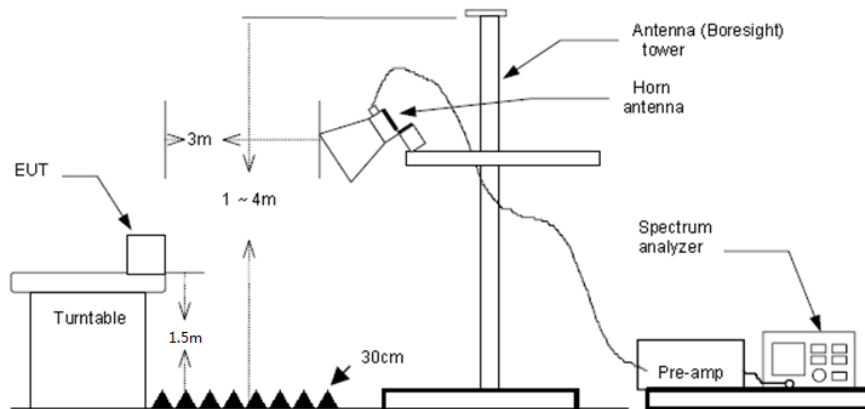TEST CONFIGURATION



TEST PROCEDURE

- 1) The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2) The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3) The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
- 4) The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- 5) The receiver set as follow:
 RBW=1MHz, VBW=3MHz PEAK detector for Peak value.
 RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Note:

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor

802.11b and 802.11g SISO mode have been tested, only worse case ANT 0 is reported

802.11n(HT20) and 802.11n(HT40) MIMO mode have been tested

802.11b					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	13.51	28.05	6.62	0.00	48.18	74.00	-25.82	HORIZONTAL	Peak
2390.01	12.99	27.65	6.75	0.00	47.39	74.00	-26.61	HORIZONTAL	Peak
2310.00	16.62	28.05	6.62	0.00	51.29	74.00	-22.71	VERTICAL	Peak
2390.01	17.11	27.65	6.75	0.00	51.51	74.00	-22.49	VERTICAL	Peak
2310.00	11.56	28.05	6.62	0.00	46.23	54.00	-7.77	HORIZONTAL	Average
2390.01	13.95	27.65	6.75	0.00	48.35	54.00	-5.65	HORIZONTAL	Average
2310.00	11.55	28.05	6.62	0.00	46.22	54.00	-7.78	VERTICAL	Average
2390.01	13.93	27.65	6.75	0.00	48.33	54.00	-5.67	VERTICAL	Average

802.11b					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.49	15.37	27.26	6.83	0.00	49.46	74.00	-24.54	HORIZONTAL	Peak
2500.00	15.79	27.20	6.84	0.00	49.83	74.00	-24.17	HORIZONTAL	Peak
2483.49	24.56	27.26	6.83	0.00	58.65	74.00	-15.35	VERTICAL	Peak
2500.00	17.66	27.20	6.84	0.00	51.70	74.00	-22.30	VERTICAL	Peak
2483.49	15.20	27.26	6.83	0.00	49.29	54.00	-4.71	HORIZONTAL	Average
2500.00	12.09	27.20	6.84	0.00	46.13	54.00	-7.87	HORIZONTAL	Average
2483.49	15.37	27.26	6.83	0.00	49.46	54.00	-4.54	VERTICAL	Average
2500.00	15.79	27.20	6.84	0.00	49.83	54.00	-4.17	VERTICAL	Average

802.11g					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	14.24	28.05	6.62	0.00	48.91	74.00	-25.09	HORIZONTAL	Peak
2390.01	26.15	27.65	6.75	0.00	60.55	74.00	-13.45	HORIZONTAL	Peak
2310.00	15.47	28.05	6.62	0.00	50.14	74.00	-23.86	VERTICAL	Peak
2390.01	24.25	27.65	6.75	0.00	58.65	74.00	-15.35	VERTICAL	Peak
2310.00	11.44	28.05	6.62	0.00	46.11	54.00	-7.89	HORIZONTAL	Average
2390.01	14.09	27.65	6.75	0.00	48.49	54.00	-5.51	HORIZONTAL	Average
2310.00	11.76	28.05	6.62	0.00	46.43	54.00	-7.57	VERTICAL	Average
2390.01	15.02	27.65	6.75	0.00	49.42	54.00	-4.58	VERTICAL	Average

802.11g					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.49	21.48	27.26	6.83	0.00	55.57	74.00	-18.43	HORIZONTAL	Peak
2500.00	13.76	27.20	6.84	0.00	47.80	74.00	-26.20	HORIZONTAL	Peak
2483.49	22.23	27.26	6.83	0.00	56.32	74.00	-17.68	VERTICAL	Peak
2500.00	15.57	27.20	6.84	0.00	49.61	74.00	-24.39	VERTICAL	Peak
2483.49	17.31	27.26	6.83	0.00	51.40	54.00	-2.60	HORIZONTAL	Average
2500.00	12.90	27.20	6.84	0.00	46.94	54.00	-7.06	HORIZONTAL	Average
2483.49	18.01	27.26	6.83	0.00	52.10	54.00	-1.90	VERTICAL	Average
2500.00	12.75	27.20	6.84	0.00	46.79	54.00	-7.21	VERTICAL	Average

802.11n(HT20)					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	13.95	28.05	6.62	0.00	48.62	74.00	-25.38	HORIZONTAL	Peak
2390.01	22.02	27.65	6.75	0.00	56.42	74.00	-17.58	HORIZONTAL	Peak
2310.00	14.69	28.05	6.62	0.00	49.36	74.00	-24.64	VERTICAL	Peak
2390.01	23.21	27.65	6.75	0.00	57.61	74.00	-16.39	VERTICAL	Peak
2310.00	11.72	28.05	6.62	0.00	46.39	54.00	-7.61	HORIZONTAL	Average
2390.01	16.77	27.65	6.75	0.00	51.17	54.00	-2.83	HORIZONTAL	Average
2310.00	11.56	28.05	6.62	0.00	46.23	54.00	-7.77	VERTICAL	Average
2390.01	17.00	27.65	6.75	0.00	51.40	54.00	-2.60	VERTICAL	Average

802.11n(HT20)					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.49	20.94	27.26	6.83	0.00	55.03	74.00	-18.97	HORIZONTAL	Peak
2500.00	12.83	27.20	6.84	0.00	46.87	74.00	-27.13	HORIZONTAL	Peak
2483.49	22.13	27.26	6.83	0.00	56.22	74.00	-17.78	VERTICAL	Peak
2500.00	14.47	27.20	6.84	0.00	48.51	74.00	-25.49	VERTICAL	Peak
2483.49	17.03	27.26	6.83	0.00	51.12	54.00	-2.88	HORIZONTAL	Average
2500.00	11.43	27.20	6.84	0.00	45.47	54.00	-8.53	HORIZONTAL	Average
2483.49	18.08	27.26	6.83	0.00	52.17	54.00	-1.83	VERTICAL	Average
2500.00	13.30	27.20	6.84	0.00	47.34	54.00	-6.66	VERTICAL	Average

802.11n(HT40)					CH03				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	15.11	28.05	6.62	0.00	49.78	74.00	-24.22	HORIZONTAL	Peak
2389.99	24.91	27.65	6.75	0.00	59.31	74.00	-14.69	HORIZONTAL	Peak
2310.00	13.75	28.05	6.62	0.00	48.42	74.00	-25.58	VERTICAL	Peak
2389.99	21.59	27.65	6.75	0.00	55.99	74.00	-18.01	VERTICAL	Peak
2310.00	11.57	28.05	6.62	0.00	46.24	54.00	-7.76	HORIZONTAL	Average
2389.99	16.55	27.65	6.75	0.00	50.95	54.00	-3.05	HORIZONTAL	Average
2310.00	11.79	28.05	6.62	0.00	46.46	54.00	-7.54	VERTICAL	Average
2389.99	17.19	27.65	6.75	0.00	51.59	54.00	-2.41	VERTICAL	Average


802.11n(HT40)					CH09				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.50	23.27	27.26	6.83	0.00	57.36	74.00	-16.64	HORIZONTAL	Peak
2500.00	18.16	27.20	6.84	0.00	52.20	74.00	-21.80	HORIZONTAL	Peak
2483.50	21.79	27.26	6.83	0.00	55.88	74.00	-18.12	VERTICAL	Peak
2500.00	16.34	27.20	6.84	0.00	50.38	74.00	-23.62	VERTICAL	Peak
2483.50	16.17	27.26	6.83	0.00	50.26	54.00	-3.74	HORIZONTAL	Average
2500.00	12.55	27.20	6.84	0.00	46.59	54.00	-7.41	HORIZONTAL	Average
2483.50	15.97	27.26	6.83	0.00	50.06	54.00	-3.94	VERTICAL	Average
2500.00	11.12	27.20	6.84	0.00	45.16	54.00	-8.84	VERTICAL	Average

5.7. Band Edge and Spurious Emissions (Conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

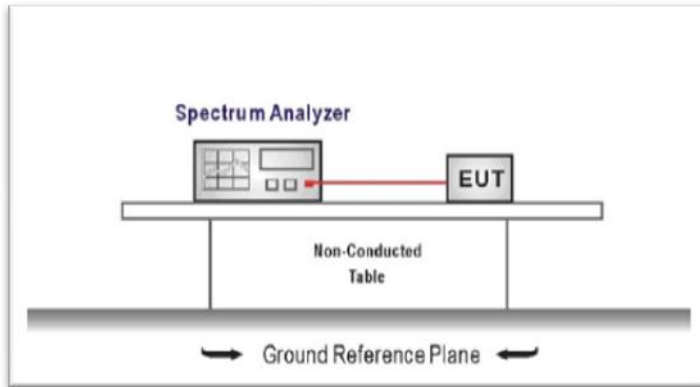TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure
Center frequency=DTS channel center frequency
The span = 1.5 times the DTS bandwidth.
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum PSD level

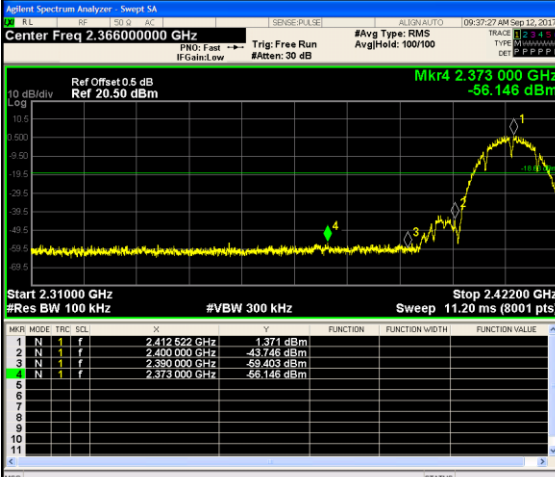
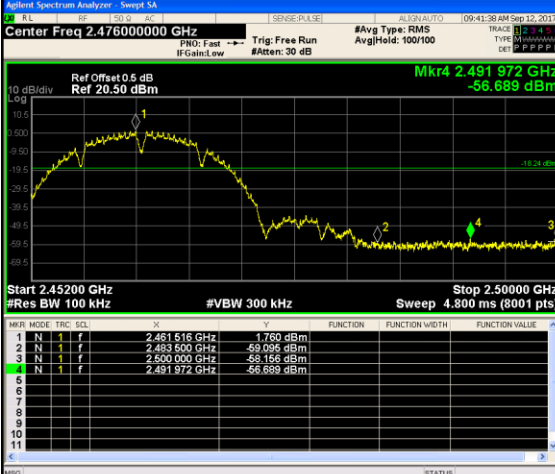
Note: the channel found to contain the maximum PSD level can be used to establish the reference level.
3. Emission level measurement
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.





TEST MODE:



Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Test Item:	Bandedge	Type:	802.11 b / Ant0													
CH01		<table><tr><td>Frequency</td><td>Auto Tune</td></tr><tr><td>Center Freq</td><td>2.366000000 GHz</td></tr><tr><td>Start Freq</td><td>2.310000000 GHz</td></tr><tr><td>Stop Freq</td><td>2.422000000 GHz</td></tr><tr><td>CF Step</td><td>11.200000 MHz</td></tr><tr><td>Auto</td><td>Man</td></tr><tr><td>Freq Offset</td><td>0 Hz</td></tr></table>	Frequency	Auto Tune	Center Freq	2.366000000 GHz	Start Freq	2.310000000 GHz	Stop Freq	2.422000000 GHz	CF Step	11.200000 MHz	Auto	Man	Freq Offset	0 Hz
Frequency	Auto Tune															
Center Freq	2.366000000 GHz															
Start Freq	2.310000000 GHz															
Stop Freq	2.422000000 GHz															
CF Step	11.200000 MHz															
Auto	Man															
Freq Offset	0 Hz															
CH11		<table><tr><td>Frequency</td><td>Auto Tune</td></tr><tr><td>Center Freq</td><td>2.476000000 GHz</td></tr><tr><td>Start Freq</td><td>2.452000000 GHz</td></tr><tr><td>Stop Freq</td><td>2.500000000 GHz</td></tr><tr><td>CF Step</td><td>4.800000 MHz</td></tr><tr><td>Auto</td><td>Man</td></tr><tr><td>Freq Offset</td><td>0 Hz</td></tr></table>	Frequency	Auto Tune	Center Freq	2.476000000 GHz	Start Freq	2.452000000 GHz	Stop Freq	2.500000000 GHz	CF Step	4.800000 MHz	Auto	Man	Freq Offset	0 Hz
Frequency	Auto Tune															
Center Freq	2.476000000 GHz															
Start Freq	2.452000000 GHz															
Stop Freq	2.500000000 GHz															
CF Step	4.800000 MHz															
Auto	Man															
Freq Offset	0 Hz															

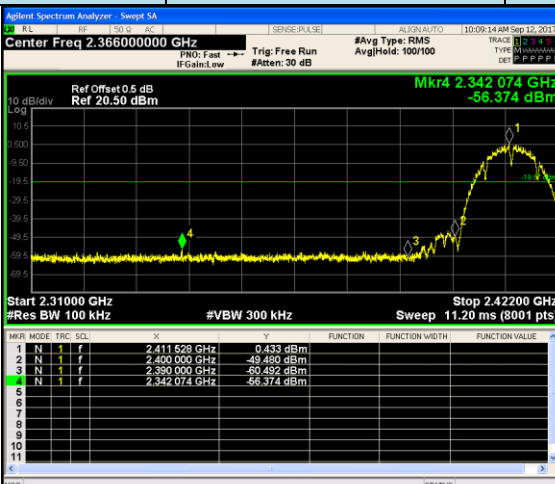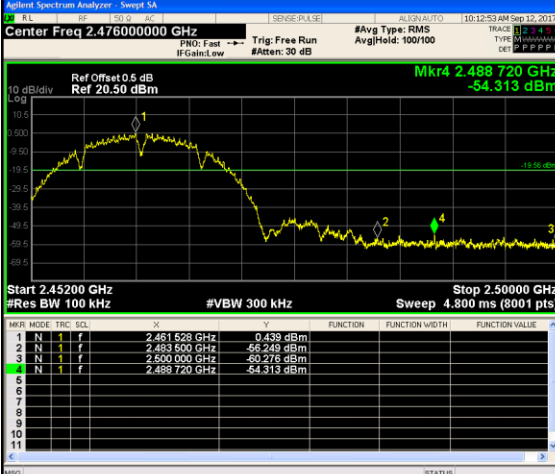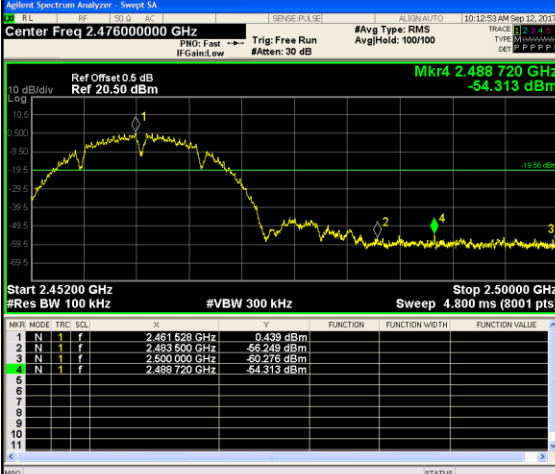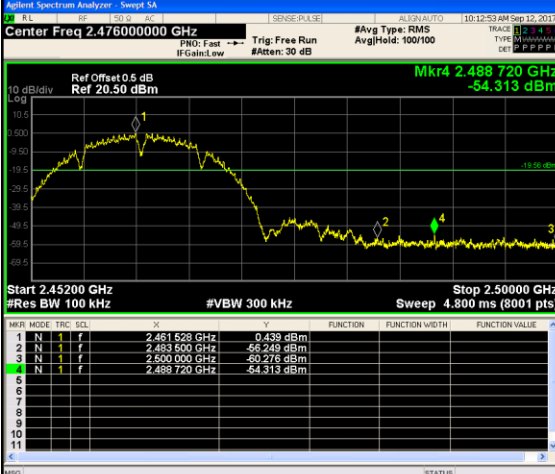Test Item:	Bandedge	Type:	802.11 b / Ant1																																																																																									
CH01	 <table><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>Scl</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.411528 GHz</td><td>0.433 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.450000 GHz</td><td>-49.480 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390000 GHz</td><td>-50.492 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.342074 GHz</td><td>-56.374 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value	1	N	1	f	2.411528 GHz	0.433 dBm				2	N	1	f	2.450000 GHz	-49.480 dBm				3	N	1	f	2.390000 GHz	-50.492 dBm				4	N	1	f	2.342074 GHz	-56.374 dBm				 <table><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>Scl</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.481528 GHz</td><td>0.438 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.493500 GHz</td><td>-56.249 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500000 GHz</td><td>-60.276 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.488720 GHz</td><td>-54.313 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value	1	N	1	f	2.481528 GHz	0.438 dBm				2	N	1	f	2.493500 GHz	-56.249 dBm				3	N	1	f	2.500000 GHz	-60.276 dBm				4	N	1	f	2.488720 GHz	-54.313 dBm			
Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value																																																																																				
1	N	1	f	2.411528 GHz	0.433 dBm																																																																																							
2	N	1	f	2.450000 GHz	-49.480 dBm																																																																																							
3	N	1	f	2.390000 GHz	-50.492 dBm																																																																																							
4	N	1	f	2.342074 GHz	-56.374 dBm																																																																																							
Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value																																																																																				
1	N	1	f	2.481528 GHz	0.438 dBm																																																																																							
2	N	1	f	2.493500 GHz	-56.249 dBm																																																																																							
3	N	1	f	2.500000 GHz	-60.276 dBm																																																																																							
4	N	1	f	2.488720 GHz	-54.313 dBm																																																																																							
CH11	 <table><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>Scl</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.481528 GHz</td><td>0.438 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.493500 GHz</td><td>-56.249 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500000 GHz</td><td>-60.276 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.488720 GHz</td><td>-54.313 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value	1	N	1	f	2.481528 GHz	0.438 dBm				2	N	1	f	2.493500 GHz	-56.249 dBm				3	N	1	f	2.500000 GHz	-60.276 dBm				4	N	1	f	2.488720 GHz	-54.313 dBm				 <table><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>Scl</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.481528 GHz</td><td>0.438 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.493500 GHz</td><td>-56.249 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500000 GHz</td><td>-60.276 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.488720 GHz</td><td>-54.313 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value	1	N	1	f	2.481528 GHz	0.438 dBm				2	N	1	f	2.493500 GHz	-56.249 dBm				3	N	1	f	2.500000 GHz	-60.276 dBm				4	N	1	f	2.488720 GHz	-54.313 dBm			
Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value																																																																																				
1	N	1	f	2.481528 GHz	0.438 dBm																																																																																							
2	N	1	f	2.493500 GHz	-56.249 dBm																																																																																							
3	N	1	f	2.500000 GHz	-60.276 dBm																																																																																							
4	N	1	f	2.488720 GHz	-54.313 dBm																																																																																							
Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value																																																																																				
1	N	1	f	2.481528 GHz	0.438 dBm																																																																																							
2	N	1	f	2.493500 GHz	-56.249 dBm																																																																																							
3	N	1	f	2.500000 GHz	-60.276 dBm																																																																																							
4	N	1	f	2.488720 GHz	-54.313 dBm																																																																																							

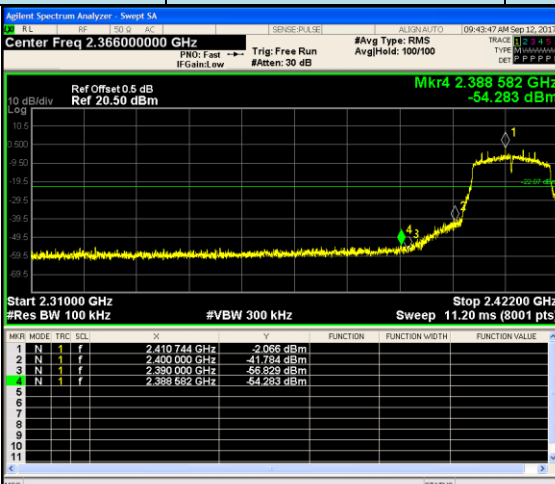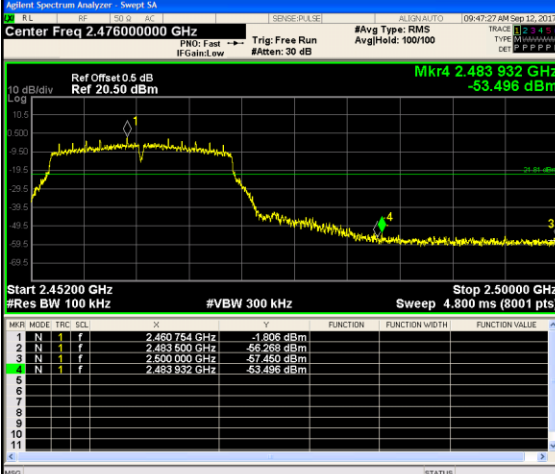Test Item:	Bandedge	Type:	802.11 g / Ant0							
CH01		<table><tr><td>Frequency</td></tr><tr><td>Auto Tune</td></tr><tr><td>Center Freq 2.36600000 GHz</td></tr><tr><td>Start Freq 2.31000000 GHz</td></tr><tr><td>Stop Freq 2.42200000 GHz</td></tr><tr><td>CF Step 11.200000 MHz</td></tr><tr><td>Auto</td></tr><tr><td>Freq Offset 0 Hz</td></tr></table>	Frequency	Auto Tune	Center Freq 2.36600000 GHz	Start Freq 2.31000000 GHz	Stop Freq 2.42200000 GHz	CF Step 11.200000 MHz	Auto	Freq Offset 0 Hz
Frequency										
Auto Tune										
Center Freq 2.36600000 GHz										
Start Freq 2.31000000 GHz										
Stop Freq 2.42200000 GHz										
CF Step 11.200000 MHz										
Auto										
Freq Offset 0 Hz										
CH11		<table><tr><td>Frequency</td></tr><tr><td>Auto Tune</td></tr><tr><td>Center Freq 2.47600000 GHz</td></tr><tr><td>Start Freq 2.45200000 GHz</td></tr><tr><td>Stop Freq 2.50000000 GHz</td></tr><tr><td>CF Step 4.800000 MHz</td></tr><tr><td>Auto</td></tr><tr><td>Freq Offset 0 Hz</td></tr></table>	Frequency	Auto Tune	Center Freq 2.47600000 GHz	Start Freq 2.45200000 GHz	Stop Freq 2.50000000 GHz	CF Step 4.800000 MHz	Auto	Freq Offset 0 Hz
Frequency										
Auto Tune										
Center Freq 2.47600000 GHz										
Start Freq 2.45200000 GHz										
Stop Freq 2.50000000 GHz										
CF Step 4.800000 MHz										
Auto										
Freq Offset 0 Hz										