

## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400158109


Page: 1 of 27

# TEST REPORT

**Application No.:** SZCR2504001581AT  
**Applicant:** Vanstone Electronic (Beijing) Co., Ltd.  
**Address of Applicant:** 3F No.2 Building, Aisino Corporation Park 18A, Xingshikou Road, Haidian District, Beijing, China 100195  
**Manufacturer:** Vanstone Electronic (Beijing) Co., Ltd.  
**Address of Manufacturer:** 3F No.2 Building, Aisino Corporation Park 18A, Xingshikou Road, Haidian District, Beijing, China 100195  
**Equipment Under Test (EUT):**  
**EUT Name:** Android MiniPOS Terminal  
**Model No.:** A80  
**Trade Mark:**   
**FCC ID:** OWL-A80-C  
**Standard(s) :** 47 CFR Part 2  
47 CFR Part 22  
47 CFR Part 24  
47 CFR Part 27  
**Date of Receipt:** 2025-04-21  
**Date of Test:** 2025-04-23 to 2025-06-26  
**Date of Issue:** 2025-06-30

|                     |             |
|---------------------|-------------|
| <b>Test Result:</b> | <b>Pass</b> |
|---------------------|-------------|

\* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu  
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Technical Services Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400158109

Page:

2 of 27

| Revision Record |         |            |          |          |
|-----------------|---------|------------|----------|----------|
| Version         | Chapter | Date       | Modifier | Remark   |
| 01              |         | 2025-06-30 |          | Original |
|                 |         |            |          |          |
|                 |         |            |          |          |

|                          |  |                              |  |  |
|--------------------------|--|------------------------------|--|--|
| Authorized for issue by: |  |                              |  |  |
|                          |  | Calvin Weng                  |  |  |
|                          |  | Calvin Weng/Project Engineer |  |  |
|                          |  | Eric Fu                      |  |  |
|                          |  | Eric Fu/Reviewer             |  |  |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

## 2 Test Summary

| Test Item                                        | FCC Rule No.                                            | Requirements                                                                                                 | Verdict |
|--------------------------------------------------|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|---------|
| Effective (Isotropic) Radiated Output Power Data | §2.1046<br>§22.913<br>§24.232<br>§27.50(d)<br>§27.50(h) | ERP≤ 7W(LTE Band 5)<br>EIRP≤ 2W(LTE Band 2)<br>EIRP≤ 1W(LTE Band 4)<br>EIRP≤ 2W(LTE Band 7,38)               | PASS    |
| Peak-Average Ratio                               | §22.913<br>§24.232<br>§27.50(d)<br>§27.50(d)            | ≤13dB                                                                                                        | PASS    |
| Bandwidth                                        | §2.1049(h)                                              | OBW: No limit<br>EBW: No limit                                                                               | PASS    |
| Band Edge Compliance                             | §2.1051<br>§22.917<br>§24.238<br>§27.50(h)<br>§27.50(m) | ≤ -13dBm (LTE Band5)<br>≤ -13dBm (LTE Band2)<br>≤ -13dBm (LTE Band4)<br>Refer to clause 6.4 for LTE Band7,38 | PASS    |
| Spurious emissions at antenna terminals          | §2.1051<br>§22.917<br>§24.238<br>§27.50(h)<br>§27.50(m) | ≤ -13dBm (LTE Band5)<br>≤ -13dBm (LTE Band2)<br>≤ -13dBm (LTE Band4)<br>Refer to clause 6.5 for LTE Band7,38 | PASS    |
| Field strength of spurious radiation             | §2.1051<br>§22.917<br>§24.238<br>§27.50(h)<br>§27.50(m) | ≤ -13dBm (LTE Band5)<br>≤ -13dBm (LTE Band2)<br>≤ -13dBm (LTE Band4)<br>Refer to clause 6.6 for LTE Band7,38 | PASS    |
| Frequency stability                              | §2.1055<br>§22.355<br>§24.235<br>§27.54                 | ≤ ±2.5ppm.                                                                                                   | PASS    |



## 3 Contents

|                                                      | Page      |
|------------------------------------------------------|-----------|
| <b>1 Cover Page</b>                                  | <b>1</b>  |
| <b>2 Test Summary</b>                                | <b>3</b>  |
| <b>3 Contents</b>                                    | <b>4</b>  |
| <b>4 General Information</b>                         | <b>6</b>  |
| 4.1 Details of E.U.T.                                | 6         |
| 4.2 Test Frequency                                   | 7         |
| 4.3 Test Environment                                 | 8         |
| 4.4 Description of Support Units                     | 8         |
| 4.5 Measurement Uncertainty                          | 9         |
| 4.6 Test Location                                    | 10        |
| 4.7 Test Facility                                    | 10        |
| 4.8 Deviation from Standards                         | 10        |
| 4.9 Abnormalities from Standard Conditions           | 10        |
| <b>5 Equipment List</b>                              | <b>11</b> |
| <b>6 Radio Spectrum Matter Test Results</b>          | <b>13</b> |
| 6.1 Effective (Isotropic) Radiated Output Power Data | 13        |
| 6.1.1 E.U.T. Operation                               | 13        |
| 6.1.2 Test Setup Diagram                             | 13        |
| 6.1.3 Measurement Data                               | 13        |
| 6.2 Peak-Average Ratio                               | 14        |
| 6.2.1 E.U.T. Operation                               | 14        |
| 6.2.2 Test Setup Diagram                             | 14        |
| 6.2.3 Measurement Data                               | 14        |
| 6.3 Bandwidth                                        | 15        |
| 6.3.1 E.U.T. Operation                               | 15        |
| 6.3.2 Test Setup Diagram                             | 15        |
| 6.3.3 Measurement Data                               | 15        |
| 6.4 Band Edge Compliance                             | 16        |
| 6.4.1 E.U.T. Operation                               | 16        |
| 6.4.2 Test Setup Diagram                             | 16        |
| 6.4.3 Measurement Data                               | 16        |
| 6.5 Spurious emissions at antenna terminals          | 17        |
| 6.5.1 E.U.T. Operation                               | 17        |
| 6.5.2 Test Setup Diagram                             | 17        |
| 6.5.3 Measurement Data                               | 17        |
| 6.6 Field strength of spurious radiation             | 18        |
| 6.6.1 E.U.T. Operation                               | 18        |
| 6.6.2 Test Setup Diagram                             | 19        |
| 6.6.3 Measurement Procedure and Data                 | 20        |
| 6.7 Frequency stability                              | 26        |
| 6.7.1 E.U.T. Operation                               | 26        |





## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400158109

Page: 5 of 27

|       |                                               |    |
|-------|-----------------------------------------------|----|
| 6.7.2 | Test Setup Diagram .....                      | 26 |
| 6.7.3 | Measurement Data .....                        | 26 |
| 7     | Test Setup Photo .....                        | 27 |
| 8     | EUT Constructional Details (EUT Photos) ..... | 27 |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 4 General Information

### 4.1 Details of E.U.T.

|                                     |                                                                                                                                                                                                                                                |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply:                       | DC3.85V by li-ion battery(3000mAh)<br>Battery M/N:BT-801<br>Battery Manufacturer:Hunan Gaoyuan Battery Co.,LTD<br>Recharged by AC/DC Power Adapter<br>Adapter M/N: SW-0983<br>Adapter Input:AC100-240V, 50/60Hz,0.5A<br>Adapter Output:DC5V/2A |
| Cable(s):                           | USB Type C cable: 1.5m unshielded cable without ferrite core                                                                                                                                                                                   |
| Cable Loss (for RF conducted test): | Below 1GHz: 0.5dB, 1GHz~2GHz:0.7dB, Above 2GHz: 1dB                                                                                                                                                                                            |
| Sample Type:                        | Portable product                                                                                                                                                                                                                               |
| LTE Operation Frequency Band:       | LTE B2/4/5/7/38                                                                                                                                                                                                                                |
| Modulation Type:                    | QPSK, 16QAM                                                                                                                                                                                                                                    |
| LTE Power Class:                    | Level 3                                                                                                                                                                                                                                        |
| Antenna Type:                       | PIFA Antenna                                                                                                                                                                                                                                   |
| Antenna Gain:                       | LTE B2:-0.38dBi; B4:-0.4dBi;B5:-2.92dBi;B7:2.58dBi; B38:2.88dBi                                                                                                                                                                                |

Remark:The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 4.2 Test Frequency

| Test mode:     | Nominal Bandwidth (MHz) | RF Channel |            |          |
|----------------|-------------------------|------------|------------|----------|
|                |                         | Low (L)    | Middle (M) | High (H) |
|                |                         | MHz        | MHz        | MHz      |
| LTE FDD Band 2 | 1.4                     | 1850.7     | 1880       | 1909.3   |
|                | 3                       | 1851.5     | 1880       | 1908.5   |
|                | 5                       | 1852.5     | 1880       | 1907.5   |
|                | 10                      | 1855.0     | 1880       | 1905.0   |
|                | 15                      | 1857.5     | 1880       | 1902.5   |
|                | 20                      | 1860.0     | 1880       | 1900.0   |
| Test mode:     | Nominal Bandwidth (MHz) | RF Channel |            |          |
|                |                         | Low (L)    | Middle (M) | High (H) |
|                |                         | MHz        | MHz        | MHz      |
| LTE FDD Band 4 | 1.4                     | 1710.7     | 1732.5     | 1754.3   |
|                | 3                       | 1711.5     | 1732.5     | 1751.5   |
|                | 5                       | 1712.5     | 1732.5     | 1752.5   |
|                | 10                      | 1715.0     | 1732.5     | 1750.0   |
|                | 15                      | 1717.5     | 1732.5     | 1747.5   |
|                | 20                      | 1720.0     | 1732.5     | 1745.0   |
| Test mode:     | Nominal Bandwidth (MHz) | RF Channel |            |          |
|                |                         | Low (L)    | Middle (M) | High (H) |
|                |                         | MHz        | MHz        | MHz      |
| LTE FDD Band 5 | 1.4                     | 824.7      | 836.5      | 848.3    |
|                | 3                       | 825.5      | 836.5      | 847.5    |
|                | 5                       | 826.5      | 836.5      | 846.5    |
|                | 10                      | 829.0      | 836.5      | 844.0    |
| Test mode:     | Nominal Bandwidth (MHz) | RF Channel |            |          |
|                |                         | Low (L)    | Middle (M) | High (H) |
|                |                         | MHz        | MHz        | MHz      |
| LTE FDD Band 7 | 5                       | 2502.5     | 2535.0     | 2567.5   |
|                | 10                      | 2505.0     | 2535.0     | 2565.0   |
|                | 15                      | 2507.5     | 2535.0     | 2562.5   |
|                | 20                      | 2510.0     | 2535.0     | 2560.0   |



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400158109

Page: 8 of 27

| Test mode:      | Nominal Bandwidth (MHz) | RF Channel |            |          |
|-----------------|-------------------------|------------|------------|----------|
|                 |                         | Low (L)    | Middle (M) | High (H) |
|                 |                         | MHz        | MHz        | MHz      |
| LTE FDD Band 38 | 5                       | 2572.5     | 2595.0     | 2617.5   |
|                 | 10                      | 2575.0     | 2595.0     | 2615.0   |
|                 | 15                      | 2577.5     | 2595.0     | 2612.5   |
|                 | 20                      | 2580.0     | 2595.0     | 2610.0   |

### 4.3 Test Environment

| Environment Parameter | Selected Values During Tests |          |
|-----------------------|------------------------------|----------|
| Temperature:          | TL                           | -30°C    |
|                       | TN                           | +20°C    |
|                       | TH                           | +50°C    |
| Voltage:              | VL                           | 3.5 Vdc  |
|                       | VN                           | 3.85 Vdc |
|                       | VH                           | 4.4 Vdc  |

NOTE: VL= lower extreme test voltage  
 VN= nominal voltage  
 VH= upper extreme test voltage  
 TL= lower extreme test temperature  
 TN= normal temperature  
 TH= upper extreme test temperature

### 4.4 Description of Support Units

| Description | Manufacturer | Model No. | Serial No. |
|-------------|--------------|-----------|------------|
| --          | --           | --        | --         |



SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch Inspection & Testing Services Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 4.5 Measurement Uncertainty

| No. | Item                            | Measurement Uncertainty         |
|-----|---------------------------------|---------------------------------|
| 1   | Radio Frequency                 | $\pm 5.4 \times 10^{-8}$        |
| 2   | Duty cycle                      | $\pm 0.3\%$                     |
| 3   | Occupied Bandwidth              | $\pm 3\%$                       |
| 4   | RF conducted power              | $\pm 0.8\text{dB}$              |
| 5   | RF power density                | $\pm 0.4\text{dB}$              |
| 6   | Conducted Spurious emissions    | $\pm 2.7\text{dB}$              |
| 7   | Radiated Spurious emission test | $\pm 3.1\text{dB}$ (Below 1GHz) |
|     |                                 | $\pm 4.4\text{dB}$ (Above 1GHz) |
| 8   | Temperature test                | $\pm 1^\circ\text{C}$           |
| 9   | Humidity test                   | $\pm 3\%$                       |
| 10  | Supply voltages                 | $\pm 1.5\%$                     |
| 11  | Time                            | $\pm 3\%$                       |



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400158109

Page:

10 of 27

### 4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

### 4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI (Member No. 1937)**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1336**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

### 4.8 Deviation from Standards

None

### 4.9 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (Shenzhen EMC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400158109

Page:

11 of 27

### 5 Equipment List

| RF conducted test                           |                              |               |               |            |               |
|---------------------------------------------|------------------------------|---------------|---------------|------------|---------------|
| Test Equipment                              | Manufacturer                 | Model No.     | Inventory No. | Cal. Date  | Cal. Due date |
| Programmable DC Source                      | Chroma                       | 62024P-80-60  | SEM011-09     | 2024-07-10 | 2025-07-09    |
| MXA Signal Analyzer                         | KEYSIGHT                     | N9020B        | SEM004-30     | 2025-03-03 | 2026-03-02    |
| Measurement Software                        | TST                          | TST PASS V2.0 | N/A           | N/A        | N/A           |
| Attenuator                                  | Huber+Suhner                 | 6620_SMA-50-1 | SEM021-09     | N/A        | N/A           |
| Universal Radio Communication Tester        | Rohde & Schwarz              | CMW 500       | SEM010-11     | 2025-03-03 | 2026-03-02    |
| Programmable Temperature & Humidity Chamber | Votsch Industrietechnik GmbH | VT 4002       | SEM002-15     | 2025-02-26 | 2026-02-25    |
| Power Sensor                                | KEYSIGHT                     | U2021XA       | SEM009-15     | 2025-03-05 | 2026-03-04    |

| RE in Chamber                |                                    |                 |               |            |               |
|------------------------------|------------------------------------|-----------------|---------------|------------|---------------|
| Test Equipment               | Manufacturer                       | Model No.       | Inventory No. | Cal. Date  | Cal. Due date |
| 3m Fully-Anechoic Chamber    | AUDIX                              | N/A             | SEM001-02     | 2024-05-11 | 2027-05-10    |
| Signal Analyzer              | Rohde & Schwarz                    | FSV40           | SEM008-04     | 2025-03-04 | 2026-03-03    |
| Trilog-Broadband Antenna     | Schwarzbeck                        | VULB9168        | SEM003-33     | 2023-09-23 | 2025-09-22    |
| Substitution Antenna         | Schwarzbeck                        | VULB9168        | SEM003-18     | 2022-08-07 | 2025-08-06    |
| Horn Antenna                 | Rohde&Schwarz                      | HF907           | SEM003-07     | 2023-07-23 | 2025-07-22    |
| Microwave system amplifier   | Agilent                            | 83017A          | SEM005-25     | 2024-09-14 | 2025-09-13    |
| Measurement Software         | AUDIX                              | e3 V8.2014-6-27 | N/A           | N/A        | N/A           |
| Coaxial Cable                | SGS                                | N/A             | SEM026-01     | 2024-07-06 | 2025-07-05    |
| Broad-Band Horn Antenna      | Schwarzbeck                        | BBHA 9170       | SEM003-15     | 2024-08-10 | 2025-08-09    |
| Pre-Amplifier                | Compliance Directions Systems Inc. | PAP-2640-50     | SEM005-08     | 2025-03-21 | 2026-03-20    |
| Signal Generator(9kHz-40GHz) | N5173B                             | MY53270267      | Agilent       | 2024-09-14 | 2025-09-13    |
| Broad-Band Horn Antenna      | Schwarzbeck                        | BBHA 9120D      | SEM003-32     | 2023-09-17 | 2025-09-16    |
| Pre-amplifier                | Rohde & Schwarz                    | CH14-H052       | SEM005-17     | 2025-03-21 | 2026-03-20    |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (Testing & Calibration Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400158109

Page: 12 of 27

|                                      |                 |         |           |            |            |
|--------------------------------------|-----------------|---------|-----------|------------|------------|
| Substitution Antenna                 | Rohde & Schwarz | HF907   | SEM003-06 | 2024-08-03 | 2025-08-02 |
| Substitution Antenna                 | ETS-LINDGREN    | 3160-09 | SEM003-12 | 2024-08-03 | 2025-08-02 |
| Universal Radio Communication Tester | Rohde & Schwarz | CMW 500 | SEM010-03 | 2025-03-03 | 2026-03-02 |

| General used equipment          |                                           |           |               |            |              |
|---------------------------------|-------------------------------------------|-----------|---------------|------------|--------------|
| Equipment                       | Manufacturer                              | Model No. | Inventory No. | Cal Date   | Cal Due Date |
| Humidity- Temperature Indicator | deli                                      | 8838      | SEM002-32     | 2024-07-24 | 2025-07-23   |
| Humidity- Temperature Indicator | deli                                      | 8838      | SEM002-33     | 2024-07-24 | 2025-07-23   |
| Barometer                       | Changchun Meteorological Industry Factory | DYM3      | SEM002-01     | 2025-03-03 | 2026-03-02   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

## 6 Radio Spectrum Matter Test Results


### 6.1 Effective (Isotropic) Radiated Output Power Data

Test Requirement: §2.1046, §22.913, §24.232, §27.50(d), §27.50(h)  
 Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01  
 Limit:  
 ERP ≤ 7W (LTE Band 5)  
 EIRP ≤ 2W (LTE Band 2)  
 EIRP ≤ 1W (LTE Band 4)  
 EIRP ≤ 2W (LTE Band 7, 38)

#### 6.1.1 E.U.T. Operation

Operating Environment:  
 Temperature: 23.1 °C Humidity: 49.4 % RH Atmospheric Pressure: 1020 mbar  
 Test mode 32: TX mode\_Keep the EUT in transmitting mode

#### 6.1.2 Test Setup Diagram

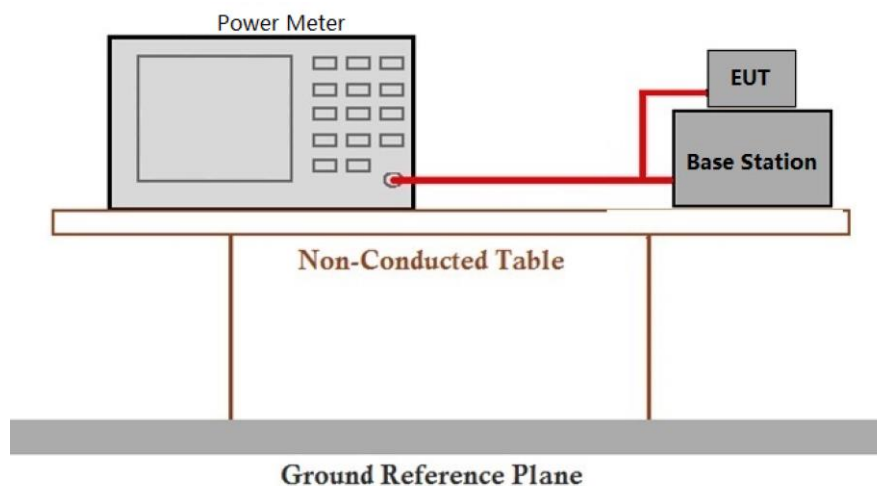

#### 6.1.3 Measurement Data

Please refer to Appendix for LTE test data.


### 6.2 Peak-Average Ratio

Test Requirement: §22.913, §24.232, §27.50(d)  
 Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01  
 Limit: ≤13dB

#### 6.2.1 E.U.T. Operation

Operating Environment:  
 Temperature: 23.1 °C Humidity: 49.4 % RH Atmospheric Pressure: 1020 mbar  
 Test mode 32: TX mode\_Keep the EUT in transmitting mode

#### 6.2.2 Test Setup Diagram

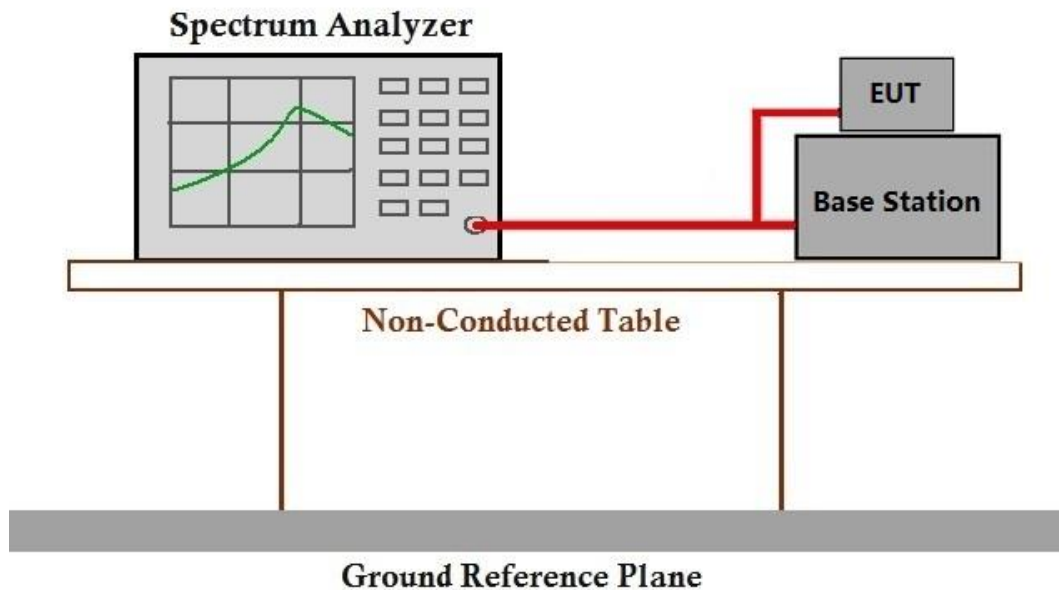

#### 6.2.3 Measurement Data

Please refer to Appendix for LTE test data.


### 6.3 Bandwidth

Test Requirement: S2.1049(h)  
 Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01  
 Limit: OBW: No limit  
 EBW: No limit

#### 6.3.1 E.U.T. Operation

Operating Environment:  
 Temperature: 23.1 °C Humidity: 49.4 % RH Atmospheric Pressure: 1020 mbar  
 Test mode 32: TX mode\_Keep the EUT in transmitting mode

#### 6.3.2 Test Setup Diagram

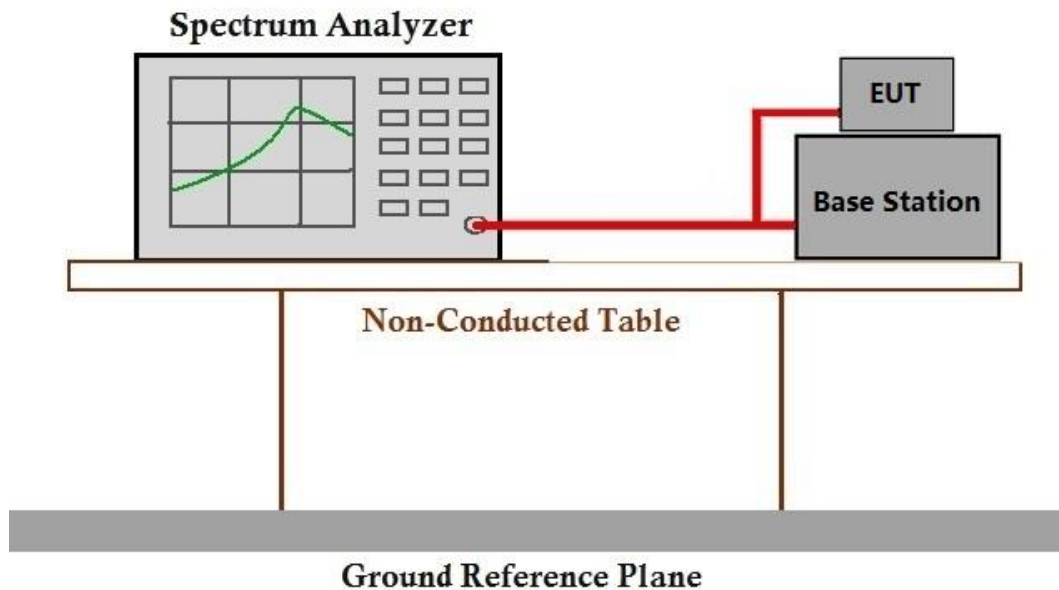

#### 6.3.3 Measurement Data

Please refer to Appendix for LTE test data.

### 6.4 Band Edge Compliance

Test Requirement: §2.1051, §22.917, §24.238, §27.50(h), §27.50(m)

Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01

Limit:  $\leq -13\text{dBm}$  (**LTE Band2,4,5**)

For **Band7,38**:

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.


#### 6.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C Humidity: 49.4 % RH Atmospheric Pressure: 1020 mbar

Test mode 32: TX mode\_Keep the EUT in transmitting mode

#### 6.4.2 Test Setup Diagram

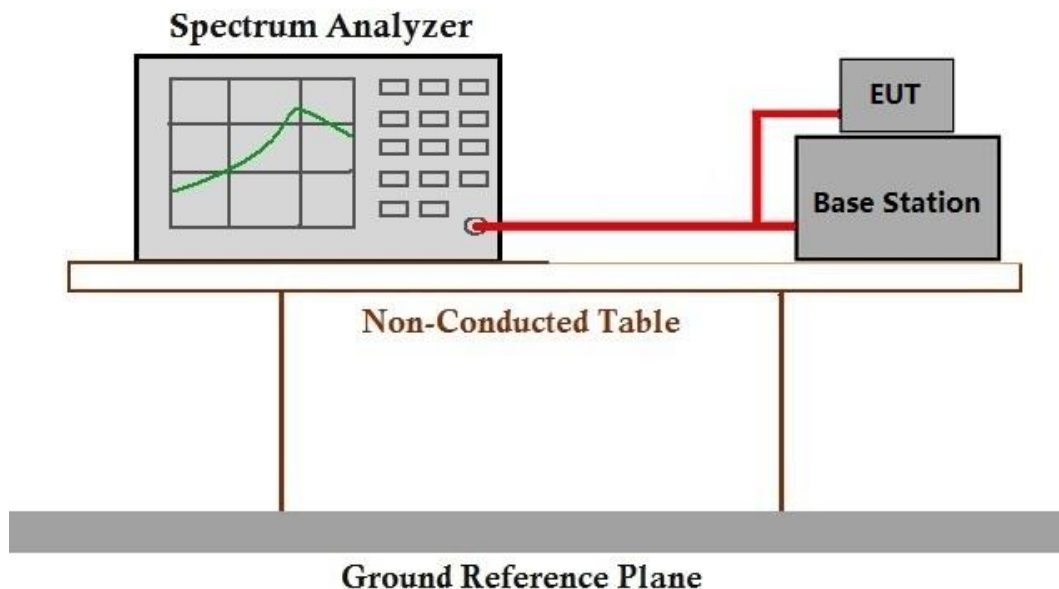

#### 6.4.3 Measurement Data

Please refer to Appendix for LTE test data.

### 6.5 Spurious emissions at antenna terminals

Test Requirement: §2.1051, §22.917, §24.238, §27.50(h), §27.50(m)

Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01

Limit:  $\leq -13\text{dBm}$  (**LTE Band2,4,5**)

For **Band7,38**:

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.


#### 6.5.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C Humidity: 49.4 % RH Atmospheric Pressure: 1020 mbar

Test mode 32: TX mode\_Keep the EUT in transmitting mode

#### 6.5.2 Test Setup Diagram

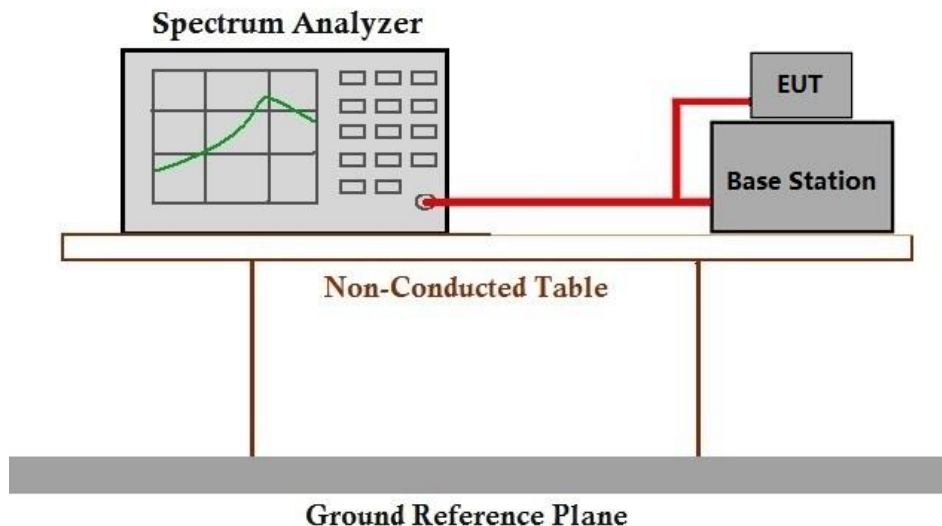

#### 6.5.3 Measurement Data

Please refer to Appendix for LTE test data.

## 6.6 Field strength of spurious radiation

Test Requirement: §2.1051, §22.917, §24.238, §27.50(h), §27.50(m)

Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01

Limit:  $\leq -13\text{dBm}$  (**LTE Band2,4,5**)

For **Band7,38**:

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### 6.6.1 E.U.T. Operation


Operating Environment:

Temperature: 21.5 °C Humidity: 49.5 % RH Atmospheric Pressure: 1020 mbar

Test mode 32: TX mode\_Keep the EUT in transmitting mode



### 6.6.2 Test Setup Diagram

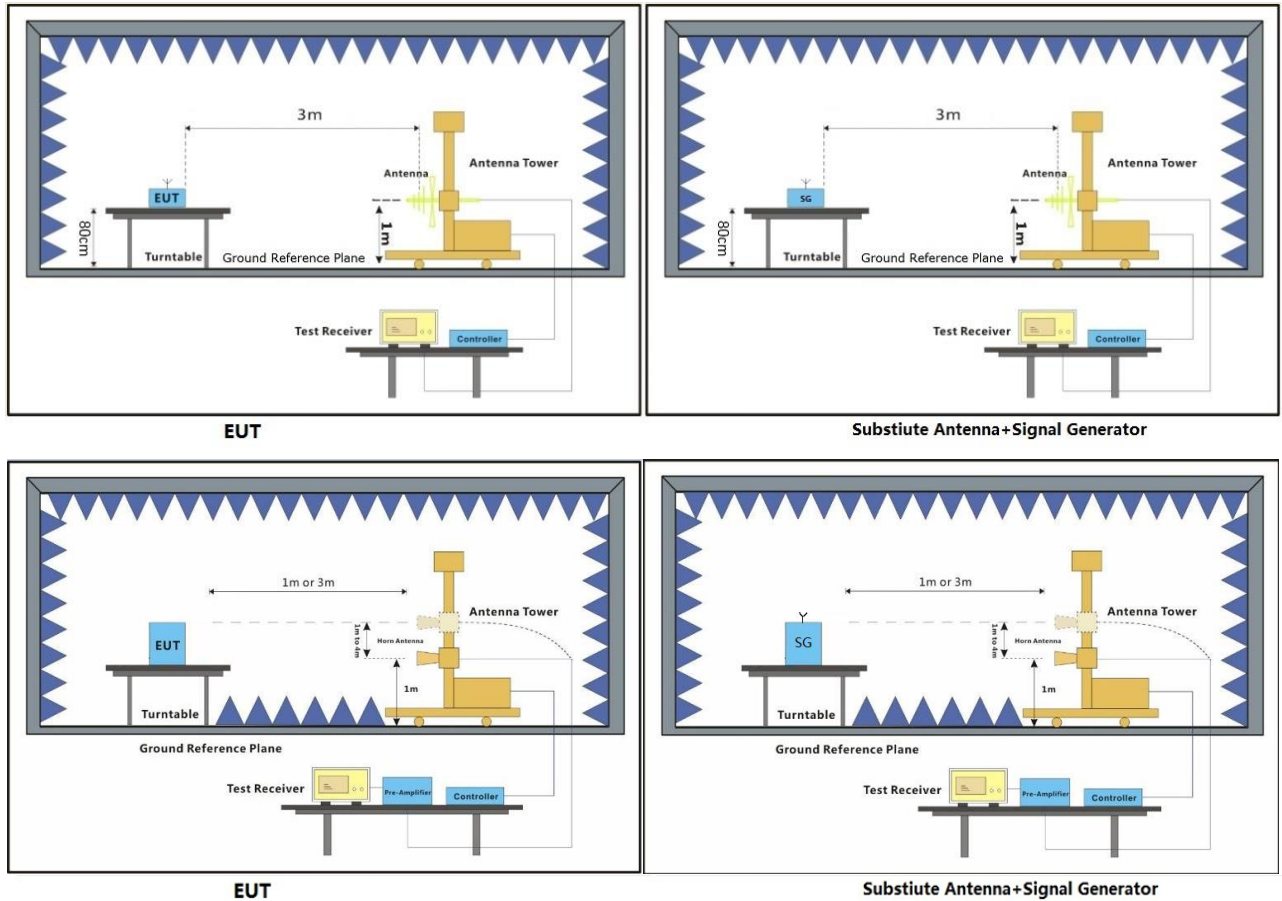

## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400158109

Page: 20 of 27

### 6.6.3 Measurement Procedure and Data

#### Test Procedure:

- (1) On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (Shenzhen EMC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400158109

Page:

21 of 27

| LTE Band 2-Low channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0 |            |             |                 |                  |                 |                    |                    |        |
|------------------------------------------------------------------|------------|-------------|-----------------|------------------|-----------------|--------------------|--------------------|--------|
| Frequency (MHz)                                                  | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | Cable Loss (dB) | Antenna Gain (dBi) | Polarization (H/V) | Result |
| 3702.0                                                           | -52.87     | -13         | -39.87          | -57.73           | 3.58            | 8.44               | Horizontal         | Pass   |
| 5553.0                                                           | -59.88     | -13         | -46.88          | -65.59           | 4.74            | 10.45              | Horizontal         | Pass   |
| 7404.0                                                           | -53.18     | -13         | -40.18          | -59.86           | 4.94            | 11.62              | Horizontal         | Pass   |
| 3702.0                                                           | -50.61     | -13         | -37.61          | -55.47           | 3.58            | 8.44               | Vertical           | Pass   |
| 5553.0                                                           | -56.84     | -13         | -43.84          | -62.55           | 4.74            | 10.45              | Vertical           | Pass   |
| 7404.0                                                           | -58.92     | -13         | -45.92          | -65.6            | 4.94            | 11.62              | Vertical           | Pass   |

| LTE Band 2-Middle channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0 |            |             |                 |                  |                 |                    |                    |        |
|---------------------------------------------------------------------|------------|-------------|-----------------|------------------|-----------------|--------------------|--------------------|--------|
| Frequency (MHz)                                                     | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | Cable Loss (dB) | Antenna Gain (dBi) | Polarization (H/V) | Result |
| 3742.0                                                              | -54.06     | -13         | -41.06          | -58.94           | 3.61            | 8.49               | Horizontal         | Pass   |
| 5613.0                                                              | -62.95     | -13         | -49.95          | -68.66           | 4.74            | 10.45              | Horizontal         | Pass   |
| 7484.0                                                              | -56.63     | -13         | -43.63          | -63.41           | 4.94            | 11.72              | Horizontal         | Pass   |
| 3742.0                                                              | -54.44     | -13         | -41.44          | -59.32           | 3.61            | 8.49               | Vertical           | Pass   |
| 5613.0                                                              | -59.61     | -13         | -46.61          | -65.32           | 4.74            | 10.45              | Vertical           | Pass   |
| 7484.0                                                              | -55.59     | -13         | -42.59          | -62.37           | 4.94            | 11.72              | Vertical           | Pass   |

| LTE Band 2-High channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0 |            |             |                 |                  |                 |                    |                    |        |
|-------------------------------------------------------------------|------------|-------------|-----------------|------------------|-----------------|--------------------|--------------------|--------|
| Frequency (MHz)                                                   | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | Cable Loss (dB) | Antenna Gain (dBi) | Polarization (H/V) | Result |
| 3782.0                                                            | -52.17     | -13         | -39.17          | -57.07           | 3.65            | 8.55               | Horizontal         | Pass   |
| 5673.0                                                            | -60.47     | -13         | -47.47          | -66.17           | 4.75            | 10.45              | Horizontal         | Pass   |
| 7564.0                                                            | -57.0      | -13         | -44.0           | -63.87           | 4.95            | 11.82              | Horizontal         | Pass   |
| 3782.0                                                            | -59.11     | -13         | -46.11          | -64.01           | 3.65            | 8.55               | Vertical           | Pass   |
| 5673.0                                                            | -60.53     | -13         | -47.53          | -66.23           | 4.75            | 10.45              | Vertical           | Pass   |
| 7564.0                                                            | -54.02     | -13         | -41.02          | -60.89           | 4.95            | 11.82              | Vertical           | Pass   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400158109

Page:

22 of 27

| LTE Band 4-Low channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0 |            |             |                 |                  |                 |                    |                    |        |
|------------------------------------------------------------------|------------|-------------|-----------------|------------------|-----------------|--------------------|--------------------|--------|
| Frequency (MHz)                                                  | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | Cable Loss (dB) | Antenna Gain (dBi) | Polarization (H/V) | Result |
| 3422.0                                                           | -56.75     | -13         | -43.75          | -61.37           | 3.36            | 7.98               | Horizontal         | Pass   |
| 5133.0                                                           | -54.24     | -13         | -41.24          | -59.85           | 4.61            | 10.22              | Horizontal         | Pass   |
| 6844.0                                                           | -55.87     | -13         | -42.87          | -61.9            | 4.9             | 10.93              | Horizontal         | Pass   |
| 3422.0                                                           | -61.24     | -13         | -48.24          | -65.86           | 3.36            | 7.98               | Vertical           | Pass   |
| 5133.0                                                           | -57.69     | -13         | -44.69          | -63.3            | 4.61            | 10.22              | Vertical           | Pass   |
| 6844.0                                                           | -58.57     | -13         | -45.57          | -64.6            | 4.9             | 10.93              | Vertical           | Pass   |

| LTE Band 4-Middle channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0 |            |             |                 |                  |                 |                    |                    |        |
|---------------------------------------------------------------------|------------|-------------|-----------------|------------------|-----------------|--------------------|--------------------|--------|
| Frequency (MHz)                                                     | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | Cable Loss (dB) | Antenna Gain (dBi) | Polarization (H/V) | Result |
| 3447.0                                                              | -50.89     | -13         | -37.89          | -55.56           | 3.37            | 8.04               | Horizontal         | Pass   |
| 5170.5                                                              | -52.08     | -13         | -39.08          | -57.71           | 4.62            | 10.25              | Horizontal         | Pass   |
| 6894.0                                                              | -50.3      | -13         | -37.3           | -56.39           | 4.9             | 10.99              | Horizontal         | Pass   |
| 3447.0                                                              | -56.96     | -13         | -43.96          | -61.63           | 3.37            | 8.04               | Vertical           | Pass   |
| 5170.5                                                              | -54.39     | -13         | -41.39          | -60.02           | 4.62            | 10.25              | Vertical           | Pass   |
| 6894.0                                                              | -52.7      | -13         | -39.7           | -58.79           | 4.9             | 10.99              | Vertical           | Pass   |

| LTE Band 4-High channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0 |            |             |                 |                  |                 |                    |                    |        |
|-------------------------------------------------------------------|------------|-------------|-----------------|------------------|-----------------|--------------------|--------------------|--------|
| Frequency (MHz)                                                   | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | Cable Loss (dB) | Antenna Gain (dBi) | Polarization (H/V) | Result |
| 3472.0                                                            | -53.21     | -13         | -40.21          | -57.92           | 3.39            | 8.1                | Horizontal         | Pass   |
| 5208.0                                                            | -53.35     | -13         | -40.35          | -58.98           | 4.64            | 10.27              | Horizontal         | Pass   |
| 6944.0                                                            | -53.82     | -13         | -40.82          | -59.97           | 4.91            | 11.06              | Horizontal         | Pass   |
| 3472.0                                                            | -55.84     | -13         | -42.84          | -60.55           | 3.39            | 8.1                | Vertical           | Pass   |
| 5208.0                                                            | -56.27     | -13         | -43.27          | -61.9            | 4.64            | 10.27              | Vertical           | Pass   |
| 6944.0                                                            | -54.15     | -13         | -41.15          | -60.3            | 4.91            | 11.06              | Vertical           | Pass   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Technical Service Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400158109

Page:

23 of 27

| LTE Band 5-Low channel, Modulation: QPSK, Bandwidth:10MHz, 1RB#0 |            |             |                 |                  |                 |                    |                    |        |
|------------------------------------------------------------------|------------|-------------|-----------------|------------------|-----------------|--------------------|--------------------|--------|
| Frequency (MHz)                                                  | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | Cable Loss (dB) | Antenna Gain (dBi) | Polarization (H/V) | Result |
| 1649.0                                                           | -62.9      | -13         | -49.9           | -65.78           | 2.62            | 5.5                | Horizontal         | Pass   |
| 2473.5                                                           | -67.14     | -13         | -54.14          | -69.84           | 3.06            | 5.76               | Horizontal         | Pass   |
| 3298.0                                                           | -60.51     | -13         | -47.51          | -64.87           | 3.3             | 7.66               | Horizontal         | Pass   |
| 1649.0                                                           | -61.14     | -13         | -48.14          | -64.02           | 2.62            | 5.5                | Vertical           | Pass   |
| 2473.5                                                           | -69.65     | -13         | -56.65          | -72.35           | 3.06            | 5.76               | Vertical           | Pass   |
| 3298.0                                                           | -59.18     | -13         | -46.18          | -63.54           | 3.3             | 7.66               | Vertical           | Pass   |

| LTE Band 5-Middle channel, Modulation: QPSK, Bandwidth:10MHz, 1RB#0 |            |             |                 |                  |                 |                    |                    |        |
|---------------------------------------------------------------------|------------|-------------|-----------------|------------------|-----------------|--------------------|--------------------|--------|
| Frequency (MHz)                                                     | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | Cable Loss (dB) | Antenna Gain (dBi) | Polarization (H/V) | Result |
| 1664.0                                                              | -63.96     | -13         | -50.96          | -66.8            | 2.63            | 5.47               | Horizontal         | Pass   |
| 2496.0                                                              | -68.41     | -13         | -55.41          | -71.14           | 3.08            | 5.81               | Horizontal         | Pass   |
| 3328.0                                                              | -61.28     | -13         | -48.28          | -65.71           | 3.31            | 7.74               | Horizontal         | Pass   |
| 1664.0                                                              | -59.1      | -13         | -46.1           | -61.94           | 2.63            | 5.47               | Vertical           | Pass   |
| 2496.0                                                              | -67.34     | -13         | -54.34          | -70.07           | 3.08            | 5.81               | Vertical           | Pass   |
| 3328.0                                                              | -62.91     | -13         | -49.91          | -67.34           | 3.31            | 7.74               | Vertical           | Pass   |

| LTE Band 5-High channel, Modulation: QPSK, Bandwidth:10MHz, 1RB#0 |            |             |                 |                  |                 |                    |                    |        |
|-------------------------------------------------------------------|------------|-------------|-----------------|------------------|-----------------|--------------------|--------------------|--------|
| Frequency (MHz)                                                   | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | Cable Loss (dB) | Antenna Gain (dBi) | Polarization (H/V) | Result |
| 1679.0                                                            | -60.05     | -13         | -47.05          | -62.85           | 2.63            | 5.43               | Horizontal         | Pass   |
| 2518.5                                                            | -67.93     | -13         | -54.93          | -70.71           | 3.08            | 5.86               | Horizontal         | Pass   |
| 3358.0                                                            | -63.25     | -13         | -50.25          | -67.74           | 3.33            | 7.82               | Horizontal         | Pass   |
| 1679.0                                                            | -60.42     | -13         | -47.42          | -63.22           | 2.63            | 5.43               | Vertical           | Pass   |
| 2518.5                                                            | -64.3      | -13         | -51.3           | -67.08           | 3.08            | 5.86               | Vertical           | Pass   |
| 3358.0                                                            | -66.81     | -13         | -53.81          | -71.3            | 3.33            | 7.82               | Vertical           | Pass   |

# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400158109

Page:

24 of 27

| LTE Band 7-Low channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0 |            |             |                 |                  |                 |                    |                    |        |
|------------------------------------------------------------------|------------|-------------|-----------------|------------------|-----------------|--------------------|--------------------|--------|
| Frequency (MHz)                                                  | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | Cable Loss (dB) | Antenna Gain (dBi) | Polarization (H/V) | Result |
| 5002.0                                                           | -48.37     | -25         | -23.37          | -53.94           | 4.57            | 10.14              | Horizontal         | Pass   |
| 7503.0                                                           | -59.22     | -25         | -34.22          | -66.02           | 4.94            | 11.74              | Horizontal         | Pass   |
| 10004.0                                                          | -56.16     | -25         | -31.16          | -63.73           | 5.46            | 13.03              | Horizontal         | Pass   |
| 5002.0                                                           | -51.06     | -25         | -26.06          | -56.63           | 4.57            | 10.14              | Vertical           | Pass   |
| 7503.0                                                           | -60.51     | -25         | -35.51          | -67.31           | 4.94            | 11.74              | Vertical           | Pass   |
| 10004.0                                                          | -57.39     | -25         | -32.39          | -64.96           | 5.46            | 13.03              | Vertical           | Pass   |

| LTE Band 7-Middle channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0 |            |             |                 |                  |                 |                    |                    |        |
|---------------------------------------------------------------------|------------|-------------|-----------------|------------------|-----------------|--------------------|--------------------|--------|
| Frequency (MHz)                                                     | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | Cable Loss (dB) | Antenna Gain (dBi) | Polarization (H/V) | Result |
| 5052.0                                                              | -49.27     | -25         | -24.27          | -54.85           | 4.59            | 10.17              | Horizontal         | Pass   |
| 7578.0                                                              | -57.65     | -25         | -32.65          | -64.53           | 4.95            | 11.83              | Horizontal         | Pass   |
| 10104.0                                                             | -56.95     | -25         | -31.95          | -64.52           | 5.48            | 13.05              | Horizontal         | Pass   |
| 5052.0                                                              | -48.49     | -25         | -23.49          | -54.07           | 4.59            | 10.17              | Vertical           | Pass   |
| 7578.0                                                              | -59.4      | -25         | -34.4           | -66.28           | 4.95            | 11.83              | Vertical           | Pass   |
| 10104.0                                                             | -57.1      | -25         | -32.1           | -64.67           | 5.48            | 13.05              | Vertical           | Pass   |

| LTE Band 7-High channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0 |            |             |                 |                  |                 |                    |                    |        |
|-------------------------------------------------------------------|------------|-------------|-----------------|------------------|-----------------|--------------------|--------------------|--------|
| Frequency (MHz)                                                   | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | Cable Loss (dB) | Antenna Gain (dBi) | Polarization (H/V) | Result |
| 5102.0                                                            | -49.11     | -25         | -24.11          | -54.71           | 4.6             | 10.2               | Horizontal         | Pass   |
| 7653.0                                                            | -57.73     | -25         | -32.73          | -64.7            | 4.95            | 11.92              | Horizontal         | Pass   |
| 10204.0                                                           | -56.91     | -25         | -31.91          | -64.49           | 5.49            | 13.07              | Horizontal         | Pass   |
| 5102.0                                                            | -50.81     | -25         | -25.81          | -56.41           | 4.6             | 10.2               | Vertical           | Pass   |
| 7653.0                                                            | -59.27     | -25         | -34.27          | -66.24           | 4.95            | 11.92              | Vertical           | Pass   |
| 10204.0                                                           | -56.44     | -25         | -31.44          | -64.02           | 5.49            | 13.07              | Vertical           | Pass   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Technical Services Co., Ltd. Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400158109

Page:

25 of 27

| LTE Band 38-Low channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0 |            |             |                 |                  |                 |                    |                    |        |
|-------------------------------------------------------------------|------------|-------------|-----------------|------------------|-----------------|--------------------|--------------------|--------|
| Frequency (MHz)                                                   | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | Cable Loss (dB) | Antenna Gain (dBi) | Polarization (H/V) | Result |
| 5142.0                                                            | -51.4      | -25         | -26.4           | -57.01           | 4.62            | 10.23              | Horizontal         | Pass   |
| 7713.0                                                            | -55.75     | -25         | -30.75          | -62.78           | 4.96            | 11.99              | Horizontal         | Pass   |
| 10284.0                                                           | -54.6      | -25         | -29.6           | -62.17           | 5.51            | 13.08              | Horizontal         | Pass   |
| 5142.0                                                            | -53.66     | -25         | -28.66          | -59.27           | 4.62            | 10.23              | Vertical           | Pass   |
| 7713.0                                                            | -59.59     | -25         | -34.59          | -66.62           | 4.96            | 11.99              | Vertical           | Pass   |
| 10284.0                                                           | -56.07     | -25         | -31.07          | -63.64           | 5.51            | 13.08              | Vertical           | Pass   |

| LTE Band 38-Middle channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0 |            |             |                 |                  |                 |                    |                    |        |
|----------------------------------------------------------------------|------------|-------------|-----------------|------------------|-----------------|--------------------|--------------------|--------|
| Frequency (MHz)                                                      | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | Cable Loss (dB) | Antenna Gain (dBi) | Polarization (H/V) | Result |
| 5172.0                                                               | -54.51     | -25         | -29.51          | -60.13           | 4.63            | 10.25              | Horizontal         | Pass   |
| 7758.0                                                               | -57.17     | -25         | -32.17          | -64.25           | 4.96            | 12.04              | Horizontal         | Pass   |
| 10344.0                                                              | -56.4      | -25         | -31.4           | -63.97           | 5.52            | 13.09              | Horizontal         | Pass   |
| 5172.0                                                               | -50.17     | -25         | -25.17          | -55.79           | 4.63            | 10.25              | Vertical           | Pass   |
| 7758.0                                                               | -59.1      | -25         | -34.1           | -66.18           | 4.96            | 12.04              | Vertical           | Pass   |
| 10344.0                                                              | -56.4      | -25         | -31.4           | -63.97           | 5.52            | 13.09              | Vertical           | Pass   |

| LTE Band 38-High channel, Modulation: QPSK, Bandwidth:20MHz, 1RB#0 |            |             |                 |                  |                 |                    |                    |        |
|--------------------------------------------------------------------|------------|-------------|-----------------|------------------|-----------------|--------------------|--------------------|--------|
| Frequency (MHz)                                                    | EIRP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | Cable Loss (dB) | Antenna Gain (dBi) | Polarization (H/V) | Result |
| 5202.0                                                             | -52.14     | -25         | -27.14          | -57.78           | 4.63            | 10.27              | Horizontal         | Pass   |
| 7803.0                                                             | -55.29     | -25         | -30.29          | -62.43           | 4.96            | 12.1               | Horizontal         | Pass   |
| 10404.0                                                            | -56.41     | -25         | -31.41          | -63.99           | 5.52            | 13.1               | Horizontal         | Pass   |
| 5202.0                                                             | -51.05     | -25         | -26.05          | -56.69           | 4.63            | 10.27              | Vertical           | Pass   |
| 7803.0                                                             | -58.62     | -25         | -33.62          | -65.76           | 4.96            | 12.1               | Vertical           | Pass   |
| 10404.0                                                            | -56.54     | -25         | -31.54          | -64.12           | 5.52            | 13.1               | Vertical           | Pass   |

Note: All modes have been tested and we found QPSK test mode has the worst test result. Only record the worst test result.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Technical Service Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


### 6.7 Frequency stability

Test Requirement: \$2.1055,\$22.355,\$24.235,\$27.54  
 Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01  
 Limit:  $\leq \pm 2.5\text{ppm}$ .

#### 6.7.1 E.U.T. Operation

Operating Environment:  
 Temperature: 23.1 °C Humidity: 49.4 % RH Atmospheric Pressure: 1020 mbar  
 Test mode 32: TX mode\_Keep the EUT in transmitting mode

#### 6.7.2 Test Setup Diagram

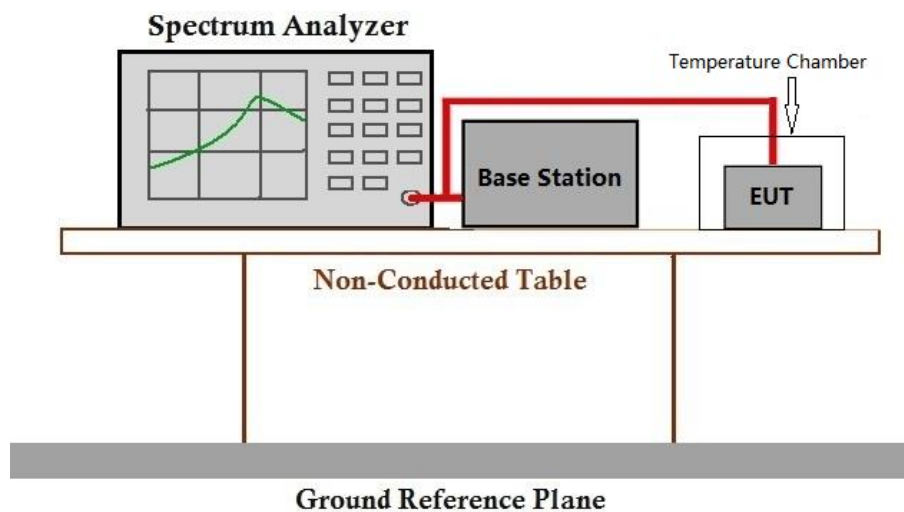

#### 6.7.3 Measurement Data

Please refer to Appendix for LTE test data.

## 7 Test Setup Photo

Refer to Appendix - Test Setup Photo for SZCR2504001581AT

## 8 EUT Constructional Details (EUT Photos)

Refer to Appendix – External and Internal Photos for SZCR2504001581AT

- End of the Report -

