

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100002305

Page: 1 of 227

TEST REPORT

Application No.: SZCR2601000023AT
Applicant: Vanstone Electronic (Beijing) Co., Ltd.
Address of Applicant: 3F No.2 Building, Aisino Corporation Park 18A, Xingshikou Road, Haidian District, Beijing, China 100195
Manufacturer: Vanstone Electronic (Beijing) Co., Ltd.
Address of Manufacturer: 3F No.2 Building, Aisino Corporation Park 18A, Xingshikou Road, Haidian District, Beijing, China 100195
Equipment Under Test (EUT):
EUT Name: Android POS Terminal
Model No.: A99
Trade Mark: 
FCC ID: OWL-A99-C
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2026-01-04
Date of Test: 2026-01-07 to 2026-01-30
Date of Issue: 2026-02-02

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (EMC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100002305

Page: 2 of 227

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2026-02-02		Original

Authorized for issue by:				
		Calvin Weng		
		Calvin Weng/Project Engineer		
		Eric Fu		
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart E 15.407 (c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)	Pass
Radiated Emissions (Below 1GHz)		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.10 (2020) Section 6.6	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Duty Cycle		ANSI C63.10 (2020) Section 12.2	ANSI C63.10 (2020) Section 12.2	Pass
99% Bandwidth		ANSI C63.10 (2020) Section 12.5.3	ANSI C63.10 (2020) Section 12.5.3	Pass
26dB Emission bandwidth		ANSI C63.10 (2020) Section 12.5.2	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)		ANSI C63.10 (2020) Section 12.5.1	47 CFR Part 15, Subpart E 15.407 (e)	Pass
Maximum Conducted output power		ANSI C63.10 (2020) Section 12.4	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Peak Power spectrum density		ANSI C63.10 (2020) Section 12.6	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Frequency Stability		ANSI C63.10 (2020) Section 6.8	47 CFR Part 15, Subpart E 15.407 (g)	Pass
Channel Move Time		KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass
Channel Closing Transmission Time		KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	7
4.1 Details of E.U.T.	7
4.2 Description of Support Units	7
4.3 Measurement Uncertainty	8
4.4 Test Location	9
4.5 Test Facility	9
4.6 Deviation from Standards	9
4.7 Abnormalities from Standard Conditions	9
5 Equipment List	10
6 Radio Spectrum Technical Requirement	13
6.1 Antenna Requirement	13
6.1.1 Test Requirement:	13
6.1.2 Conclusion	13
6.2 Transmission in the Absence of Data	14
6.2.1 Test Requirement:	14
6.2.2 Conclusion	14
7 Radio Spectrum Matter Test Results	15
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	15
7.1.1 E.U.T. Operation	15
7.1.2 Test Mode Description	15
7.1.3 Test Setup Diagram	16
7.1.4 Measurement Procedure and Data	16
7.2 Radiated Emissions (Below 1GHz)	19
7.2.1 E.U.T. Operation	19
7.2.2 Test Mode Description	19
7.2.3 Test Setup Diagram	20
7.2.4 Measurement Procedure and Data	21
7.3 Radiated Emissions (Above 1GHz)	24
7.3.1 E.U.T. Operation	25
7.3.2 Test Mode Description	25
7.3.3 Test Setup Diagram	25
7.3.4 Measurement Procedure and Data	26
7.4 Radiated Emissions which fall in the restricted bands	39
7.4.1 E.U.T. Operation	40
7.4.2 Test Mode Description	40
7.4.3 Test Setup Diagram	40



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100002305

Page: 5 of 227

7.4.4	Measurement Procedure and Data.....	41
7.5	Duty Cycle.....	60
7.5.1	E.U.T. Operation.....	60
7.5.2	Test Mode Description.....	60
7.5.3	Test Setup Diagram.....	60
7.5.4	Measurement Procedure and Data.....	60
7.6	99% Bandwidth.....	61
7.6.1	E.U.T. Operation.....	61
7.6.2	Test Mode Description.....	61
7.6.3	Test Setup Diagram.....	61
7.6.4	Measurement Procedure and Data.....	61
7.7	26dB Emission bandwidth.....	62
7.7.1	E.U.T. Operation.....	62
7.7.2	Test Mode Description.....	62
7.7.3	Test Setup Diagram.....	62
7.7.4	Measurement Procedure and Data.....	62
7.8	Minimum 6 dB bandwidth (5.725-5.85 GHz band).....	63
7.8.1	E.U.T. Operation.....	63
7.8.2	Test Mode Description.....	63
7.8.3	Test Setup Diagram.....	63
7.8.4	Measurement Procedure and Data.....	63
7.9	Maximum Conducted output power.....	64
7.9.1	E.U.T. Operation.....	64
7.9.2	Test Mode Description.....	64
7.9.3	Test Setup Diagram.....	65
7.9.4	Measurement Procedure and Data.....	65
7.10	Peak Power spectrum density.....	66
7.10.1	E.U.T. Operation.....	66
7.10.2	Test Mode Description.....	66
7.10.3	Test Setup Diagram.....	67
7.10.4	Measurement Procedure and Data.....	67
7.11	Frequency Stability.....	68
7.11.1	E.U.T. Operation.....	68
7.11.2	Test Mode Description.....	68
7.11.3	Test Setup Diagram.....	68
7.11.4	Measurement Procedure and Data.....	68
7.12	Channel Move Time.....	69
7.12.1	E.U.T. Operation.....	70
7.12.2	Test Mode Description.....	70
7.12.3	Test Setup Diagram.....	70
7.12.4	Measurement Procedure and Data.....	71
7.13	Channel Closing Transmission Time.....	72
7.13.1	E.U.T. Operation.....	73
7.13.2	Test Mode Description.....	73
7.13.3	Test Setup Diagram.....	73
7.13.4	Measurement Procedure and Data.....	74
8	Test Setup Photo.....	75
9	EUT Constructional Details (EUT Photos).....	75



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100002305

Page: 6 of 227

10	Appendix.....	76
----	---------------	----



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:	DC7.6V by li-ion battery(3000mAh) Battery M/N:BT-991 Battery Manufacture:Hunan Gaoyuan Battery Co.,Ltd. Recharged by AC/DC adapter Adapter M/N:SW-0983 Adapter Manufacturer: Xiamen Keli Electronics Co., Ltd Adapter Input:AC100-240V, 50/60Hz, 0.5A Adapter Output: DC5V/2A
Cable(s):	USB type C cable: 1.5m unshielded cable without ferrite core
Cable Loss (for RF conducted test):	1.5dB
Operation Frequency/Number of channels (20MHz):	U-NII-1: 5180-5240MHz (4 Channels); U-NII-2A: 5260-5320MHz (4 Channels); U-NII-2C: 5500-5700MHz (11 Channels); U-NII-3: 5745-5825MHz (5 Channels)
Operation Frequency/Number of channels/(40MHz):	U-NII-1: 5190-5230MHz (2 Channels); U-NII-2A: 5270-5310MHz (2 Channels); U-NII-2C: 5510-5670MHz (5 Channels); U-NII-3: 5755-5795MHz (2 Channels)
Operation Frequency/Number of channels (80MHz):	U-NII-1: 5210MHz (1 Channel); U-NII-2A: 5290MHz (1 Channels); U-NII-2C: 5530-5610MHz (2 Channels); U-NII-3: 5775MHz (1 Channel)
Modulation Type:	802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Spacing:	802.11a/n/ac 20: 20MHz; 802.11n/ac40: 40MHz; 802.11ac 80: 80MHz
DFS Function:	Slave without Radar detection
TPC Function:	Without TPC function
Antenna Type:	PIFA Antenna
Antenna Gain:	U-NII-1:-1.58dBi, U-NII-2A:-1.23dBi, U-NII-2C:2.23dBi, U-NII-3:0.86dBi

Remark:The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--

The EUT has been tested as an independent unit.



4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	$\pm 3.2\text{dB}$
Radiated Emissions (Below 1GHz)	$\pm 6.0\text{dB}$ for 3m; $\pm 5.0\text{dB}$ for 10m
Radiated Emissions (Above 1GHz)	$\pm 4.6\text{dB}$ (1-18GHz); $\pm 4.8\text{dB}$ (18-40GHz)
Radiated Emissions which fall in the restricted bands	$\pm 6.0\text{dB}$ (below 1GHz); $\pm 4.6\text{dB}$ (above 1GHz);
Duty Cycle	$\pm 0.3\%$
99% Bandwidth	$\pm 0.3\%$
26dB Emission bandwidth	$\pm 0.3\%$
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	$\pm 0.3\%$
Maximum Conducted output power	$\pm 0.8\text{dB}$
Peak Power spectrum density	$\pm 0.4\text{dB}$
Frequency Stability	$\pm 5.4 \times 10^{-8}$

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100002305

Page: 9 of 227

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2025-05-07	2028-05-06
EMI Test Receiver	Rohde&Schwarz	ESR	SZ-WRG-M-047	2025-12-15	2026-12-14
Matching Pad	N/A	N/A	SEM021-23	2025-03-19	2026-03-18
Matching Pad	N/A	N/A	SEM021-24	2025-03-19	2026-03-18
Measurement Software	AUDIX	e3 V8.2014-6-27a	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2025-07-05	2026-07-04
LISN	Rohde&Schwarz	ENV216	SEM007-01	2025-07-25	2026-07-24
LISN	ETS-LINDGREN	3816/2	SEM007-02	2025-03-03	2026-03-02

Radiated Emissions (9kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2025-03-21	2026-03-20
MXE EMI receiver	KEYSIGHT	N9038A	SEM004-16	2025-07-25	2026-07-24
Trilog-Broadband Antenna	Schwarzbeck	VULB9168	SEM003-18	2025-08-29	2027-08-28
Pre-amplifier	Sonoma Instrument Co	310N	SEM005-04	2025-03-04	2026-03-03
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2025-11-17	2027-11-16
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM029-01	2025-07-05	2026-07-04

Radiated Emissions (Below 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2025-11-17	2027-11-16
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2025-07-25	2026-07-24
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2025-08-29	2027-08-28
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2025-03-04	2026-03-03
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2025-07-05	2026-07-04



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100002305

Page: 11 of 227

Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-12-16	2026-12-15
Low Noise Amplifier 1G-18GHz	Tonscend	TAP01018050	SZ-WRG-M-051	2025-12-16	2026-12-15
Low Noise Amplifier 18G-40GHz	Tonscend	TAP18040048	SZ-WRG-M-052	2025-12-16	2026-12-15
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2025-12-13	2026-12-12
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2025-12-13	2026-12-12
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2025-07-23	2026-07-22

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-12-16	2026-12-15
Low Noise Amplifier 30M-8GHz	Tonscend	TAP30M8G30	SZ-WRG-M-050	2025-12-16	2026-12-15
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2025-12-13	2026-12-12
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2025-12-13	2026-12-12
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2025-07-23	2026-07-22



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100002305

Page: 12 of 227

RF Conducted Test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2025-07-24	2026-07-23
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2025-03-04	2026-03-03
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2025-09-10	2026-09-09
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2025-07-05	2026-07-04
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2025-03-03	2026-03-02
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2025-02-26	2026-02-25
Power Sensor	TST PASS	TSPS2023R	SEM009-26	2025-03-04	2026-03-03
Power Sensor	KEYSIGHT	U2021XA	SEM009-16	2025-03-04	2026-03-03
Manual Step Attenuator	KEYSIGHT	8494B	SEM021-05	2025-03-03	2026-03-02
Manual Step Attenuator	KEYSIGHT	8496B	SEM021-06	2025-03-03	2026-03-02
MXG Vector Signal Generator	Agilent	N5182A	SEM006-21	2025-03-03	2026-03-02
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-22	2025-03-04	2026-03-03

General used equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2025-07-23	2026-07-22
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2025-07-23	2026-07-22
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2025-03-03	2026-03-02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna are U-NII-1:-1.58dBi, U-NII-2A:-1.23dBi, U-NII-2C:2.23dBi, U-NII-3:0.86dBi.

Antenna location: Refer to internal photos



6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (c)

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)
 Test Method: ANSI C63.10 (2020) Section 6.2
 Test Engineer: Mason Wu

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:


Temperature: 23.4 °C Humidity: 42.5 % RH Atmospheric Pressure: 1020 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	05	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	06	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	07	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



7.1.3 Test Setup Diagram

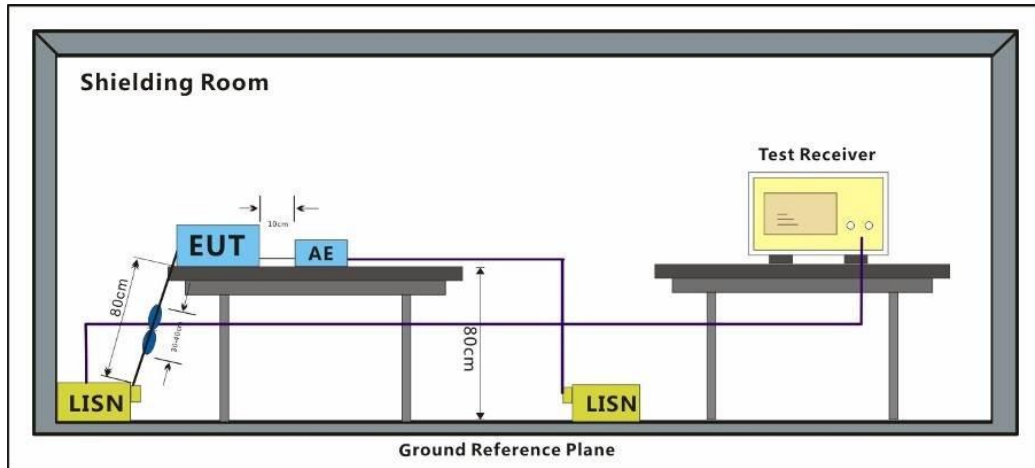

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark 1: Level=Read Level+ Cable Loss+ LISN Factor

Remark 2: Pre-test AC 120V/50-60Hz&AC 240V/50-60Hz then choose the AC 120/60Hz as worst case.




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100002305

Page: 17 of 227

Test Mode: 04; Line: Live line

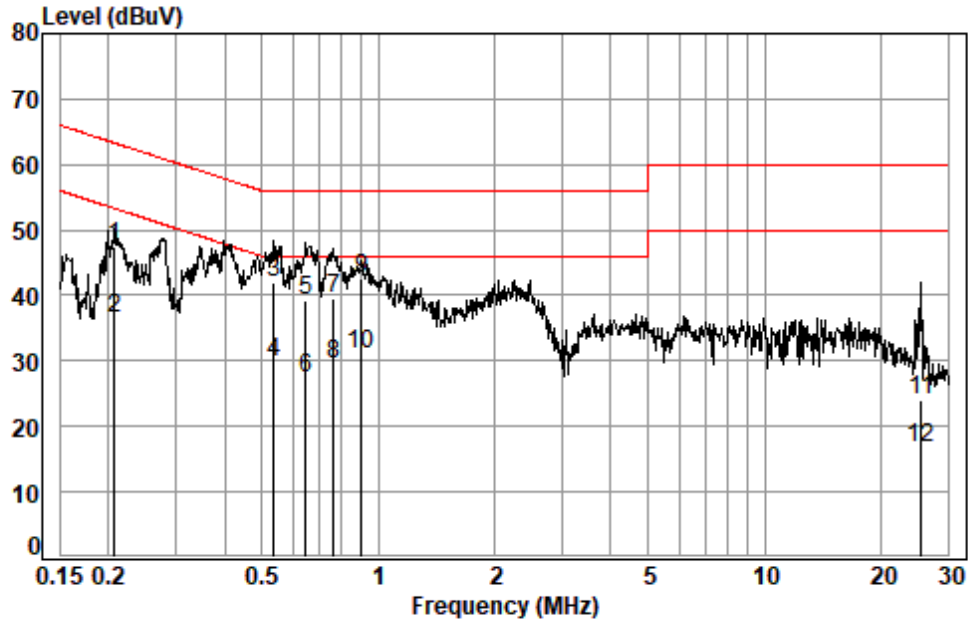

Site : Shielding Room
Condition: Line
Job No. : 00023AT
Test mode: 04

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.2072	0.07	9.63	37.61	47.31	63.32	-16.01	QP
2	0.2072	0.07	9.63	26.82	36.52	53.32	-16.80	Average
3	0.5378	0.09	9.64	32.37	42.10	56.00	-13.90	QP
4	0.5378	0.09	9.64	20.06	29.79	46.00	-16.21	Average
5	0.6474	0.10	9.64	29.43	39.17	56.00	-16.83	QP
6	0.6474	0.10	9.64	17.68	27.42	46.00	-18.58	Average
7	0.7670	0.10	9.65	29.86	39.61	56.00	-16.39	QP
8	0.7670	0.10	9.65	19.75	29.50	46.00	-16.50	Average
9 *	0.9039	0.11	9.66	32.67	42.44	56.00	-13.56	QP
10 *	0.9039	0.11	9.66	21.33	31.10	46.00	-14.90	Average
11	25.4560	0.25	13.36	10.43	24.04	60.00	-35.96	QP
12	25.4560	0.25	13.36	3.22	16.83	50.00	-33.17	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Shenzhen EMC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Line: Neutral Line

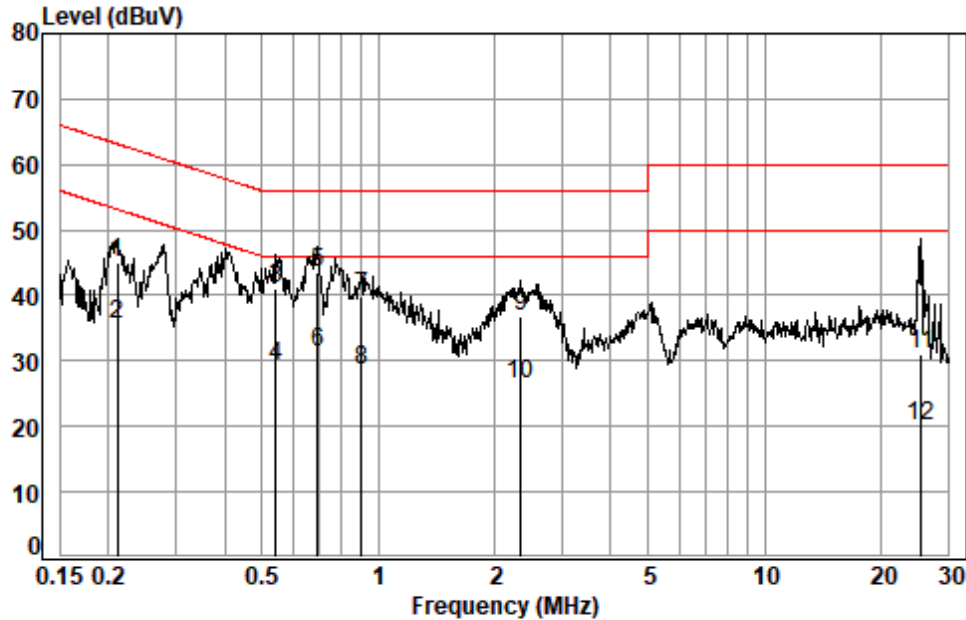

Site : Shielding Room
Condition: Neutral
Job No. : 00023AT
Test mode: 04

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.2117	0.07	9.66	35.22	44.95	63.14	-18.19	QP
2	0.2117	0.07	9.66	25.82	35.55	53.14	-17.59	Average
3	0.5436	0.09	9.63	31.43	41.15	56.00	-14.85	QP
4	0.5436	0.09	9.63	19.57	29.29	46.00	-16.71	Average
5 *	0.6973	0.10	9.64	33.68	43.42	56.00	-12.58	QP
6 *	0.6973	0.10	9.64	21.73	31.47	46.00	-14.53	Average
7	0.9039	0.11	9.66	30.04	39.81	56.00	-16.19	QP
8	0.9039	0.11	9.66	18.80	28.57	46.00	-17.43	Average
9	2.3460	0.13	9.75	27.05	36.93	56.00	-19.07	QP
10	2.3460	0.13	9.75	16.52	26.40	46.00	-19.60	Average
11	25.4560	0.25	13.32	17.49	31.06	60.00	-28.94	QP
12	25.4560	0.25	13.32	6.44	20.01	50.00	-29.99	Average



7.2 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)
 Test Method: ANSI C63.10 (2020) Section 6.4,6.5
 Measurement Distance: 3m
 Test Engineer: Mason Wu

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 23.5 °C Humidity: 46.8 % RH Atmospheric Pressure: 1020 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



7.2.3 Test Setup Diagram

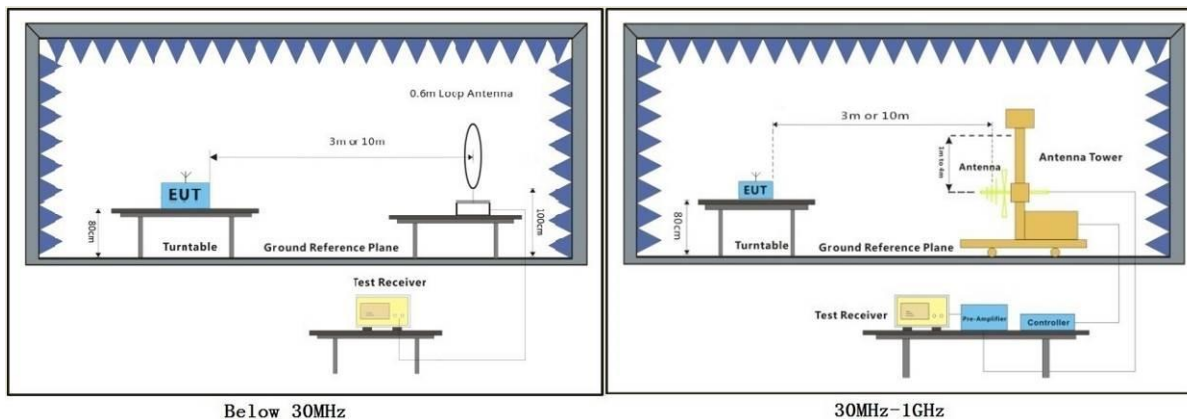

Below 30MHz

30MHz-1GHz



7.2.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. The disturbance below 1GHz was very low and the below harmonics were the highest point could be found when testing, so only the below harmonics had been displayed.



Test Mode: 04; Polarity: Horizontal

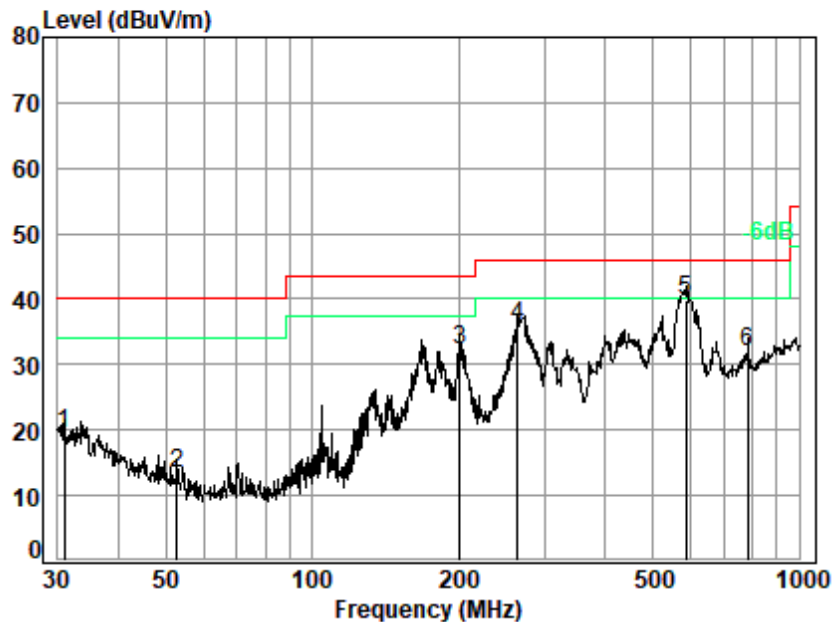


Site : chamber
Condition: 3m HORIZONTAL
Job No. : 00023AT
Test Mode: 04

: second display

	Ant	Cable	Preamp	Read		Limit	Over	
Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	30.962	20.96	0.75	27.65	25.48	19.54	40.00	-20.46 QP
2	52.760	12.49	0.91	27.63	27.62	13.39	40.00	-26.61 QP
3	200.688	14.32	1.70	27.80	44.10	32.32	43.50	-11.18 QP
4	263.819	17.07	1.98	27.60	44.32	35.77	46.00	-10.23 QP
5 q	584.790	23.68	3.06	28.08	41.29	39.95	46.00	-6.05 QP
6	785.093	27.79	3.65	27.63	28.18	31.99	46.00	-14.01 QP



Test Mode: 04; Polarity: Vertical

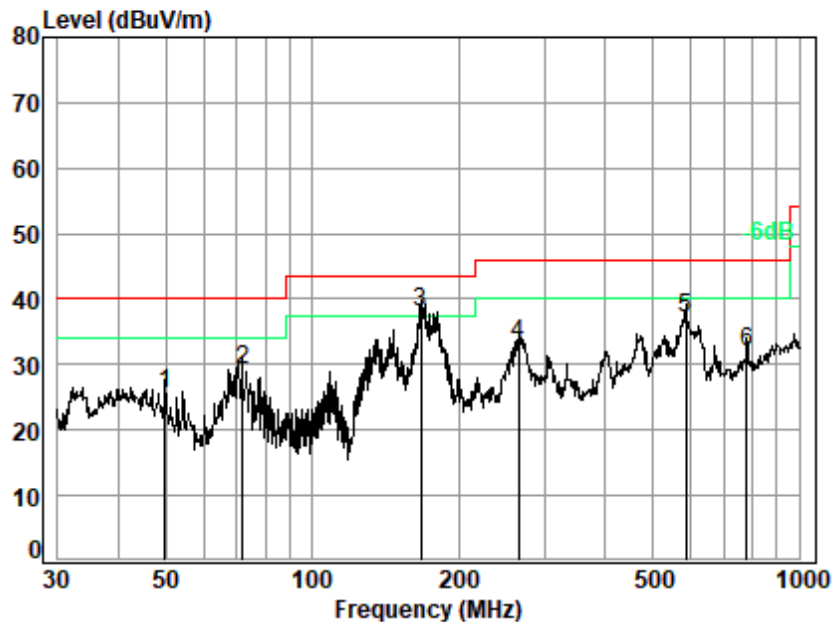

Site : chamber

Condition: 3m VERTICAL

Job No. : 00023AT

Test Mode: 04

: second display

	Ant	Cable	Preamp	Read		Limit	Over	
Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	49.707	13.11	0.90	27.63	39.25	25.63	40.00	-14.37 QP
2	71.832	10.50	1.00	27.61	45.23	29.12	40.00	-10.88 QP
3 q	167.237	13.86	1.58	27.75	50.23	37.92	43.50	-5.58 QP
4	265.676	17.07	1.99	27.59	41.63	33.10	46.00	-12.90 QP
5	584.790	23.68	3.06	28.08	38.52	37.18	46.00	-8.82 QP
6	779.607	27.93	3.64	27.64	28.14	32.07	46.00	-13.93 QP



7.3 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)
 Test Method: ANSI C63.10 (2020) Section 6.6
 Measurement Distance: 1m or 3m
 Test Engineer: Mihawk Li

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22.4 °C


Humidity: 59.1 % RH

Atmospheric Pressure: 1020 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

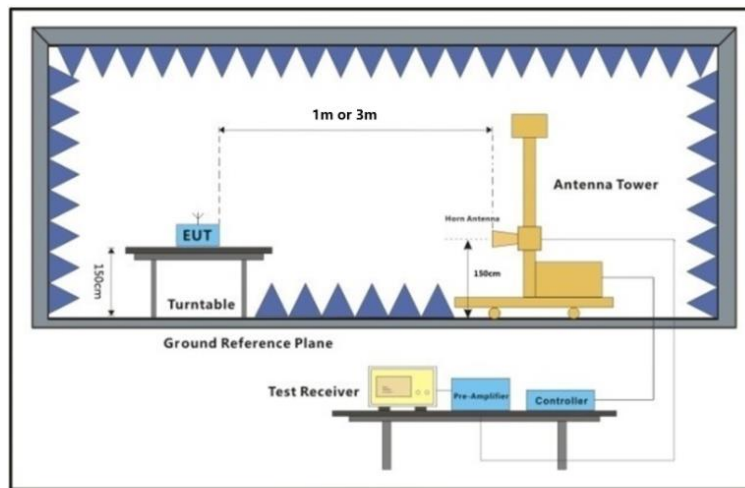

Above 1GHz



7.3.4 Measurement Procedure and Data


- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters for frequency above 1GHz, and 1 meter for frequency above 18GHz away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 40GHz, The points marked on below plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the below harmonics were the highest point could be found when testing, so only the below harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
7. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $\leq 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.




11a_TX_CH_36_Horizontal

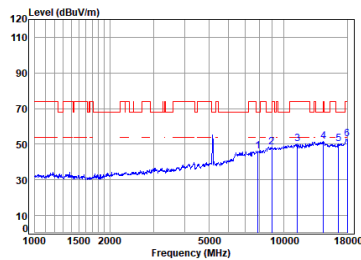

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5180 TX RSE
: 5G Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	7875.254	11.48	37.20	55.97	53.41	46.12	68.20	-22.08 Peak 0.00
2	8969.161	12.17	38.46	54.73	52.39	48.29	68.20	-19.91 Peak 0.00
3	11335.190	14.49	39.36	53.40	49.69	50.14	74.00	-23.86 Peak 0.00
4	pp14450.130	16.98	40.30	54.10	48.22	51.40	68.20	-16.80 Peak 0.00
5	16600.640	17.65	38.40	53.82	48.09	50.32	68.20	-17.88 Peak 0.00
6	18000.000	18.35	42.60	54.30	46.22	52.87	74.00	-21.13 Peak 0.00


11a_TX_CH_36_Vertical

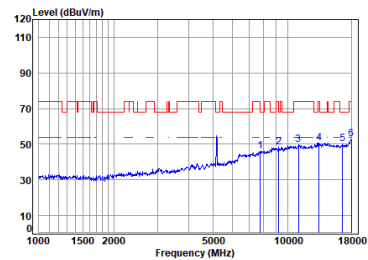

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5180 TX RSE
: 5G Wi-Fi 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	7762.260	11.36	37.00	56.04	53.68	46.00	68.20	-22.20	Peak	0.00
2	9205.540	12.31	38.52	54.46	52.12	48.49	68.20	-19.71	Peak	0.00
3	11044.130	14.39	39.30	53.49	49.34	49.54	74.00	-24.46	Peak	0.00
4	13365.320	16.13	40.40	53.91	48.24	50.86	74.00	-23.14	Peak	0.00
5	pp16600.640	17.65	38.40	53.82	48.13	50.36	68.20	-17.84	Peak	0.00
6	18000.000	18.35	42.60	54.30	46.39	53.04	74.00	-20.96	Peak	0.00


11a_TX_CH_44_Horizontal

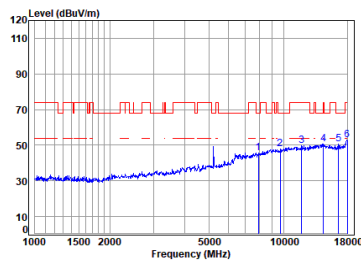

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5220 TX RSE
: 5G Wi-Fi 11A

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB	Factor
1	7920.911	11.54	37.30	55.94	52.85	45.75	68.20	-22.45 Peak 0.00
2	9697.151	12.69	38.51	53.92	50.74	48.02	68.20	-20.18 Peak 0.00
3	11093.200	14.60	39.10	53.26	49.27	49.71	74.00	-24.29 Peak 0.00
4	pp14450.130	16.98	40.30	54.10	47.38	50.56	68.20	-17.64 Peak 0.00
5	16600.640	17.65	38.40	53.82	48.25	50.48	68.20	-17.72 Peak 0.00
6	18000.000	18.35	42.60	54.30	46.13	52.78	74.00	-21.22 Peak 0.00

11a_TX_CH_44_Vertical

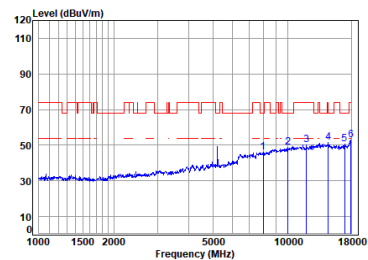


Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5220 TX RSE
: 5G Wi-Fi 11A

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux	
	Loss	Factor	Factor	Level	Level	Line	Limit	Remark	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	
1	7966.832	11.55	37.27	55.92	53.01	45.91	68.20	-22.29 Peak	0.00
2	10018.420	13.04	38.90	53.60	50.29	48.63	68.20	-19.57 Peak	0.00
3	11906.070	14.89	39.02	53.23	49.48	50.16	74.00	-23.84 Peak	0.00
4	pp14533.910	16.79	40.20	54.10	48.54	51.43	68.20	-16.77 Peak	0.00
5	16939.940	18.14	38.68	53.89	47.72	50.65	68.20	-17.55 Peak	0.00
6	17948.050	18.30	42.29	54.28	46.60	52.91	74.00	-21.09 Peak	0.00




11a_TX_CH_48_Horizontal

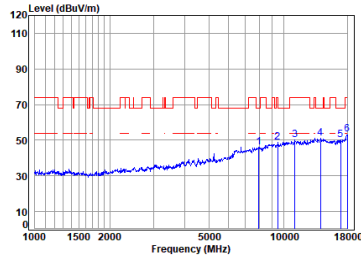

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5240 TX RSE
: 5G Wi-Fi 11A

Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	Limit	Factor
1	7943.838	11.55	37.30	55.93	53.21	46.13	68.20	-22.07	Peak	0.00
2	9475.497	12.50	38.00	54.16	51.67	48.01	74.00	-25.19	Peak	0.00
3	11180.160	14.67	39.32	53.47	49.45	49.97	74.00	-24.03	Peak	0.00
4	pp14079.080	16.56	40.44	54.10	48.24	51.14	68.20	-17.06	Peak	0.00
5	16939.940	18.14	38.68	53.89	47.20	50.13	68.20	-18.07	Peak	0.00
6	18000.000	18.35	42.60	54.30	46.61	53.26	74.00	-20.74	Peak	0.00


11a_TX_CH_48_Vertical

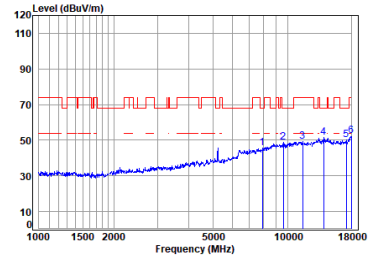

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5240 TX RSE
: 5G Wi-Fi 11A

Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	Limit	Factor
1	7920.911	11.54	37.30	55.94	52.62	45.52	68.20	-22.68	Peak	0.00
2	9613.430	12.47	38.75	54.01	51.42	48.63	68.20	-19.57	Peak	0.00
3	11467.000	14.77	39.23	53.36	48.41	49.05	74.00	-24.95	Peak	0.00
4	pp13957.530	16.25	40.43	54.09	48.98	51.57	68.20	-16.63	Peak	0.00
5	17186.530	17.91	38.99	53.98	47.16	50.08	68.20	-18.12	Peak	0.00
6	18000.000	18.35	42.60	54.30	45.72	52.37	74.00	-21.63	Peak	0.00


11a_TX_CH_52_Horizontal

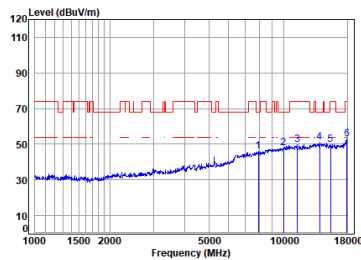

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5260 TX RSE
: 5G Wi-Fi 11A

Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	Limit	Factor
1	7920.911	11.54	37.30	55.94	53.16	46.06	68.20	-22.14	Peak	0.00
2	9901.525	12.97	38.83	53.62	49.67	47.85	68.20	-20.35	Peak	0.00
3	11335.190	14.49	39.36	53.40	49.16	49.61	74.00	-24.39	Peak	0.00
4	pp13957.530	16.25	40.43	54.09	48.53	51.12	68.20	-17.08	Peak	0.00
5	15443.410	16.82	38.96	53.92	47.91	49.77	74.00	-24.23	Peak	0.00
6	17948.050	18.30	42.29	54.28	46.75	53.06	74.00	-20.94	Peak	0.00

11a_TX_CH_52_Vertical

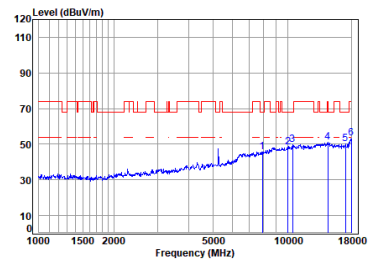


Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5260 TX RSE
: 5G Wi-Fi 11A

Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	Limit	Factor
1	7920.911	11.54	37.30	55.94	52.79	45.69	68.20	-22.51	Peak	0.00
2	10010.420	13.04	38.90	53.60	49.83	46.17	68.20	-20.03	Peak	0.00
3	10453.970	13.63	39.25	53.55	50.43	49.76	68.20	-18.44	Peak	0.00
4	14491.960	17.07	40.22	54.10	47.88	51.07	74.00	-22.93	Peak	0.00
5	pp17087.460	18.42	38.89	53.94	47.02	50.39	68.20	-17.81	Peak	0.00
6	18000.000	18.35	42.60	54.30	46.57	53.22	74.00	-20.78	Peak	0.00




11a_TX_CH_60_Horizontal

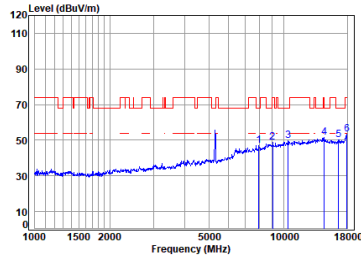

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5300 TX RSE
: 5G Wi-Fi 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	7943.838	11.55	37.30	55.93	54.27	47.19	68.20	-21.01	Peak	0.00
2	9047.272	12.14	38.59	54.65	52.52	48.68	74.00	-25.48	Peak	0.00
3	10423.000	13.62	39.22	53.56	50.37	49.65	68.20	-18.55	Peak	0.00
4	pp14533.910	16.79	40.20	54.10	48.74	51.63	68.20	-16.57	Peak	0.00
5	16600.640	17.65	38.40	53.82	48.02	50.25	68.20	-17.95	Peak	0.00
6	17948.050	18.30	42.29	54.28	46.88	53.19	74.00	-28.81	Peak	0.00


11a_TX_CH_60_Vertical

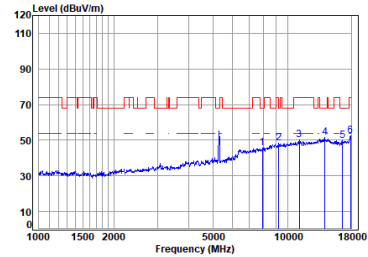

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5300 TX RSE
: 5G Wi-Fi 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	7920.911	11.54	37.30	55.94	52.69	45.59	68.20	-22.61	Peak	0.00
2	9205.540	12.31	38.52	54.46	51.84	48.21	68.20	-19.99	Peak	0.00
3	11140.310	14.70	39.30	53.46	49.78	50.40	74.00	-23.60	Peak	0.00
4	pp14119.830	16.45	40.42	54.10	48.77	51.54	68.20	-16.66	Peak	0.00
5	16600.640	17.65	38.40	53.82	47.61	49.84	68.20	-18.36	Peak	0.00
6	17896.250	18.25	41.97	54.26	46.72	52.68	74.00	-21.32	Peak	0.00


11a_TX_CH_64_Horizontal

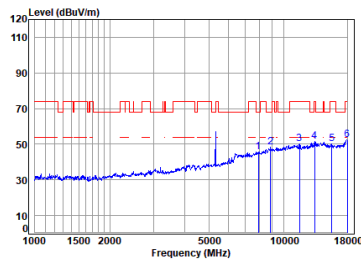

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5320 TX RSE
: 5G Wi-Fi 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	7898.049	11.54	37.29	55.96	52.63	45.50	68.20	-22.70	Peak	0.00
2	pp 8840.473	12.24	38.30	54.80	52.68	48.42	68.20	-19.78	Peak	0.00
3	11566.870	14.79	39.07	53.33	49.77	50.30	74.00	-23.70	Peak	0.00
4	13326.750	16.37	40.28	53.90	48.59	51.34	74.00	-22.66	Peak	0.00
5	15622.990	17.19	38.75	53.85	48.05	50.14	74.00	-23.86	Peak	0.00
6	18000.000	18.35	42.60	54.30	45.77	52.42	74.00	-21.58	Peak	0.00

11a_TX_CH_64_Vertical

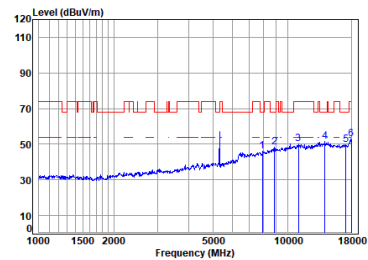

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5320 TX RSE
: 5G Wi-Fi 11A


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	7920.911	11.54	37.30	55.94	52.97	45.87	68.20	-22.33	Peak	0.00
2	8866.062	12.23	38.40	54.85	52.59	48.37	68.20	-19.83	Peak	0.00
3	11044.130	14.39	39.30	53.49	50.11	50.31	74.00	-23.69	Peak	0.00
4	pp14119.830	16.45	40.42	54.10	48.88	51.65	68.20	-16.55	Peak	0.00
5	17136.920	18.23	38.94	53.96	46.61	49.82	68.20	-18.38	Peak	0.00
6	18000.000	18.35	42.60	54.30	46.36	53.01	74.00	-20.99	Peak	0.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


11a_TX_CH_100_Horizontal

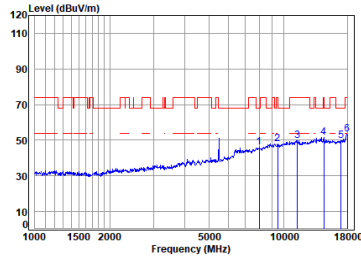

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5500 TX RSE
: 5G Wi-Fi 11A

Freq	Cable	Loss	Ant	Preamp	Read	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	Line	Limit	Factor
					dBuV/m	dBuV/m	dB	
1	7989.893	11.56	37.22	55.91	53.23	46.10	68.20	-22.10 Peak
2	9448.149	12.43	38.90	54.19	50.79	47.93	74.00	-26.07 Peak
3	11335.190	14.49	39.36	53.40	49.50	49.95	74.00	-24.05 Peak
4	14491.960	17.07	40.22	54.10	48.20	51.39	74.00	-22.61 Peak
5	pp17038.150	18.22	38.84	53.92	46.74	49.88	68.20	-18.32 Peak
6	18000.000	18.35	42.60	54.30	46.59	53.24	74.00	-20.76 Peak


11a_TX_CH_100_Vertical

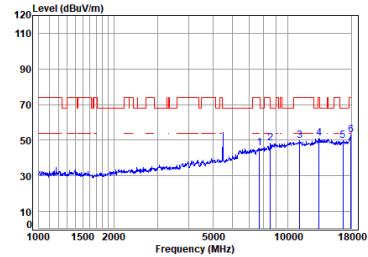

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5500 TX RSE
: 5G Wi-Fi 11A

Freq	Cable	Loss	Ant	Preamp	Read	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	Line	Limit	Factor
					dBuV/m	dBuV/m	dB	
1	7695.244	11.43	36.87	56.07	53.25	45.48	74.00	-28.52 Peak
2	8514.456	12.26	37.00	55.27	53.36	48.15	68.20	-20.05 Peak
3	11172.560	14.73	39.45	53.45	48.95	49.68	74.00	-24.32 Peak
4	13365.320	16.13	40.40	53.91	48.48	51.10	74.00	-22.90 Peak
5	pp16648.690	17.62	38.45	53.83	47.33	49.57	68.20	-18.63 Peak
6	17948.050	18.30	42.29	54.28	46.76	53.07	74.00	-20.93 Peak


11a_TX_CH_116_Horizontal

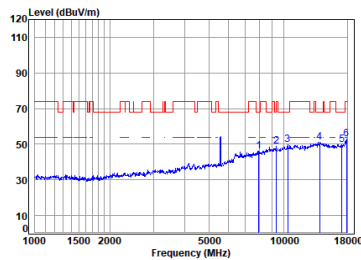

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5500 TX RSE
: 5G Wi-Fi 11A

Freq	Cable	Loss	Ant	Preamp	Read	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	Line	Limit	Factor
					dBuV/m	dBuV/m	dB	
1	7943.838	11.55	37.30	55.93	53.35	46.27	68.20	-21.93 Peak
2	9339.543	12.22	38.70	54.31	52.40	49.01	74.00	-24.99 Peak
3	10393.710	13.62	39.20	53.56	50.57	49.83	68.20	-18.37 Peak
4	pp13957.530	16.25	40.43	54.09	48.49	51.08	68.20	-17.12 Peak
5	17136.920	18.23	38.94	53.96	46.50	49.71	68.20	-18.49 Peak
6	17896.250	18.25	41.97	54.26	46.81	52.77	74.00	-21.23 Peak

11a_TX_CH_116_Vertical

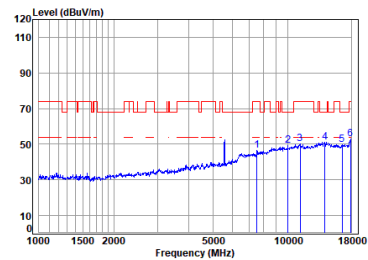

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5500 TX RSE
: 5G Wi-Fi 11A


Freq	Cable	Loss	Ant	Preamp	Read	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	Line	Limit	Factor
					dBuV/m	dBuV/m	dB	
1	7519.349	11.20	36.72	56.18	54.79	46.53	74.00	-27.47 Peak
2	10010.420	13.04	38.90	53.60	51.14	49.40	68.20	-18.72 Peak
3	11204.900	14.75	39.50	53.44	49.35	50.16	74.00	-23.84 Peak
4	pp14119.830	16.45	40.42	54.10	48.50	51.27	68.20	-16.93 Peak
5	16552.730	17.69	38.31	53.81	47.72	49.91	68.20	-18.29 Peak
6	17896.250	18.25	41.97	54.26	46.78	52.74	74.00	-21.26 Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


11a_TX_CH_140_Horizontal

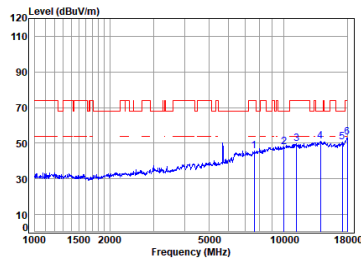

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5700 TX RSE
: 5G Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 7666.788	11.11	36.77	56.13	54.01	45.76	74.00	-28.24	Peak	0.00
2 10010.428	13.04	38.90	53.60	49.72	48.06	68.20	-20.14	Peak	0.00
3 11269.860	14.68	39.43	53.42	48.86	49.55	74.00	-24.45	Peak	0.00
4 pp14038.450	16.51	40.52	54.10	48.05	50.98	68.20	-17.22	Peak	0.00
5 17186.530	17.91	38.99	53.98	47.68	50.60	68.20	-17.60	Peak	0.00
6 18000.000	18.35	42.60	54.30	46.62	53.27	74.00	-20.73	Peak	0.00


11a_TX_CH_140_Vertical

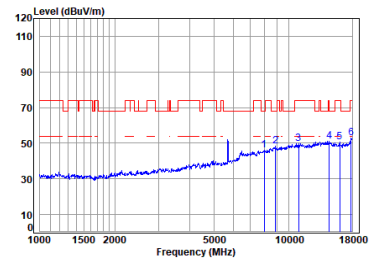

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5700 TX RSE
: 5G Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 7966.832	11.55	37.27	55.92	52.96	45.86	68.20	-22.34	Peak	0.00
2 8866.062	12.23	38.40	54.85	52.54	48.32	68.20	-19.88	Peak	0.00
3 10040.700	14.06	39.40	53.50	49.73	49.69	74.00	-24.31	Peak	0.00
4 pp14533.910	16.79	40.20	54.10	48.28	51.17	68.20	-17.03	Peak	0.00
5 16034.730	17.12	38.10	53.71	49.13	50.64	74.00	-23.36	Peak	0.00
6 17844.590	18.21	41.56	54.24	47.38	52.91	74.00	-21.09	Peak	0.00


11a_TX_CH_149_Horizontal

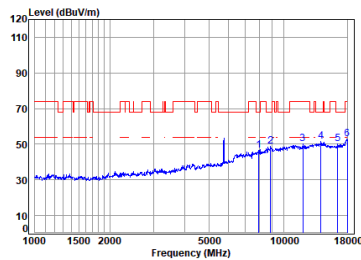

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5745 TX RSE
: 5.8G Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 7943.838	11.55	37.30	55.93	53.45	46.37	68.20	-21.83	Peak	0.00
2 8840.473	12.24	38.30	54.80	53.10	48.84	68.20	-19.36	Peak	0.00
3 11940.540	14.77	39.12	53.22	49.32	49.99	74.00	-24.01	Peak	0.00
4 pp14119.830	16.45	40.42	54.10	48.65	51.42	68.20	-16.78	Peak	0.00
5 16504.960	17.74	38.21	53.80	48.12	50.27	68.20	-17.93	Peak	0.00
6 18000.000	18.35	42.60	54.30	46.40	53.05	74.00	-20.95	Peak	0.00

11a_TX_CH_149_Vertical

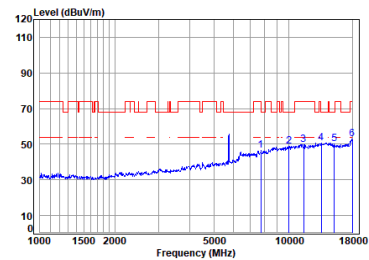

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5745 TX RSE
: 5.8G Wi-Fi 11A


Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 7739.857	11.39	36.98	56.05	54.09	46.41	74.00	-27.59	Peak	0.00
2 10010.420	13.04	38.90	53.60	50.33	48.67	68.20	-19.53	Peak	0.00
3 11500.200	15.05	39.20	53.35	48.79	49.69	74.00	-24.31	Peak	0.00
4 pp13520.740	15.80	40.56	53.96	48.32	50.72	68.20	-17.48	Peak	0.00
5 15265.880	16.85	39.23	53.99	48.19	50.28	68.20	-17.92	Peak	0.00
6 18000.000	18.35	42.60	54.30	46.49	53.14	74.00	-20.86	Peak	0.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


11a_TX_CH_157_Horizontal

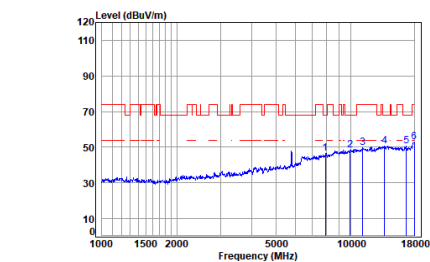

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5.8G TX RSE
: 5.8G Wi-Fi 11A

Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	7920.911	11.54	37.30	55.94	53.73	46.63	68.20	-21.57	Peak	0.00
2	9952.717	12.51	38.71	53.65	50.43	48.40	68.20	-19.80	Peak	0.00
3	11172.560	14.73	39.45	53.45	49.17	49.90	74.00	-24.10	Peak	0.00
4	pp13677.970	16.27	40.32	54.01	48.05	50.63	68.20	-17.57	Peak	0.00
5	16745.218	17.53	38.55	53.85	48.19	50.42	68.20	-17.78	Peak	0.00
6	18000.000	18.35	42.60	54.30	46.34	52.99	74.00	-21.01	Peak	0.00


11a_TX_CH_157_Vertical

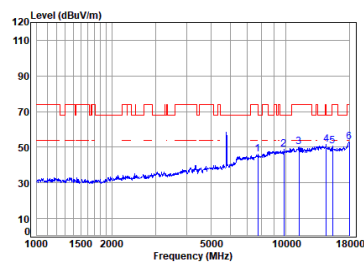

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5.8G TX RSE
: 5.8G Wi-Fi 11A

Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	7717.518	11.43	36.94	56.06	53.75	46.66	74.00	-27.34	Peak	0.00
2	9838.312	12.98	38.50	53.77	50.96	48.67	68.20	-19.53	Peak	0.00
3	11302.480	14.63	39.40	53.41	49.47	50.09	74.00	-23.91	Peak	0.00
4	pp14533.910	16.79	40.20	54.10	48.46	51.35	68.20	-16.85	Peak	0.00
5	15443.410	16.82	38.96	53.92	48.58	50.44	74.00	-23.56	Peak	0.00
6	18000.000	18.35	42.60	54.30	46.46	53.11	74.00	-20.89	Peak	0.00


11a_TX_CH_165_Horizontal

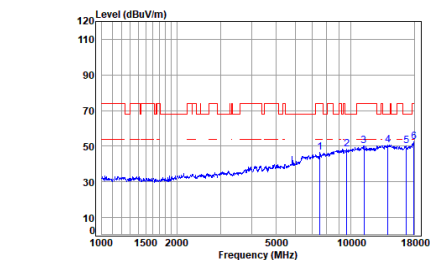

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5.8G TX RSE
: 5.8G Wi-Fi 11A

Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	7519.349	11.20	36.72	56.18	54.86	46.60	74.00	-27.40	Peak	0.00
2	9641.257	12.54	38.63	53.90	51.15	48.34	68.20	-19.86	Peak	0.00
3	11302.480	14.63	39.40	53.41	49.74	50.36	74.00	-23.64	Peak	0.00
4	pp14119.830	16.45	40.42	54.10	48.01	50.78	68.20	-17.42	Peak	0.00
5	16745.218	17.53	38.55	53.85	47.79	50.02	68.20	-18.18	Peak	0.00
6	17948.050	18.30	42.29	54.28	46.38	52.69	74.00	-21.31	Peak	0.00

11a_TX_CH_165_Vertical

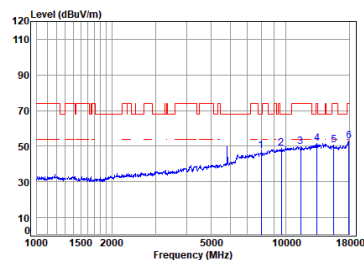

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5.8G TX RSE
: 5.8G Wi-Fi 11A


Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Factor
1	7989.893	11.56	37.22	55.91	54.56	47.43	68.20	-20.77	Peak	0.00
2	pp 9613.430	12.47	38.75	54.01	51.63	48.84	68.20	-19.36	Peak	0.00
3	11500.200	15.05	39.20	53.35	48.90	49.80	74.00	-24.20	Peak	0.00
4	13365.320	16.13	40.40	53.91	49.11	51.73	74.00	-22.27	Peak	0.00
5	15622.990	17.19	38.75	53.85	48.35	50.44	74.00	-23.56	Peak	0.00
6	17948.050	18.30	42.29	54.28	46.51	52.82	74.00	-21.18	Peak	0.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


11a_TX_CH_36_Horizontal

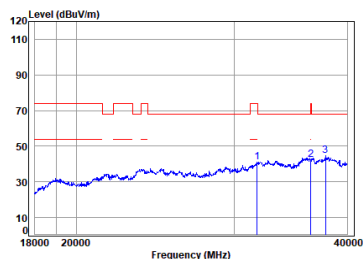

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5180 TX RSE

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 31756.920	7.85	40.80	51.49	53.35	40.97	74.00	-33.03	Peak	-9.54	
2 36432.240	7.97	42.10	49.55	51.52	42.50	74.00	-31.50	Peak	-9.54	
3 pp37825.520	7.78	41.86	50.10	54.66	44.66	68.20	-23.54	Peak	-9.54	


11a_TX_CH_36_Vertical

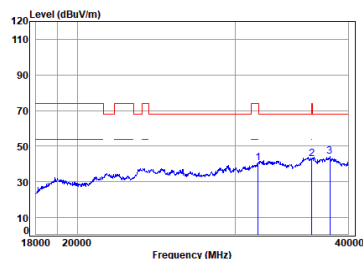

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5180 TX RSE

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 31756.920	7.85	40.80	51.49	53.07	40.69	74.00	-33.31	Peak	-9.54	
2 36432.240	7.97	42.10	49.55	51.96	42.94	74.00	-31.06	Peak	-9.54	
3 pp38189.710	7.75	42.23	50.31	53.98	44.11	68.20	-24.09	Peak	-9.54	


11a_TX_CH_44_Horizontal

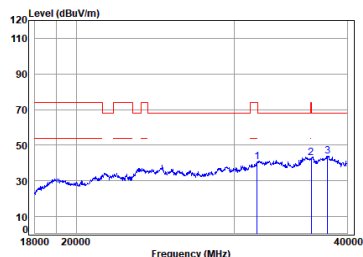

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5220 TX RSE

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 31782.290	7.86	40.81	51.46	52.89	40.56	74.00	-33.44	Peak	-9.54	
2 36490.470	7.91	42.10	49.59	51.87	42.75	74.00	-31.25	Peak	-9.54	
3 pp38037.540	7.85	42.05	50.22	53.82	43.96	68.20	-24.24	Peak	-9.54	

11a_TX_CH_44_Vertical

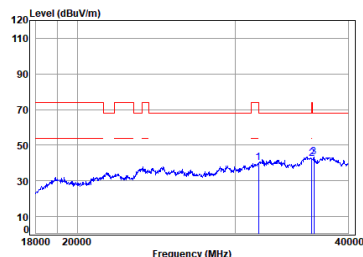


Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5220 TX RSE

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 31807.680	7.87	40.82	51.43	52.66	40.38	68.20	-27.82	Peak	-9.54	
2 36461.340	7.94	42.10	49.57	51.70	42.63	74.00	-31.37	Peak	-9.54	
3 pp36636.450	7.75	41.99	49.68	52.99	43.51	68.20	-24.69	Peak	-9.54	




11a_TX_CH_48_Horizontal

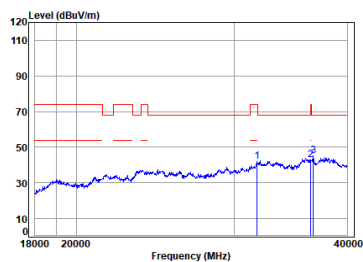

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5240 TX RSE
: 5G Wi-Fi 11A

Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	Line	Limit	Factor
1	31782.298	7.86	40.81	51.46	54.22	41.89	74.00	-32.11	Peak
2	36432.248	7.97	42.10	49.55	51.68	42.66	74.00	-31.34	Peak
3	pp36695.000	7.69	41.94	49.72	54.70	45.07	68.20	-23.13	Peak


11a_TX_CH_48_Vertical

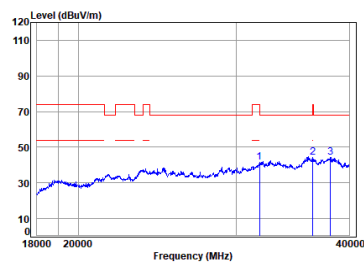

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5240 TX RSE
: 5G Wi-Fi 11A

Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	Line	Limit	Factor
1	31807.680	7.87	40.82	51.43	53.81	41.53	68.20	-26.67	Peak
2	36461.340	7.94	42.10	49.57	53.10	44.03	74.00	-29.97	Peak
3	pp38128.770	7.79	42.15	50.28	54.32	44.44	68.20	-23.76	Peak


11a_TX_CH_52_Horizontal

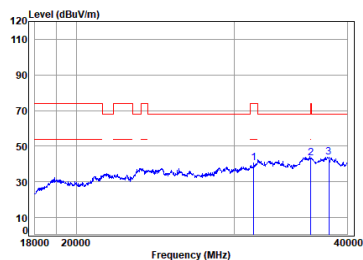

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5260 TX RSE
: 5G Wi-Fi 11A

Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	Line	Limit	Factor
1	31584.358	7.76	40.60	51.79	53.73	40.76	74.00	-33.24	Peak
2	36461.340	7.94	42.10	49.57	52.54	43.47	74.00	-30.53	Peak
3	pp38189.710	7.75	42.23	50.31	53.76	43.89	68.20	-24.31	Peak

11a_TX_CH_52_Vertical

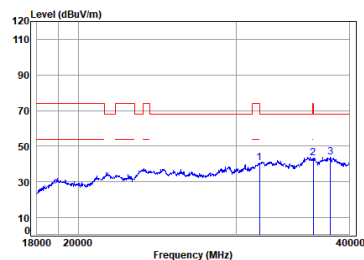


Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5260 TX RSE
: 5G Wi-Fi 11A

Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	Line	Limit	Factor
1	31807.680	7.87	40.82	51.43	52.75	40.47	68.20	-27.73	Peak
2	36490.470	7.91	42.10	49.59	52.63	43.51	74.00	-30.49	Peak
3	pp38128.770	7.79	42.15	50.28	53.70	43.82	68.20	-24.38	Peak




11a_TX_CH_60_Horizontal

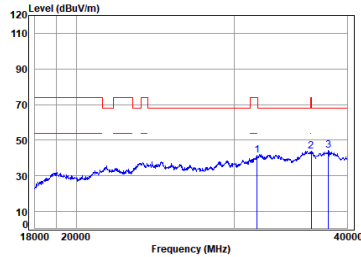

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5300 TX RSE
: 56 Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 31782.298	7.86	40.81	51.46	53.67	41.34	74.00	-32.66	Peak	-9.54
2 36490.478	7.91	42.10	49.59	52.97	43.05	74.00	-30.15	Peak	-9.54
3 pp38129.770	7.79	42.15	50.28	54.06	44.18	68.20	-24.02	Peak	-9.54


11a_TX_CH_60_Vertical

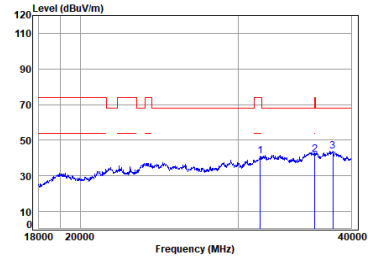

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5300 TX RSE
: 56 Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 31706.250	7.83	40.77	51.55	53.69	41.20	74.00	-32.80	Peak	-9.54
2 36461.340	7.94	42.10	49.57	50.97	41.90	74.00	-32.10	Peak	-9.54
3 pp38159.220	7.77	42.19	50.30	53.74	43.65	68.20	-24.34	Peak	-9.54


11a_TX_CH_64_Horizontal

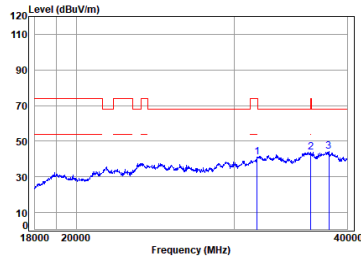

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5320 TX RSE
: 56 Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 31782.298	7.86	40.81	51.46	53.46	41.13	74.00	-32.87	Peak	-9.54
2 36432.240	7.97	42.10	49.55	52.79	43.77	74.00	-30.23	Peak	-9.54
3 pp38159.220	7.77	42.19	50.30	54.02	44.14	68.20	-24.06	Peak	-9.54

11a_TX_CH_64_Vertical

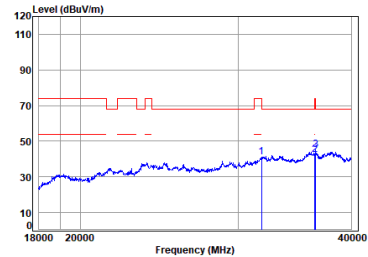


Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5320 TX RSE
: 56 Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 31807.680	7.87	40.82	51.43	53.45	41.17	68.20	-27.03	Peak	-9.54
2 36432.240	7.97	42.10	49.55	51.23	42.21	74.00	-31.79	Peak	-9.54
3 pp36519.620	7.88	42.08	49.61	54.37	45.18	68.20	-23.02	Peak	-9.54




11a_TX_CH_100_Horizontal

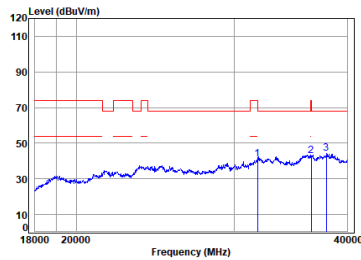

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5500 TX RSE
: 56 Wi-Fi 11A

Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
1	31887.688	7.87	40.82	51.43	53.30	41.02	68.20	-27.18 Peak	-9.54
2	36490.478	7.91	42.10	49.59	52.02	42.90	74.00	-31.10 Peak	-9.54
3	pp37946.536	7.84	41.96	50.17	54.25	44.34	68.20	-23.86 Peak	-9.54


11a_TX_CH_100_Vertical

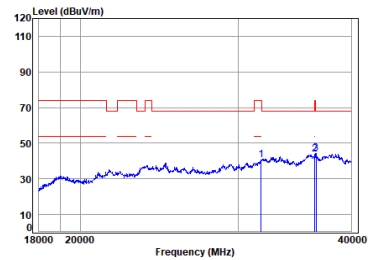

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5500 TX RSE
: 56 Wi-Fi 11A

Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
1	31782.290	7.86	40.81	51.46	52.98	40.65	74.00	-33.35 Peak	-9.54
2	36432.240	7.97	42.10	49.55	52.61	43.59	74.00	-30.41 Peak	-9.54
3	pp36577.980	7.81	42.04	49.65	53.53	44.19	68.20	-24.01 Peak	-9.54


11a_TX_CH_116_Horizontal

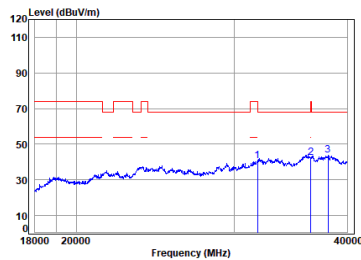

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5500 TX RSE
: 56 Wi-Fi 11A

Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
1	31887.688	7.87	40.82	51.43	52.87	40.59	68.20	-27.61 Peak	-9.54
2	36461.340	7.94	42.10	49.57	51.59	42.52	74.00	-31.48 Peak	-9.54
3	pp38098.330	7.81	42.12	50.26	53.51	43.64	68.20	-24.56 Peak	-9.54

11a_TX_CH_116_Vertical

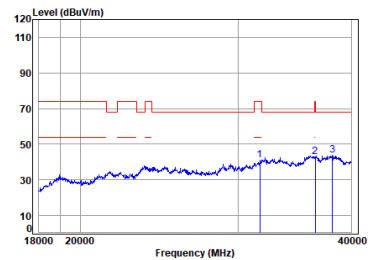


Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5500 TX RSE
: 56 Wi-Fi 11A

Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
1	31688.940	7.82	40.74	51.58	53.47	40.91	74.00	-33.09 Peak	-9.54
2	36490.470	7.91	42.10	49.59	52.21	43.09	74.00	-30.91 Peak	-9.54
3	pp38128.770	7.79	42.15	50.28	53.67	43.79	68.20	-24.41 Peak	-9.54




11a_TX_CH_140_Horizontal

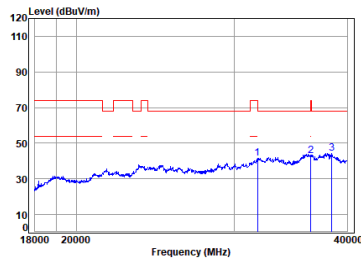

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5700 TX RSE
: 56 Wi-Fi 11A

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Level	Line	Limit	Factor
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 31887.688	7.87	40.82	51.43	53.78	41.50	68.20	-26.70 Peak	-9.54
2 36461.348	7.94	42.10	49.57	52.03	42.96	74.00	-31.04 Peak	-9.54
3 pp38465.158	7.57	42.73	50.48	54.04	44.32	68.20	-23.88 Peak	-9.54


11a_TX_CH_140_Vertical

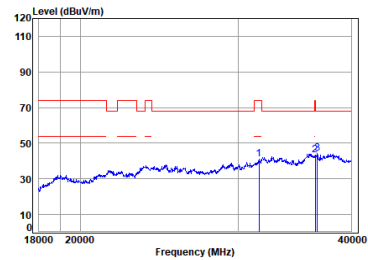

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5700 TX RSE
: 56 Wi-Fi 11A

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Level	Line	Limit	Factor
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 31605.140	7.80	40.68	51.67	53.72	40.99	74.00	-33.01 Peak	-9.54
2 36498.470	7.91	42.10	49.59	52.29	43.17	74.00	-30.83 Peak	-9.54
3 pp36695.000	7.69	41.94	49.72	53.76	44.13	68.20	-24.07 Peak	-9.54


11a_TX_CH_149_Horizontal

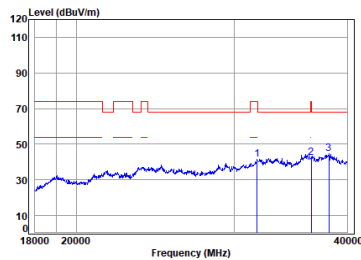

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5745 TX RSE
: 5.8G Wi-Fi 11A

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Level	Line	Limit	Factor
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 31782.298	7.86	40.81	51.46	53.73	41.40	74.00	-32.60 Peak	-9.54
2 36498.470	7.91	42.10	49.59	51.56	42.44	74.00	-31.56 Peak	-9.54
3 pp38189.710	7.75	42.23	50.31	54.58	44.71	68.20	-23.49 Peak	-9.54

11a_TX_CH_149_Vertical

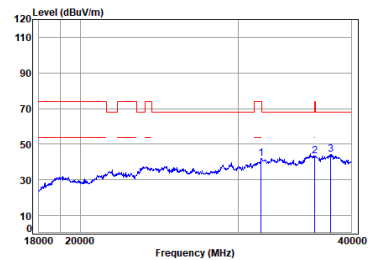


Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5745 TX RSE
: 5.8G Wi-Fi 11A

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Level	Line	Limit	Factor
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 31782.298	7.86	40.81	51.46	54.23	41.98	74.00	-32.02 Peak	-9.54
2 36461.340	7.94	42.10	49.57	52.20	43.13	74.00	-30.87 Peak	-9.54
3 pp37976.840	7.86	41.98	50.19	54.14	44.25	68.20	-23.95 Peak	-9.54




11a_TX_CH_157_Horizontal

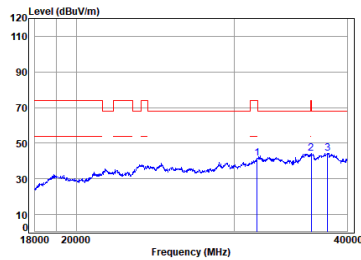

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5.8G TX RSE
: 5.8G Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 31782.290	7.86	40.81	51.46	53.92	41.59	74.00	-32.41	Peak	-9.54
2 36490.478	7.91	42.10	49.59	53.23	44.11	74.00	-29.89	Peak	-9.54
3 pp38837.540	7.85	42.05	50.22	54.25	44.39	68.20	-23.81	Peak	-9.54


11a_TX_CH_157_Vertical

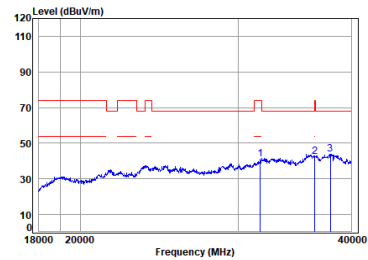

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5.8G TX RSE
: 5.8G Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 31706.250	7.83	40.77	51.55	53.67	41.18	74.00	-32.82	Peak	-9.54
2 36461.340	7.94	42.10	49.57	51.52	42.45	74.00	-31.55	Peak	-9.54
3 pp37946.530	7.84	41.96	50.17	53.85	43.94	68.20	-24.26	Peak	-9.54


11a_TX_CH_165_Horizontal

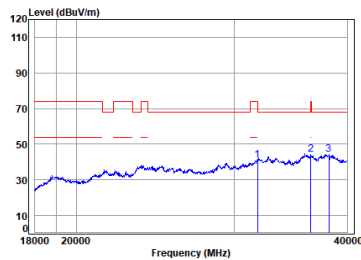

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5.8G TX RSE
: 5.8G Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 31087.680	7.87	40.82	51.43	53.43	41.15	68.20	-27.05	Peak	-9.54
2 36461.340	7.94	42.10	49.57	53.16	44.09	74.00	-29.91	Peak	-9.54
3 pp38189.710	7.75	42.23	50.31	54.10	44.23	68.20	-23.97	Peak	-9.54

11a_TX_CH_165_Vertical

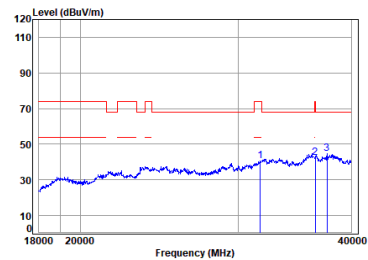

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5.8G TX RSE
: 5.8G Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 31706.250	7.83	40.77	51.55	53.07	40.58	74.00	-33.42	Peak	-9.54
2 36490.478	7.91	42.10	49.59	51.64	42.52	74.00	-31.48	Peak	-9.54
3 pp37614.680	7.68	41.80	49.97	54.77	44.74	68.20	-23.46	Peak	-9.54



7.4 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)
 Test Method: ANSI C63.10 (2020) Section 6.10.5
 Measurement Distance: 3m
 Test Engineer: Mihawk Li

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C


Humidity: 56.7 % RH

Atmospheric Pressure: 1020 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

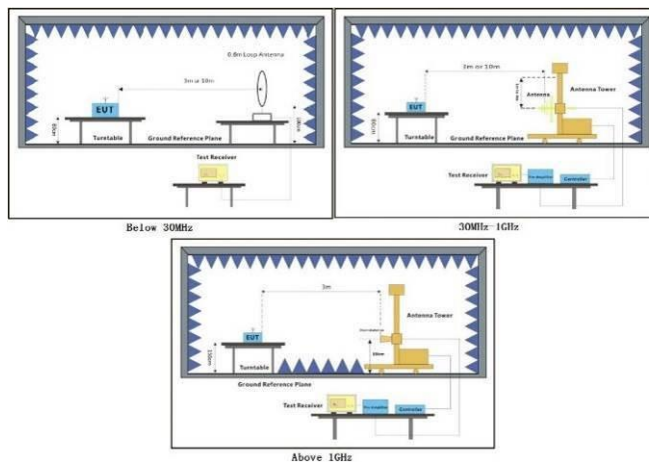

7.4.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 3: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



11a_TX_CH_36_Horizontal-Peak

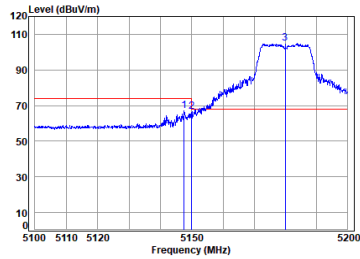

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5180 Band edge

: 5G Wi-Fi 11A

	Freq	Cable	Ant	Preamp	Read	Level	Limit	Over		Aux
	MHz	Loss	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Remark	Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5147.558	10.13	33.30	29.95	53.80	67.28	74.00	-6.72	Peak	0.00
2	5149.980	10.14	33.30	29.95	53.19	66.68	74.00	-7.32	Peak	0.00
3	5180.000	10.25	33.30	29.94	91.48	105.09	68.20	36.89	Peak	0.00

11a_TX_CH_36_Horizontal-Avg

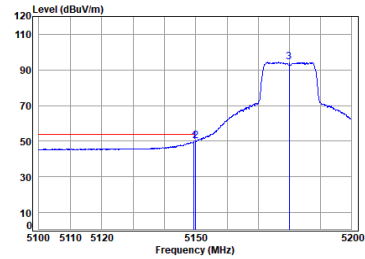

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5180 Band edge

: 5G Wi-Fi 11A

	Freq	Cable	Ant	Preamp	Read	Level	Limit	Over		Aux
	MHz	Loss	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Remark	Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5149.458	10.14	33.30	29.95	36.23	49.72	54.00	-4.28	Average	0.00
2	pp 5149.980	10.14	33.30	29.95	36.86	50.35	54.00	-3.65	Average	0.00
3	5180.000	10.25	33.30	29.94	80.66	94.27	-----	-----	Average	0.00

11a_TX_CH_36_Vertical-Peak

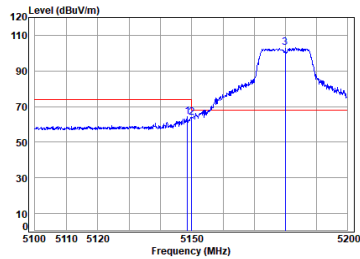

Condition: 3m VERTICAL


Job No : 00023AT

Mode : 5180 Band edge

: 5G Wi-Fi 11A

	Freq	Cable	Ant	Preamp	Read	Level	Limit	Over		Aux
	MHz	Loss	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Remark	Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5148.558	10.14	33.30	29.95	50.64	64.13	74.00	-9.87	Peak	0.00
2	5149.980	10.14	33.30	29.95	50.59	64.08	74.00	-9.92	Peak	0.00
3	pp 5180.000	10.25	33.30	29.94	89.55	103.16	68.20	34.96	Peak	0.00

11a_TX_CH_36_Vertical-Avg

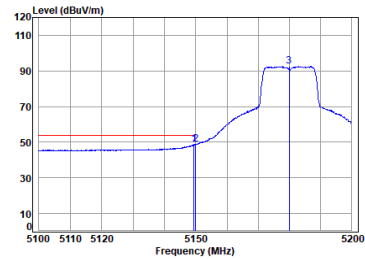

Condition: 3m VERTICAL

Job No : 00023AT


Mode : 5180 Band edge

: 5G Wi-Fi 11A

	Freq	Cable	Ant	Preamp	Read	Level	Limit	Over		Aux
	MHz	Loss	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Remark	Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5149.357	10.14	33.30	29.95	35.11	48.60	54.00	-5.40	Average	0.00
2	pp 5149.980	10.14	33.30	29.95	35.36	48.85	54.00	-5.15	Average	0.00
3	5180.000	10.25	33.30	29.94	78.89	92.50	-----	-----	Average	0.00



11ac_VHT(20M)_TX_CH_36_Horizontal-Peak

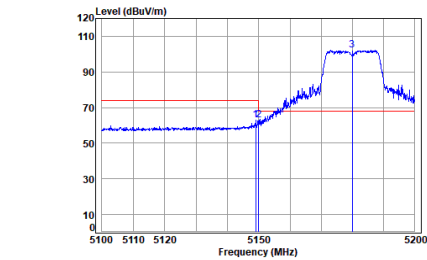

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5180 Band edge

: 56 Wi-Fi 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5149.057	10.14	33.30	29.95	49.48	62.97	74.00	-11.03	Peak	0.00
2	5149.908	10.14	33.30	29.95	49.60	63.09	74.00	-10.91	Peak	0.00
3	5180.000	10.25	33.30	29.94	88.55	102.16	68.20	33.96	Peak	0.00

11ac_VHT(20M)_TX_CH_36_Horizontal-Avg

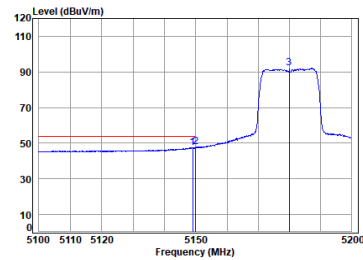

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5180 Band edge

: 56 Wi-Fi 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5148.958	10.14	33.30	29.95	34.10	47.59	54.00	-6.41	Average	0.00
2	5149.908	10.14	33.30	29.95	34.45	47.94	54.00	-6.06	Average	0.00
3	5180.000	10.25	33.30	29.94	78.51	92.12	68.20	23.92	Average	0.00

11ac_VHT(20M)_TX_CH_36_Vertical-Peak

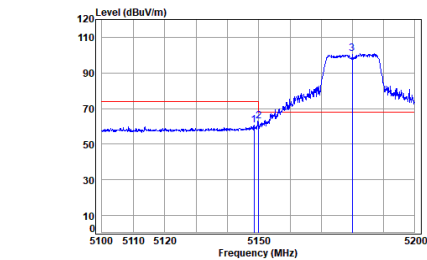

Condition: 3m VERTICAL


Job No : 00023AT

Mode : 5180 Band edge

: 56 Wi-Fi 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5148.458	10.14	33.30	29.95	47.03	60.52	74.00	-13.48	Peak	0.00
2	5149.908	10.14	33.30	29.95	49.54	63.03	74.00	-10.97	Peak	0.00
3	5180.000	10.25	33.30	29.94	87.06	100.67	68.20	32.47	Peak	0.00

11ac_VHT(20M)_TX_CH_36_Vertical-Avg

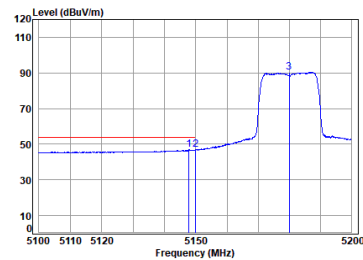

Condition: 3m VERTICAL

Job No : 00023AT


Mode : 5180 Band edge

: 56 Wi-Fi 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5147.857	10.13	33.30	29.95	33.42	46.90	54.00	-7.10	Average	0.00
2	5149.908	10.14	33.30	29.95	33.54	47.03	54.00	-6.97	Average	0.00
3	5180.000	10.25	33.30	29.94	76.75	90.36	68.20	22.16	Average	0.00



11ac_VHT(40M)_TX_CH_38_Horizontal-Peak

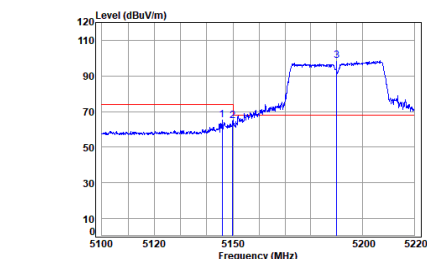

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5190 Band edge

: 56 Wi-Fi 11AC40

	Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	Line	Limit	Factor
								dB		
1	5145.878	10.13	33.30	29.95	51.76	65.24	74.00	-8.76	Peak	0.00
2	5149.908	10.14	33.30	29.95	51.20	64.77	74.00	-9.23	Peak	0.00
3 pp	5190.000	10.29	33.30	29.94	64.73	98.30	68.20	30.18	Peak	0.00

11ac_VHT(40M)_TX_CH_38_Horizontal-Avg

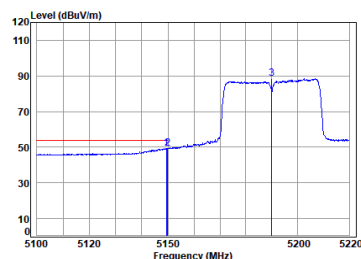

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5190 Band edge

: 56 Wi-Fi 11AC40

	Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	Line	Limit	Factor
								dB		
1	5149.461	10.14	33.30	29.95	35.81	49.30	54.00	-4.70	Average	0.00
2 pp	5149.908	10.14	33.30	29.95	35.83	49.32	54.00	-4.68	Average	0.00
3	5190.000	10.29	33.30	29.94	74.68	88.33	68.20	20.13	Average	0.00

11ac_VHT(40M)_TX_CH_38_Vertical-Peak

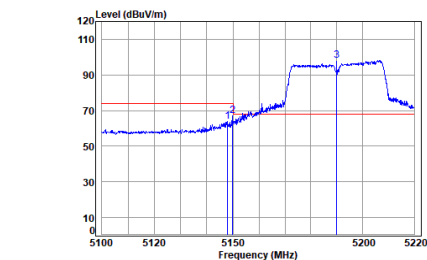

Condition: 3m VERTICAL


Job No : 00023AT

Mode : 5190 Band edge

: 56 Wi-Fi 11AC40

	Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	Line	Limit	Factor
								dB		
1	5148.824	10.13	33.30	29.95	50.52	64.00	74.00	-10.00	Peak	0.00
2	5149.908	10.14	33.30	29.95	53.40	66.89	74.00	-7.11	Peak	0.00
3 pp	5190.000	10.29	33.30	29.94	84.45	98.10	68.20	29.90	Peak	0.00

11ac_VHT(40M)_TX_CH_38_Vertical-Avg

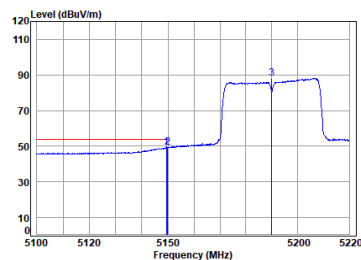

Condition: 3m VERTICAL

Job No : 00023AT


Mode : 5190 Band edge

: 56 Wi-Fi 11AC40


	Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	Line	Limit	Factor
								dB		
1	5149.461	10.14	33.30	29.95	35.85	49.34	54.00	-4.66	Average	0.00
2 pp	5149.908	10.14	33.30	29.95	35.88	49.37	54.00	-4.63	Average	0.00
3	5190.000	10.29	33.30	29.94	74.62	88.27	68.20	20.07	Average	0.00




11ac_VHT(80M)_TX_CH_42_Horizontal-Peak

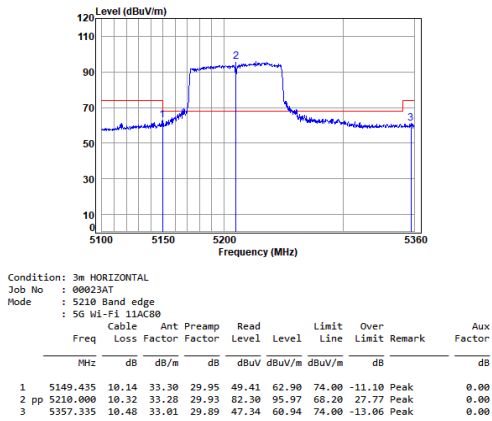


11ac_VHT(80M)_TX_CH_42_Horizontal-Avg

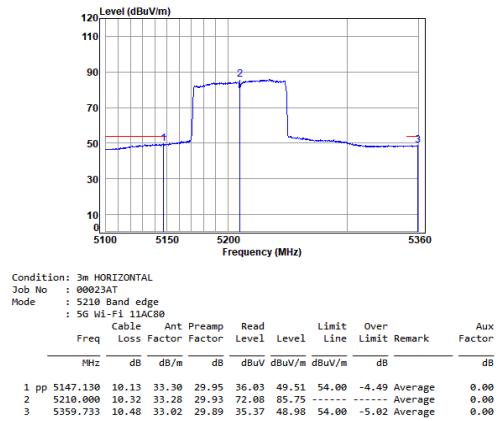


11ac_VHT(80M)_TX_CH_42_Vertical-Peak

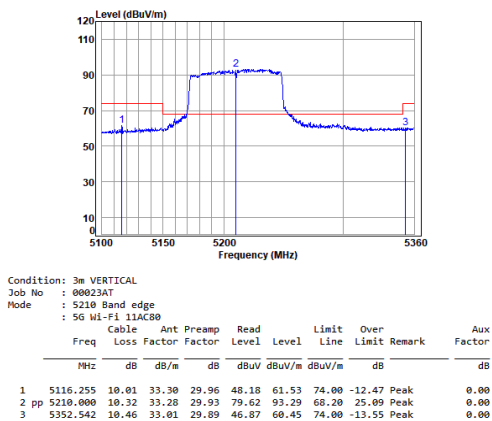

11ac_VHT(80M)_TX_CH_42_Vertical-Avg

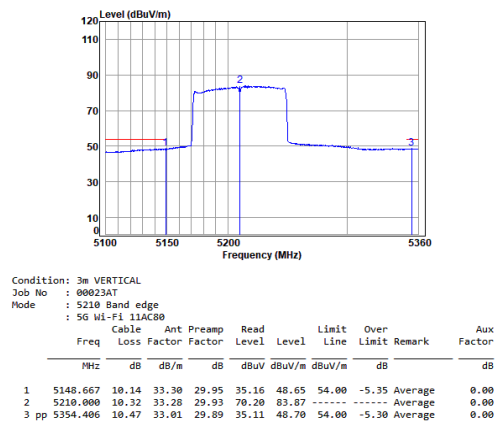

11a_TX_CH_64_Horizontal-Peak

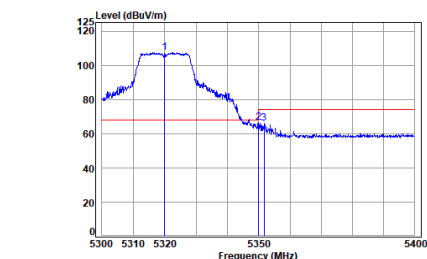

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5320 Band edge

: 56 Wi-Fi 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	pp 5320.000	10.35	33.06	29.90	93.95	107.46	68.20	39.26	Peak	0.00
2	5350.020	10.45	33.00	29.89	53.06	66.62	74.00	-7.38	Peak	0.00
3	5351.667	10.46	33.00	29.89	52.33	65.90	74.00	-8.10	Peak	0.00

11a_TX_CH_64_Horizontal-Avg

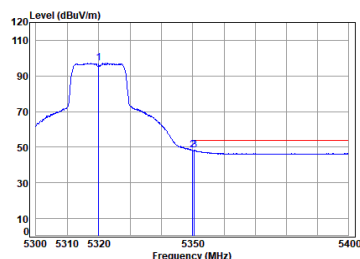

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5320 Band edge

: 56 Wi-Fi 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5320.000	10.35	33.06	29.90	83.69	97.20	-----	-----	Average	0.00
2	pp 5350.020	10.45	33.00	29.89	34.78	48.34	54.00	-5.66	Average	0.00
3	5350.566	10.45	33.00	29.89	34.71	48.27	54.00	-5.73	Average	0.00

11a_TX_CH_64_Vertical-Peak

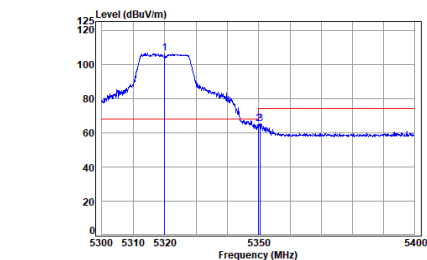

Condition: 3m VERTICAL


Job No : 00023AT

Mode : 5320 Band edge

: 56 Wi-Fi 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	pp 5320.000	10.35	33.06	29.90	92.98	106.49	68.20	38.29	Peak	0.00
2	5350.020	10.45	33.00	29.89	51.55	65.11	74.00	-8.89	Peak	0.00
3	5350.566	10.45	33.00	29.89	51.70	65.26	74.00	-8.74	Peak	0.00

11a_TX_CH_64_Vertical-Avg

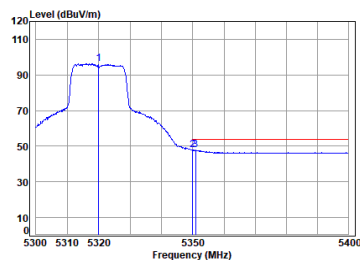

Condition: 3m VERTICAL

Job No : 00023AT

Mode : 5320 Band edge

: 56 Wi-Fi 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5320.000	10.35	33.06	29.90	82.67	96.18	-----	-----	Average	0.00
2	pp 5350.020	10.45	33.00	29.89	34.47	48.03	54.00	-5.97	Average	0.00
3	5350.966	10.45	33.00	29.89	34.37	47.93	54.00	-6.07	Average	0.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

11ac_VHT(20M)_TX_CH_64_Horizontal-Peak

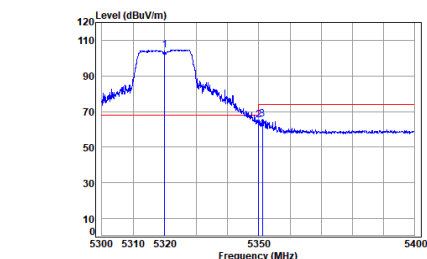

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5320 Band edge

: 56 Wi-Fi 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Line	Limit	Factor
	dB			dBuV/m	dBuV/m	dB	
1 pp 5320.000	10.35	33.06	29.90	91.16	104.67	68.20	36.47 Peak 0.00
2 5350.020	10.45	33.00	29.89	51.89	65.45	74.00	-8.55 Peak 0.00
3 5351.167	10.45	33.00	29.89	52.09	65.65	74.00	-8.35 Peak 0.00

11ac_VHT(20M)_TX_CH_64_Horizontal-Avg

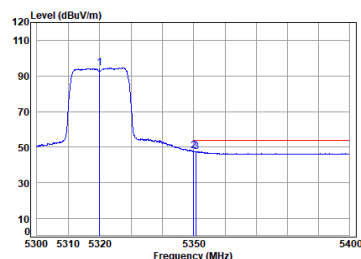

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5320 Band edge

: 56 Wi-Fi 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Line	Limit	Factor
	dB			dBuV/m	dBuV/m	dB	
1 5320.000	10.35	33.06	29.90	61.15	94.66	-----	Average 0.00
2 pp 5350.020	10.45	33.00	29.89	34.12	47.68	54.00	-6.32 Average 0.00
3 5350.767	10.45	33.00	29.89	34.06	47.62	54.00	-6.38 Average 0.00

11ac_VHT(20M)_TX_CH_64_Vertical-Peak

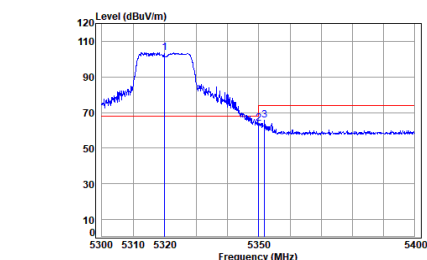

Condition: 3m VERTICAL


Job No : 00023AT

Mode : 5320 Band edge

: 56 Wi-Fi 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Line	Limit	Factor
	dB			dBuV/m	dBuV/m	dB	
1 pp 5320.000	10.35	33.06	29.90	90.20	103.71	68.20	35.51 Peak 0.00
2 5350.020	10.45	33.00	29.89	50.25	63.81	74.00	-10.19 Peak 0.00
3 5351.867	10.46	33.00	29.89	52.17	65.74	74.00	-8.26 Peak 0.00

11ac_VHT(20M)_TX_CH_64_Vertical-Avg

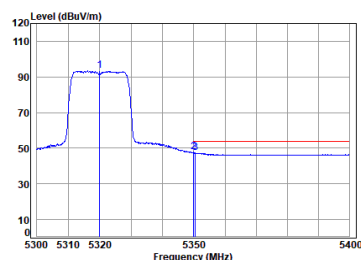

Condition: 3m VERTICAL

Job No : 00023AT


Mode : 5320 Band edge

: 56 Wi-Fi 11AC20


Freq	Cable	Ant	Preamp	Read	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Line	Limit	Factor
	dB			dBuV/m	dBuV/m	dB	
1 5320.000	10.35	33.06	29.90	79.89	93.40	-----	Average 0.00
2 pp 5350.020	10.45	33.00	29.89	34.17	47.73	54.00	-6.27 Average 0.00
3 5350.566	10.45	33.00	29.89	34.00	47.56	54.00	-6.44 Average 0.00




11ac_VHT(40M)_TX_CH_62_Horizontal-Peak

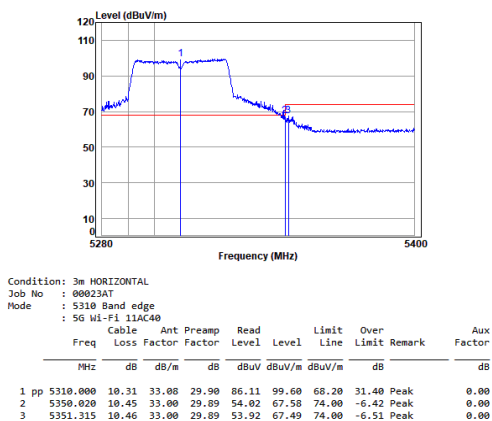


11ac_VHT(40M)_TX_CH_62_Horizontal-Avg

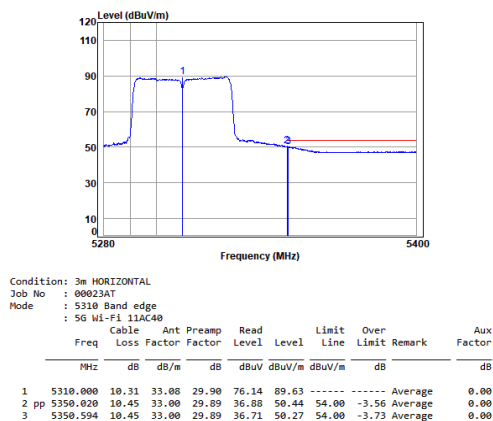


11ac_VHT(40M)_TX_CH_62_Vertical-Peak

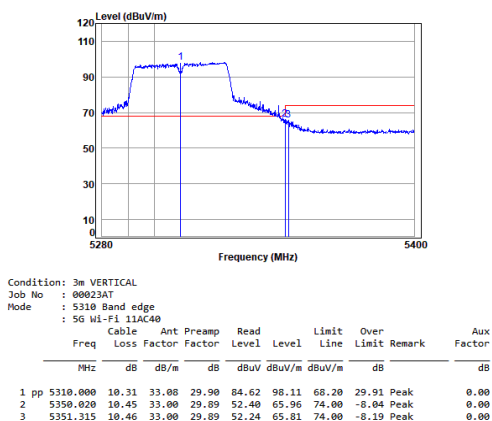

11ac_VHT(40M)_TX_CH_62_Vertical-Avg

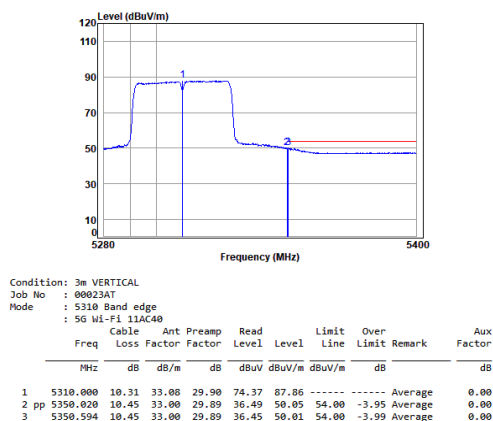

11ac_VHT(80M)_TX_CH_58_Horizontal-Peak

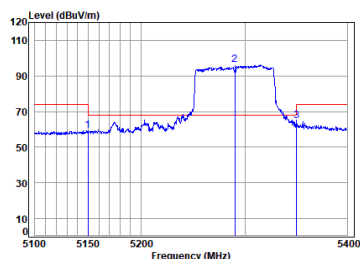

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5290 Band edge

: 5G Wi-Fi 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB			dBuV	dBuV/m	dB	dB		dB
1	5143.620	10.12	33.30	29.95	45.71	59.20	74.00	-14.80	Peak	0.00
2	5290.000	10.28	33.12	29.91	81.66	95.15	68.20	26.95	Peak	0.00
3	5350.229	10.45	33.00	29.89	51.22	64.78	74.00	-9.22	Peak	0.00

11ac_VHT(80M)_TX_CH_58_Horizontal-Avg



Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5290 Band edge

: 5G Wi-Fi 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB			dBuV	dBuV/m	dB	dB		dB
1	5143.620	10.12	33.30	29.95	33.46	46.93	54.00	-7.07	Average	0.00
2	5290.000	10.28	33.12	29.91	72.06	85.55	68.20	17.35	Average	0.00
3	5350.229	10.45	33.00	29.89	36.85	50.41	54.00	-3.59	Average	0.00

11ac_VHT(80M)_TX_CH_58_Vertical-Peak

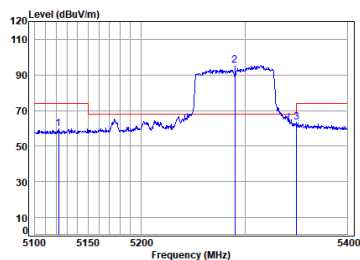

Condition: 3m VERTICAL


Job No : 00023AT

Mode : 5290 Band edge

: 5G Wi-Fi 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB			dBuV	dBuV/m	dB	dB		dB
1	5143.620	10.12	33.30	29.96	46.29	59.67	74.00	-14.33	Peak	0.00
2	5290.000	10.28	33.12	29.91	81.66	95.15	68.20	26.95	Peak	0.00
3	5350.229	10.45	33.00	29.89	49.78	63.34	74.00	-10.66	Peak	0.00

11ac_VHT(80M)_TX_CH_58_Vertical-Avg



Condition: 3m VERTICAL

Job No : 00023AT


Mode : 5290 Band edge

: 5G Wi-Fi 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB			dBuV	dBuV/m	dB	dB		dB
1	5143.620	10.12	33.30	29.95	33.34	46.82	54.00	-7.18	Average	0.00
2	5290.000	10.28	33.12	29.91	71.47	84.96	68.20	16.76	Average	0.00
3	5351.452	10.46	33.00	29.89	36.66	50.23	54.00	-3.77	Average	0.00



11a_TX_CH_100_Horizontal-Peak

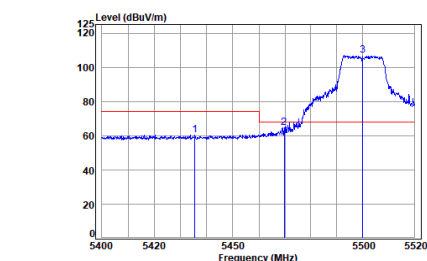

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5500 Band edge

: 5G Wi-Fi 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dB		dB
1	5435.484	10.61	33.10	29.86	46.67	60.52	74.00	-13.48	Peak	0.00
2	5469.759	10.59	33.10	29.85	50.73	64.57	68.20	-3.63	Peak	0.00
3 pp	5500.000	10.58	33.10	29.84	93.17	107.01	68.20	38.81	Peak	0.00

11a_TX_CH_100_Horizontal-Avg

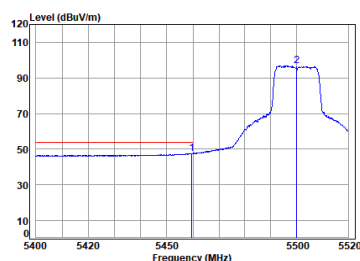

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5500 Band edge

: 5G Wi-Fi 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dB		dB
1 pp	5459.670	10.60	33.10	29.86	33.78	47.62	54.00	-6.38	Average	0.00
2	5500.000	10.58	33.10	29.84	82.89	96.73	68.20	28.53	Average	0.00

11a_TX_CH_100_Vertical-Peak

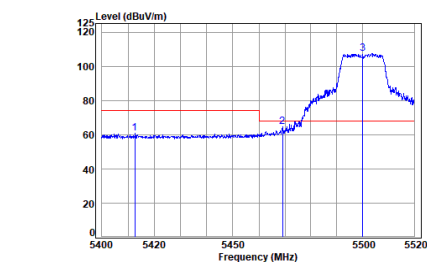

Condition: 3m VERTICAL


Job No : 00023AT

Mode : 5500 Band edge

: 5G Wi-Fi 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dB		dB
1	5412.595	10.61	33.10	29.87	47.01	60.85	74.00	-13.15	Peak	0.00
2	5469.759	10.59	33.10	29.85	50.73	64.57	68.20	-3.63	Peak	0.00
3 pp	5500.000	10.58	33.10	29.84	93.17	107.01	68.20	38.81	Peak	0.00

11a_TX_CH_100_Vertical-Avg

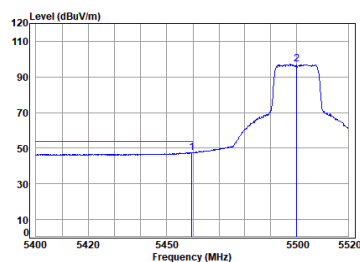

Condition: 3m VERTICAL

Job No : 00023AT


Mode : 5500 Band edge

: 5G Wi-Fi 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dB		dB
1 pp	5459.550	10.60	33.10	29.86	33.79	47.63	54.00	-6.37	Average	0.00
2	5500.000	10.58	33.10	29.84	82.89	96.73	68.20	28.53	Average	0.00




11a_TX_CH_140_Horizontal-Peak

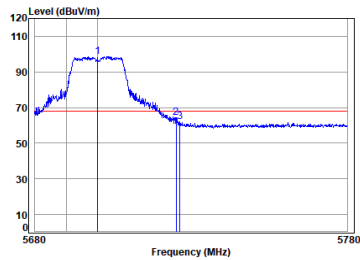

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5700 Band edge
: 56 Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp 5700.000	10.56	33.70	29.78	84.25	98.73	68.20	30.53	Peak	0.00
2 5725.000	10.68	33.75	29.78	49.59	64.24	68.20	-3.96	Peak	0.00
3 5726.283	10.68	33.75	29.78	47.38	62.03	68.20	-6.17	Peak	0.00


11a_TX_CH_140_Vertical-Peak

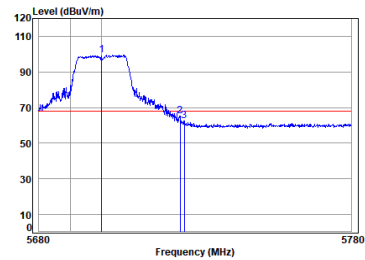

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5700 Band edge
: 56 Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp 5700.000	10.56	33.70	29.78	84.98	99.46	68.20	31.26	Peak	0.00
2 5725.000	10.68	33.75	29.78	50.43	65.08	68.20	-3.12	Peak	0.00
3 5726.383	10.68	33.75	29.78	48.04	62.69	68.20	-5.51	Peak	0.00


11ac_VHT(20M)_TX_CH_100_Horizontal-Peak

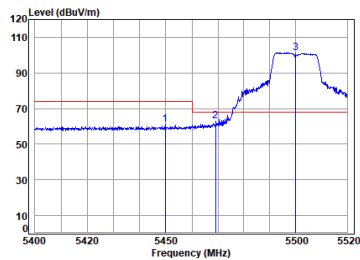

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5500 Band edge
: 56 Wi-Fi 11AC20

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 5449.839	10.60	33.10	29.86	47.20	61.04	74.00	-12.96	Peak	0.00
2 5469.158	10.59	33.10	29.85	48.91	62.75	68.20	-5.45	Peak	0.00
3 pp 5500.000	10.58	33.10	29.84	87.55	101.39	68.20	33.19	Peak	0.00

11ac_VHT(20M)_TX_CH_100_Horizontal-Avg

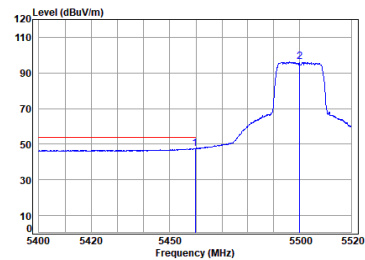


Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5500 Band edge
: 56 Wi-Fi 11AC20

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp 5459.791	10.60	33.10	29.86	33.81	47.65	54.00	-6.35	Average	0.00
2 5500.000	10.58	33.10	29.84	82.22	96.06	-----	-----	Average	0.00




11ac_VHT(20M)_TX_CH_100_Verical-Peak

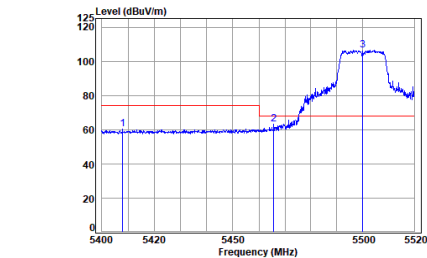

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5500 Band edge
: 56 Wi-Fi 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dB		dB
1	5487.839	10.62	33.10	29.87	46.51	60.36	74.00	-13.64	Peak	0.00
2	5485.673	10.59	33.10	29.85	49.40	63.24	68.20	-4.96	Peak	0.00
3 pp	5500.000	10.58	33.10	29.84	92.63	106.47	68.20	38.27	Peak	0.00


11ac_VHT(20M)_TX_CH_100_Verical-Avg

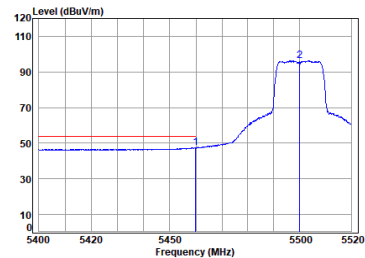

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5500 Band edge
: 56 Wi-Fi 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dB		dB
1 pp	5459.910	10.60	33.10	29.86	33.57	47.41	54.00	-6.59	Average	0.00
2	5500.000	10.58	33.10	29.84	82.43	96.27	68.20	28.07	Average	0.00


11ac_VHT(20M)_TX_CH_140_Horizontal-Peak

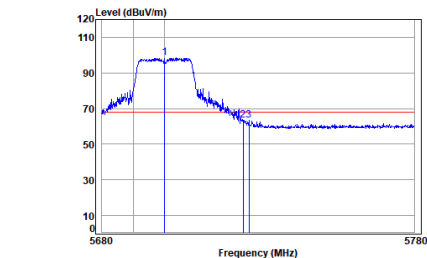

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5700 Band edge
: 56 Wi-Fi 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dB		dB
1 pp	5700.000	10.56	33.70	29.78	84.07	98.55	68.20	30.35	Peak	0.00
2	5725.000	10.68	33.75	29.78	48.67	63.32	68.20	-4.88	Peak	0.00
3	5726.883	10.68	33.75	29.78	48.82	63.47	68.20	-4.73	Peak	0.00

11ac_VHT(20M)_TX_CH_140_Verical-Peak

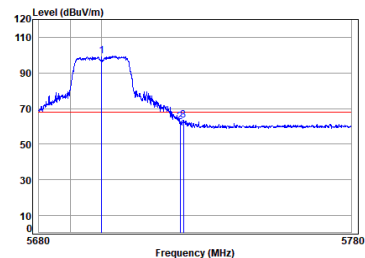


Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5700 Band edge
: 56 Wi-Fi 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dB		dB
1 pp	5700.000	10.56	33.70	29.78	84.91	99.39	68.20	31.19	Peak	0.00
2	5725.000	10.68	33.75	29.78	47.88	62.53	68.20	-5.67	Peak	0.00
3	5726.883	10.68	33.75	29.78	48.70	63.35	68.20	-4.85	Peak	0.00




11ac_VHT(40M)_TX_CH_102_Horizontal-Peak



Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5510 Band edge
: 56 Wi-Fi 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5499.202	10.60	33.10	29.86	46.65	60.49	74.00	-13.51	Peak	0.00
2	5468.992	10.59	33.10	29.85	50.80	64.64	68.20	-3.56	Peak	0.00
3 pp	5510.000	10.56	33.10	29.84	83.70	97.52	68.20	29.32	Peak	0.00


11ac_VHT(40M)_TX_CH_102_Horizontal-Avg

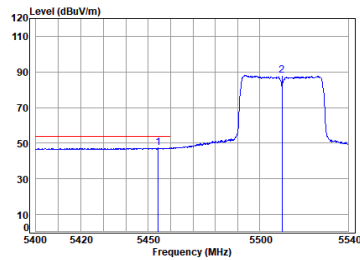

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5510 Band edge
: 56 Wi-Fi 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp	5454.454	10.60	33.10	29.86	33.49	47.33	54.00	-6.67	Average	0.00
2	5510.000	10.56	33.10	29.84	74.43	88.25	-----	-----	Average	0.00


11ac_VHT(40M)_TX_CH_102_Vertical-Peak



Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5510 Band edge
: 56 Wi-Fi 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5485.255	10.62	33.10	29.87	46.33	60.18	74.00	-13.82	Peak	0.00
2	5469.972	10.59	33.10	29.85	51.08	64.92	68.20	-3.28	Peak	0.00
3 pp	5510.000	10.56	33.10	29.84	84.72	98.54	68.20	30.34	Peak	0.00

11ac_VHT(40M)_TX_CH_102_Vertical-Avg

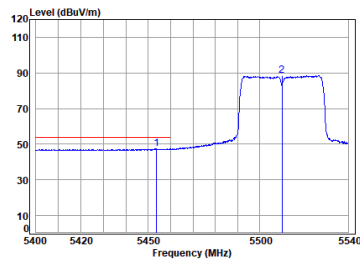


Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5510 Band edge
: 56 Wi-Fi 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp	5453.616	10.60	33.10	29.86	33.62	47.46	54.00	-6.54	Average	0.00
2	5510.000	10.56	33.10	29.84	74.85	88.67	-----	-----	Average	0.00




11ac_VHT(40M)_TX_CH_134_Horizontal-Peak

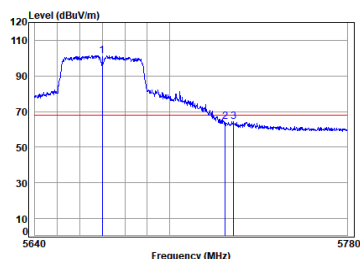

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5670 Band edge
: 56 Wi-Fi 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Line	Limit	Factor
	dB			dBuV	dBuV/m	dB	dB
1 pp 5678.000	10.52	33.52	29.79	87.22	101.47	68.20	33.27 Peak 0.00
2 5725.000	10.68	33.75	29.78	49.69	64.34	68.20	-3.86 Peak 0.00
3 5728.642	10.69	33.76	29.78	49.67	64.34	68.20	-3.86 Peak 0.00


11ac_VHT(40M)_TX_CH_134_Vertical-Peak

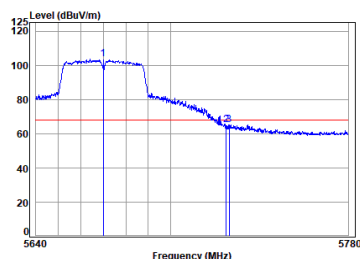

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5670 Band edge
: 56 Wi-Fi 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Line	Limit	Factor
	dB			dBuV	dBuV/m	dB	dB
1 pp 5678.000	10.52	33.52	29.79	89.59	103.84	68.20	35.64 Peak 0.00
2 5725.000	10.68	33.75	29.78	50.43	65.08	68.20	-3.12 Peak 0.00
3 5726.255	10.68	33.75	29.78	50.43	65.08	68.20	-3.12 Peak 0.00


11ac_VHT(80M)_TX_CH_106_Horizontal-Peak

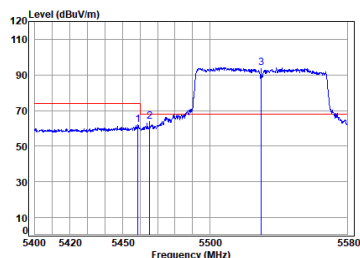

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5530 Band edge
: 56 Wi-Fi 11AC80

Freq	Cable	Ant	Preamp	Read	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Line	Limit	Factor
	dB			dBuV	dBuV/m	dB	dB
1 5458.749	10.60	33.10	29.86	48.28	62.12	74.00	-11.88 Peak 0.00
2 5465.375	10.59	33.10	29.85	50.17	64.01	68.20	-4.19 Peak 0.00
3 pp 5530.000	10.53	33.10	29.83	80.34	94.14	68.20	25.94 Peak 0.00

11ac_VHT(80M)_TX_CH_106_Horizontal-Avg

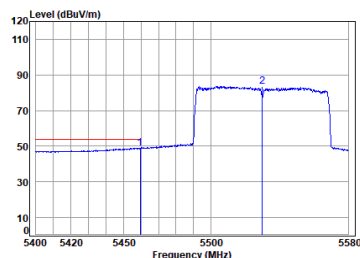


Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5530 Band edge
: 56 Wi-Fi 11AC80

Freq	Cable	Ant	Preamp	Read	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Line	Limit	Factor
	dB			dBuV	dBuV/m	dB	dB
1 pp 5459.465	10.60	33.10	29.86	35.16	49.00	54.00	-5.00 Average 0.00
2 5530.000	10.53	33.10	29.83	69.81	83.61	-----	----- Average 0.00



11ac_VHT(80M)_TX_CH_106_Verical-Peak

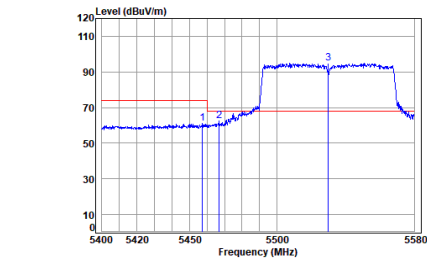

Condition: 3m VERTICAL


Job No : 00023AT

Mode : 5530 Band edge

: 5G Wi-Fi 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5457.317	10.60	33.10	29.86	47.25	61.09	74.00	-12.91	Peak	0.00
2	5466.909	10.59	33.10	29.85	48.73	62.57	68.20	-5.63	Peak	0.00
3 pp	5530.000	10.53	33.10	29.83	80.95	94.75	68.20	26.55	Peak	0.00

11ac_VHT(80M)_TX_CH_106_Verical-Avg

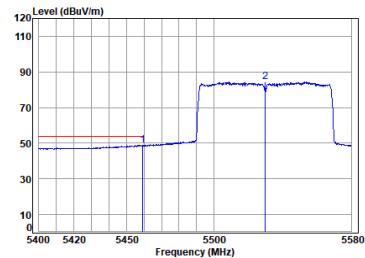

Condition: 3m VERTICAL


Job No : 00023AT

Mode : 5530 Band edge

: 5G Wi-Fi 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp	5459.286	10.60	33.10	29.86	35.15	48.99	54.00	-5.01	Average	0.00
2	5530.000	10.53	33.10	29.83	70.40	84.20	68.20	16.00	Average	0.00

11ac_VHT(80M)_TX_CH_122_Horizontal-Peak

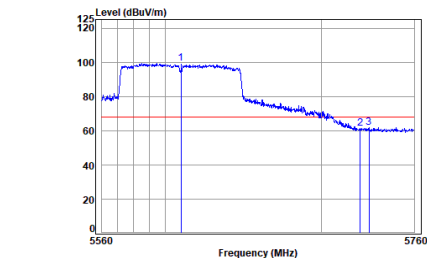

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5610 Band edge

: 5G Wi-Fi 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp	5610.000	10.43	33.40	29.81	85.13	99.15	68.20	30.95	Peak	0.00
2	5725.000	10.68	33.75	29.78	46.62	61.27	68.20	-6.93	Peak	0.00
3	5730.763	10.70	33.76	29.78	47.19	61.87	68.20	-6.33	Peak	0.00

11ac_VHT(80M)_TX_CH_122_Verical-Peak

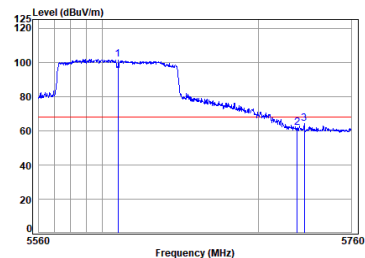

Condition: 3m VERTICAL

Job No : 00023AT


Mode : 5610 Band edge

: 5G Wi-Fi 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp	5610.000	10.43	33.40	29.81	87.76	101.78	68.20	33.58	Peak	0.00
2	5725.000	10.68	33.75	29.78	47.31	61.96	68.20	-6.24	Peak	0.00
3	5729.547	10.70	33.76	29.78	49.28	63.96	68.20	-4.24	Peak	0.00




11a_TX_CH_149_Horizontal

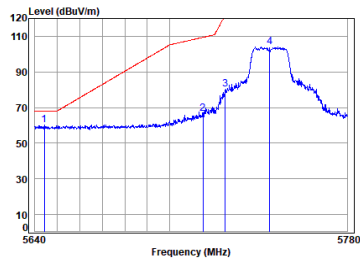

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5745 Band edge
: 5.8G Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp 5644.289	10.48	33.40	29.80	46.20	60.28	68.20	-7.92	Peak	0.00
2 5715.000	10.63	33.73	29.78	51.91	66.49	109.40	-42.91	Peak	0.00
3 5725.000	10.68	33.75	29.78	65.62	80.27	122.20	-41.93	Peak	0.00
4 5745.000	10.77	33.79	29.77	89.41	104.20	-----	-----	Peak	0.00


11a_TX_CH_149_Vertical

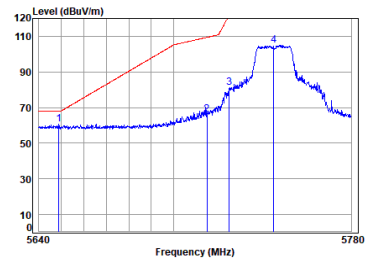

Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5745 Band edge
: 5.8G Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp 5648.857	10.48	33.40	29.80	46.48	60.56	68.20	-7.64	Peak	0.00
2 5715.000	10.63	33.73	29.78	51.51	66.89	109.40	-43.51	Peak	0.00
3 5725.000	10.68	33.75	29.78	66.61	81.26	122.20	-40.94	Peak	0.00
4 5745.000	10.77	33.79	29.77	90.25	105.04	-----	-----	Peak	0.00


11a_TX_CH_165_Horizontal

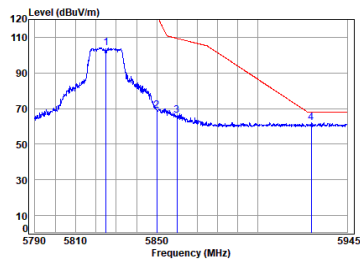

Condition: 3m HORIZONTAL
Job No : 00023AT
Mode : 5825 Band edge
: 5.8G Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 5825.000	10.99	34.10	29.75	88.67	104.01	-----	-----	Peak	0.00
2 5850.000	10.95	34.20	29.74	53.58	68.99	122.20	-53.21	Peak	0.00
3 5860.000	10.94	34.22	29.74	50.83	66.25	109.40	-43.15	Peak	0.00
4 pp 5926.966	10.87	34.25	29.72	46.67	62.07	68.20	-6.13	Peak	0.00

11a_TX_CH_165_Vertical

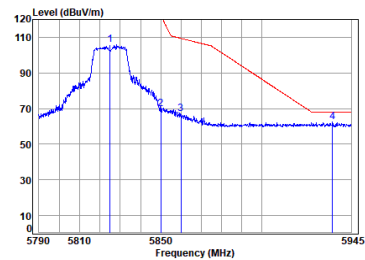


Condition: 3m VERTICAL
Job No : 00023AT
Mode : 5825 Band edge
: 5.8G Wi-Fi 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 5825.000	10.99	34.10	29.75	90.40	105.74	-----	-----	Peak	0.00
2 5850.000	10.95	34.20	29.74	54.58	69.99	122.20	-52.21	Peak	0.00
3 5860.000	10.94	34.22	29.74	51.48	66.90	109.40	-42.50	Peak	0.00
4 pp 5935.584	10.86	34.23	29.72	47.12	62.49	68.20	-5.71	Peak	0.00



11ac_VHT(20M)_TX_CH_149_Horizontal

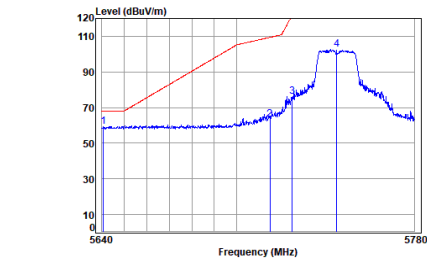

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5745 Band edge

: 5.8G Wi-Fi 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5640.691	10.47	33.40	29.80	45.36	59.43	68.20	-8.77	Peak	0.00
2	5715.000	10.63	33.73	29.78	49.04	63.62	109.40	-45.78	Peak	0.00
3	5725.000	10.68	33.75	29.78	61.69	76.34	122.20	-45.86	Peak	0.00
4	5745.000	10.77	33.79	29.77	87.73	102.52	-----	-----	Peak	0.00

11ac_VHT(20M)_TX_CH_149_Vertical

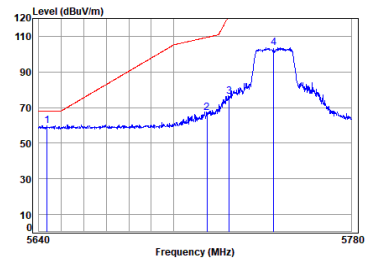

Condition: 3m VERTICAL


Job No : 00023AT

Mode : 5745 Band edge

: 5.8G Wi-Fi 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5643.735	10.48	33.40	29.80	45.81	59.89	68.20	-8.31	Peak	0.00
2	5715.000	10.63	33.73	29.78	52.51	67.09	109.40	-42.31	Peak	0.00
3	5725.000	10.68	33.75	29.78	61.43	76.08	122.20	-46.12	Peak	0.00
4	5745.000	10.77	33.79	29.77	88.77	103.56	-----	-----	Peak	0.00

11ac_VHT(20M)_TX_CH_165_Horizontal

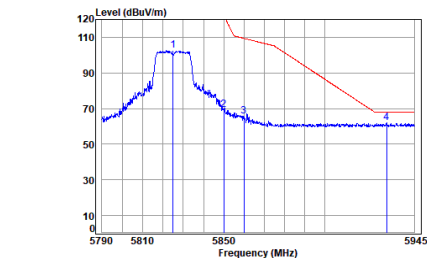

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5825 Band edge

: 5.8G Wi-Fi 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5825.000	10.99	34.10	29.75	87.21	102.55	-----	-----	Peak	0.00
2	5850.000	10.95	34.20	29.74	53.92	69.33	122.20	-52.87	Peak	0.00
3	5860.000	10.94	34.22	29.74	50.31	65.73	109.40	-43.67	Peak	0.00
4	5931.195	10.86	34.24	29.72	46.54	61.92	68.20	-6.28	Peak	0.00

11ac_VHT(20M)_TX_CH_165_Vertical

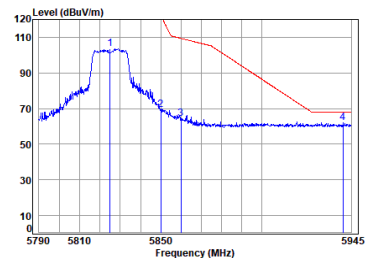

Condition: 3m VERTICAL

Job No : 00023AT

Mode : 5825 Band edge

: 5.8G Wi-Fi 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5825.000	10.99	34.10	29.75	88.18	103.52	-----	-----	Peak	0.00
2	5850.000	10.95	34.20	29.74	54.16	69.57	122.20	-52.63	Peak	0.00
3	5860.000	10.94	34.22	29.74	48.95	64.37	109.40	-45.03	Peak	0.00
4	5948.761	10.86	34.22	29.72	46.89	62.25	68.20	-5.95	Peak	0.00




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057

11ac_VHT(40M)_TX_CH_151_Horizontal

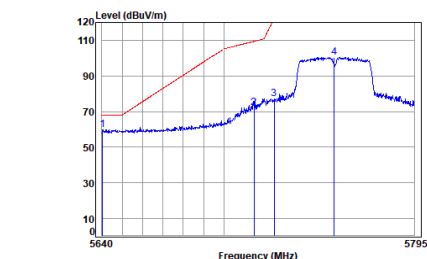

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5755 Band edge

: 5.8G Wi-Fi 11AC40

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Level	Line	Limit	Factor
	dB			dBuV	dBuV/m	dBuV/m	dB	
1 pp 5640.306	10.47	33.40	29.80	45.67	59.74	68.20	-8.46	Peak 0.00
2 5715.000	10.63	33.73	29.78	57.64	72.22	109.40	-37.18	Peak 0.00
3 5725.000	10.68	33.75	29.78	62.30	76.95	122.20	-45.25	Peak 0.00
4 5755.000	10.81	33.82	29.77	85.64	100.50	-----	-----	Peak 0.00

11ac_VHT(40M)_TX_CH_151_Vertical



Condition: 3m VERTICAL


Job No : 00023AT

Mode : 5755 Band edge

: 5.8G Wi-Fi 11AC40

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Level	Line	Limit	Factor
	dB			dBuV	dBuV/m	dBuV/m	dB	
1 pp 5646.732	10.48	33.40	29.80	45.80	59.88	68.20	-8.32	Peak 0.00
2 5715.000	10.63	33.73	29.78	58.58	73.16	109.40	-36.24	Peak 0.00
3 5725.000	10.68	33.75	29.78	63.21	77.86	122.20	-44.34	Peak 0.00
4 5755.000	10.81	33.82	29.77	87.21	102.07	-----	-----	Peak 0.00

11ac_VHT(40M)_TX_CH_159_Horizontal

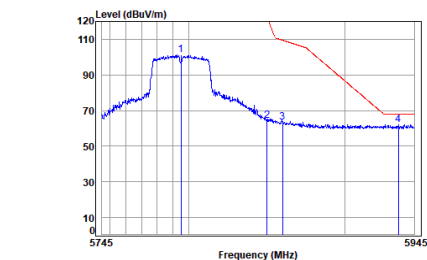

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5795 Band edge

: 5.8G Wi-Fi 11AC40

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Level	Line	Limit	Factor
	dB			dBuV	dBuV/m	dBuV/m	dB	
1 5795.000	11.00	33.98	29.76	86.12	101.34	-----	-----	Peak 0.00
2 5850.000	10.95	34.20	29.74	48.77	64.18	122.20	-58.02	Peak 0.00
3 5860.000	10.94	34.22	29.74	48.09	63.51	109.40	-45.89	Peak 0.00
4 pp 5934.836	10.86	34.23	29.72	46.83	62.20	68.20	-6.00	Peak 0.00

11ac_VHT(40M)_TX_CH_159_Vertical



Condition: 3m VERTICAL

Job No : 00023AT

Mode : 5795 Band edge

: 5.8G Wi-Fi 11AC40


Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	Level	Line	Limit	Factor
	dB			dBuV	dBuV/m	dBuV/m	dB	
1 5795.000	11.00	33.98	29.76	87.06	102.28	-----	-----	Peak 0.00
2 5850.000	10.95	34.20	29.74	49.92	65.33	122.20	-56.87	Peak 0.00
3 5860.000	10.94	34.22	29.74	48.05	63.47	109.40	-45.93	Peak 0.00
4 pp 5942.559	10.86	34.21	29.72	46.93	62.28	68.20	-5.92	Peak 0.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

11ac_VHT(80M)_TX_CH_155_Horizontal

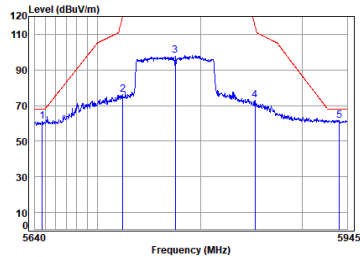

Condition: 3m HORIZONTAL


Job No : 00023AT

Mode : 5775 Band edge

: 5.86 Wi-Fi 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5647.133	10.48	33.40	29.80	47.28	61.36	68.20	-6.84	Peak	0.00
2	5724.008	10.67	33.75	29.78	61.72	76.36	120.12	-43.76	Peak	0.00
3	5775.000	10.91	33.90	29.76	83.19	98.24	-----	-----	Peak	0.00
4	5853.349	10.95	34.21	29.74	57.58	73.00	114.56	-41.56	Peak	0.00
5 pp	5937.178	10.86	34.23	29.72	46.44	61.81	68.20	-6.39	Peak	0.00

11ac_VHT(80M)_TX_CH_155_Vertical

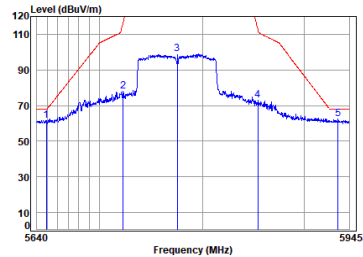

Condition: 3m VERTICAL

Job No : 00023AT

Mode : 5775 Band edge

: 5.86 Wi-Fi 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	5648.918	10.48	33.40	29.80	47.54	61.62	68.20	-6.58	Peak	0.00
2	5722.502	10.66	33.75	29.78	63.50	78.13	116.09	-38.56	Peak	0.00
3	5775.000	10.91	33.90	29.76	83.75	98.80	-----	-----	Peak	0.00
4	5853.965	10.95	34.21	29.74	57.75	73.17	113.16	-39.99	Peak	0.00
5 pp	5933.739	10.86	34.23	29.72	47.02	62.39	68.20	-5.81	Peak	0.00



7.5 Duty Cycle

Test Requirement: ANSI C63.10 (2020) Section 12.2
 Test Method: ANSI C63.10 (2020) Section 12.2
 Test Engineer: Linvo Ding


7.5.1 E.U.T. Operation

Operating Environment:
 Temperature: 28.0 °C Humidity: 37.4 % RH Atmospheric Pressure: 1020 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

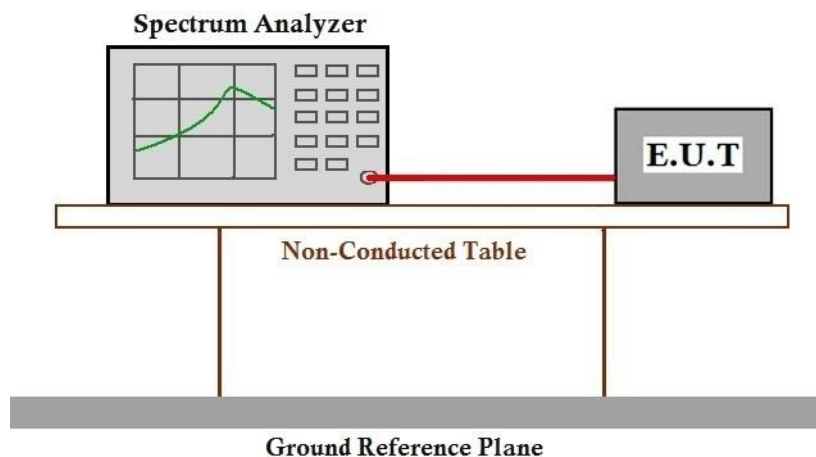

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 99% Bandwidth

Test Requirement ANSI C63.10 (2020) Section 12.5.3

Test Method: ANSI C63.10 (2020) Section 12.5.3

Test Engineer: Linvo Ding

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 28.0 °C


Humidity: 37.4 % RH

Atmospheric Pressure: 1020 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

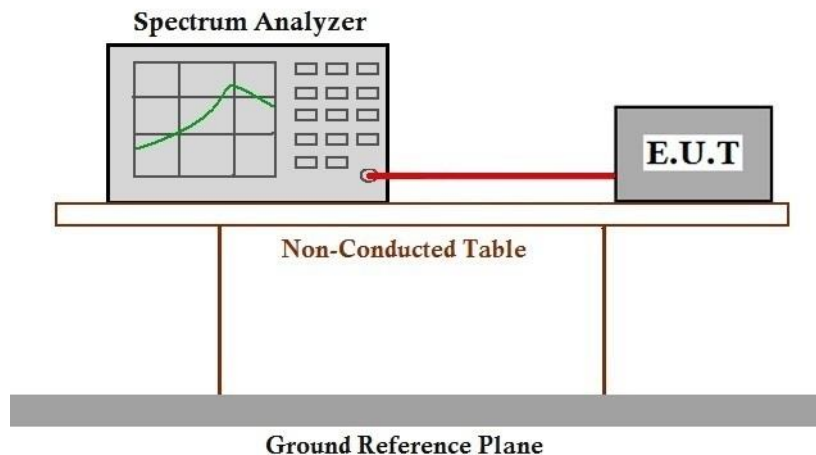

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.5.2

Test Engineer: Linvo Ding

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 28.0 °C


Humidity: 37.4 % RH

Atmospheric Pressure: 1020 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

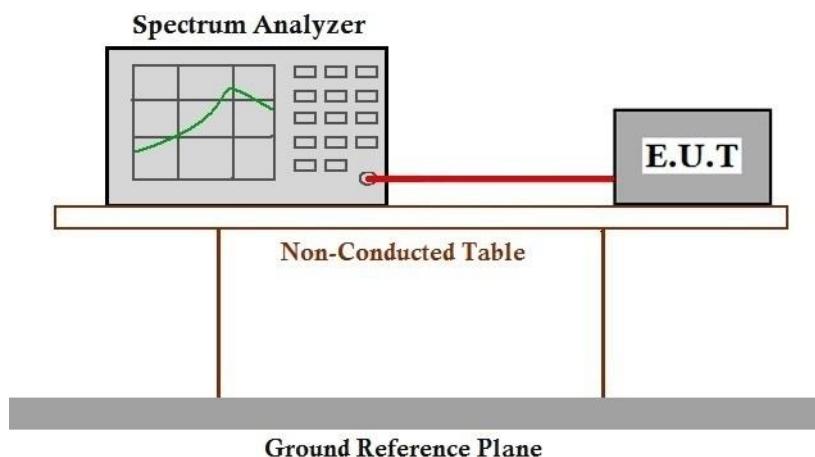

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart E 15.407 (e)

Test Method: ANSI C63.10 (2020) Section 12.5.1

Test Engineer: Linvo Ding

Limit:

Frequency band(MHz)	Limit
5725-5850	≥ 500 kHz

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 28.0 °C


Humidity: 37.4 % RH

Atmospheric Pressure: 1020 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

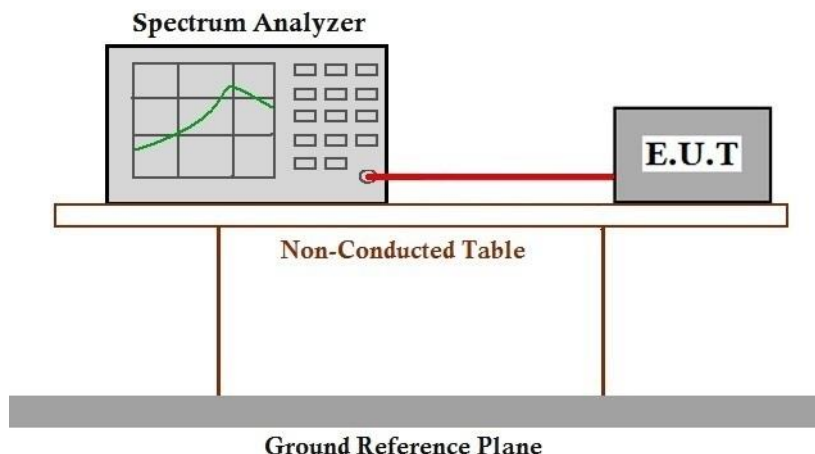

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.9 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.4

Test Engineer: Linvo Ding

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) or 11dBm+10logB*
5470-5725	≤250mW(24dBm) or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 28.0 °C

Humidity: 37.4 % RH


Atmospheric Pressure: 1020 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



7.9.3 Test Setup Diagram

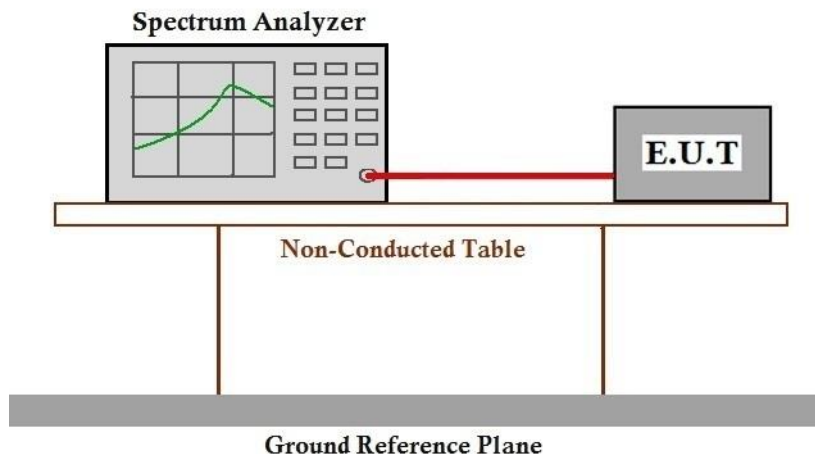

7.9.4 Measurement Procedure and Data

$$\text{AV Output power Level} = \text{Reading level} + \text{Cable loss} + \text{DCCF}$$

Please Refer to Appendix for Details

7.10 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.6

Test Engineer: Linvo Ding

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 28.0 °C

Humidity: 37.4 % RH


Atmospheric Pressure: 1020 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



7.10.3 Test Setup Diagram

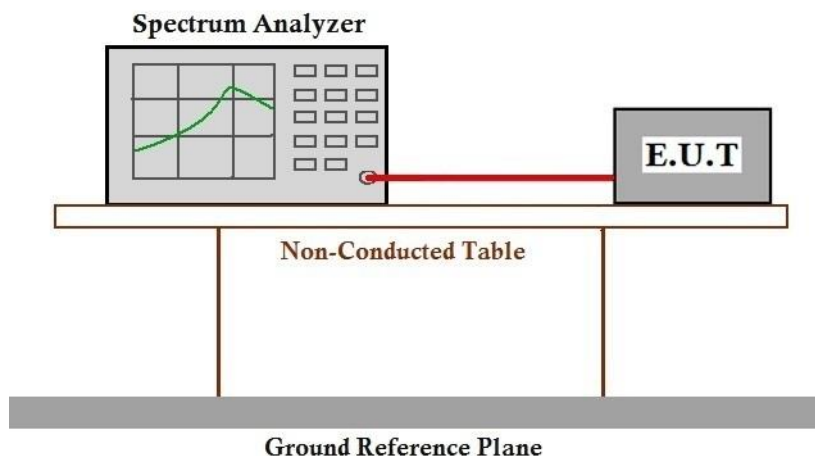

7.10.4 Measurement Procedure and Data

RBW conversion factor from 300kHz to 500kHz (2.22dB) for UNII Band 3 has been considered.

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch
Inspection & Testing Services

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.11 Frequency Stability

Test Requirement 47 CFR Part 15, Subpart E 15.407 (g)
 Test Method: ANSI C63.10 (2020) Section 6.8
 Test Engineer: Linvo Ding

7.11.1 E.U.T. Operation


Operating Environment:

Temperature: 28.0 °C Humidity: 37.4 % RH Atmospheric Pressure: 1020 mbar

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

7.11.3 Test Setup Diagram

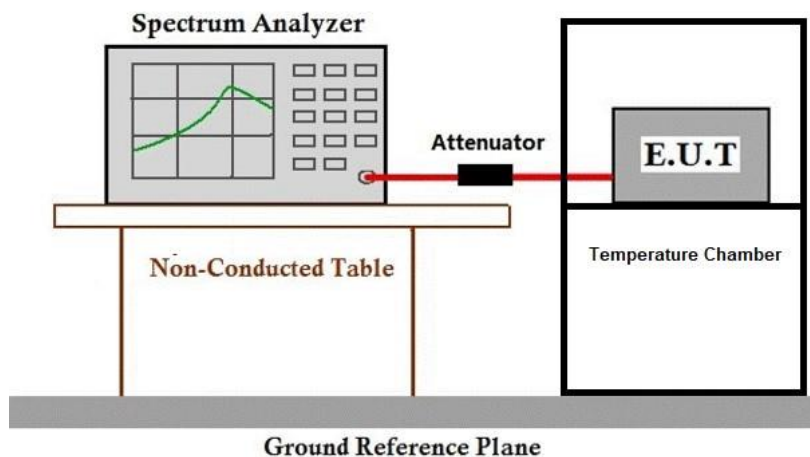

7.11.4 Measurement Procedure and Data

Please Refer to Appendix for Details

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100002305

Page: 69 of 227

7.12 Channel Move Time

Test Requirement KDB 905462 D02 Section 5.1
Test Method: KDB 905462 D02 Section 7.8.3
Test Engineer: Linvo Ding

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.12.1 E.U.T. Operation

Operating Environment:

Temperature: 17 °C




Humidity: 47 % RH

Atmospheric Pressure: 1020 mbar

7.12.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	Normal operating_Keep the EUT communication with the companion device.

7.12.3 Test Setup Diagram

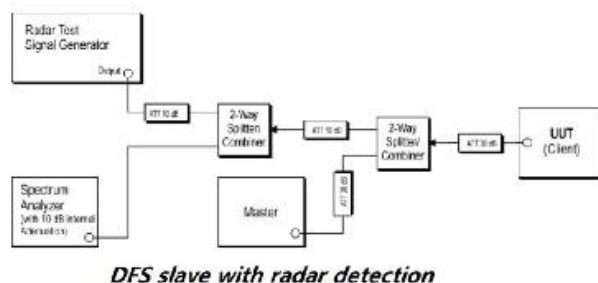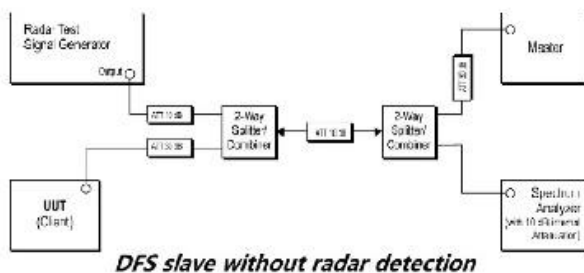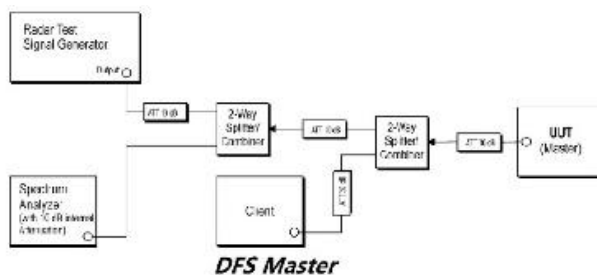

7.12.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details

7.13 Channel Closing Transmission Time

Test Requirement KDB 905462 D02 Section 5.1
 Test Method: KDB 905462 D02 Section 7.8.3
 Test Engineer: Linvo Ding

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.13.1 E.U.T. Operation

Operating Environment:

Temperature: 17 °C




Humidity: 47 % RH

Atmospheric Pressure: 1020 mbar

7.13.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	Normal operating_Keep the EUT communication with the companion device.

7.13.3 Test Setup Diagram

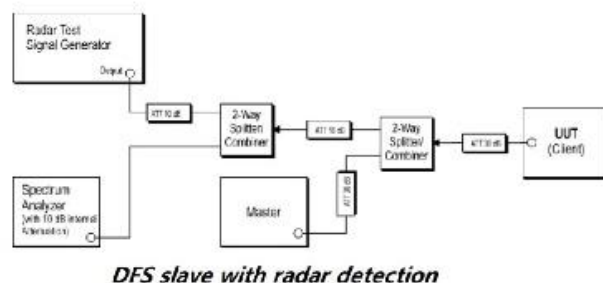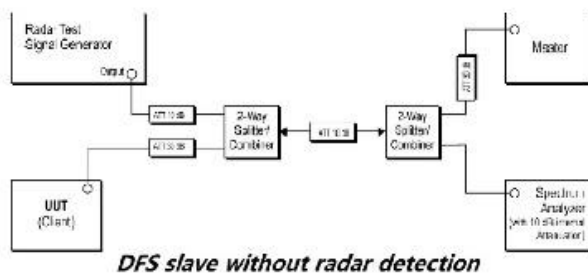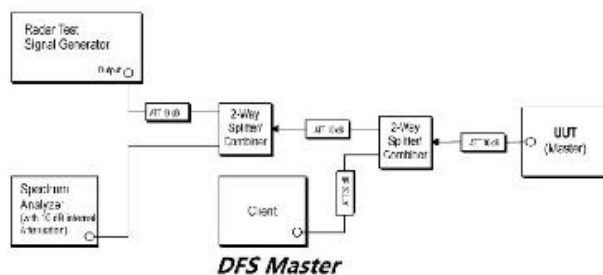

7.13.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing and Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SZCR2601000023AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix – External and Internal Photos for SZCR2601000023AT



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

10 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11a	SISO	5180	1.392	1.580	88.10	0.55	1.51
		5200	1.392	1.626	85.61	0.67	4.00
		5240	1.392	1.580	88.10	0.55	1.55
		5260	1.393	1.644	84.73	0.72	4.92
		5300	1.393	1.572	88.61	0.53	0.54
		5320	1.392	1.644	84.67	0.72	4.39
		5500	1.393	1.627	85.62	0.67	4.49
		5580	1.392	1.626	85.61	0.67	3.97
		5700	1.392	1.625	85.66	0.67	3.97
		5745	1.392	1.617	86.09	0.65	3.49
		5785	1.392	1.626	85.61	0.67	3.97
		5825	1.393	1.617	86.15	0.65	4.02
802.11n (HT20)	SISO	5180	1.301	1.516	85.82	0.66	3.72
		5200	1.300	1.588	81.86	0.87	7.09
		5240	1.301	1.543	84.32	0.74	4.67
		5260	1.301	1.534	84.81	0.72	4.18
		5300	1.301	1.525	85.31	0.69	3.68
		5320	1.300	1.497	86.84	0.61	2.17
		5500	1.300	1.570	82.80	0.82	6.16
		5580	1.301	1.534	84.81	0.72	4.21
		5700	1.300	1.525	85.25	0.69	3.71
		5745	1.301	1.484	87.67	0.57	1.32
		5785	1.300	1.524	85.30	0.69	3.68
		5825	1.301	1.480	87.91	0.56	1.08
802.11n (HT40)	SISO	5190	0.650	0.874	74.37	1.29	6.68
		5230	0.648	0.882	73.47	1.34	6.57
		5270	0.649	0.873	74.34	1.29	5.78
		5310	0.648	0.927	69.90	1.56	11.02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100002305

Page: 77 of 227

		5510	0.649	0.909	71.40	1.46	9.63
		5550	0.649	0.873	74.34	1.29	5.75
		5670	0.649	0.873	74.34	1.29	5.77
		5755	0.649	0.873	74.34	1.29	6.71
		5795	0.649	0.873	74.34	1.29	6.68
802.11ac (VHT20)	SISO	5180	1.313	1.582	83.00	0.81	6.08
		5200	1.312	1.483	88.47	0.53	0.57
		5240	1.313	1.555	84.44	0.73	5.16
		5260	1.313	1.483	88.54	0.53	0.57
		5300	1.312	1.518	86.43	0.63	2.64
		5320	1.312	1.483	88.47	0.53	1.12
		5500	1.312	1.501	87.41	0.58	1.64
		5580	1.313	1.537	85.43	0.68	3.65
		5700	1.313	1.573	83.47	0.78	5.57
		5745	1.312	1.537	85.36	0.69	3.65
		5785	1.312	1.546	84.86	0.71	4.73
		5825	1.313	1.546	84.93	0.71	4.15
802.11ac (VHT40)	SISO	5190	0.653	0.922	70.82	1.50	10.33
		5230	0.653	0.869	75.14	1.24	5.90
		5270	0.653	0.886	73.70	1.33	6.53
		5310	0.653	0.886	73.70	1.33	6.52
		5510	0.653	0.877	74.46	1.28	5.75
		5550	0.652	0.868	75.12	1.24	5.88
		5670	0.652	0.913	71.41	1.46	8.72
		5755	0.653	0.868	75.23	1.24	5.91
		5795	0.653	0.877	74.46	1.28	6.66
802.11ac (VHT80)	SISO	5210	0.325	0.603	53.90	2.68	13.07
		5290	0.331	0.548	60.40	2.19	10.46
		5530	0.325	0.548	59.31	2.27	7.73
		5610	0.325	0.557	58.35	2.34	9.97
		5775	0.330	0.557	59.25	2.27	8.84



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1.2 Test Graph


1.2.1 Ant1

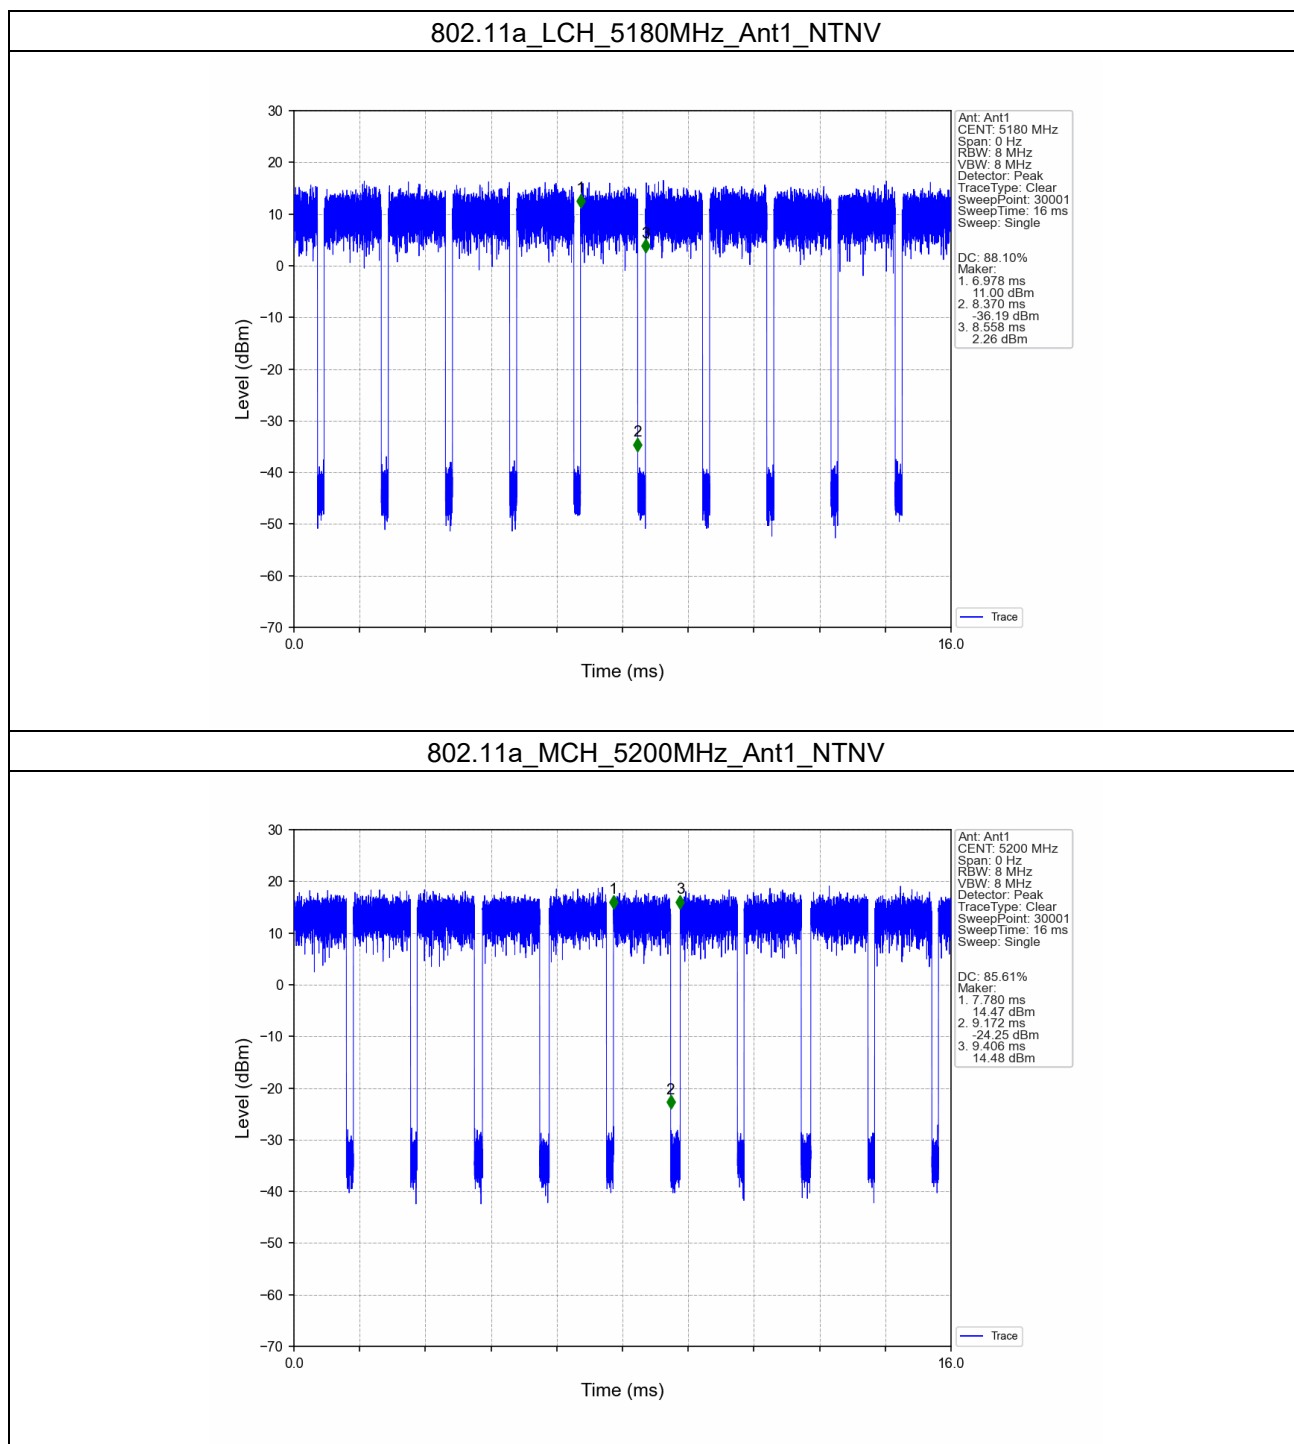


802.11a_HCH_5240MHz_Ant1_NTNV

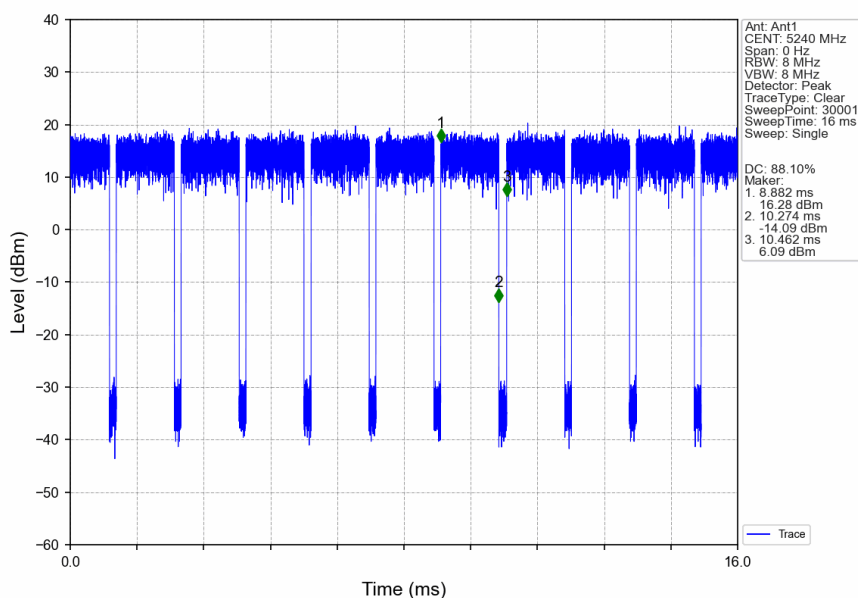


802.11a_LCH_5260MHz_Ant1_NTNV

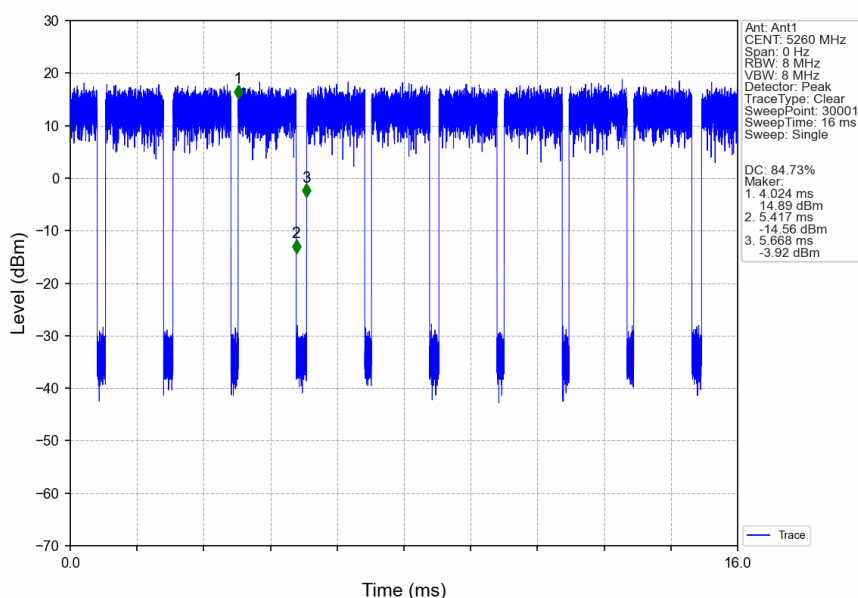


802.11a_MCH_5300MHz_Ant1_NTNV

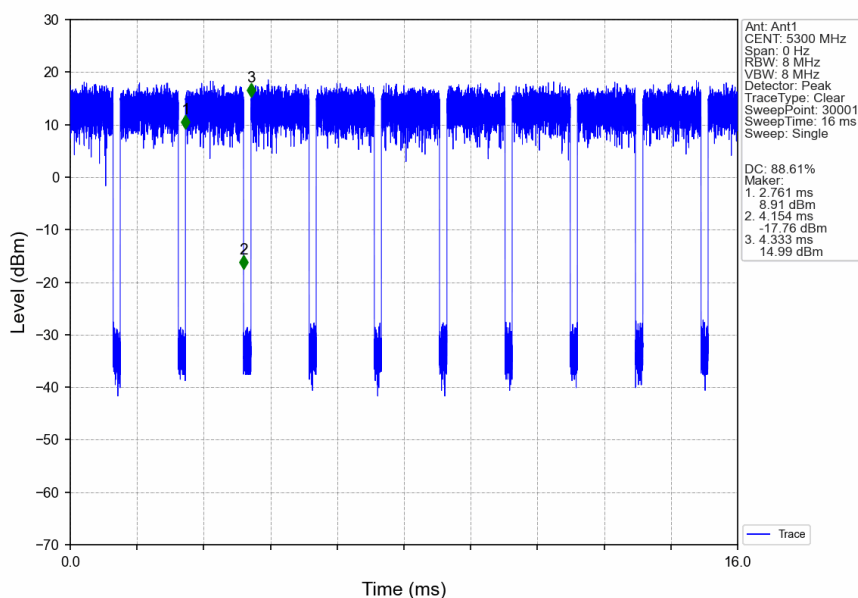


802.11a_HCH_5320MHz_Ant1_NTNV

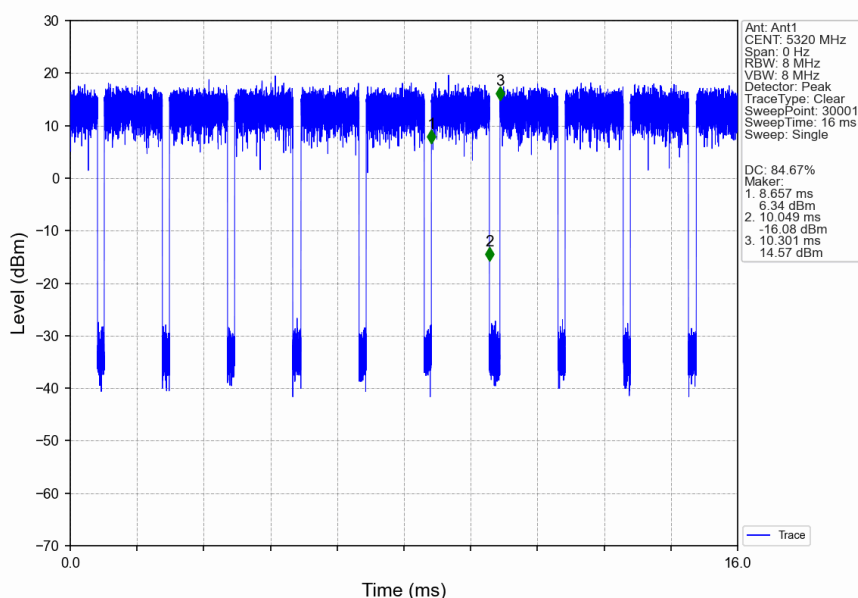


802.11a_LCH_5500MHz_Ant1_NTNV

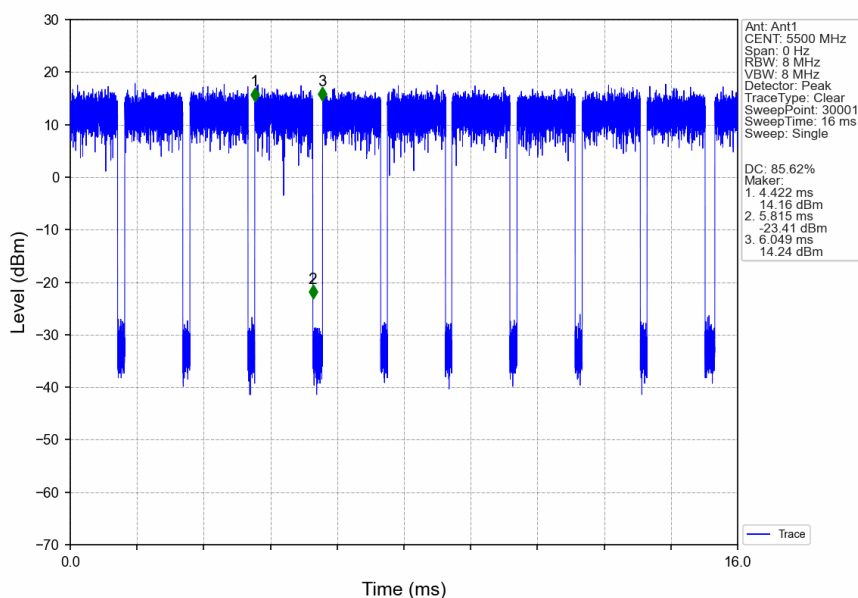


802.11a_MCH_5580MHz_Ant1_NTNV

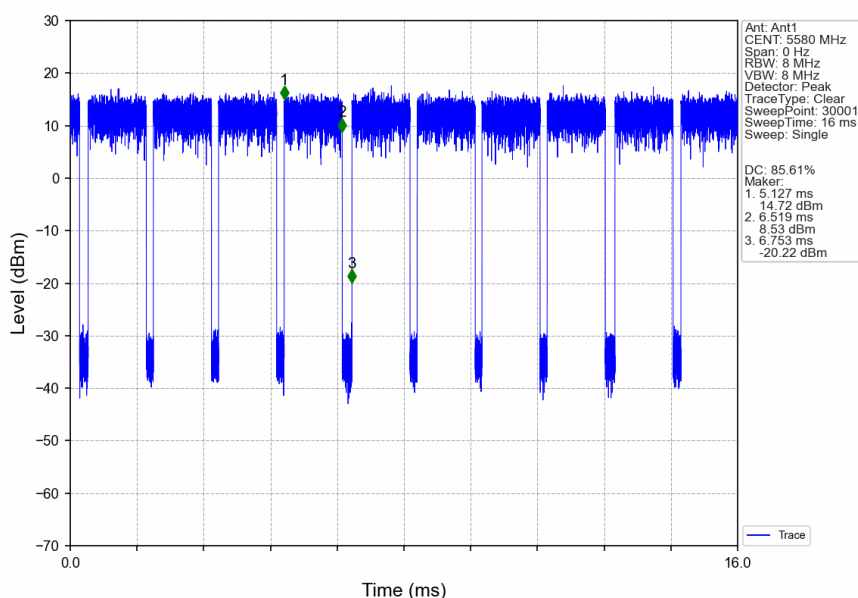


802.11a_HCH_5700MHz_Ant1_NTNV

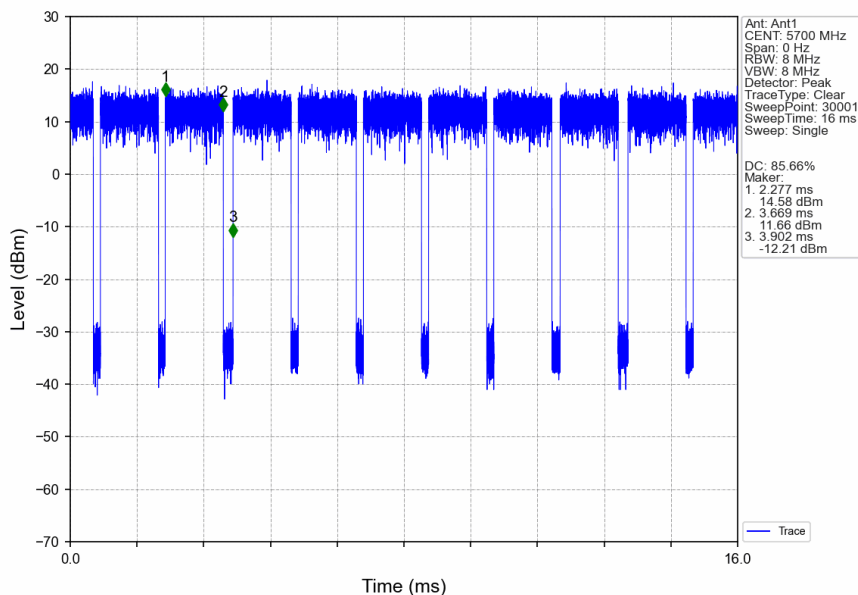


802.11a_LCH_5745MHz_Ant1_NTNV

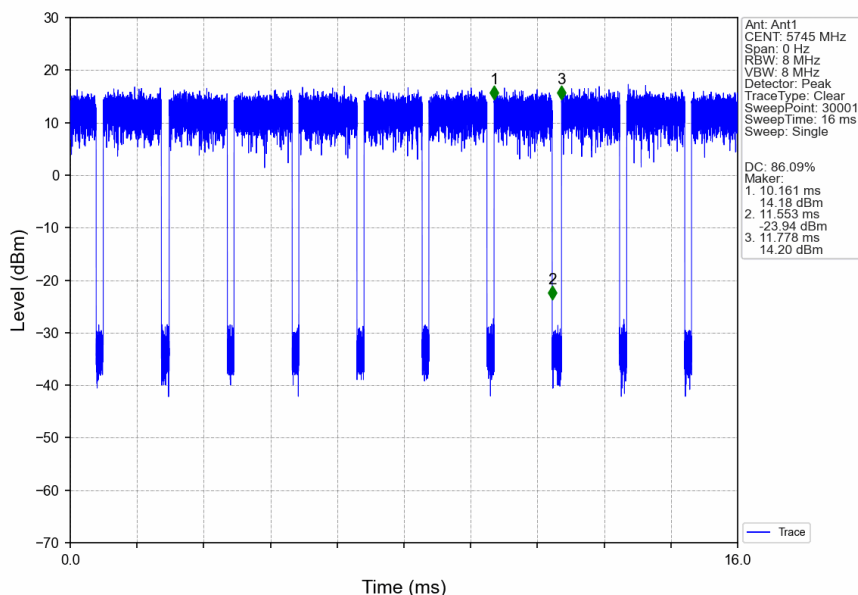


802.11a_MCH_5785MHz_Ant1_NTNV

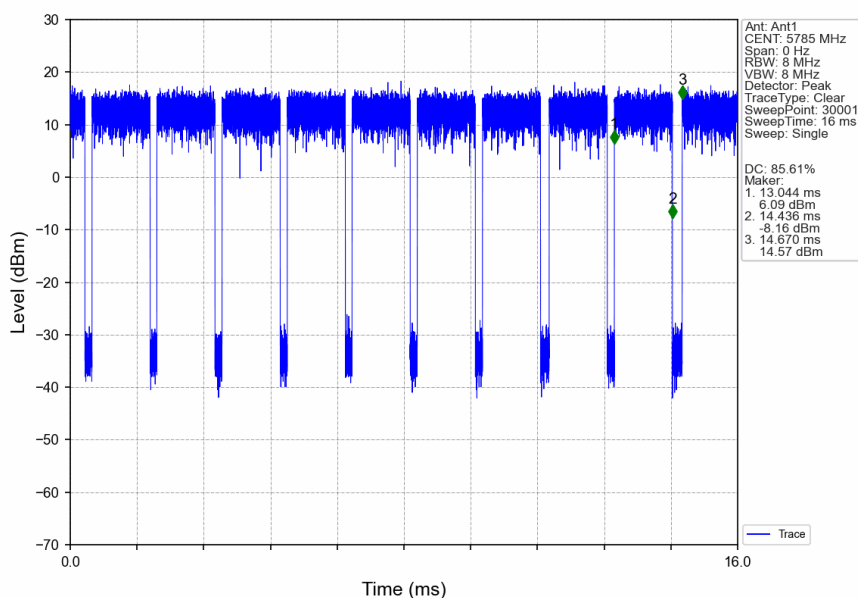


802.11a_HCH_5825MHz_Ant1_NTNV

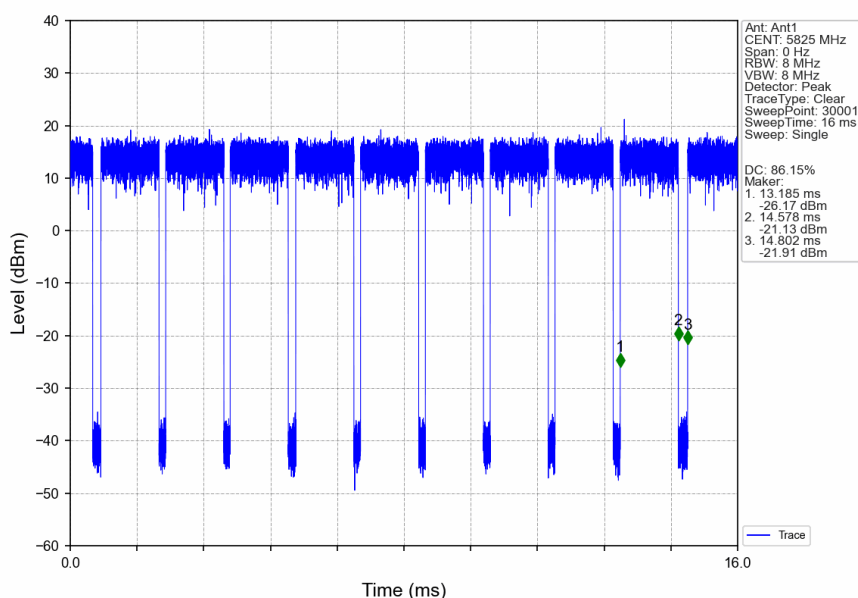


802.11n(HT20)_LCH_5180MHz_Ant1_NTNV

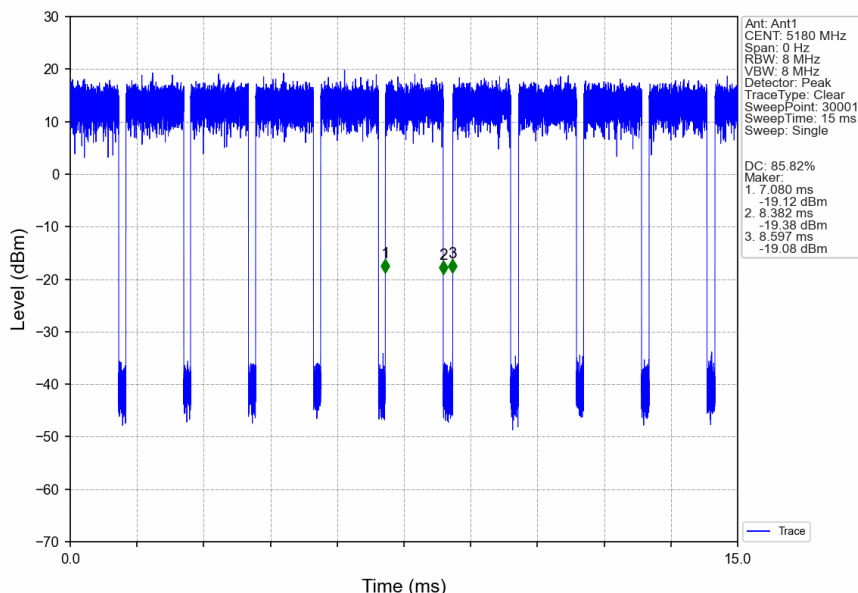


802.11n(HT20)_MCH_5200MHz_Ant1_NTNV

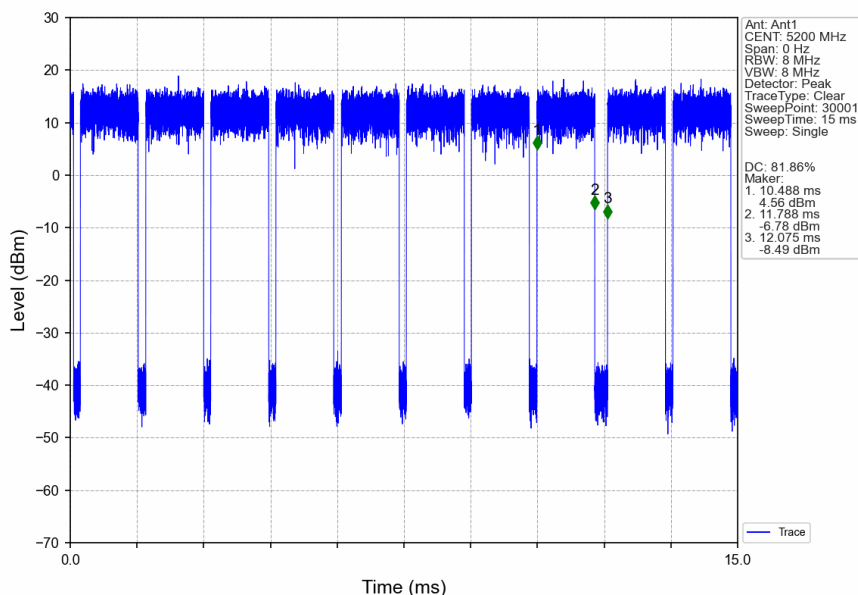


802.11n(HT20)_HCH_5240MHz_Ant1_NTNV

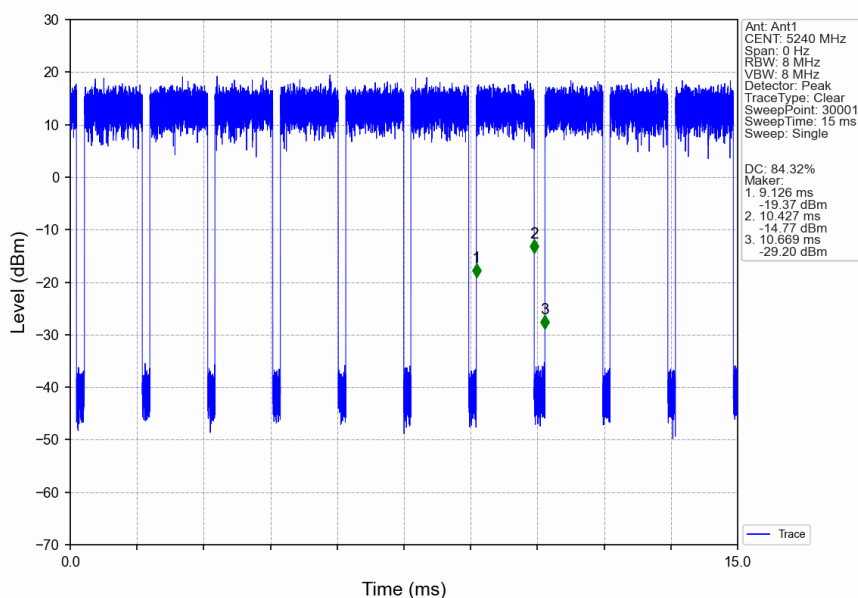


802.11n(HT20)_LCH_5260MHz_Ant1_NTNV

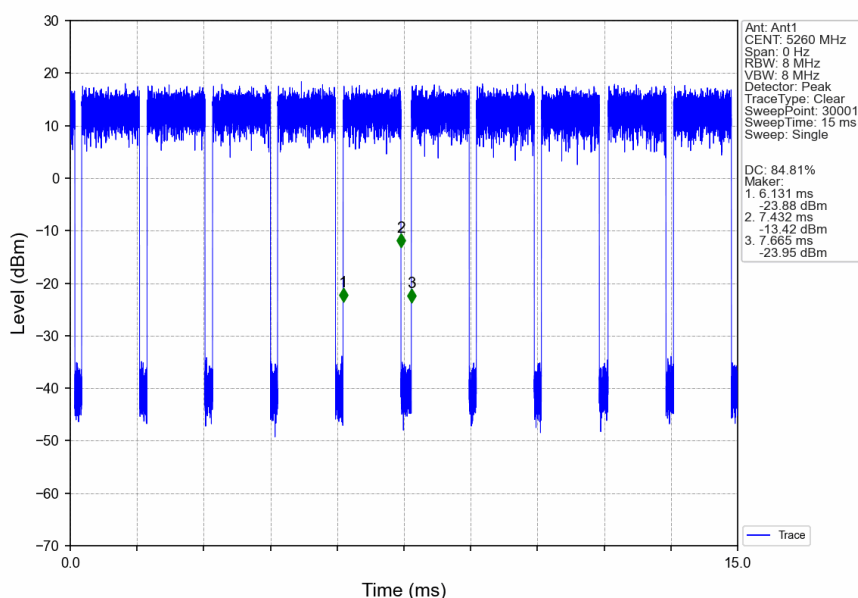


802.11n(HT20)_MCH_5300MHz_Ant1_NTNV

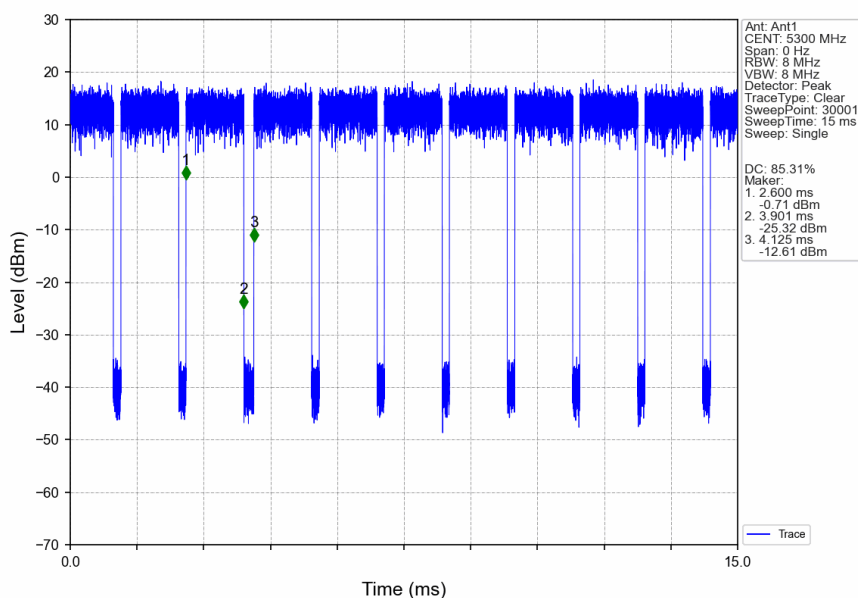


802.11n(HT20)_HCH_5320MHz_Ant1_NTNV

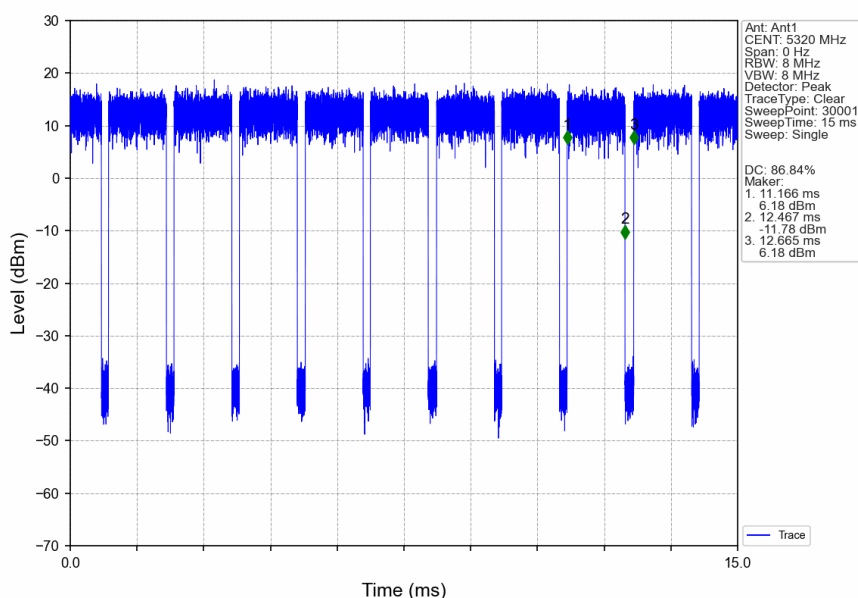


802.11n(HT20)_LCH_5500MHz_Ant1_NTNV

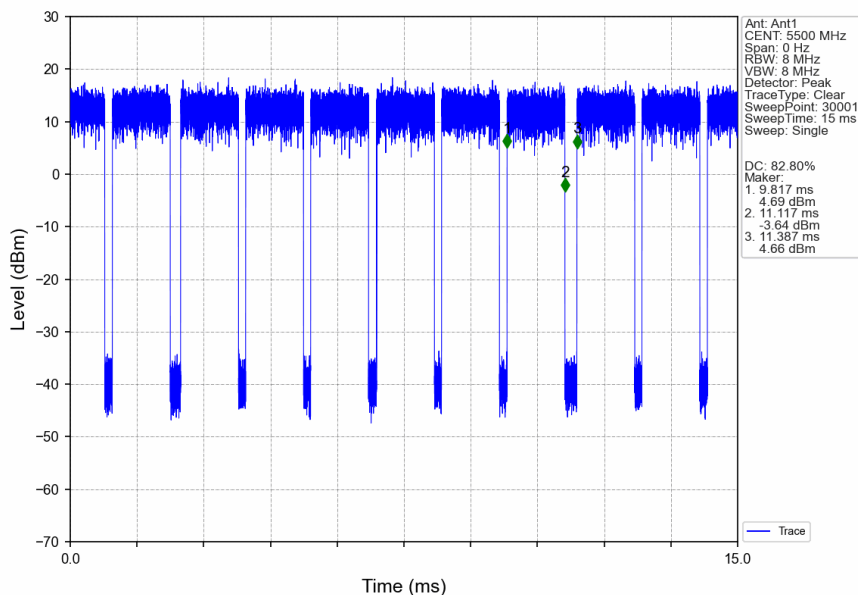


802.11n(HT20)_MCH_5580MHz_Ant1_NTNV

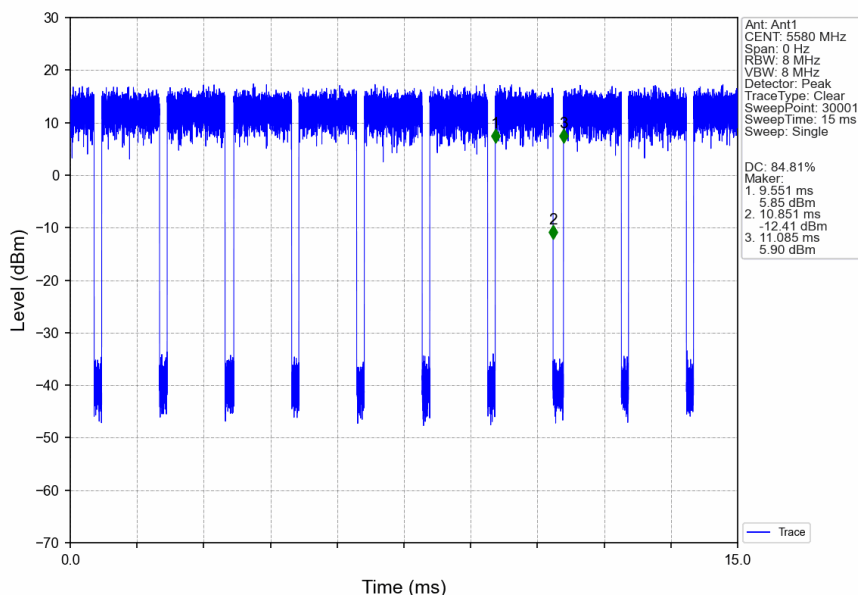


802.11n(HT20)_HCH_5700MHz_Ant1_NTNV

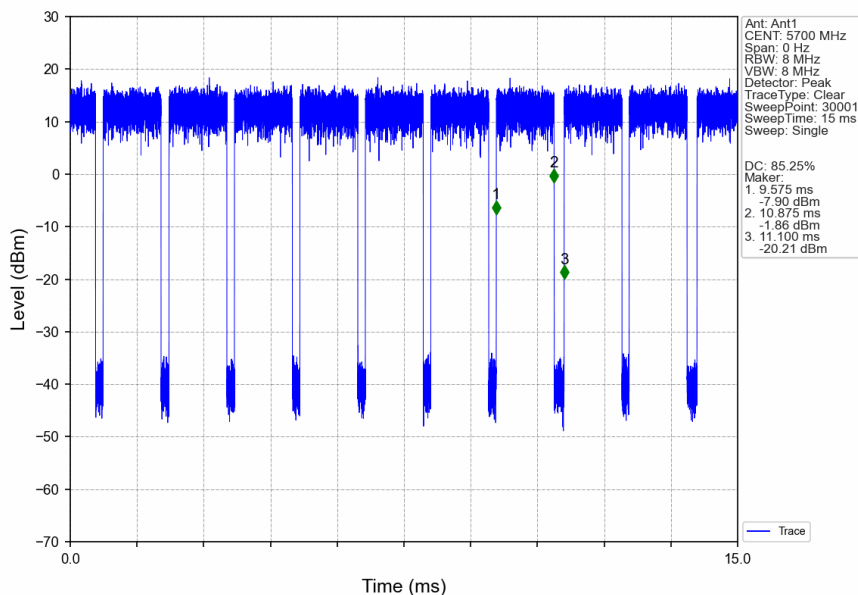


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

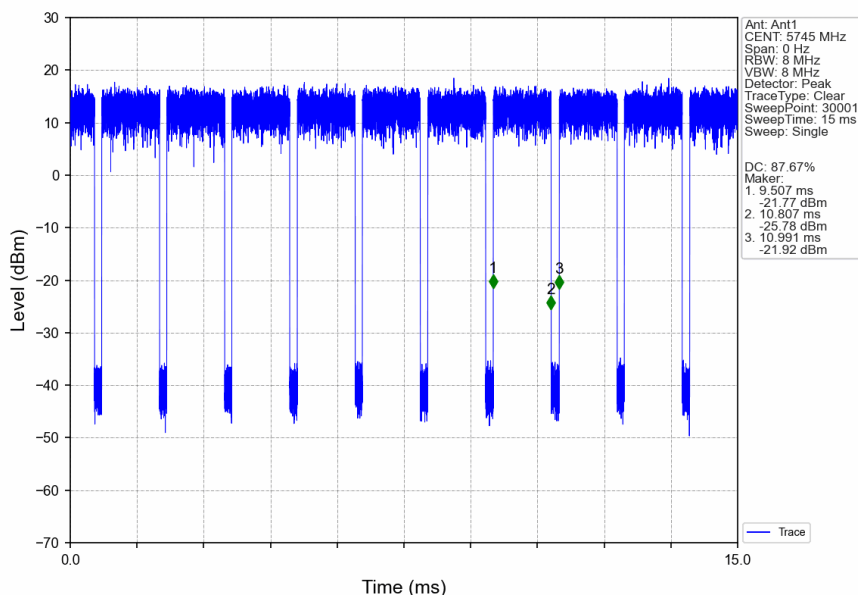


802.11n(HT20)_MCH_5785MHz_Ant1_NTNV

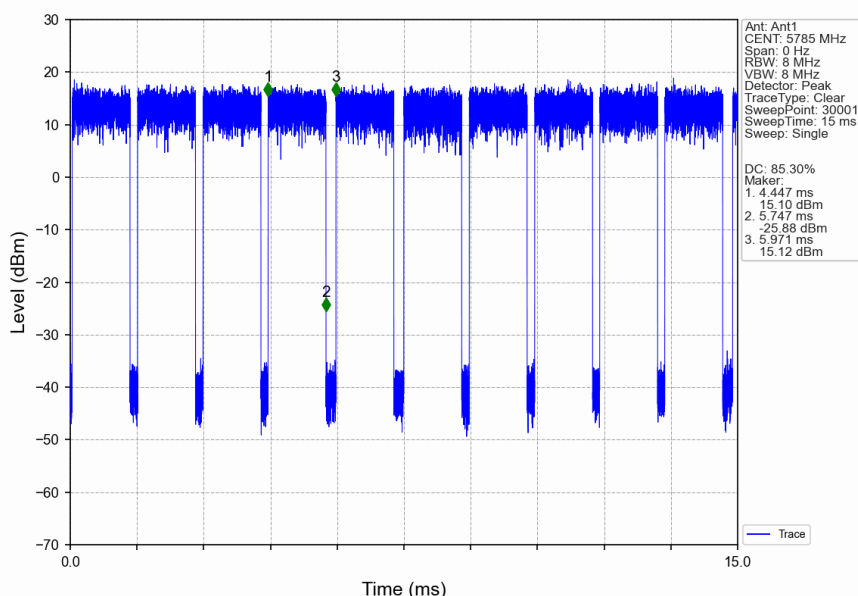


802.11n(HT20)_HCH_5825MHz_Ant1_NTNV

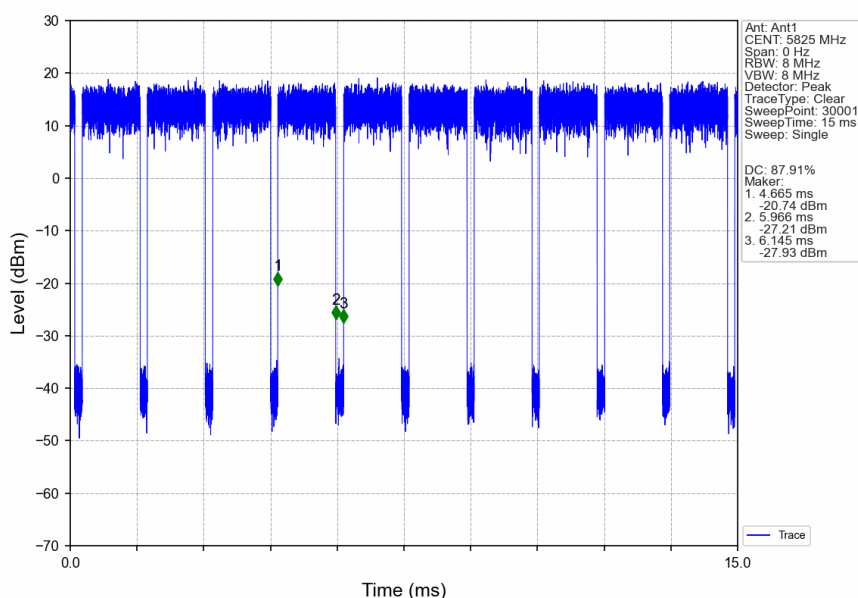


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

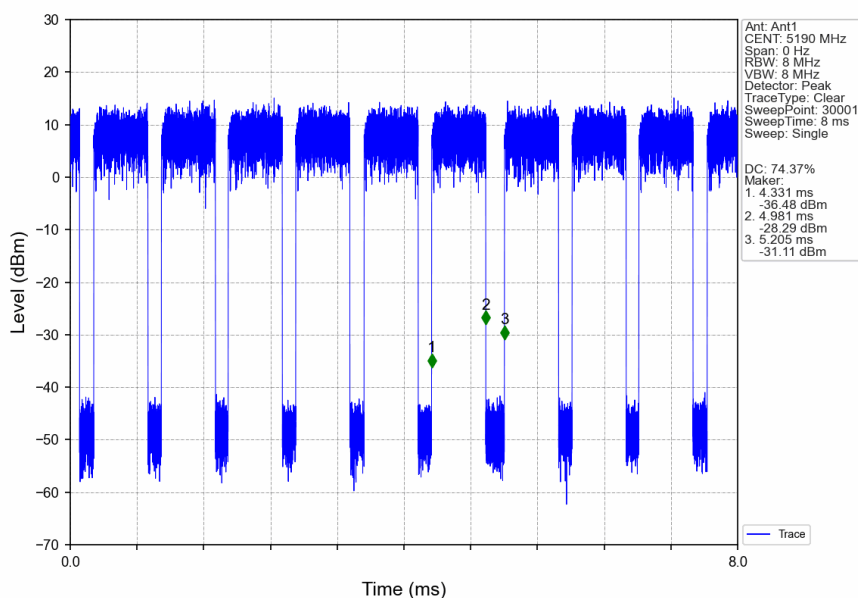


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

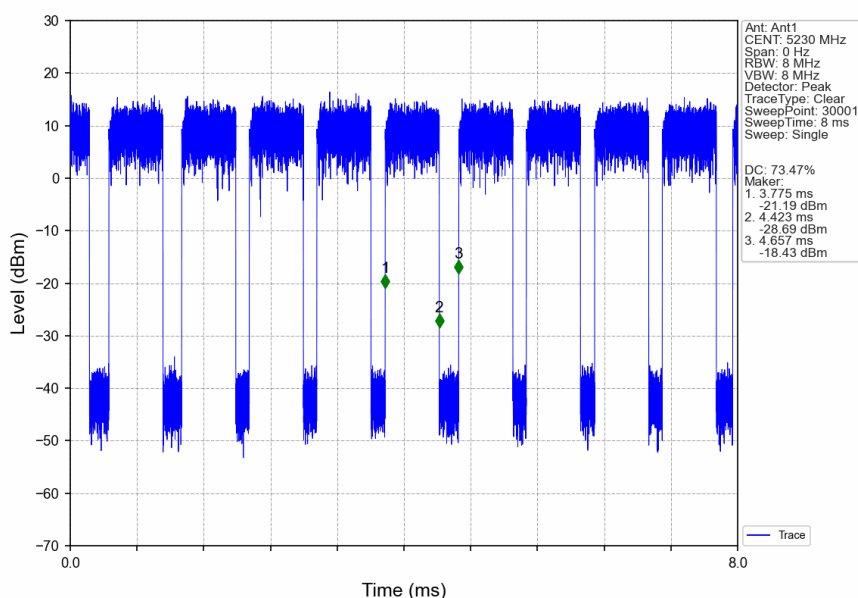


802.11n(HT40)_LCH_5270MHz_Ant1_NTNV

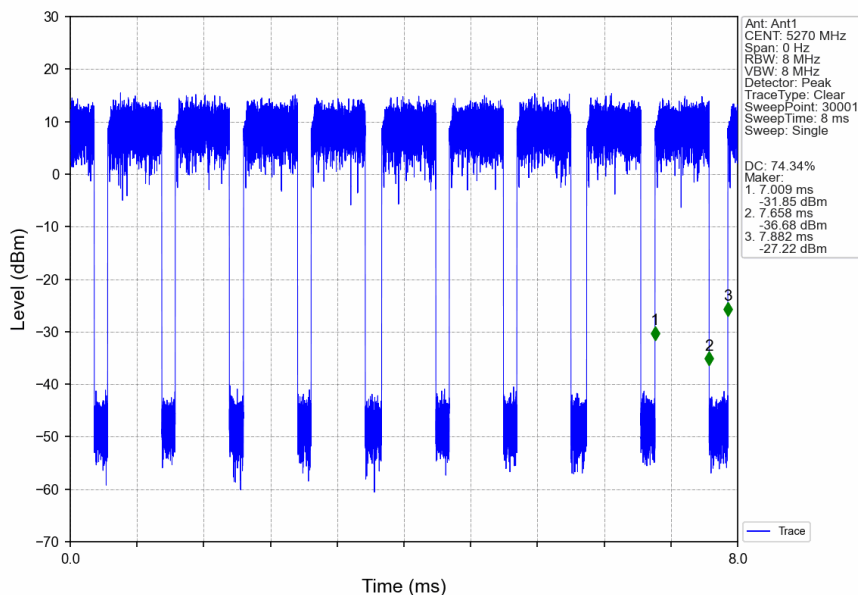


802.11n(HT40)_HCH_5310MHz_Ant1_NTNV

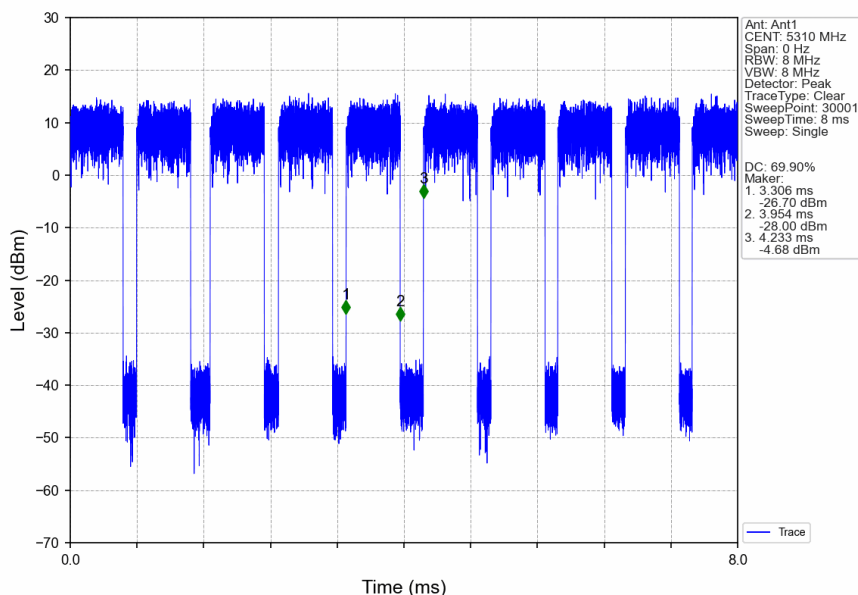


802.11n(HT40)_LCH_5510MHz_Ant1_NTNV

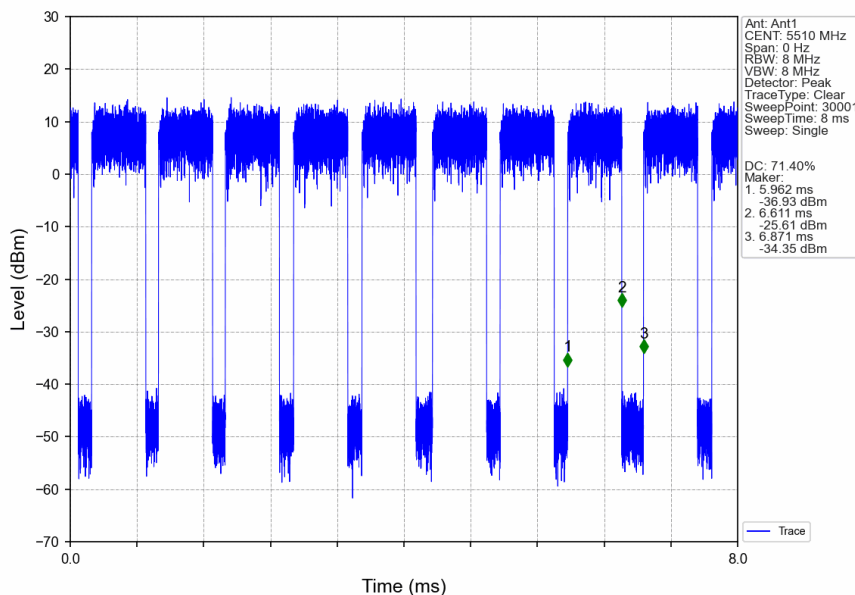


802.11n(HT40)_MCH_5550MHz_Ant1_NTNV

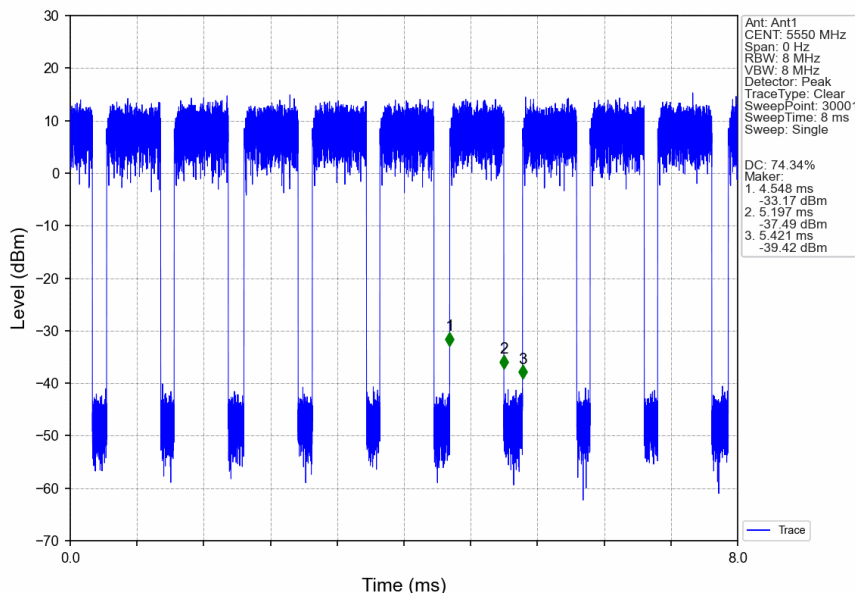


802.11n(HT40)_HCH_5670MHz_Ant1_NTNV

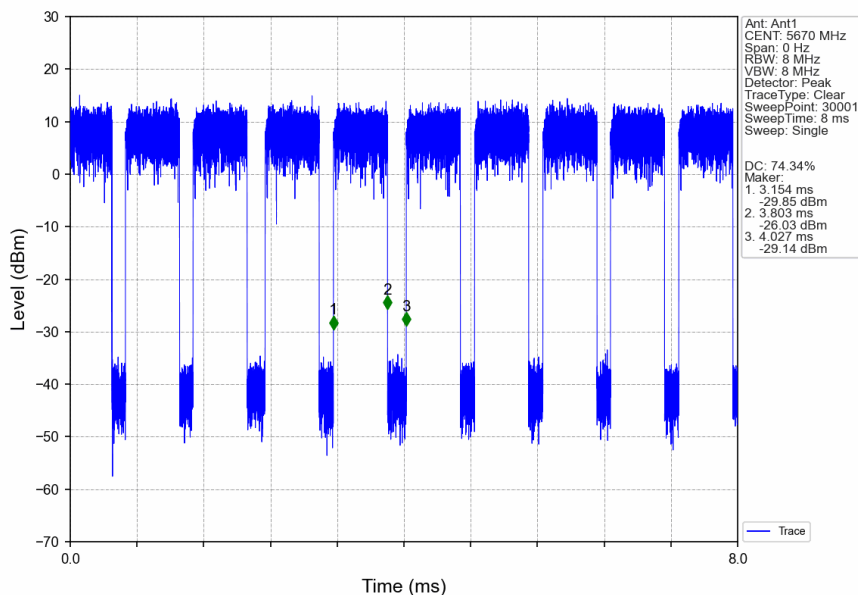


802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

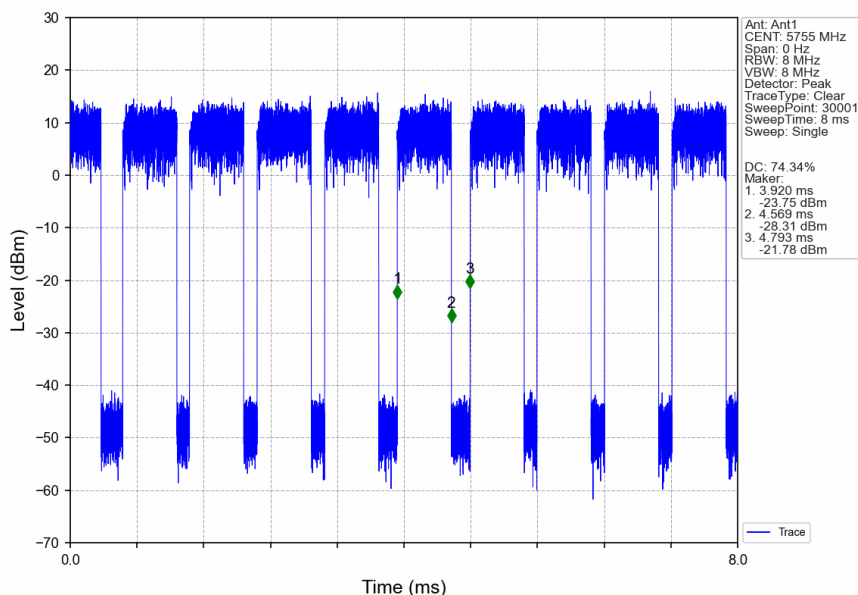


802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

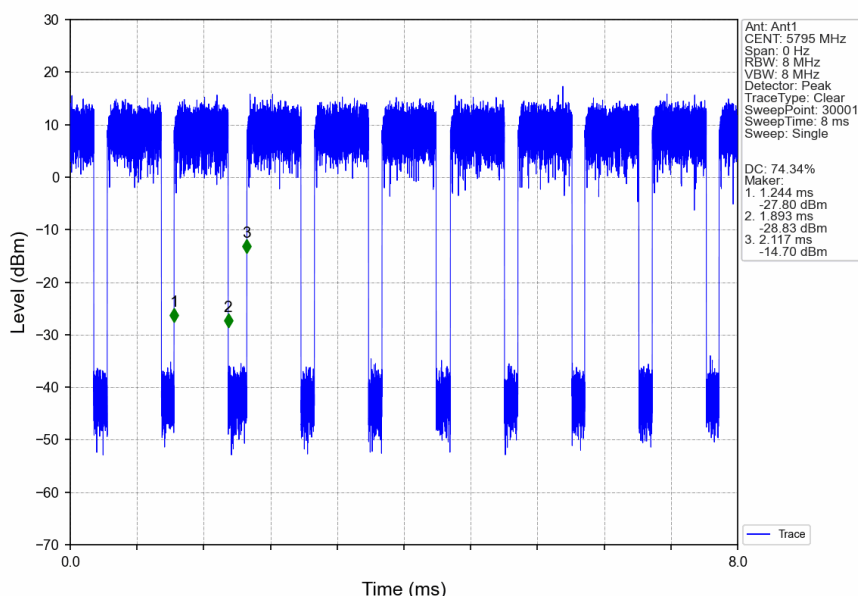

802.11ac(VHT20)_LCH_5180MHz_Ant1_NTNV

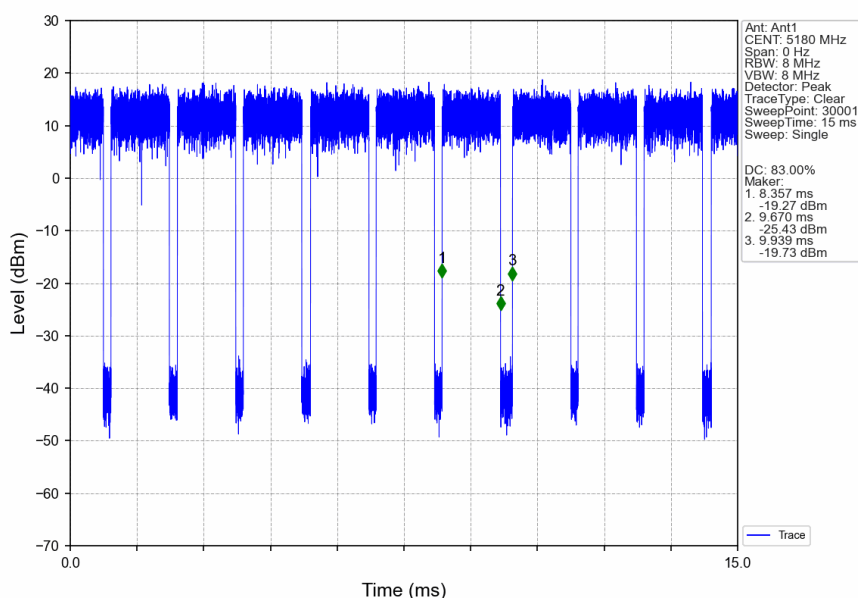

802.11ac(VHT20)_MCH_5200MHz_Ant1_NTNV

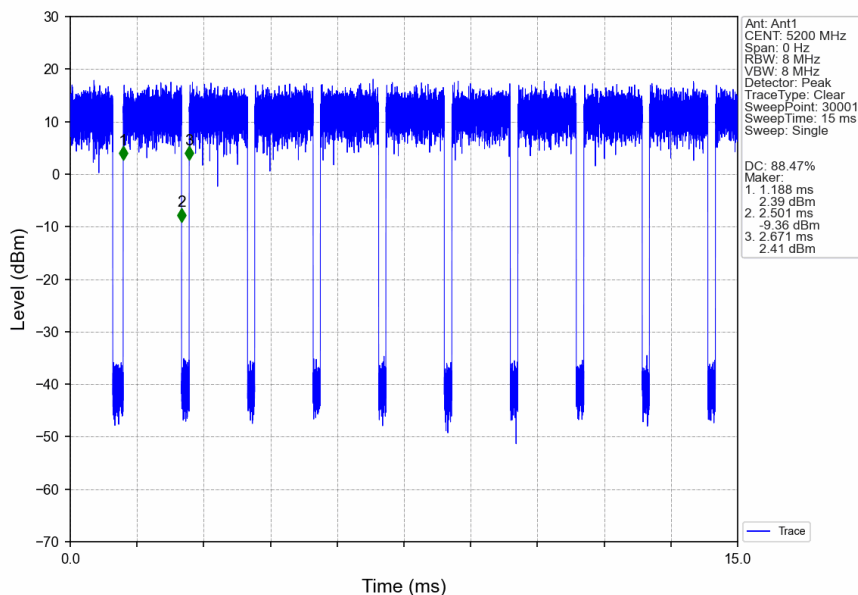

802.11ac(VHT20)_HCH_5240MHz_Ant1_NTNV

