


1. Peak-Average Ratio

1.1 GSM850


1.1.1 Test Result

Band: GSM850						
ENV	Mode		Frequency (MHz)	Peak-Average Ratio (dB)		Verdict
	Network	Subset		Result	Limit	
NTNV	GPRS	4 TX Slots	824.2	9.66	<=13	Pass
			836.6	3.73	<=13	Pass
			848.8	3.65	<=13	Pass
	EGPRS	4 TX Slots	824.2	6.57	<=13	Pass
			836.6	9.49	<=13	Pass
			848.8	9.52	<=13	Pass


1.1.2 Test Graph

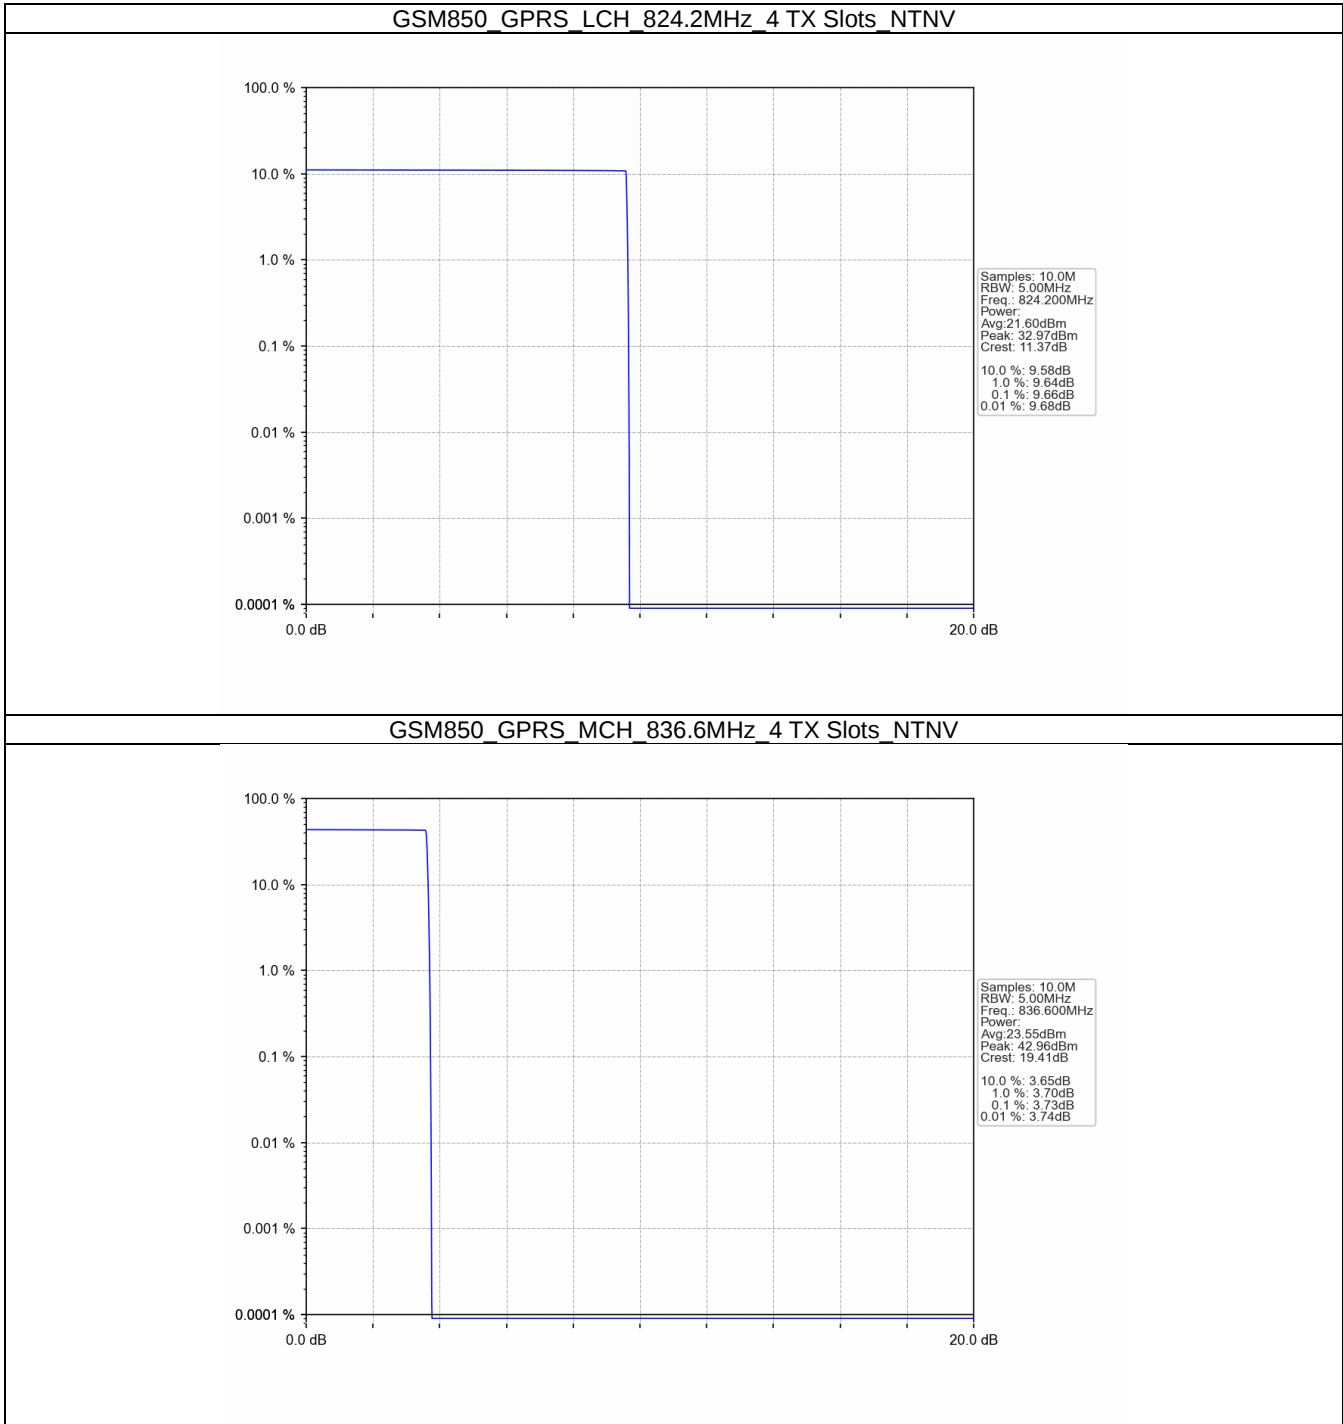


GSM850 GPRS HCH 848.8MHz 4 TX Slots_NTNV

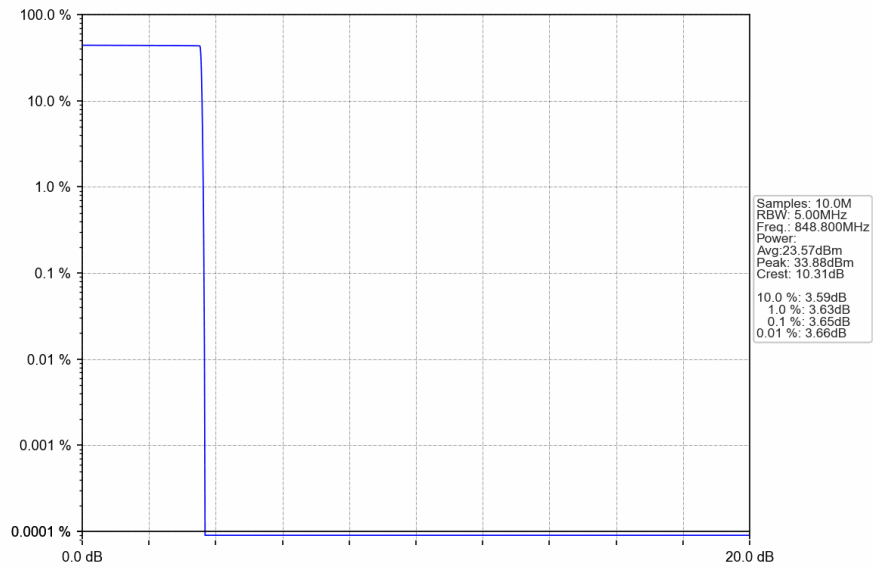


GSM850 EGPRS LCH 824.2MHz 4 TX Slots_NTNV

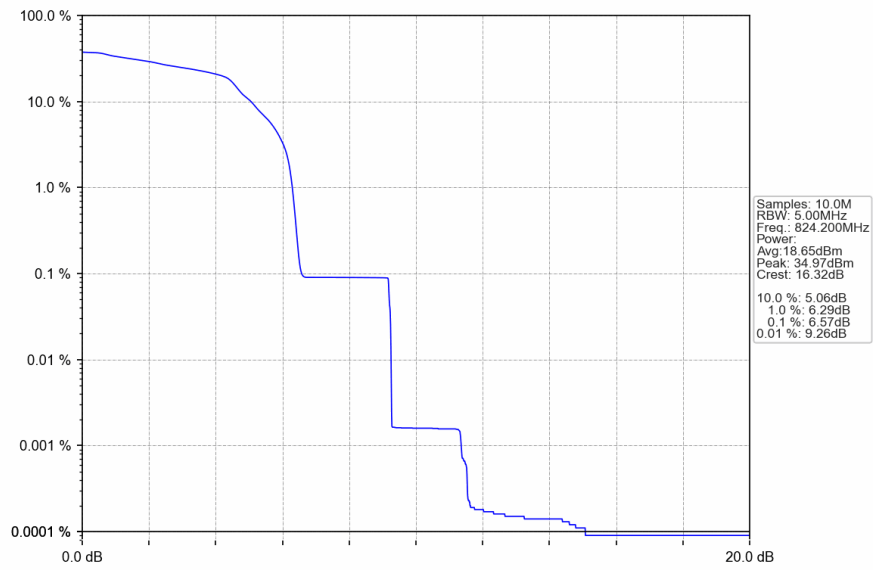

GSM850_EGPRS_MCH_836.6MHz_4 TX Slots_NTNV

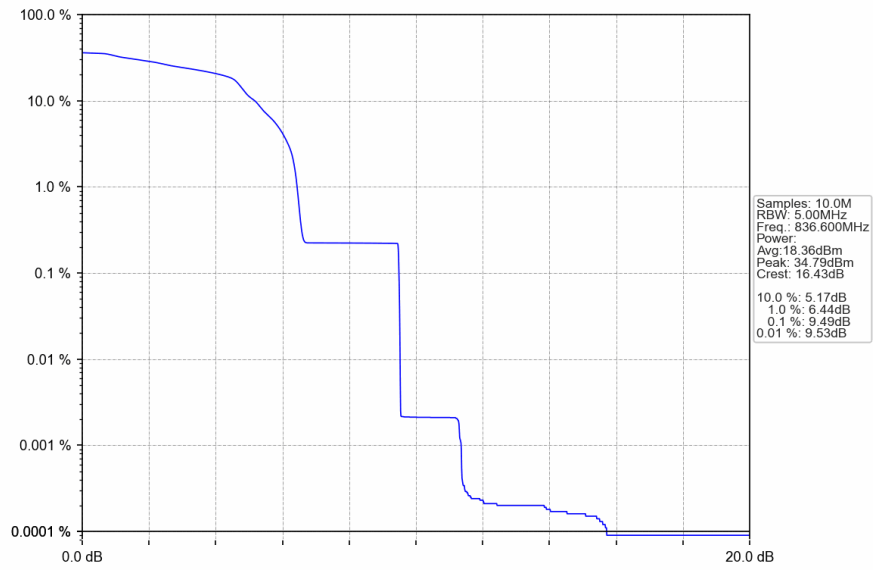

GSM850_EGPRS_HCH_848.8MHz_4 TX Slots_NTNV

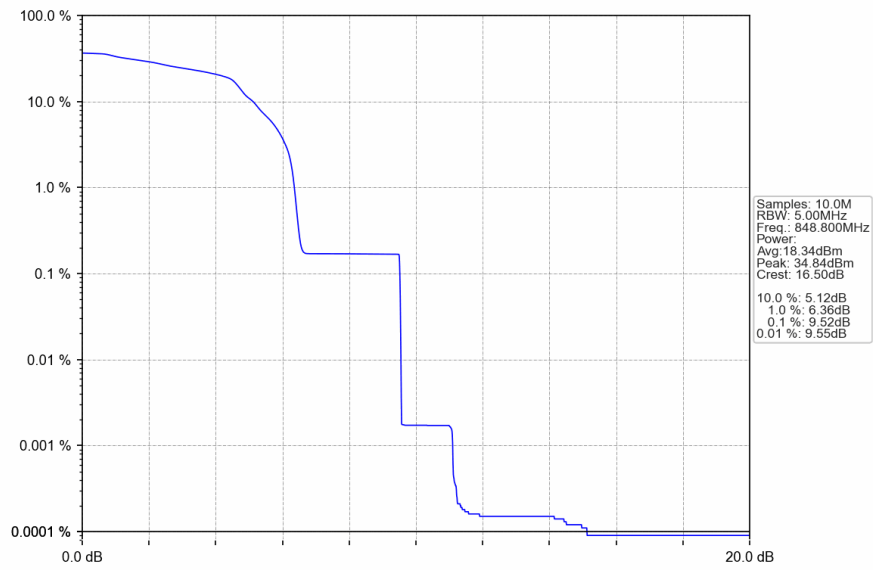


2. Peak-Average Ratio

2.1 PCS1900


2.1.1 Test Result

Band: PCS1900						
ENV	Mode		Frequency (MHz)	Peak-Average Ratio (dB)		Verdict
	Network	Subset		Result	Limit	
NTNV	GPRS	4 TX Slots	1850.2	9.55	<=13	Pass
			1880	3.51	<=13	Pass
			1909.8	3.60	<=13	Pass
	EGPRS	4 TX Slots	1850.2	12.90	<=13	Pass
			1880	7.95	<=13	Pass
			1909.8	7.96	<=13	Pass


2.1.2 Test Graph

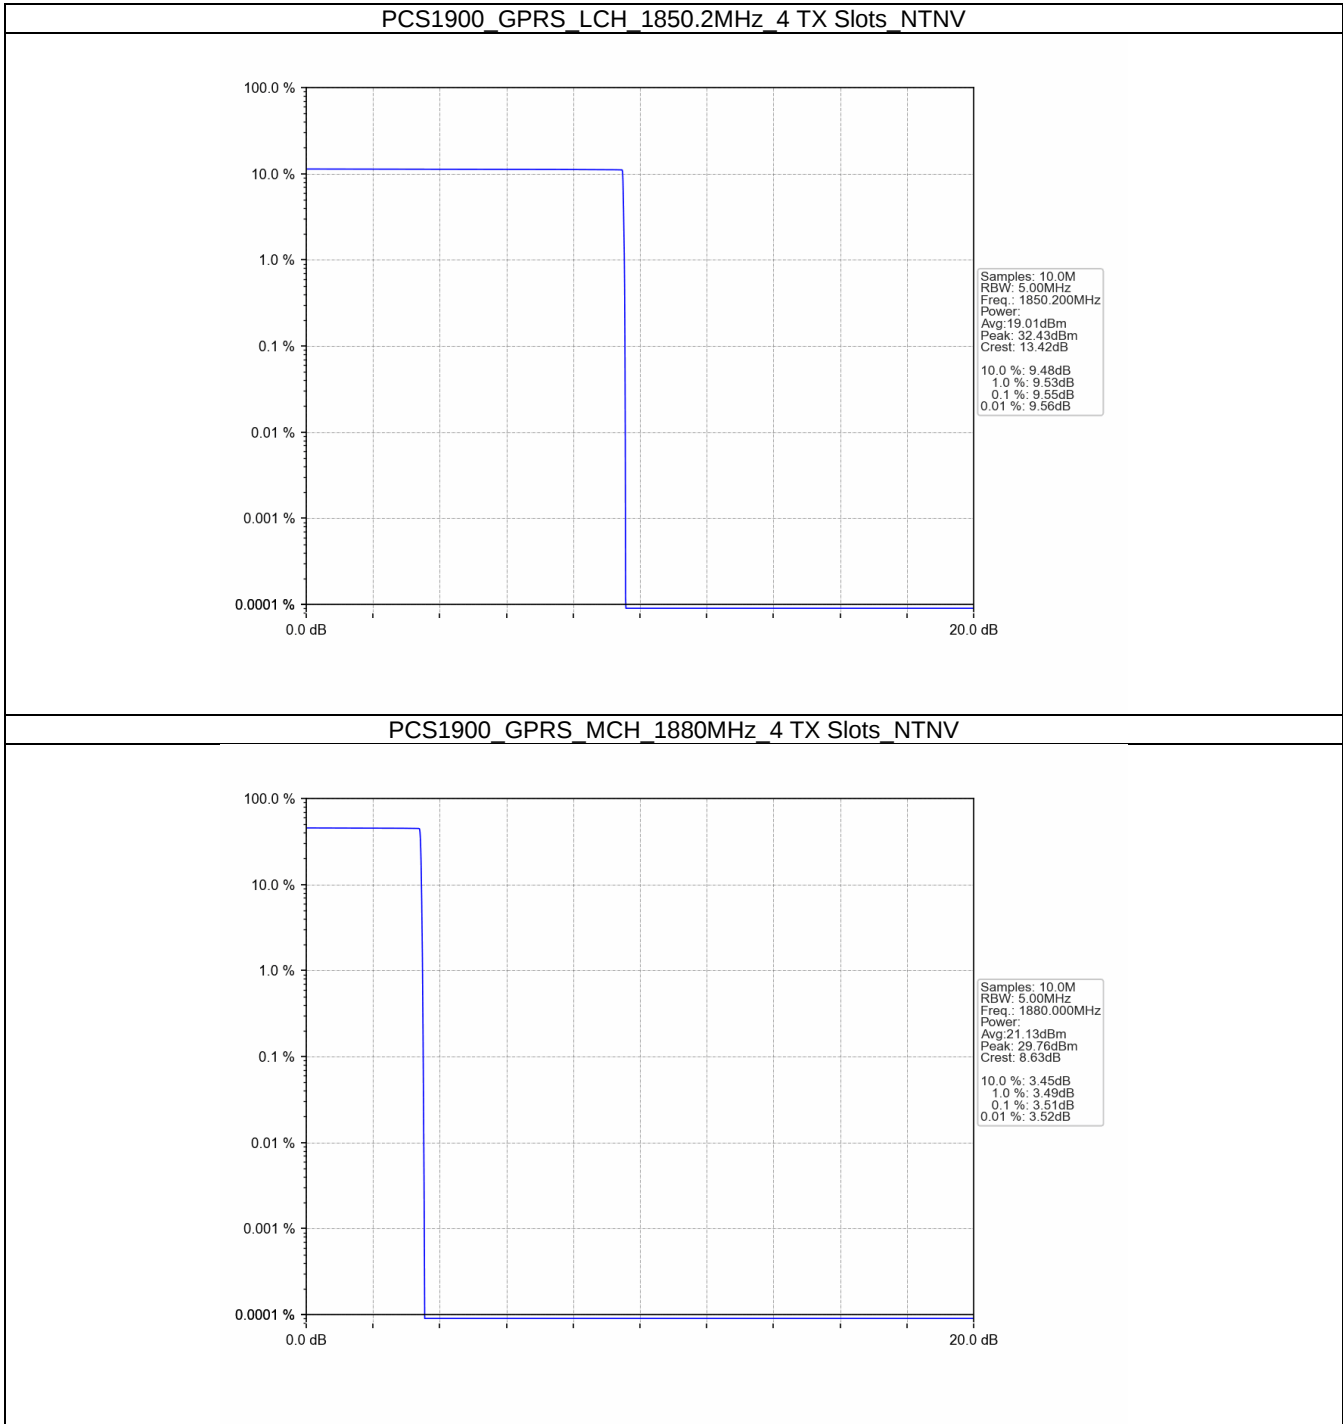


PCS1900 GPRS HCH 1909.8MHz 4 TX Slots_NTNV

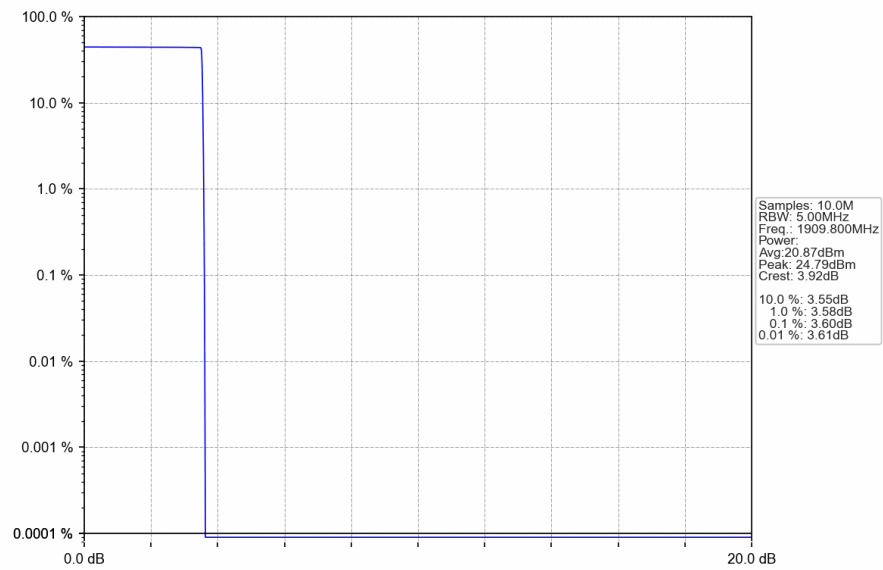

PCS1900 EGPRS LCH 1850.2MHz 4 TX Slots_NTNV

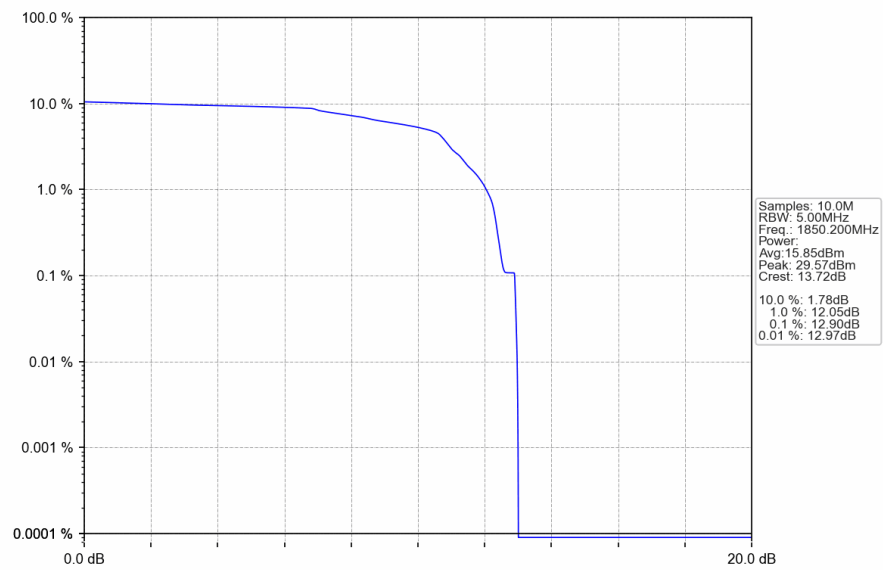

PCS1900 EGPRS MCH 1880MHz 4 TX Slots_NTNV

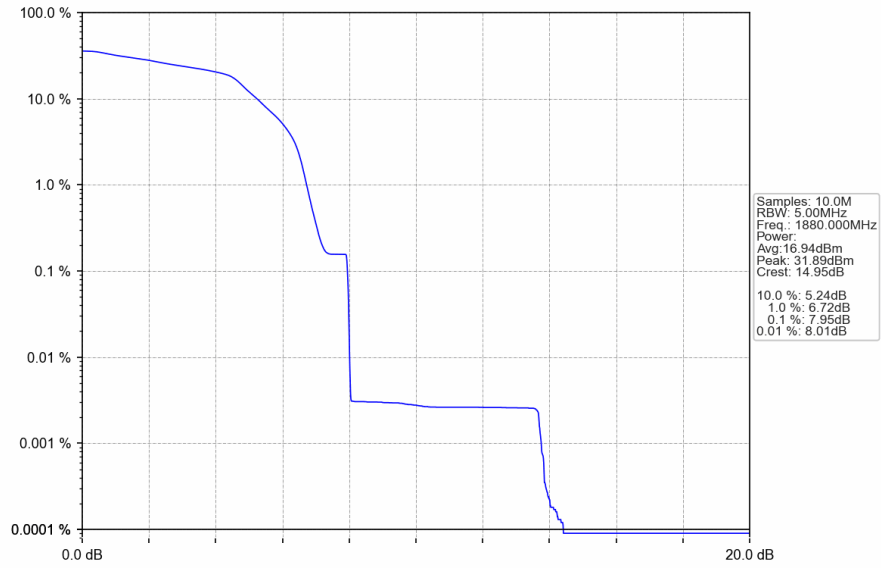

PCS1900 EGPRS HCH 1909.8MHz 4 TX Slots_NTNV

