



TESTING LABORATORY  
CERTIFICATE # 4821.01



FCC PART 20.21

## TEST REPORT

For

**SHENZHEN HUAPTEC CO., LTD**

3rd FL, E BLDG, Sogood Science Park, SanWei community, Hangcheng Street, Bao'an District,  
Shenzhen, China

**FCC ID: OWWC110505S**

|                                                                                                                                                                                                                                                                                                                             |                                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                                                                                                                                                                                      | <b>Product Type:</b><br>Mobile Signal Booster |
| <b>Report Number:</b> RSZ190723003-00B                                                                                                                                                                                                                                                                                      |                                               |
| <b>Report Date:</b> 2019-10-15                                                                                                                                                                                                                                                                                              |                                               |
| Jacob Kong <i>Jacob Kong</i>                                                                                                                                                                                                                                                                                                |                                               |
| <b>Reviewed By:</b> RF Engineer                                                                                                                                                                                                                                                                                             |                                               |
| <b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen)<br>6/F., West Wing, Third Phase of Wanli Industrial<br>Building, Shihua Road, Futian Free Trade Zone,<br>Shenzhen, Guangdong, China<br>Tel: +86-755-33320018<br>Fax: +86-755-33320008<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |                                               |

**Note:** This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”

## **TABLE OF CONTENTS**

|                                                                                                             |           |
|-------------------------------------------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                                                             | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                                                    | 4         |
| OBJECTIVE .....                                                                                             | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                                                          | 4         |
| TEST METHODOLOGY .....                                                                                      | 4         |
| MEASUREMENT UNCERTAINTY .....                                                                               | 5         |
| TEST FACILITY .....                                                                                         | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                                                       | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                                                                     | 6         |
| EUT EXERCISE SOFTWARE .....                                                                                 | 6         |
| SPECIAL ACCESSORIES.....                                                                                    | 6         |
| EQUIPMENT MODIFICATIONS .....                                                                               | 7         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                                                                    | 7         |
| EXTERNAL I/O CABLE.....                                                                                     | 7         |
| BLOCK DIAGRAM OF TEST SETUP .....                                                                           | 7         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                                                        | <b>8</b>  |
| <b>TEST EQUIPMENT LIST .....</b>                                                                            | <b>9</b>  |
| <b>§ 20.21(E)(3) – AUTHORIZED FREQUENCY BAND VERIFICATION .....</b>                                         | <b>11</b> |
| APPLICABLE STANDARD .....                                                                                   | 11        |
| TEST PROCEDURE .....                                                                                        | 11        |
| TEST DATA .....                                                                                             | 12        |
| <b>§ 20.21(e)(8)(i)(D) , § 20.21(e)(8)(i)(B)&amp; §20.21(e)(4)– MAXIMUM POWER MEASUREMENT .....</b>         | <b>18</b> |
| APPLICABLE STANDARD .....                                                                                   | 18        |
| TEST PROCEDURE .....                                                                                        | 18        |
| TEST DATA .....                                                                                             | 19        |
| <b>§ 20.21(e)(8)(i)(C)(2), § 20.21(e)(8)(i)(B)&amp;§20.21(e)(4) – MAXIMUM BOOSTER GAIN COMPUTATION ....</b> | <b>22</b> |
| APPLICABLE STANDARDS.....                                                                                   | 22        |
| TEST PROCEDURE .....                                                                                        | 22        |
| TEST DATA .....                                                                                             | 22        |
| <b>§ 20.21(e)(8)(i)(F)- INTERMODULATION PRODUCT.....</b>                                                    | <b>24</b> |
| APPLICABLE STANDARDS.....                                                                                   | 24        |
| TEST PROCEDURE .....                                                                                        | 24        |
| TEST DATA .....                                                                                             | 25        |
| <b>§ 20.21(e)(8)(i)(E)- OUT OF BAND EMISSIONS .....</b>                                                     | <b>36</b> |
| APPLICABLE STANDARDS.....                                                                                   | 36        |
| TEST PROCEDURE .....                                                                                        | 36        |
| TEST DATA .....                                                                                             | 37        |
| <b>§ 20.21(e)(8)(i)(A), § 20.21(e)(8)(i)(H) &amp; §20.21(e)(4) - NOISE LIMITS .....</b>                     | <b>98</b> |
| APPLICABLE STANDARDS.....                                                                                   | 98        |
| TEST PROCEDURE .....                                                                                        | 98        |
| TEST DATA .....                                                                                             | 99        |

|                                                                                      |            |
|--------------------------------------------------------------------------------------|------------|
| <b>§ 20.21(e)(8)(i)(I) &amp; §20.21(e)(4) - UPLINK INACTIVITY .....</b>              | <b>109</b> |
| APPLICABLE STANDARDS.....                                                            | 109        |
| TEST PROCEDURE .....                                                                 | 109        |
| TEST DATA .....                                                                      | 110        |
| <b>§ 20.21(e)(8)(i)(C)(1) &amp; § 20.21(e)(8)(i)(H) - VARIABLE BOOSTER GAIN.....</b> | <b>113</b> |
| APPLICABLE STANDARDS.....                                                            | 113        |
| TEST PROCEDURE .....                                                                 | 113        |
| TEST DATA .....                                                                      | 114        |
| <b>§ 2.1049 - OCCUPIED BANDWIDTH .....</b>                                           | <b>120</b> |
| APPLICABLE STANDARDS.....                                                            | 120        |
| TEST PROCEDURE .....                                                                 | 120        |
| TEST DATA .....                                                                      | 121        |
| <b>§ 20.21(e)(8)(ii)(A) &amp; §20.21(e)(4) - OSCILLATION DETECTION .....</b>         | <b>152</b> |
| APPLICABLE STANDARDS.....                                                            | 152        |
| TEST PROCEDURE .....                                                                 | 152        |
| TEST DATA .....                                                                      | 152        |
| <b>§2.1051- SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....</b>                        | <b>167</b> |
| APPLICABLE STANDARDS.....                                                            | 167        |
| TEST PROCEDURE .....                                                                 | 167        |
| TEST DATA .....                                                                      | 168        |
| <b>§ 2.1053 - RADIATED SPURIOUS EMISSIONS .....</b>                                  | <b>188</b> |
| APPLICABLE STANDARDS.....                                                            | 188        |
| TEST PROCEDURE .....                                                                 | 188        |
| TEST DATA .....                                                                      | 189        |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                      |                        |
|----------------------|------------------------|
| Product              | Mobile Signal Booster  |
| Tested Model         | C27G-5S-BTW            |
| Multitple Model      | C27G-5S-BTW-RV         |
| Voltage Range        | DC5V                   |
| Date of Test         | 2019-07-30~ 2019-10-15 |
| Sample serial number | 190723003              |
| Received date        | 2019-07-23             |
| Sample/EUT Status    | Good condition         |

This device is a mobile wideband consumer and the BoosterOperating frequency bands list below:

| Electrical specification | Uplink         | Downlink       |
|--------------------------|----------------|----------------|
| Frequency Range          | 698 ~ 716MHz   | 728 ~ 746MHz   |
|                          | 776 ~ 787MHz   | 746 ~ 757MHz   |
|                          | 824 ~ 849 MHz  | 869 ~ 894 MHz  |
|                          | 1850 ~ 1915MHz | 1930 ~ 1995MHz |
|                          | 1710 ~ 1755MHz | 2110 ~ 2155MHz |

### Objective

This test report is prepared on behalf of *SHENZHEN HUAPTEC CO., LTD* in accordance with Part 2, Part 20.21 and Part 22, Part 24, Part 27 of the Federal Communication Commissions rules.

### Related Submittal(s)/Grant(s)

No related submittal(s).

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Applicable Standards: TIA 603-D. KDB 935210 D03 Signal Booster Measurements v04r03.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

| Item                            |            | Uncertainty               |
|---------------------------------|------------|---------------------------|
| RF conducted test with spectrum |            | $\pm 0.9\text{dB}$        |
| Radiated emission               | 30MHz~1GHz | $\pm 5.91\text{dB}$       |
|                                 | Above 1G   | $\pm 4.92\text{dB}$       |
| Occupied Bandwidth              |            | $\pm 0.5\text{kHz}$       |
| Temperature                     |            | $\pm 1.0^{\circ}\text{C}$ |
| Humidity                        |            | $\pm 6\%$                 |

**Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 342867, the FCC Designation No. : CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

Antenna kitting requirement: EUT has one set antenna kitting for marketing, the antenna gain and cable loss for varier band were listed below, fulfill the requirement of FCC Part 20.21(e)(8)(i)(G), more detail information please refer to the user manuals.

Outdoor antenna:

| Frequency band (MHz) | Antenna Gain (dBi) |              | Cable loss (dB) |
|----------------------|--------------------|--------------|-----------------|
|                      | Magnetic antenna   | Omni antenna |                 |
| 698-716              | 1                  | 4            | 2.2             |
| 776-787              | 1                  | 4            | 2.3             |
| 824-849              | 2                  | 4            | 2.3             |
| 1710-1755            | 4                  | 6            | 4.6             |
| 1850-1915            | 3                  | 5            | 4.0             |

Indoor antenna:

| Frequency band (MHz) | Antenna Gain (dBi) |               | Cable loss (dB) |
|----------------------|--------------------|---------------|-----------------|
|                      | Magnetic antenna   | Panel antenna |                 |
| 728-746              | -1.5               | -2            | 4               |
| 746-757              | -1.5               | -2            | 4               |
| 869-894              | -1.5               | -2            | 4               |
| 2110-2155            | 2                  | 0.5           | 4.5             |
| 1930-1995            | 2.5                | 0.5           | 4.5             |

Note: For magnetic antenna, it inculde a cable and will not supply with extra cable, so for magnetic antenna calculation is no need consider the cable loss.

### EUT Exercise Software

No exercise software was used.

### Special Accessories

No special accessory was used.

## Equipment Modifications

No modification was made to the EUT tested.


## Support Equipment List and Details

| Manufacturer    | Description                         | Model      | Serial Number         |
|-----------------|-------------------------------------|------------|-----------------------|
| Un-known        | Load                                | Un-known   | Un-known              |
| Rohde & Schwarz | Wideband Radio Communication Tester | CMW500     | 1201.002K50-146520-wh |
| Panasonic       | Storage Battery                     | LC-P1224ST | N/A                   |

## External I/O Cable

| Cable Description                | Length (m) | From Port   | To      |
|----------------------------------|------------|-------------|---------|
| Shielding Detachable RF Cable    | 1.2        | EUT         | CMW500  |
| Un-shielding Detachable DC Cable | 1.5        | Car charger | EUT     |
| Un-shielding Detachable AC Cable | 1.5        | Mains       | CMW500  |
| Un-shielding Detachable DC Cable | 1.0        | Car Charger | Battery |

## Block Diagram of Test Setup

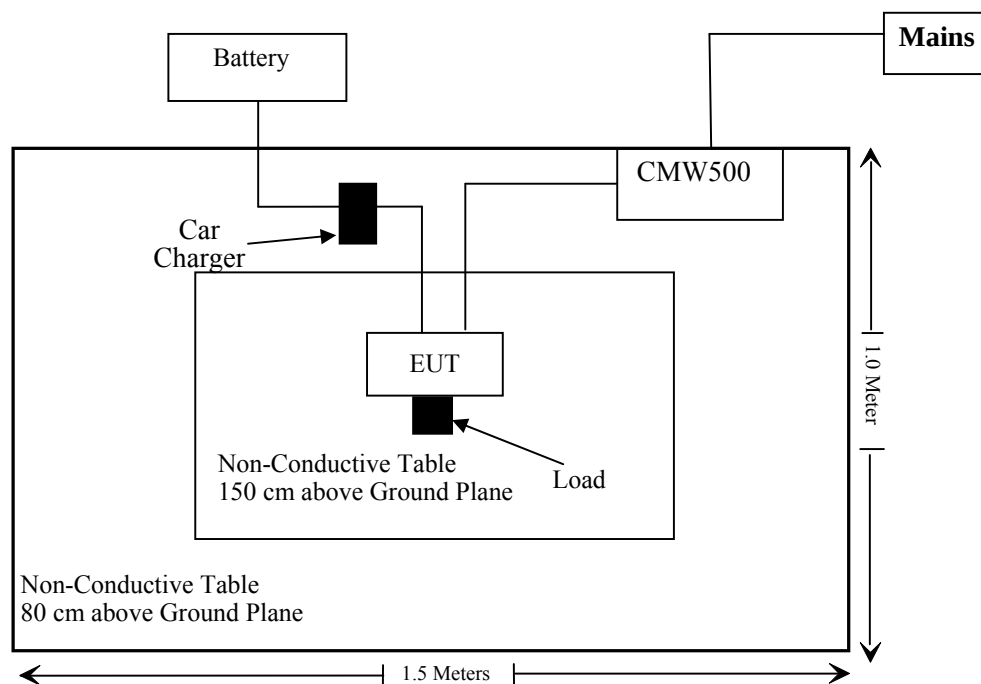

## SUMMARY OF TEST RESULTS

| FCC Rules                                                       | Description of Test                          | Results        |
|-----------------------------------------------------------------|----------------------------------------------|----------------|
| §20.21(e)(3)                                                    | 7.1 Authorized Frequency Band Verification   | Compliance     |
| § 20.21(e)(8)(i)(D)<br>§ 20.21(e)(8)(i)(B) &<br>§20.21(e)(4)    | 7.2 Maximum Power Measurement                | Compliance     |
| § 20.21(e)(8)(i)(C)(2)<br>§ 20.21(e)(8)(i)(B) &<br>§20.21(e)(4) | 7.3 Maximum Booster Gain Computation         | Compliance     |
| § 20.21(e)(8)(i)(B)<br>§ 20.21(e)(3)                            | 7.13 Spectrum block filtering test procedure | Not applicable |
| § 20.21(e)(8)(i)(F)                                             | 7.4 Intermodulation Product                  | Compliance     |
| § 20.21(e)(8)(i)(E)                                             | 7.5 Out Of Band Emissions                    | Compliance     |
| § 20.21(e)(8)(i)(A)<br>§ 20.21(e)(8)(i)(H)<br>&§20.21(e)(4)     | 7.7 Noise Limits                             | Compliance     |
| § 20.21(e)(8)(i)(I)<br>&§20.21(e)(4)                            | 7.8 Uplink Inactivity                        | Compliance     |
| § 20.21(e)(8)(i)(C)(1) &<br>§ 20.21(e)(8)(i)(H)                 | 7.9 Variable Booster Gain                    | Compliance     |
| § 2.1049                                                        | 7.10 Occupied Bandwidth                      | Compliance     |
| § 20.21(e)(8)(ii)(A)<br>&§20.21(e)(4)                           | 7.11 Oscillation Detection                   | Compliance     |
| §2.1051                                                         | 7.6 Spurious Emissions At Antenna Terminals  | Compliance     |
| § 2.1053                                                        | 7.12 Radiated Spurious Emissions             | Compliance     |

Not applicable: This item only for wideband consumer boosters utilizing spectrum block filtering.

**TEST EQUIPMENT LIST**

| Manufacturer                  | Description       | Model               | Serial Number          | Calibration Date | Calibration Due Date |
|-------------------------------|-------------------|---------------------|------------------------|------------------|----------------------|
| <b>Radiated Emission Test</b> |                   |                     |                        |                  |                      |
| Sunol Sciences                | Horn Antenna      | DRH-118             | A052604                | 2017-12-22       | 2020-12-21           |
| Rohde & Schwarz               | Signal Analyzer   | FSEM                | 845987/005             | 2019-07-22       | 2020-07-21           |
| Sunol Sciences                | Broadband Antenna | JB1                 | A040904-1              | 2017-12-22       | 2020-12-21           |
| COM-POWER                     | Pre-amplifier     | PA-122              | 181919                 | 2018-11-12       | 2019-11-12           |
| Sonoma Instrument             | Amplifier         | 310N                | 186238                 | 2018-11-12       | 2019-11-12           |
| Agilent                       | Signal Generator  | N5183A              | MY51040755             | 2018-12-03       | 2019-12-03           |
| Rohde & Schwarz               | EMI Test Receiver | ESR3                | 102455                 | 2019-07-09       | 2020-07-08           |
| COM-POWER                     | Dipole Antenna    | AD-100              | 41000                  | NCR              | NCR                  |
| A.H. System                   | Horn Antenna      | SAS-200/571         | 135                    | 2018-09-01       | 2021-08-31           |
| UTiFLEX MICRO-C0AX            | RF Cable          | UFA147A-2362-100100 | MFR64639<br>231029-003 | 2018-11-12       | 2019-11-12           |
| Ducommun Technologies         | RF Cable          | 104PEA              | 218124002              | 2018-11-12       | 2019-11-12           |
| Ducommun Technologies         | RF Cable          | RG-214              | 1                      | 2019-05-21       | 2019-11-19           |
| Ducommun Technologies         | RF Cable          | RG-214              | 2                      | 2018-11-12       | 2019-11-12           |
| Ducommun Technologies         | Horn Antenna      | ARH-4223-02         | 1007726-04             | 2017-12-29       | 2020-12-28           |
| Ducommun Technologies         | Horn Antenna      | ARH-4223-02         | 1007726-03             | 2017-12-29       | 2020-12-28           |
| Ducommun Technologies         | Pre-amplifier     | ALN-22093530-01     | 991373-01              | 2018-08-03       | 2019-08-03           |

| Manufacturer             | Description                         | Model  | Serial Number         | Calibration Date | Calibration Due Date |
|--------------------------|-------------------------------------|--------|-----------------------|------------------|----------------------|
| <b>RF Conducted test</b> |                                     |        |                       |                  |                      |
| Rohde & Schwarz          | Spectrum Analyzer                   | FSU26  | 200120                | 2018-12-24       | 2019-12-24           |
| Rohde & Schwarz          | Wideband Radio Communication Tester | CMW500 | 1201.002K50-146520-wh | 2019-07-09       | 2020-07-08           |
| Agilent                  | Signal Generator                    | N5183A | MY51040755            | 2018-12-03       | 2019-12-03           |
| Ducommun Technologies    | RF Cable                            | 104PEA | 218124002             | 2018-11-12       | 2019-11-12           |
| Ducommun technologies    | RF Cable                            | RG-214 | 3                     | Each Time        |                      |
| WEINSCHTEL               | 3dB Attenuator                      | 6231   | 666                   | Each Time        |                      |
| HP                       | Adjustable attenuator               | 8496B  | 2827A12453            | Each Time        |                      |
| Agilent                  | Adjustable attenuator               | 8494B  | 2812A17263            | Each Time        |                      |

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## § 20.21(E)(3) – AUTHORIZED FREQUENCY BAND VERIFICATION

### Applicable Standard

According to § 20.21(e)(3) Frequency Bands

This test is intended to confirm that the signal booster only operates on the CMRS frequency bands authorized for use by the NPS. In addition, this test will identify the frequency at which the maximum gain is realized within each CMRS operational band, which then serves as a basis for subsequent tests.

### Test Procedure

- Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output connected to the spectrum analyzer.
- Set the spectrum analyzer RBW for 100 kHz with the VBW  $\geq 3 \times$  the RBW using a PEAK detector with the MAX HOLD function.
- Set the center frequency of the spectrum analyzer to the center of the operational band under test with a span of 1 MHz.
- Set the signal generator for CW mode and tune to the center frequency of the operational band under test.
- Set the initial signal generator power to a level that is at least 6 dB below the AGC level specified by the manufacturer.
- Slowly increase the signal generator power level until the output signal reaches the AGC operational level.
- Reduce the signal generator power to a level that is 3 dB below the level noted above and manually reset the EUT.
- Reset the spectrum analyzer span to  $2 \times$  the CMRS band under test. Adjust the tuned frequency of the signal generator to sweep  $2 \times$  the CMRS band using the sweep function. The AGC must not be activated throughout the entire sweep.
- Using three markers, identify the CMRS band edges and the frequency with the highest power. Affirm that the values of all markers are visible on the display of the spectrum analyzer (e.g., marker table set to on).
- Capture the spectrum analyzer trace for inclusion in the test report.
- Repeat 7.1c) to 7.1j) for all operational uplink and downlink bands.

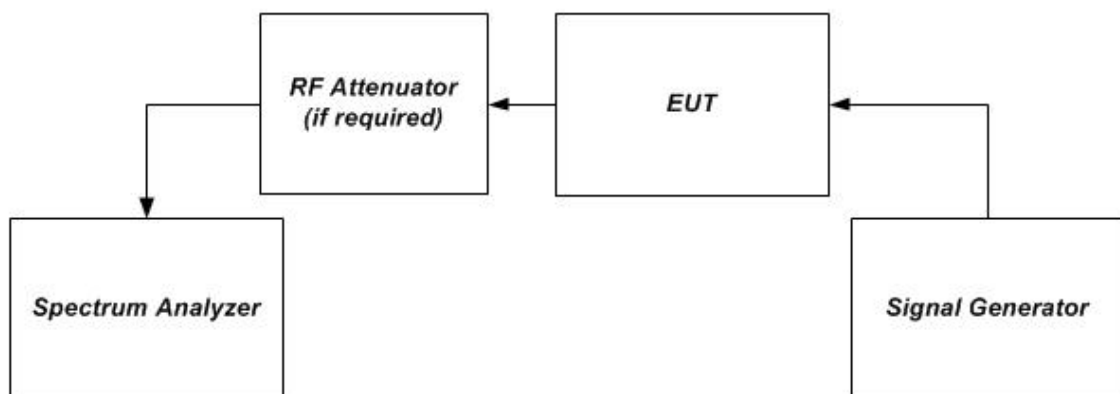


Figure 1 – Band verification test instrumentation setup


**Test Data****Environmental Conditions**

|                    |                 |
|--------------------|-----------------|
| Temperature:       | 23~25 °C        |
| Relative Humidity: | 50~52 %         |
| ATM Pressure:      | 101.0~101.2 kPa |

The testing was performed by Kieron Luo on 2019-08-02 and 2019-08-22.


**Test Result:** Compliance. Please refer to following plots.

Uplink:

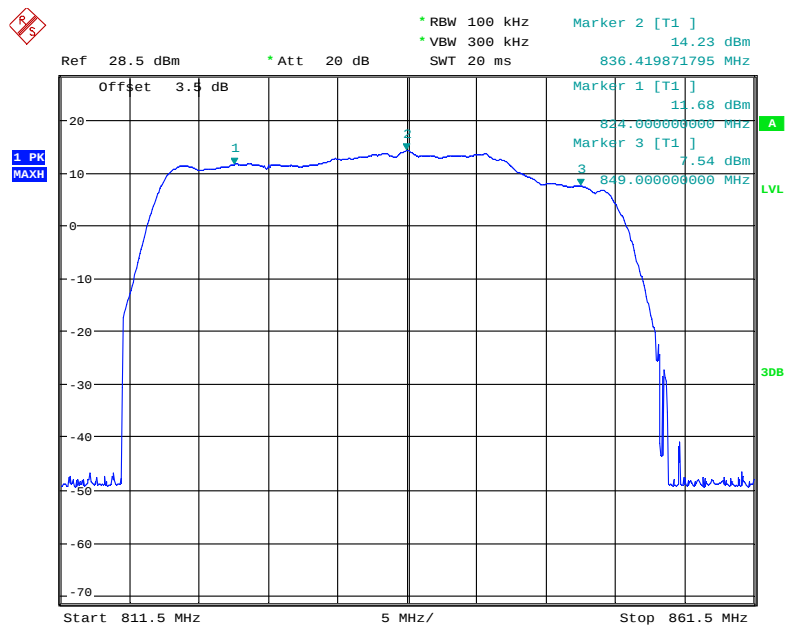**Cellular Band**


Date: 2.AUG.2019 05:13:54

### PCS Band

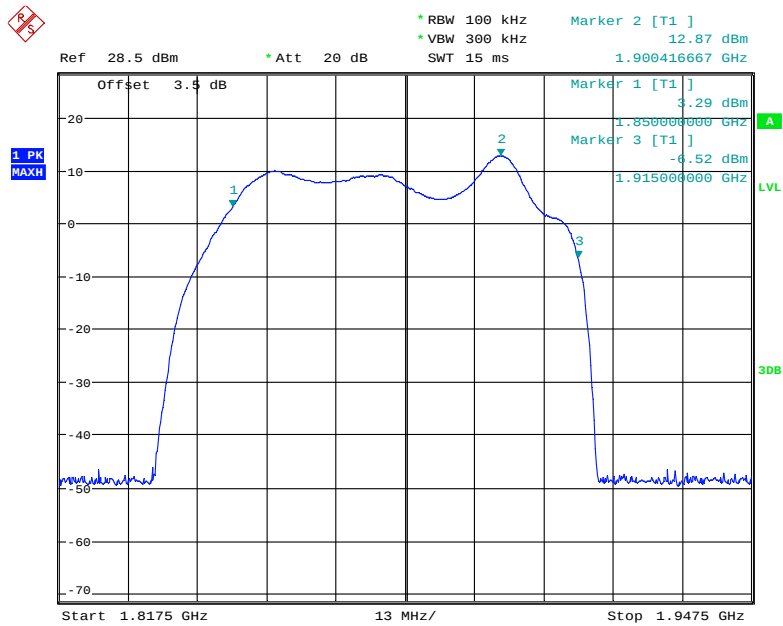


Date: 22.AUG.2019 09:37:28

### AWS Band

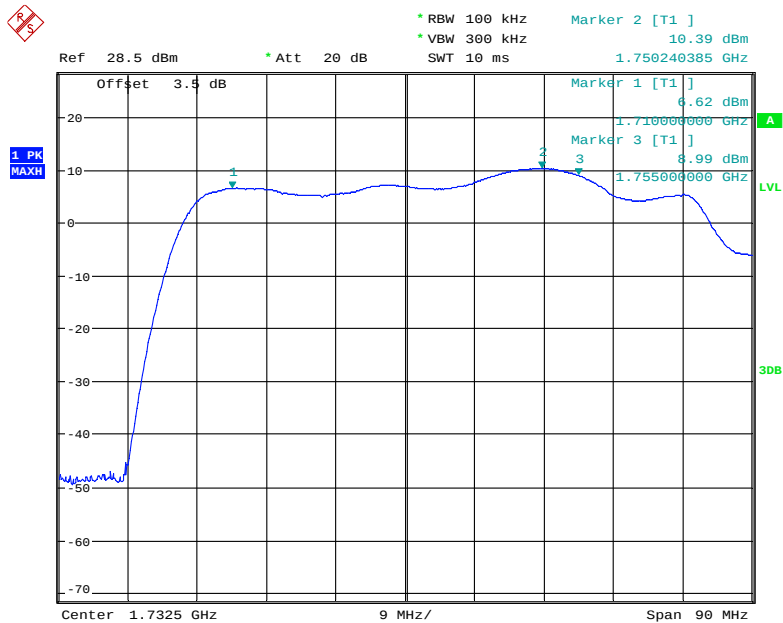


Date: 22.AUG.2019 09:25:59

### Lower 700MHz

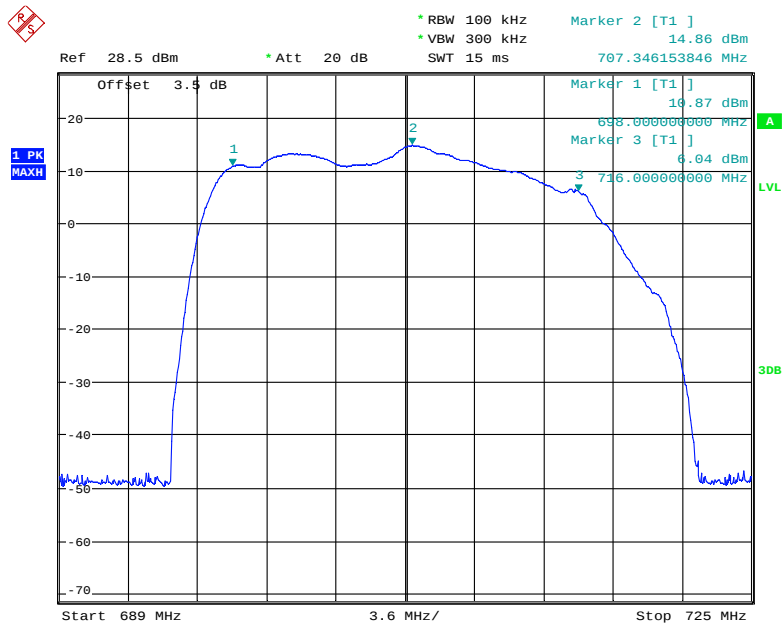

Date: 2.AUG.2019 05:23:40


### Upper 700MHz

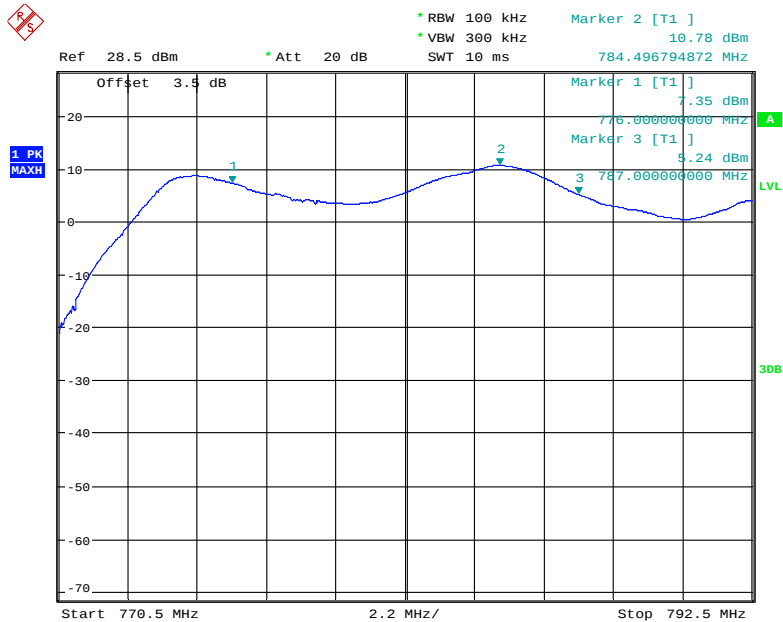

Date: 22.AUG.2019 09:56:43


Downlink:

### Cellular Band

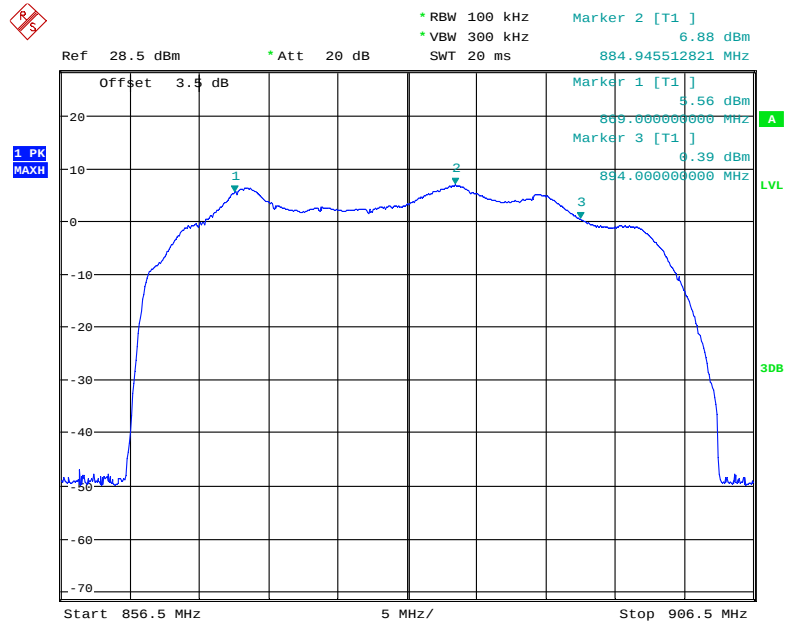


Date: 2.AUG.2019 05:33:09

### PCS Band

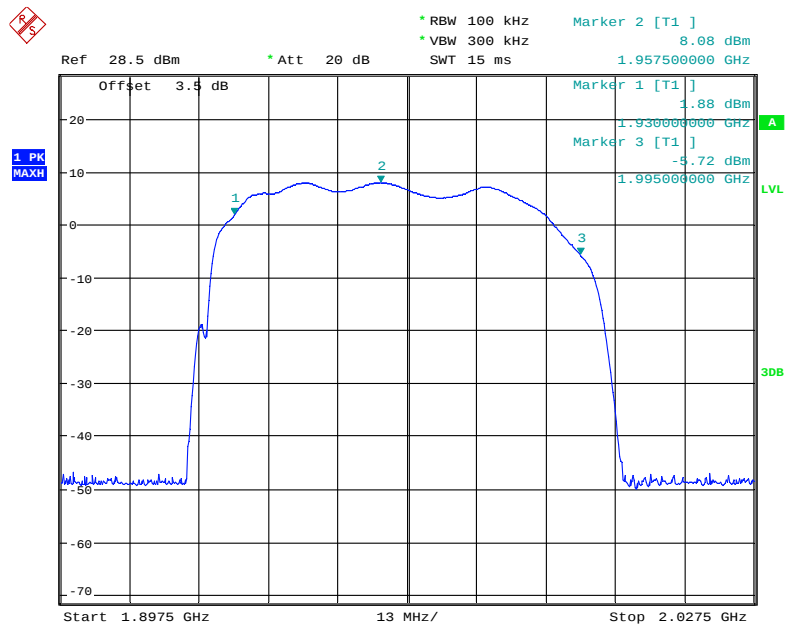


Date: 2.AUG.2019 05:29:52

### AWS Band

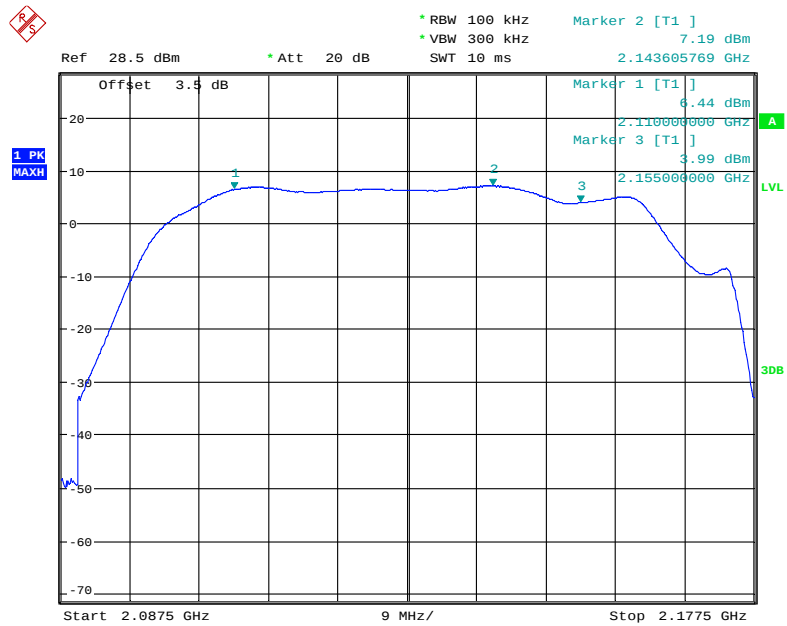


Date: 2.AUG.2019 05:38:23

### Lower 700MHz

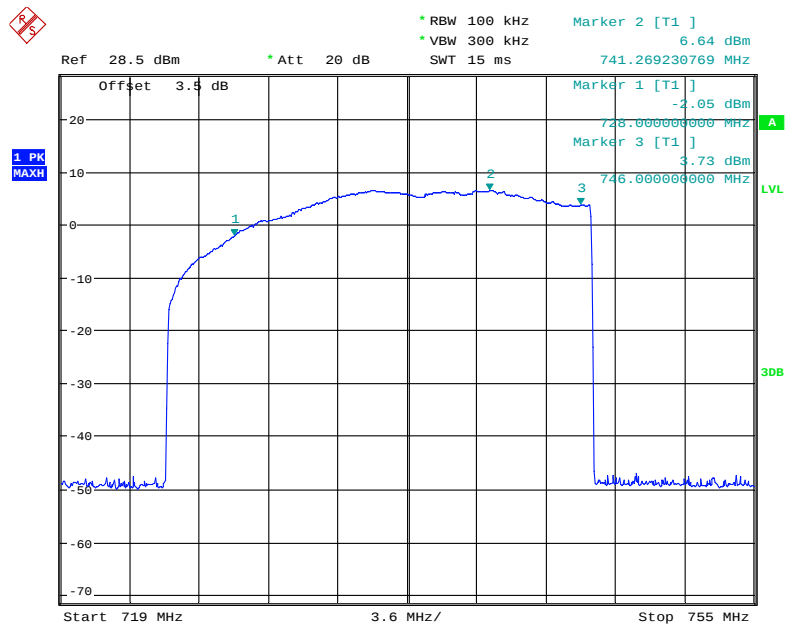

Date: 2.AUG.2019 05:45:30

Upper 700MHz

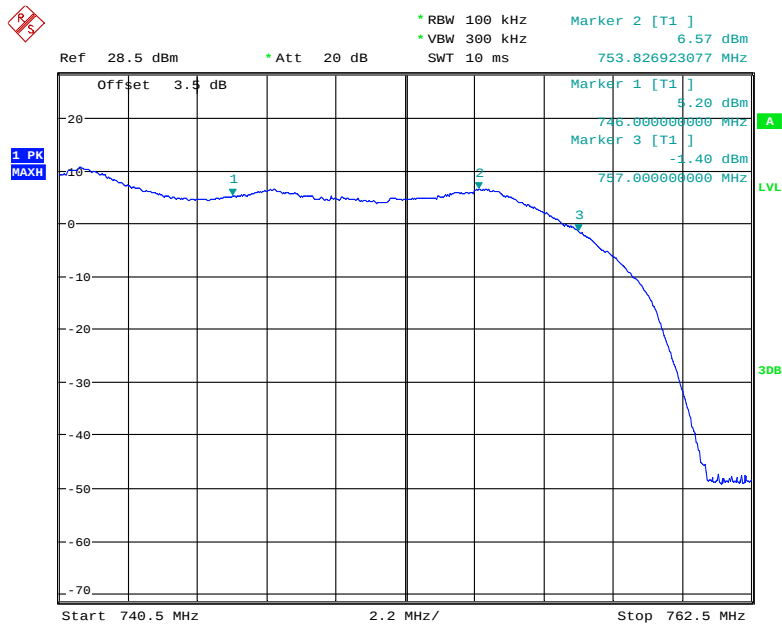

Date: 22.AUG.2019 10:50:53

## § 20.21(e)(8)(i)(D) ,§ 20.21(e)(8)(i)(B)& §20.21(e)(4)– MAXIMUM POWER MEASUREMENT

### Applicable Standard

According to § 20.21(e)(8)(i)(D) Power Limits; § 20.21(e)(8)(i)(B) Bidirectional Capability (uplink minimum conducted power output); §20.21(e)(4) Self-monitoring.

This procedure shall be used to demonstrate compliance to the signal booster power limits and requirements as specified in §§ 20.21(e)(8)(i)(D) and 20.21(e)(8)(i)(B) for wideband consumer signal boosters.

- a) Compliance to authorized EIRP limits must be shown using the highest gains from the list of antennas, cabling, and coupling devices declared by the manufacturer for use with the consumer booster.
- b) In addition, the maximum power levels measured in this procedure will be utilized in calculating the maximum gain as described in the next subclause.
- c) The frequency with the highest power level in each operational band as determined in 7.1 is to be measured discretely by applying the following procedure utilizing the stated emission and power detector types independently.
- d) Use a signal generator to create a pulsed CW or GSM signal with a pulse width of 570  $\mu$ s and a duty cycle of 12.5% (i.e., one GSM timeslot), then measure utilizing the burst power function of the measuring instrument.
- e) Use a signal generator to create an AWGN signal with a 99% occupied bandwidth of 4.1 MHz, then measure utilizing the channel power or band power function of the measuring instrumentation.
- f) All modes of operation must be verified to maintain operation within authorized limits at the maximum uplink and downlink test levels per device type as defined in 5.4, by increasing the power level in 2 dB steps from the AGC level to the maximum input level specified in 5.5.

### Test Procedure

- a) Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output (donor port) connected to the spectrum analyzer.
- b) Configure the signal generator and spectrum analyzer for operation on the frequency determined in 7.1 with the highest power level, but with the center frequency of the signal no closer than 2.5 MHz from the band edge. The spectrum analyzer span shall be set to at least 10 MHz.
- c) Set the initial signal generator power to a level well below that which causes AGC control.
- d) Slowly increase the signal generator power level until the output signal reaches the AGC operational limit (from observation of signal behavior on the spectrum analyzer; i.e., no further increase in output power as input power is increased).
- e) Reduce power sufficiently on the signal generator to ensure that the AGC is not controlling the power output.
- f) Slowly increase the signal generator power to a level just below (within 0.5 dB of) the AGC limit without triggering the AGC. Note the signal generator power level as  $P_{in}$ .
- g) Measure the output power  $P_{out}$  with the spectrum analyzer as follows.
  - 1) Set RBW = 100 kHz for AWGN signal type and 300 kHz for CW or GSM signal type.
  - 2) Set VBW  $\geq 3 \times$  RBW.
  - 3) Select either the BURST POWER or CHANNEL POWER measurement tool, as required for each signal type. The channel power integration bandwidth shall be 99% occupied bandwidth (4.1 MHz).
  - 4) Select the RMS (power averaging) detector.
  - 5) Ensure that the number Note: This requirement
  - 6) Set sweep time = auto

- 7) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- h) Record the measured power level as  $P_{OUT}$  with one set of results for the GSM or CW input stimulus and another set of results for the AWGN input stimulus.
- i) Repeat step h) while increasing the signal generator amplitude in 2 dB steps until the maximum input level indicated in 5.5 is reached. If the booster has shut down at any point during the input power steps it should be noted and step h) shall be repeated at an input level 1 dB less than that found to cause the shutdown.
- j) Repeat the entire procedure for each operational uplink and downlink frequency band supported by the booster.
- k) Provide tabulated results in the test report.

## Test Data

### Environmental Conditions

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 52 %      |
| <b>ATM Pressure:</b>      | 101.2 kPa |

*The testing was performed by Kieron Luo on 2019-08-22 and 2019-10-15.*

*Test Result: Compliance. Please refer to the following tables*

### AGC level:

| Operation Band | Signal type | AGC Input level |                |
|----------------|-------------|-----------------|----------------|
|                |             | Uplink (dBm)    | Downlink (dBm) |
| PCS            | AWGN        | -28.87          | -40.01         |
|                | CW          | -26.68          | -37.66         |
| cellular       | AWGN        | -29.29          | -38.10         |
|                | CW          | -29.24          | -38.58         |
| AWS            | AWGN        | -28.26          | -37.07         |
|                | CW          | -27.05          | -36.89         |
| Lower 700 MHz  | AWGN        | -29.78          | -40.54         |
|                | CW          | -30.49          | -34.81         |
| Upper 700 MHz  | AWGN        | -30.56          | -40.66         |
|                | CW          | -30.52          | -38.73         |

**Output Power:**

For Omni antenna(outdoor) and panel antenna(indoor):

| Mode     | Operation Band | Signal type | Pre AGC Input level | Conducted Output level | Antenna Gain | Cable loss | EIRP  | Limit |
|----------|----------------|-------------|---------------------|------------------------|--------------|------------|-------|-------|
|          |                |             | dBm                 | dBm                    | dBi          | dB         | dBm   | dBm   |
| Uplink   | PCS            | AWGN        | -29.07              | 19.06                  | 5            | 4.0        | 20.06 | 17-30 |
|          |                | CW          | -27.08              | 22.00                  |              |            | 23.00 |       |
|          | cellular       | AWGN        | -29.59              | 18.18                  | 4            | 2.3        | 19.88 |       |
|          |                | CW          | -29.44              | 19.52                  |              |            | 21.22 |       |
|          | AWS            | AWGN        | -28.56              | 19.68                  | 6            | 4.6        | 21.08 |       |
|          |                | CW          | -27.25              | 22.12                  |              |            | 23.52 |       |
|          | Lower 700 MHz  | AWGN        | -29.98              | 18.13                  | 4            | 2.2        | 19.93 |       |
|          |                | CW          | -30.79              | 18.87                  |              |            | 20.67 |       |
|          | Upper 700 MHz  | AWGN        | -30.76              | 17.49                  | 4            | 2.3        | 19.19 |       |
|          |                | CW          | -30.82              | 18.51                  |              |            | 20.21 |       |
| Downlink | PCS            | AWGN        | -40.31              | 7.76                   | 0.5          | 4.5        | 3.76  | ≤17   |
|          |                | CW          | -38.26              | 11.02                  |              |            | 7.02  |       |
|          | cellular       | AWGN        | -38.40              | 8.72                   | -2           | 4          | 2.72  |       |
|          |                | CW          | -38.88              | 10.85                  |              |            | 4.85  |       |
|          | AWS            | AWGN        | -37.17              | 11.73                  | 0.5          | 4.5        | 7.73  |       |
|          |                | CW          | -37.09              | 12.66                  |              |            | 8.66  |       |
|          | Lower 700 MHz  | AWGN        | -40.74              | 7.08                   | -2           | 4          | 1.08  |       |
|          |                | CW          | -35.01              | 13.94                  |              |            | 7.94  |       |
|          | Upper 700 MHz  | AWGN        | -40.96              | 5.86                   | -2           | 4          | -0.14 |       |
|          |                | CW          | -39.03              | 8.54                   |              |            | 2.54  |       |

For Magnetic antenna:

| Mode     | Operation Band | Signal type | Pre AGC Input level | Conducted Output level | Antenna Gain & Cable Loss | EIRP  | Limit |
|----------|----------------|-------------|---------------------|------------------------|---------------------------|-------|-------|
|          |                |             | dBm                 | dBm                    | dB                        | dBm   | dBm   |
| Uplink   | PCS            | AWGN        | -29.07              | 19.06                  | 3                         | 22.06 | 17-30 |
|          |                | GSM         | -27.08              | 22.00                  |                           | 25.00 |       |
|          | cellular       | AWGN        | -29.59              | 18.18                  | 2                         | 20.18 |       |
|          |                | GSM         | -29.44              | 19.52                  |                           | 21.52 |       |
|          | AWS            | AWGN        | -28.56              | 19.68                  | 4                         | 23.68 |       |
|          |                | GSM         | -27.25              | 22.12                  |                           | 26.12 |       |
|          | Lower 700 MHz  | AWGN        | -29.98              | 18.13                  | 1                         | 19.13 |       |
|          |                | GSM         | -30.79              | 18.87                  |                           | 19.87 |       |
|          | Upper 700 MHz  | AWGN        | -30.76              | 17.49                  | 1                         | 18.49 |       |
|          |                | GSM         | -30.82              | 18.51                  |                           | 19.51 |       |
| Downlink | PCS            | AWGN        | -40.31              | 7.76                   | 2.5                       | 10.26 | ≤17   |
|          |                | GSM         | -38.26              | 11.02                  |                           | 13.52 |       |
|          | cellular       | AWGN        | -38.4               | 8.72                   | -1.5                      | 7.22  |       |
|          |                | GSM         | -38.88              | 10.85                  |                           | 9.35  |       |
|          | AWS            | AWGN        | -37.17              | 11.73                  | 2                         | 13.73 |       |
|          |                | GSM         | -37.09              | 12.66                  |                           | 14.66 |       |
|          | Lower 700 MHz  | AWGN        | -40.74              | 7.08                   | -1.5                      | 5.58  |       |
|          |                | GSM         | -35.01              | 13.94                  |                           | 12.44 |       |
|          | Upper 700 MHz  | AWGN        | -40.96              | 5.86                   | -1.5                      | 4.36  |       |
|          |                | GSM         | -39.03              | 8.54                   |                           | 7.04  |       |

**Maximum Input level:**

| Mode     | Operation Band | Signal type | Maximum Input level | Maximum Input level Limits | Conducted Output level |
|----------|----------------|-------------|---------------------|----------------------------|------------------------|
|          |                |             | dBm                 | dBm                        | dBm                    |
| Uplink   | PCS            | AWGN        | -19.4               | 27.0                       | 19.21                  |
|          |                | CW          | -18.2               |                            | 22.09                  |
|          | Cellular       | AWGN        | -18.8               |                            | 18.31                  |
|          |                | CW          | -16.5               |                            | 19.66                  |
|          | AWS            | AWGN        | -17.4               |                            | 19.81                  |
|          |                | CW          | -19.2               |                            | 22.20                  |
|          | Lower 700 MHz  | AWGN        | -16.4               |                            | 18.25                  |
|          |                | CW          | -14.8               |                            | 18.96                  |
|          | Upper 700 MHz  | AWGN        | -19.0               |                            | 17.55                  |
|          |                | CW          | -18.5               |                            | 18.63                  |
| Downlink | PCS            | AWGN        | -31.3               | -20                        | 7.85                   |
|          |                | CW          | -28.1               |                            | 11.28                  |
|          | Cellular       | AWGN        | -29.2               |                            | 8.89                   |
|          |                | CW          | -26.7               |                            | 10.93                  |
|          | AWS            | AWGN        | -30.4               |                            | 11.86                  |
|          |                | CW          | -27.2               |                            | 12.73                  |
|          | Lower 700 MHz  | AWGN        | -30.1               |                            | 7.21                   |
|          |                | CW          | -26.6               |                            | 14.13                  |
|          | Upper 700 MHz  | AWGN        | -29.4               |                            | 5.95                   |
|          |                | CW          | -29.2               |                            | 8.66                   |

Note: The output level was measured at input level 1 dB less than the maximum input level.

## § 20.21(e)(8)(i)(C)(2), § 20.21(e)(8)(i)(B)&§20.21(e)(4) – MAXIMUM BOOSTER GAIN COMPUTATION

### Applicable Standards

According to § 20.21(e)(8)(i)(C)(2) (ii) Booster Gain Limits (maximum gain); § 20.21(e)(8)(i)(B) Bidirectional Capability (equivalent uplink and downlink gain); §20.21(e)(4) Self-monitoring.

This subclause provides guidance on the computation of the maximum gain based on the results obtained from previous measurements. The NPS limits on maximum gain for fixed and mobile wideband consumer signal boosters are provided in § 20.21(e)(8)(i)(C)(2). Additionally, § 20.21(e)(8)(i)(B) requires that wideband consumer signal boosters be able to provide equivalent uplink and downlink gain (within 9 dB)

### Test Procedure

- Calculate the maximum gain of the booster as follows to demonstrate compliance to the applicable gain limits as specified.
- For both the uplink and downlink in each supported frequency band, use each of the  $P_{OUT}$  and  $P_{IN}$  result pairs for all signal types used in 7.2 in the following equation to determine the maximum gain (G) of the booster:  
$$G \text{ (dB)} = P_{OUT}(\text{dBm}) - P_{IN}(\text{dBm}).$$
- Record the maximum gain of the uplink and downlink paths for each supported frequency band, and verify that the each gain value complies with the applicable limit.
- Provide tabulated results in the test report.

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 52 %      |
| ATM Pressure:      | 101.2 kPa |

*The testing was performed by Kieron Luo on 2019-08-22.*

**Test Result:** Compliance. Please refer to the following tables please refer to section 7.2.

| Mode     | Operation Band | Signal type | Pre AGC Input level | Conducted Output level | Gain  | Limit |
|----------|----------------|-------------|---------------------|------------------------|-------|-------|
|          |                |             | dBm                 | dBm                    | dB    | dB    |
| Uplink   | PCS            | AWGN        | -29.07              | 19.06                  | 48.13 | 50    |
|          |                | CW          | -27.08              | 22.00                  | 49.08 |       |
|          | Cellular       | AWGN        | -29.59              | 18.18                  | 47.77 | 50    |
|          |                | CW          | -29.44              | 19.52                  | 48.96 |       |
|          | AWS            | AWGN        | -28.56              | 19.68                  | 48.24 | 50    |
|          |                | CW          | -27.25              | 22.12                  | 49.37 |       |
|          | Lower 700 MHz  | AWGN        | -29.98              | 18.13                  | 48.11 | 50    |
|          |                | CW          | -30.79              | 18.87                  | 49.66 |       |
|          | Upper 700 MHz  | AWGN        | -30.76              | 17.49                  | 48.25 | 50    |
|          |                | CW          | -30.82              | 18.51                  | 49.33 |       |
| Downlink | PCS            | AWGN        | -40.31              | 7.76                   | 48.07 | 50    |
|          |                | CW          | -38.26              | 11.02                  | 49.28 |       |
|          | Cellular       | AWGN        | -38.4               | 8.72                   | 47.12 | 50    |
|          |                | CW          | -38.88              | 10.85                  | 49.73 |       |
|          | AWS            | AWGN        | -37.17              | 11.73                  | 48.9  | 50    |
|          |                | CW          | -37.09              | 12.66                  | 49.75 |       |
|          | Lower 700 MHz  | AWGN        | -40.74              | 7.08                   | 47.82 | 50    |
|          |                | CW          | -35.01              | 13.94                  | 48.95 |       |
|          | Upper 700 MHz  | AWGN        | -40.96              | 5.86                   | 46.82 | 50    |
|          |                | CW          | -39.03              | 8.54                   | 47.57 |       |

Note: Mobile Booster maximum gain shall not exceed 50 dB when using an inside antenna.

#### Equivalent Uplink and downlink gain:

| Operating Band | Signal type | Uplink Gain | Downlink Gain | Caculated Value | Limit |
|----------------|-------------|-------------|---------------|-----------------|-------|
| MHz            |             | dB          | dB            | dB              | dB    |
| PCS            | AWGN        | 48.13       | 48.07         | 0.06            | ±9    |
|                | CW          | 49.08       | 49.28         | -0.20           |       |
| Cellular       | AWGN        | 47.77       | 47.12         | 0.65            |       |
|                | CW          | 48.96       | 49.73         | -0.77           |       |
| AWS            | AWGN        | 48.24       | 48.9          | -0.66           |       |
|                | CW          | 49.37       | 49.75         | -0.38           |       |
| Lower 700 MHz  | AWGN        | 48.11       | 47.82         | 0.29            |       |
|                | CW          | 49.66       | 48.95         | 0.71            |       |
| Upper 700 MHz  | AWGN        | 48.25       | 46.82         | 1.43            |       |
|                | CW          | 49.33       | 47.57         | 1.76            |       |

## § 20.21(e)(8)(i)(F)- INTERMODULATION PRODUCT

### Applicable Standards

According to § 20.21(e)(8)(i)(F) Intermodulation Limits.

### Test Procedure

The following procedures shall be used to demonstrate compliance to the intermodulation limit specified in § 20.21(e)(8)(i)(F) for wideband consumer signal boosters.

- Connect the signal booster to the test equipment as shown in **Figure 2**. Begin with the uplink output connected to the spectrum analyzer.
- Set the spectrum analyzer RBW = 3 kHz.
- Set the VBW  $\geq 3 \times$  RBW.
- Select the RMS detector
- Set the spectrum analyzer center frequency to the center of the supported operational band under test.
- Set the span to 5 MHz. Affirm that the number of measurement points per sweep  $\geq (2 \times \text{span})/\text{RBW}$ .
- Configure the two signal generators for CW operation with generator 1 tuned 300 kHz below the operational band center frequency and generator 2 tuned 300 kHz above the operational band center frequency.
- Set the signal generator amplitudes so that the power from each into the RF combiner is equivalent, then turn on the RF output.
- Increase the signal generators' amplitudes equally until just before the EUT begins AGC and affirm that all intermodulation products (if any exist) are below the specified limit of -19 dBm.
- Utilize the trace averaging function of the spectrum analyzer and wait for the trace to stabilize. Place a marker at the highest amplitude intermodulation product.
- Record the maximum intermodulation product amplitude level that is observed.
- Capture the spectrum analyzer trace for inclusion in the test report.
- Repeat 7.4e) to 7.4l) for all uplink and downlink operational bands.

**Note:** If using a single signal generator with dual outputs, affirm that intermodulation products are not the result of the generator.

- Increase the signal generator amplitude in 2 dB steps to 10 dB above the AGC threshold determined in 7.4i), but to not to exceed the maximum input level in 5.5, to affirm that the EUT maintains compliance with the intermodulation limit

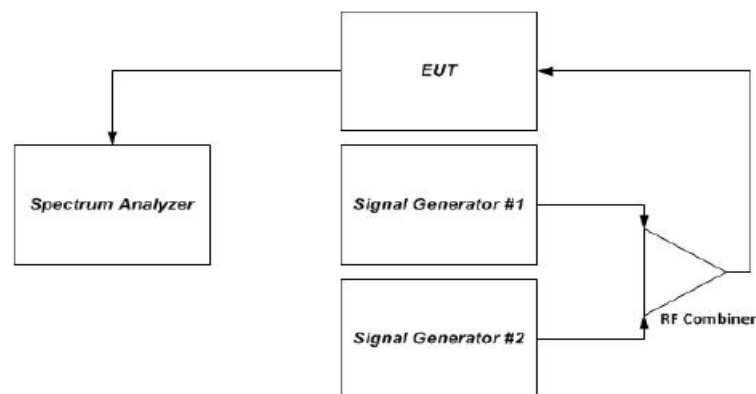


Figure 2 – Intermodulation product instrumentation test setup

## Test Data

### Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 52 %      |
| ATM Pressure:      | 101.2 kPa |

The testing was performed by Kieron Luo on 2019-08-03.

**Test Result:** Compliance. Please refer to following plots.


## Downlink

### Cellular Pre-AGC

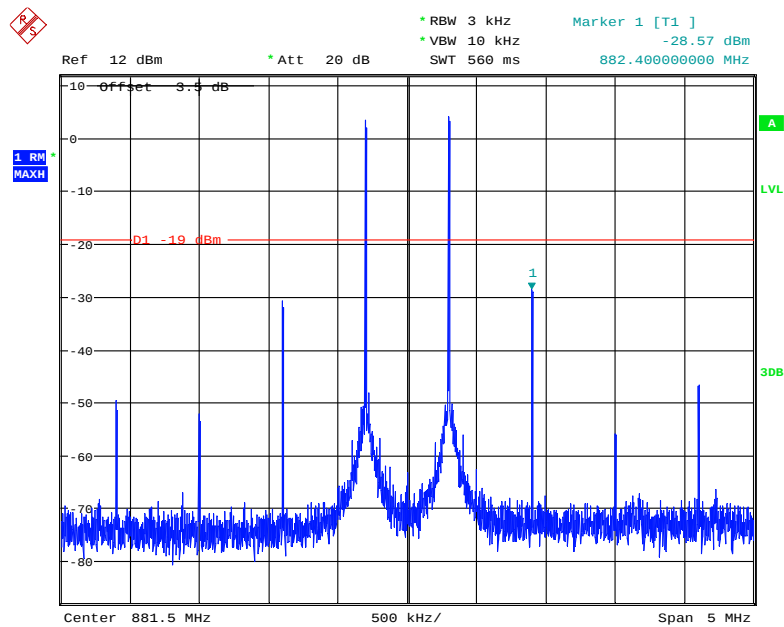


Date: 3.AUG.2019 13:16:19

### Cellular Above AGC

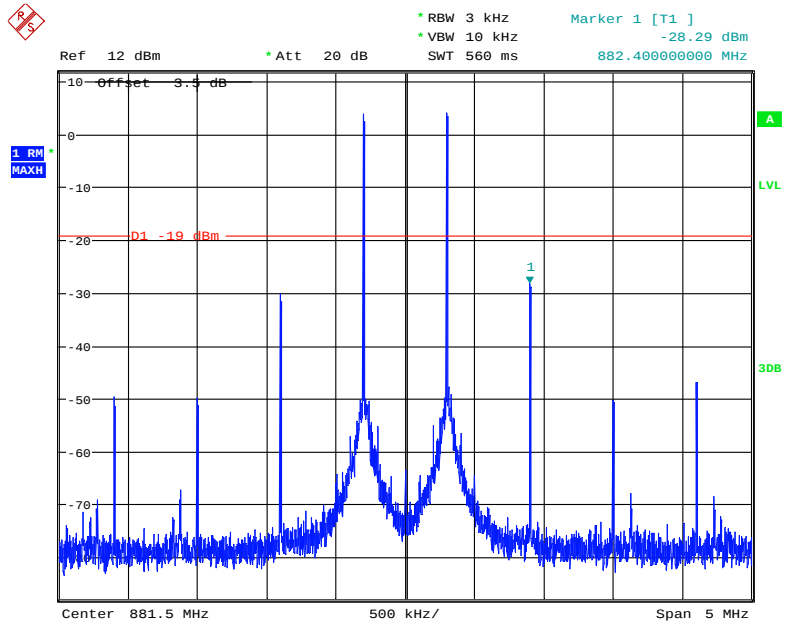


Date: 3.AUG.2019 13:16:46

### PCS Pre-AGC

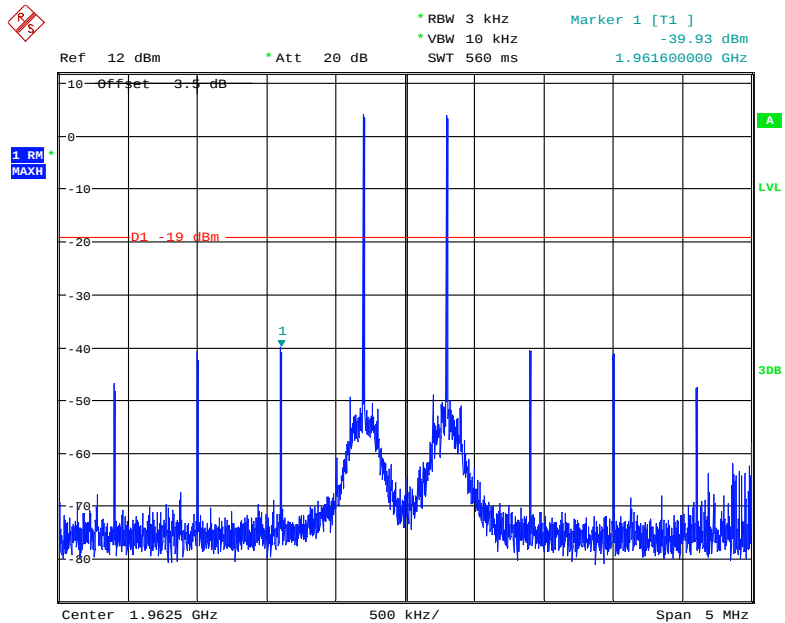


Date: 3.AUG.2019 13:18:18

### PCS Above AGC

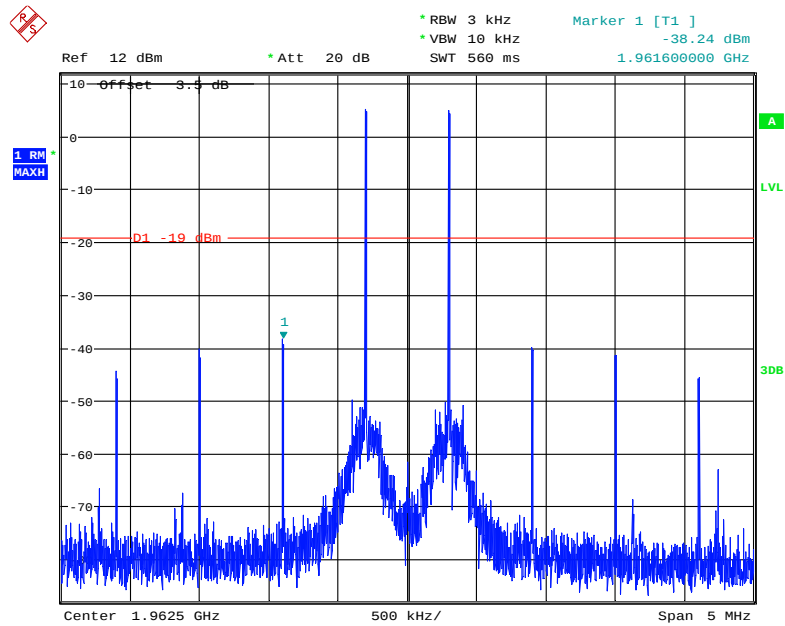


Date: 3.AUG.2019 13:19:04

### AWS Pre-AGC

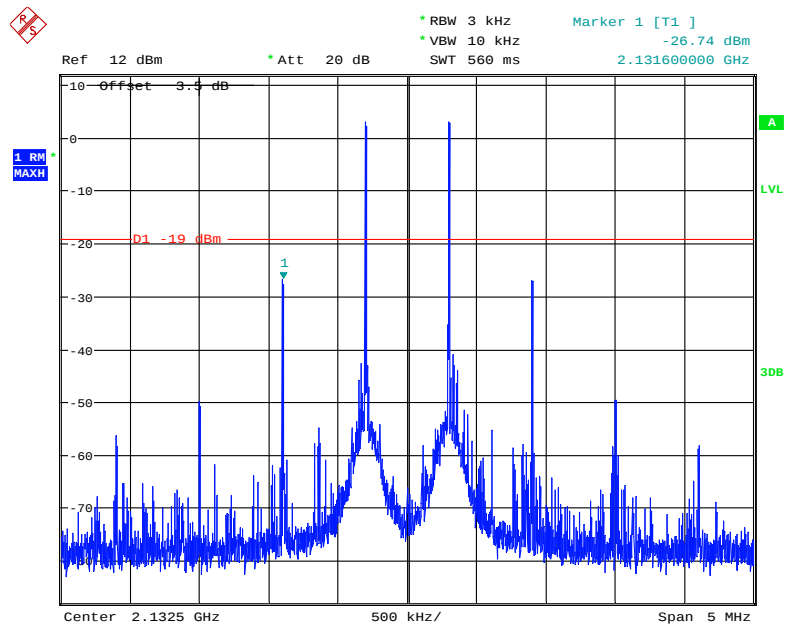


Date: 3.AUG.2019 13:21:16

### AWS Above AGC

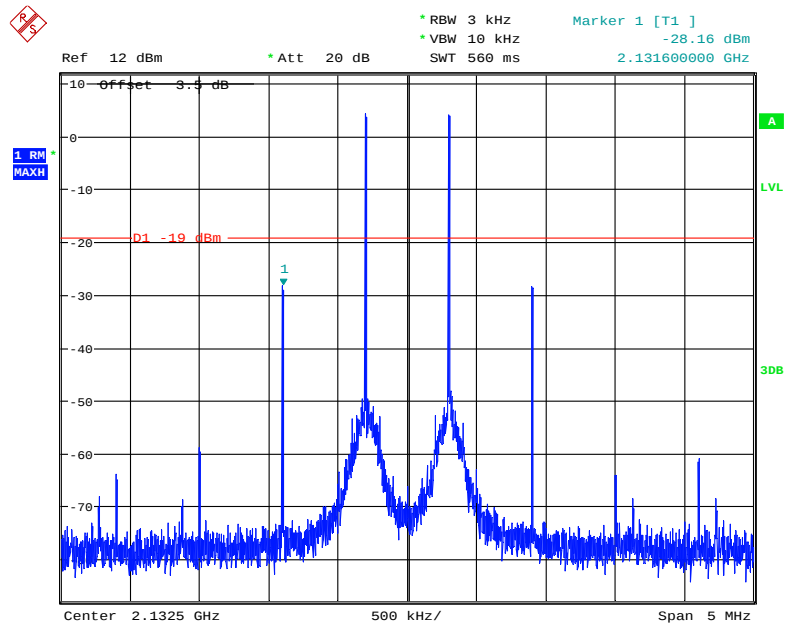


Date: 3.AUG.2019 13:21:43

### Lower 700MHz Pre-AGC

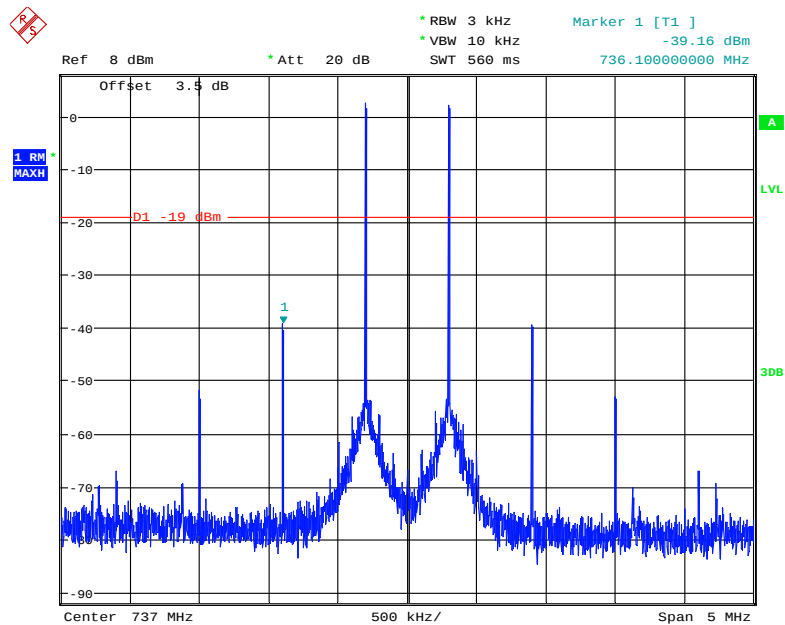


Date: 3.AUG.2019 13:25:30

### Lower 700MHz Above AGC

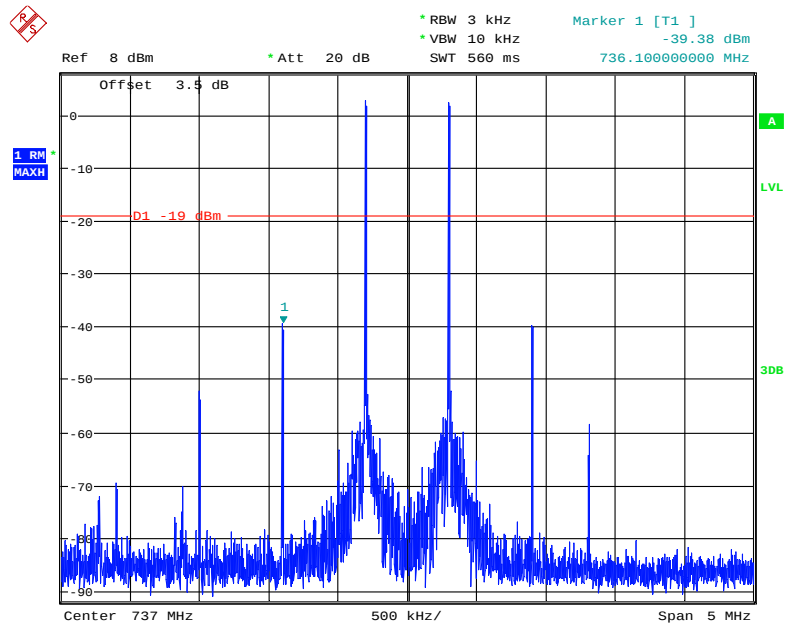


Date: 3.AUG.2019 13:25:59

### Upper 700MHz Pre-AGC

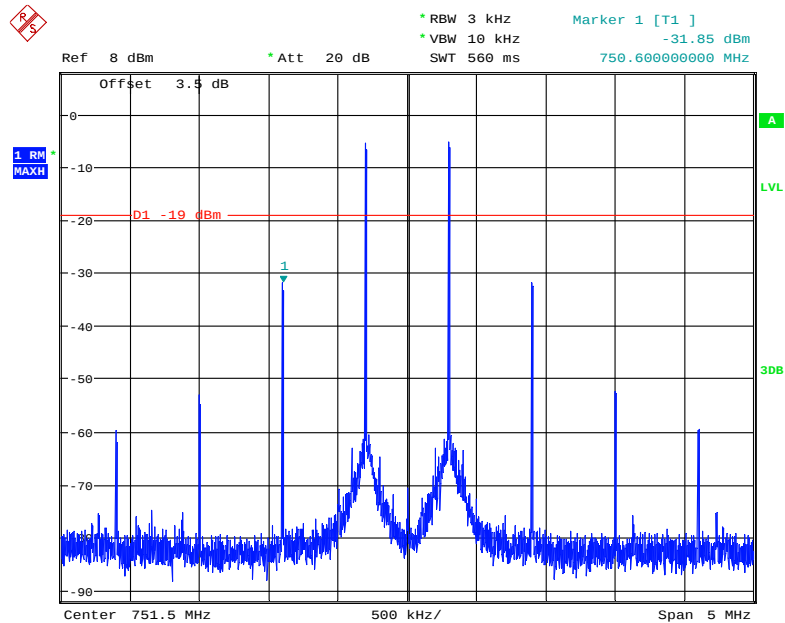

Date: 3.AUG.2019 13:28:23


### Upper 700MHz Above AGC

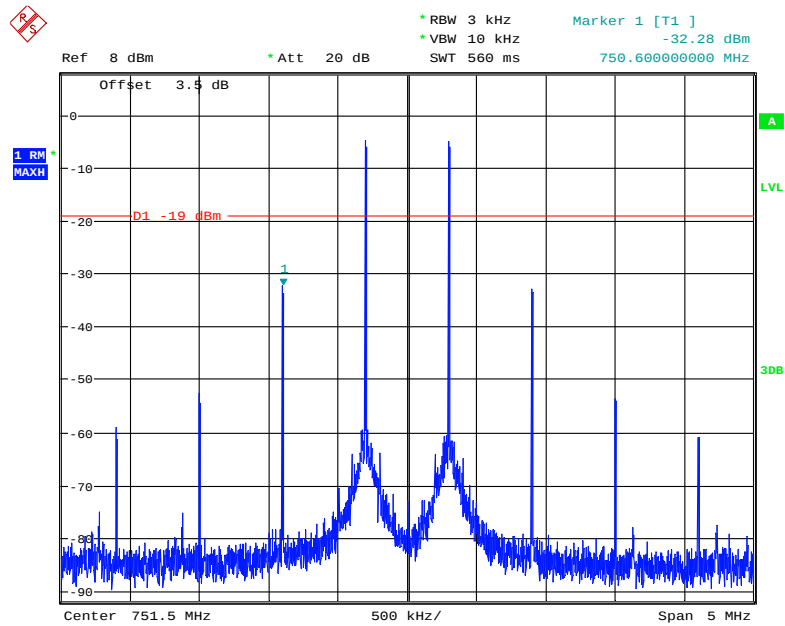

Date: 3.AUG.2019 13:28:54


### Uplink

### Cellular Pre-AGC

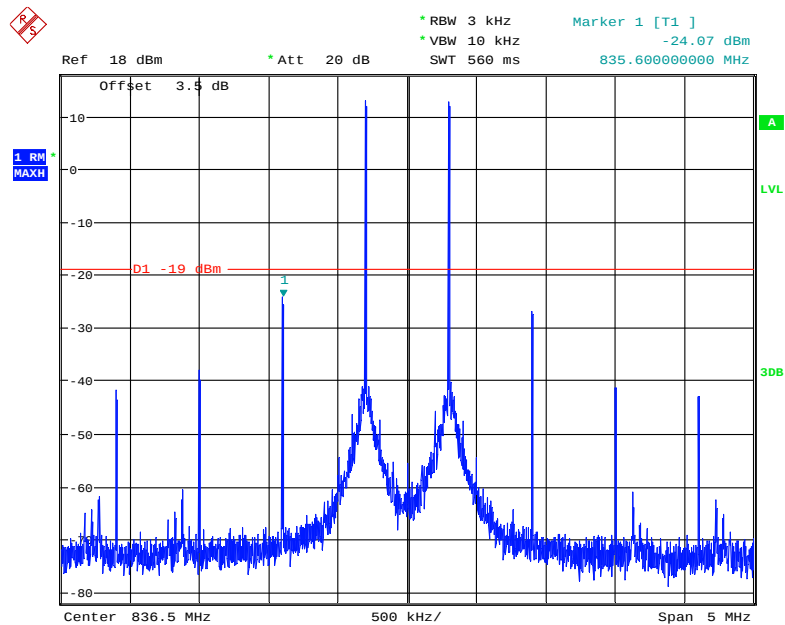


Date: 3.AUG.2019 13:35:39

### Cellular Above AGC

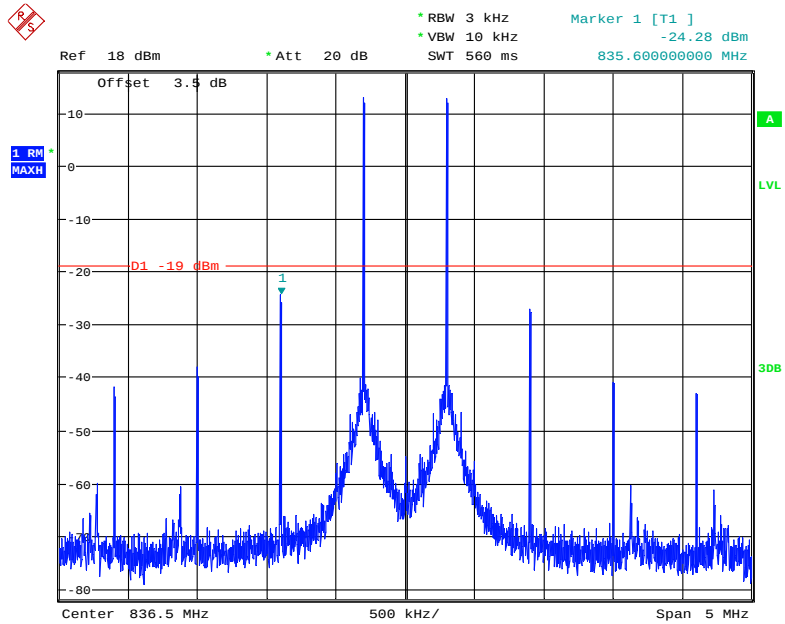


Date: 3.AUG.2019 13:36:51

### PCS Pre-AGC

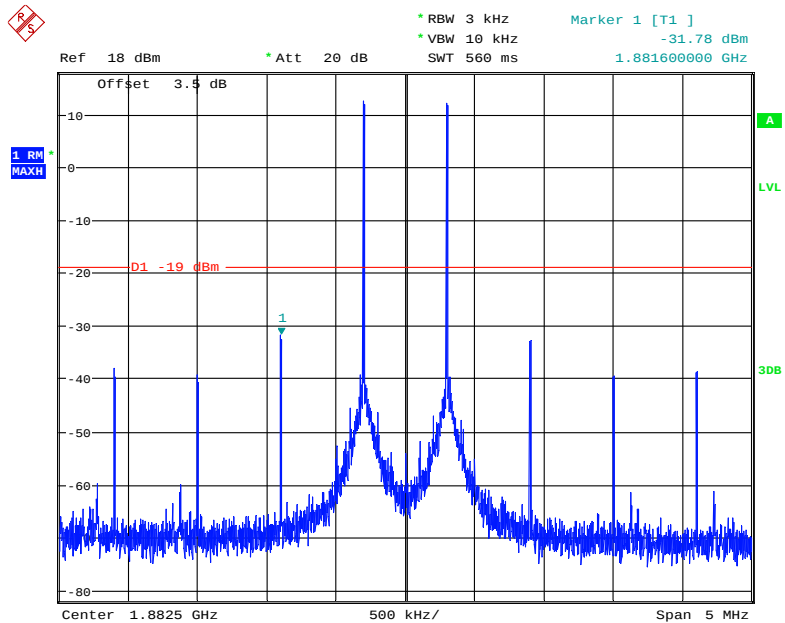


Date: 3.AUG.2019 13:38:02

### PCS Above AGC

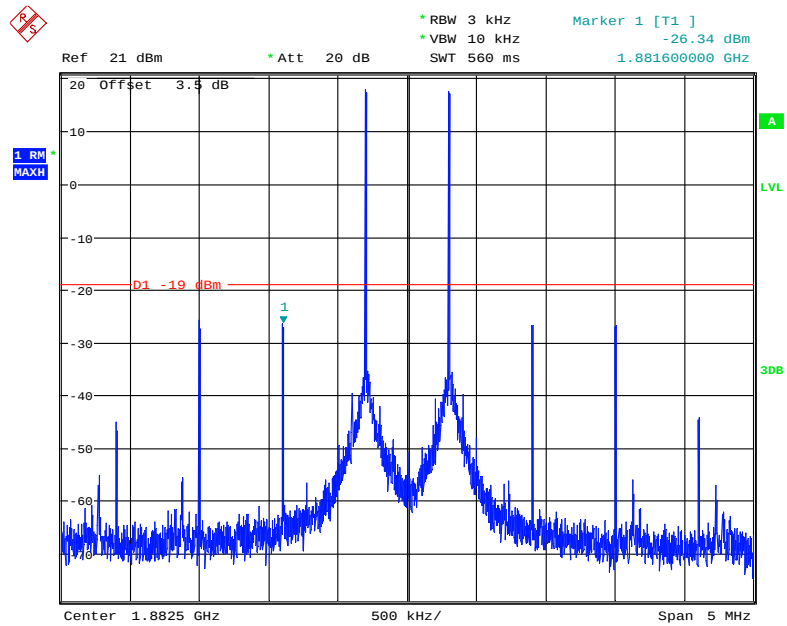


Date: 3.AUG.2019 13:43:25

### AWS Pre-AGC

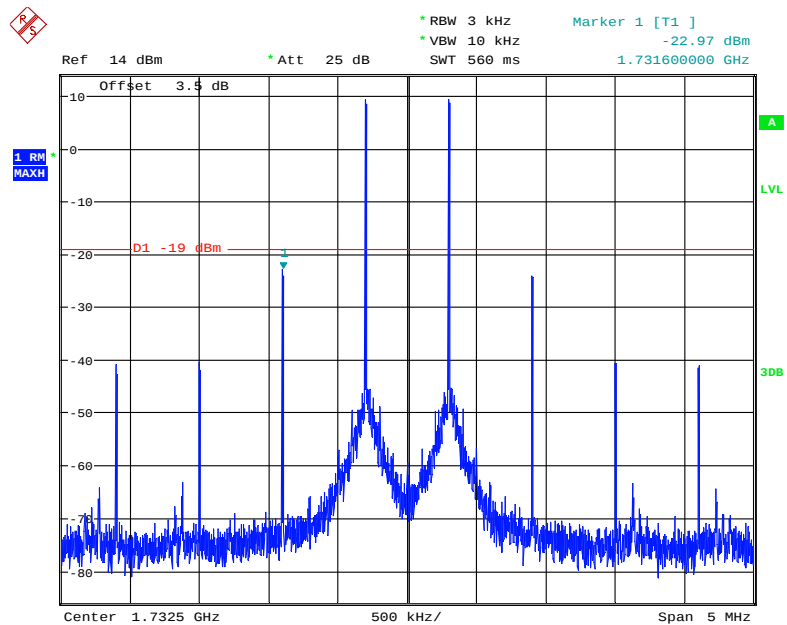


Date: 3.AUG.2019 13:47:47

### AWS Above AGC

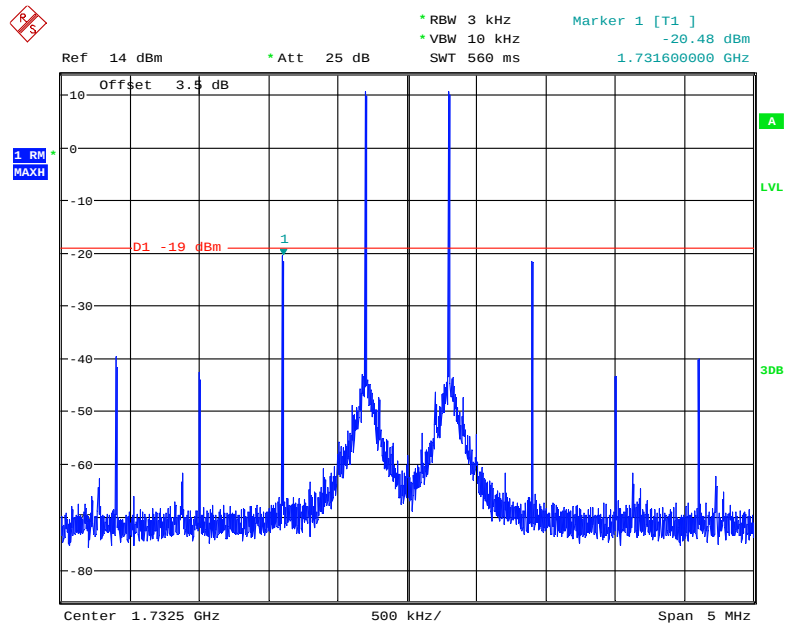


Date: 3.AUG.2019 13:48:18

### Lower 700MHz Pre-AGC

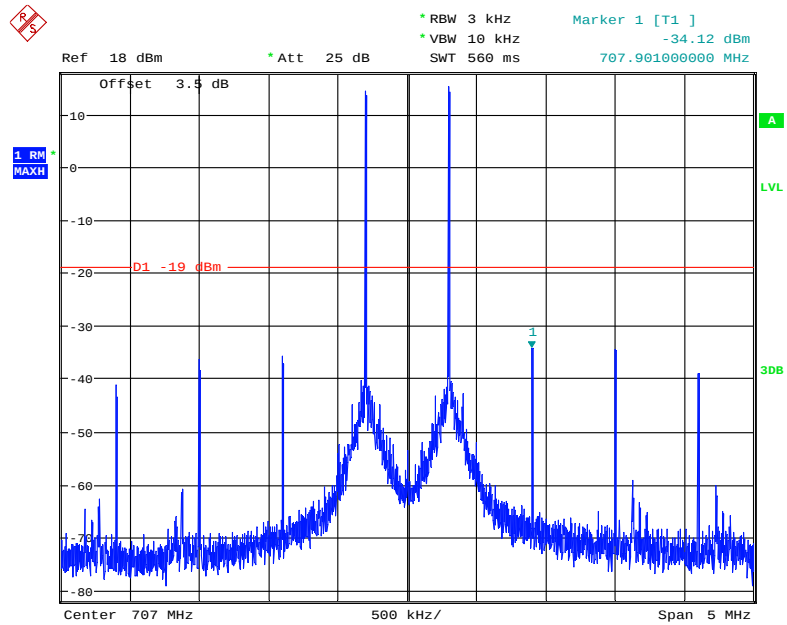


Date: 3.AUG.2019 13:50:22

### Lower 700MHz Above AGC

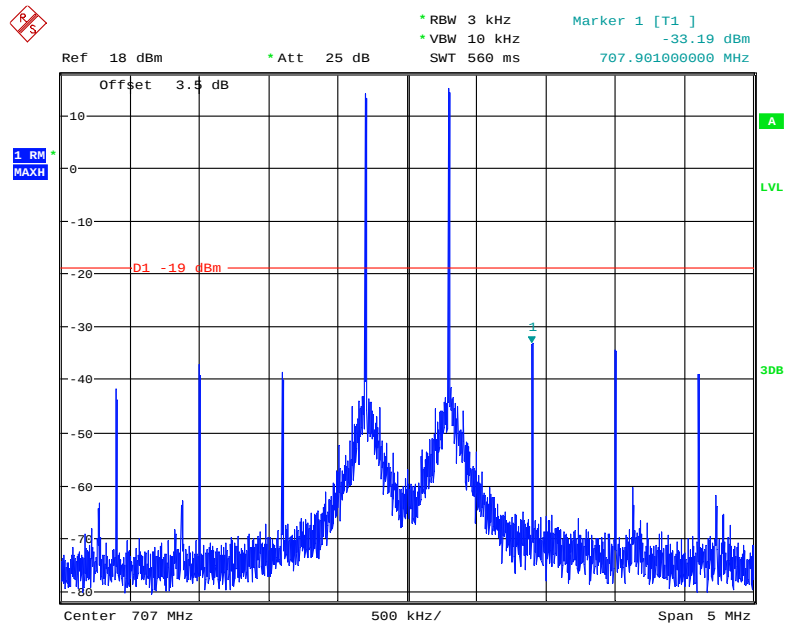


Date: 3.AUG.2019 13:51:07

### Upper 700MHz Pre-AGC

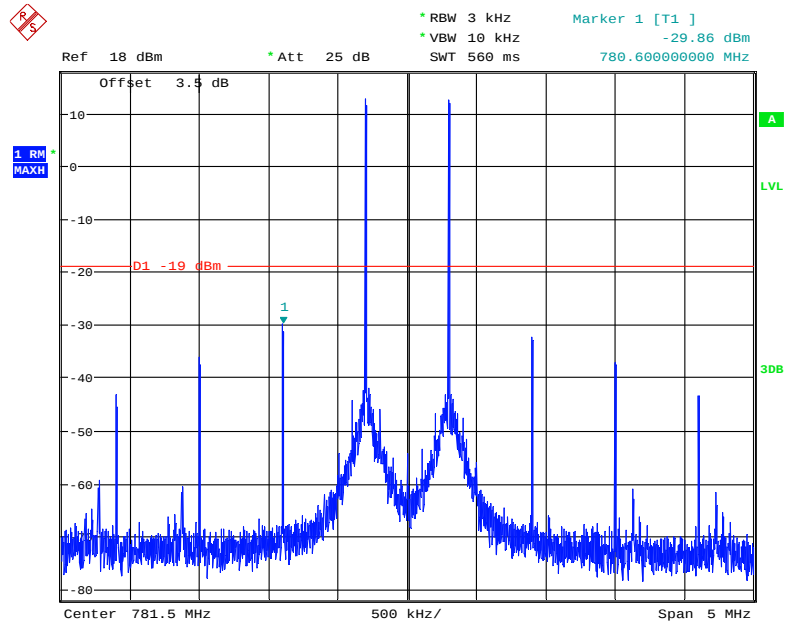

Date: 3.AUG.2019 13:52:40

Upper 700MHz Above AGC

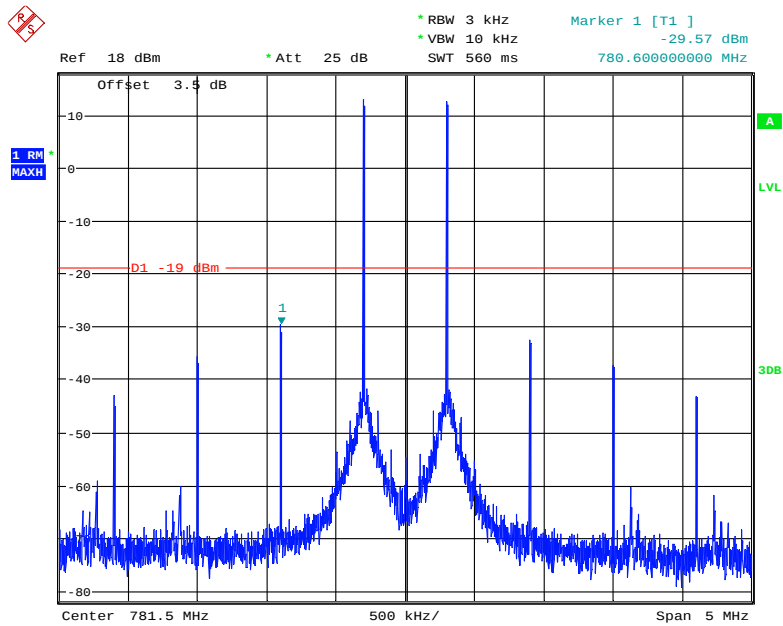

Date: 3.AUG.2019 13:53:33

## § 20.21(e)(8)(i)(E)- OUT OF BAND EMISSIONS

### Applicable Standards

According to § 20.21(e)(8)(i)(E) Out of Band Emission Limits.

### Test Procedure

This measurement is intended to demonstrate compliance to the limit specified in § 20.21(e)(8)(i)(E). The mobile emission limit applicable to the supported band of operation can be determined from the applicable rule part as listed in Annex A for each authorized operating band.

- a) Connect the EUT to the test equipment as shown in **Figure 1**. Begin with the uplink output connected to the spectrum analyzer.
- b) Configure the signal generator for the appropriate operation for all uplink and downlink bands:
  - i) GSM: 0.2 MHz from upper and lower band edges.
  - ii) LTE (5 MHz): 2.5 MHz from upper and lower band edges.
  - iii) CDMA: 1.25 MHz from upper and lower band edges, except for cellular band as follows (only the upper and lower frequencies need to be tested):

824.88 MHz, 845.73 MHz, 836.52 MHz, 848.10 MHz, 869.88 MHz, 890.73 MHz, 881.52 MHz, 893.10 MHz.


**Note 1:** *Alternative test modulation types:*

- CDMA (alternative 1.25 MHz AWGN)
- LTE 5 MHz (alternative W-CDMA or 4.1 MHz AWGN)

**Note 2:** *For LTE, the signal generator should utilize the uplink and downlink signal types for these modulations in uplink and downlink tests, respectively. LTE shall use 5 MHz signal, 25 resource blocks transmitting.*

**Note 3:** *When using an AWGN test signal, the bandwidth shall be the measured 99% occupied bandwidth.*

- c) Set the signal generator amplitude to the maximum power level prior to AGC similar to the procedures in 7.2.2e) to 7.2.2f) of power measurement procedure for appropriate modulations.
- d) Set RBW = measurement bandwidth specified in the applicable rule section for the supported frequency band (*see Annex A for cross-reference to applicable rule section*).
- e) Set VBW =  $3 \times \text{RBW}$ .
- f) Select the RMS (power averaging) detector.
- g) Sweep time = auto-couple.
- h) Set the analyzer start frequency to the upper band/block edge frequency and the stop frequency to the upper band/block edge frequency plus 300 kHz (when operational frequency is  $< 1$  GHz) or 3 MHz (when operational frequency is  $\geq 1$  GHz).
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- j) Use peak marker function to find the maximum power level.
- k) Capture the spectrum analyzer trace of the power level for inclusion in the test report.
- l) Increase the signal generator amplitude in 2 dB steps until the maximum input level indicated in 5.5 is reached. Affirm that the EUT maintains compliance with the OOB limits.
- m) Reset the analyzer start frequency to the lower band/block edge frequency minus 300 kHz (when operational frequency is  $< 1$  GHz) or 3 MHz (when operational frequency is  $\geq 1$  GHz), and the stop frequency to the lower band/block edge frequency and repeat 7.5j) to 7.5l).
- n) Repeat 7.5b) through 7.5m) for each uplink and downlink operational band.

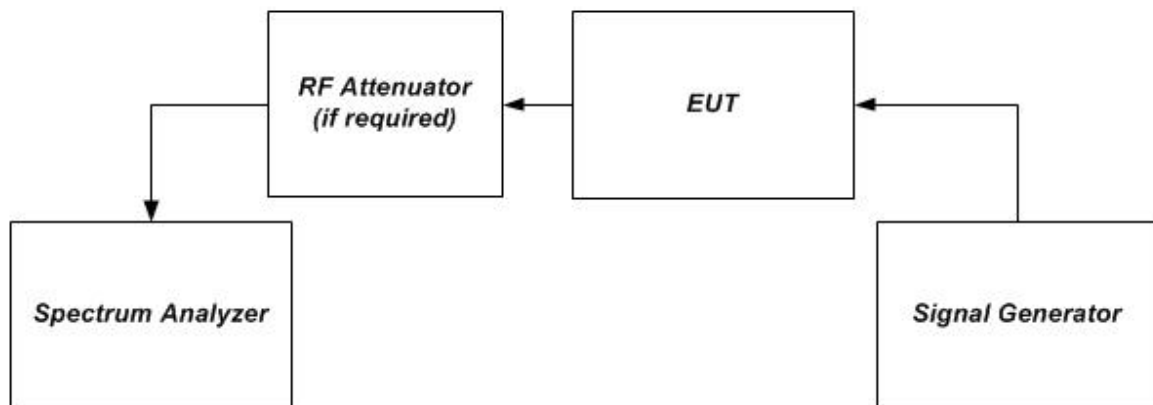

**Figure 1 – Band verification test instrumentation setup**

## Test Data

### Environmental Conditions


|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 52 %      |
| <b>ATM Pressure:</b>      | 101.2 kPa |

*The testing was performed by Kieron Luo from 2019-07-30 to 2019-08-08.*

**Test Result:** Compliance. Please refer to following plots.


# Downlink

## Lower 700MHz CDMA Left Side Pre-AGC

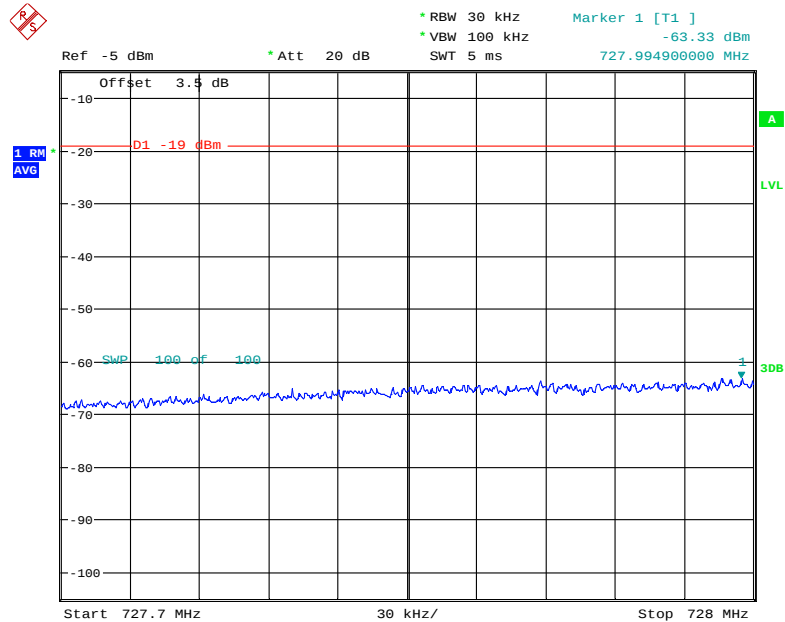


Date: 8.AUG.2019 14:25:30

## Lower 700MHz CDMA Left Side Above AGC

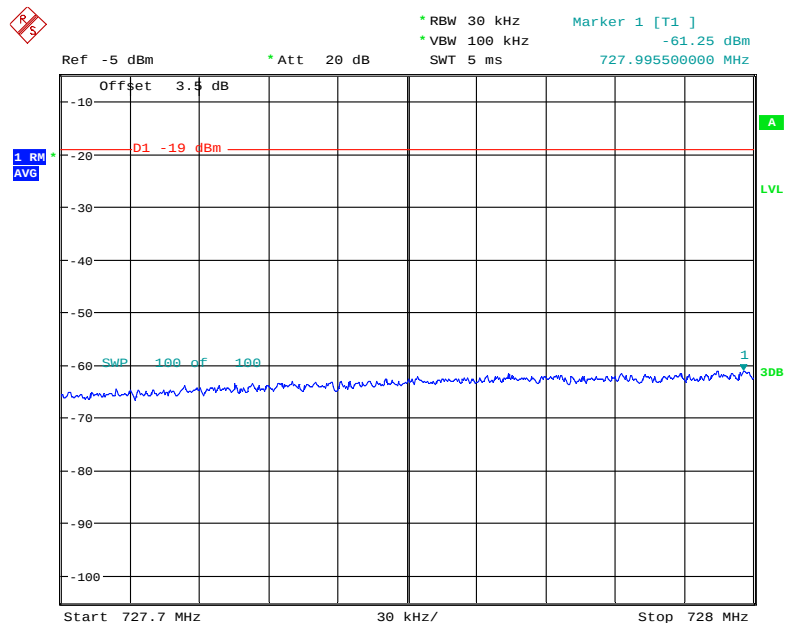


Date: 8.AUG.2019 14:26:05

### Lower 700MHz GSM Left Side Pre-AGC

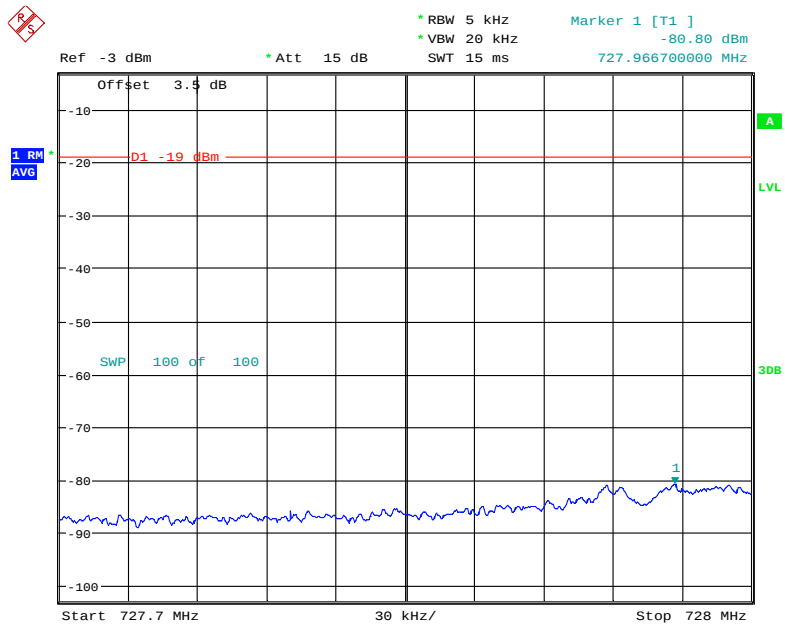


Date: 8.AUG.2019 13:30:02

### Lower 700MHz GSM Left Side Above AGC

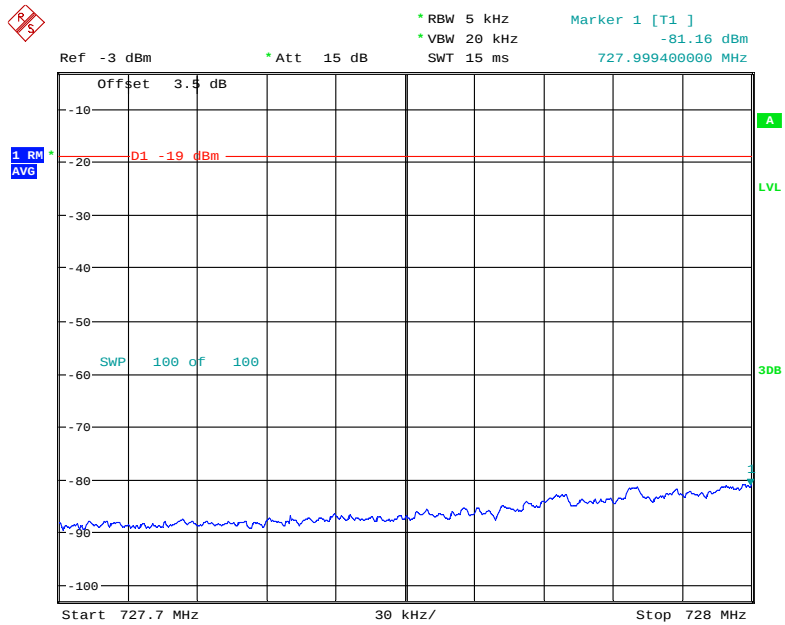


Date: 8.AUG.2019 13:30:29

### Lower 700MHz LTE Left Side Pre-AGC

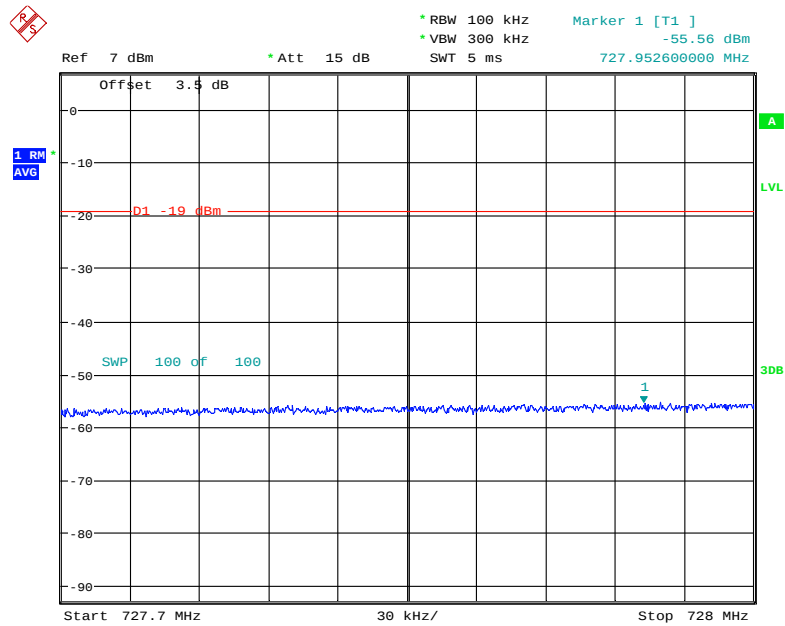


Date: 8.AUG.2019 12:56:52

### Lower 700MHz LTE Left Side Above AGC

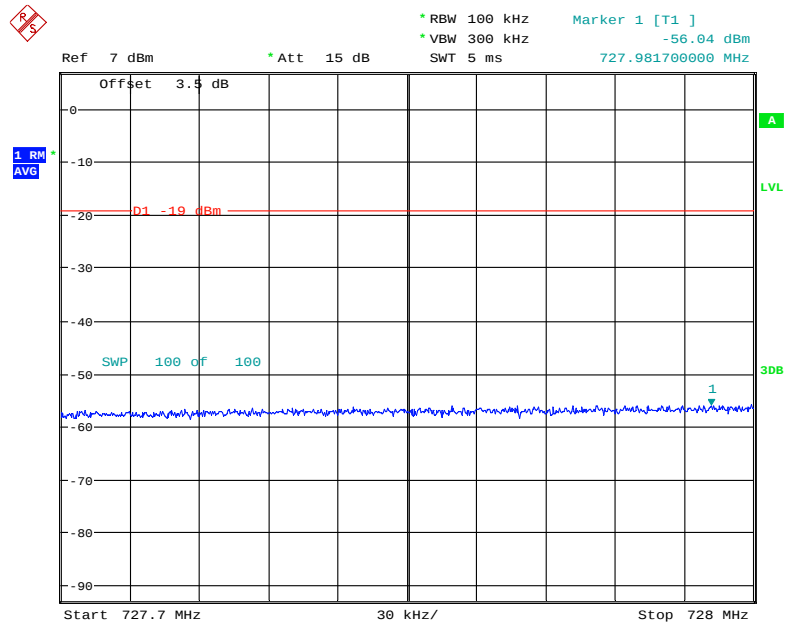


Date: 8.AUG.2019 12:57:13

### Lower 700MHz CDMA Right Side Pre-AGC

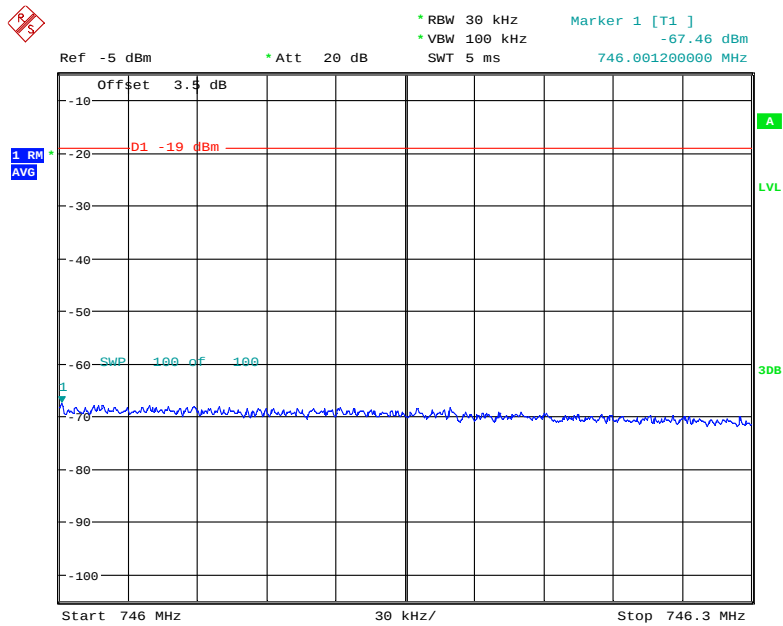


Date: 8.AUG.2019 14:26:32

### Lower 700MHz CDMA Right Side Above AGC

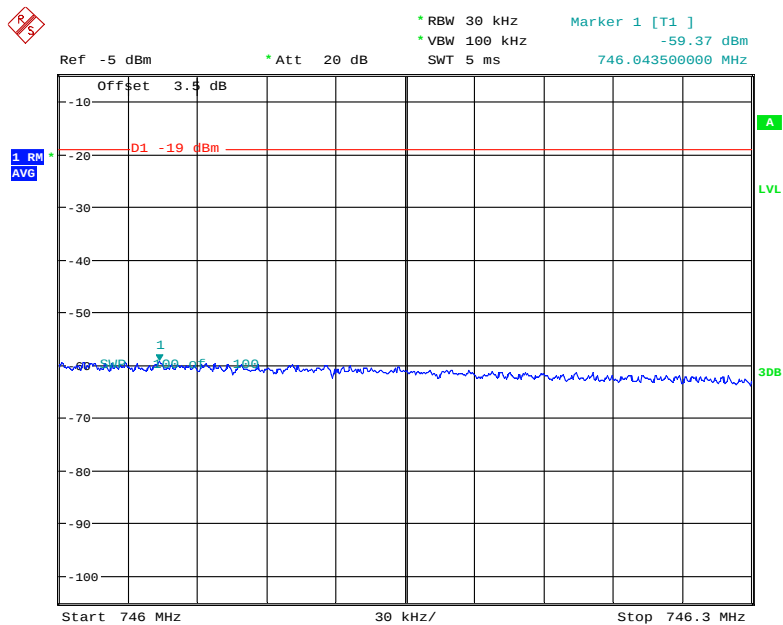


Date: 8.AUG.2019 14:26:53

### Lower 700MHz GSM Right Side Pre-AGC

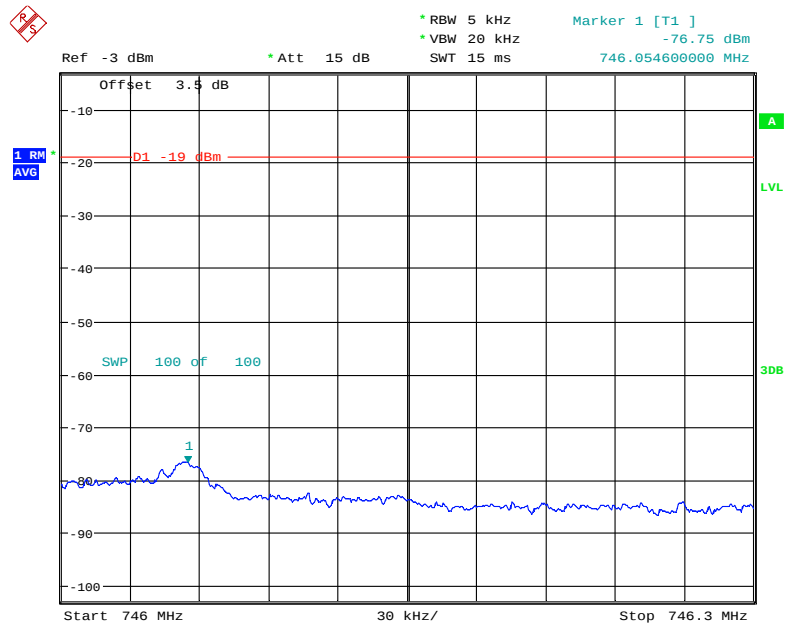


Date: 8.AUG.2019 13:30:58

### Lower 700MHz GSM Right Side Above AGC

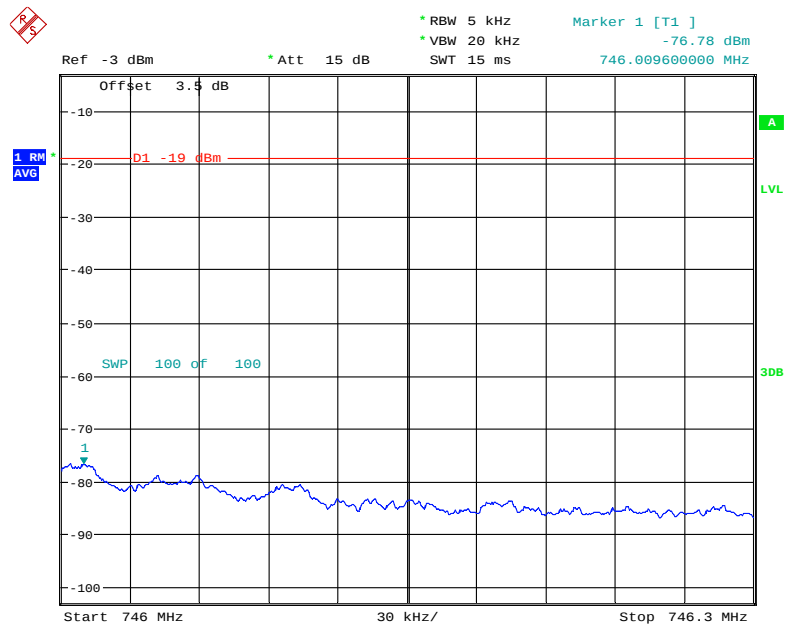


Date: 8.AUG.2019 13:31:16

### Lower 700MHz LTE Right Side Pre-AGC

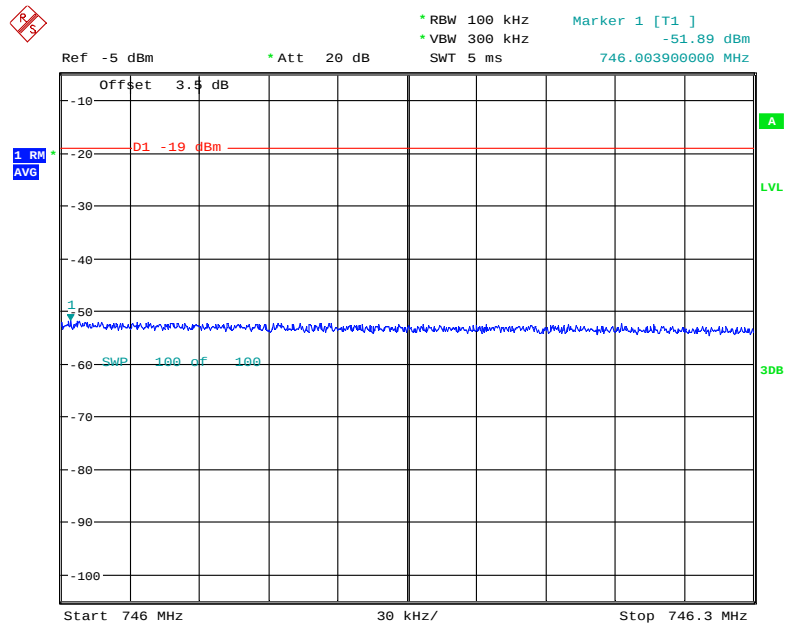


Date: 8.AUG.2019 14:35:57

### Lower 700MHz LTE Right Side Above AGC

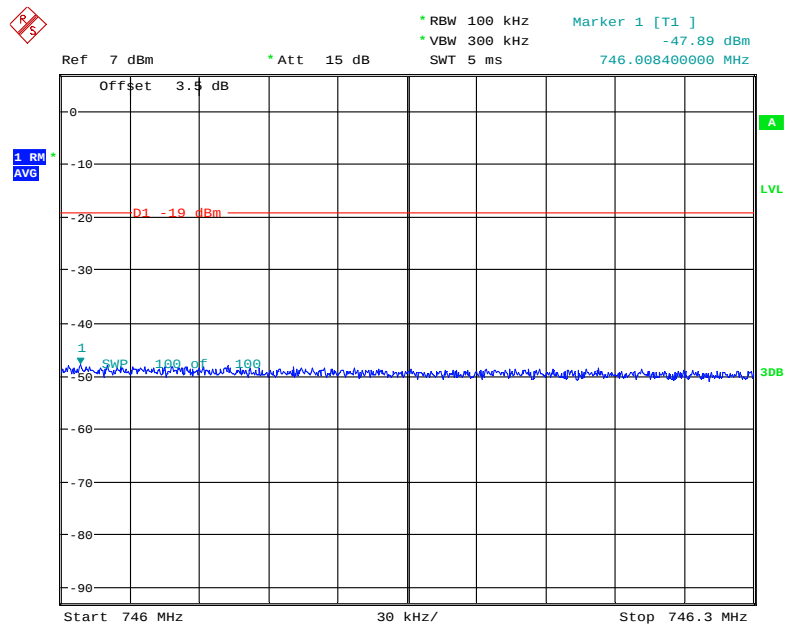


Date: 8.AUG.2019 12:58:07

### Upper 700MHz CDMA Left Side Pre-AGC

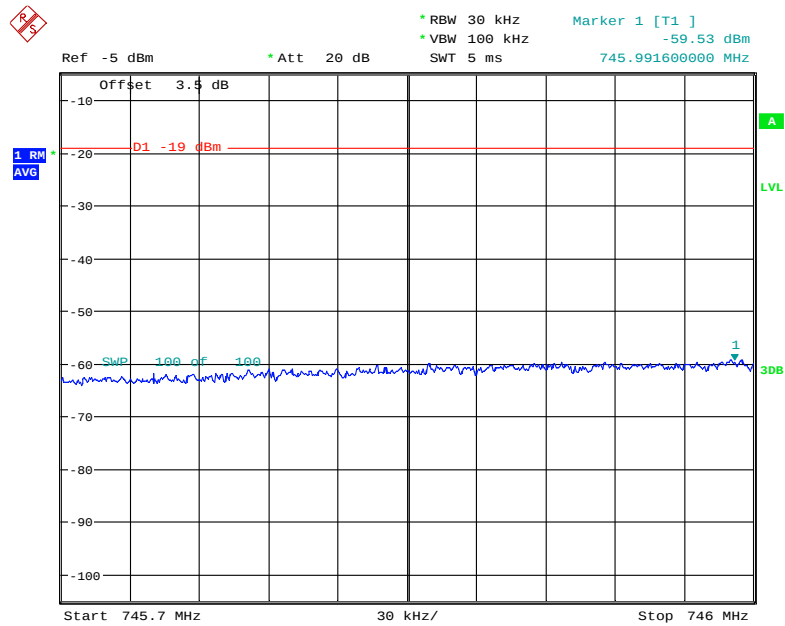


Date: 8.AUG.2019 14:27:26

### Upper 700MHz CDMA Left Side Above AGC

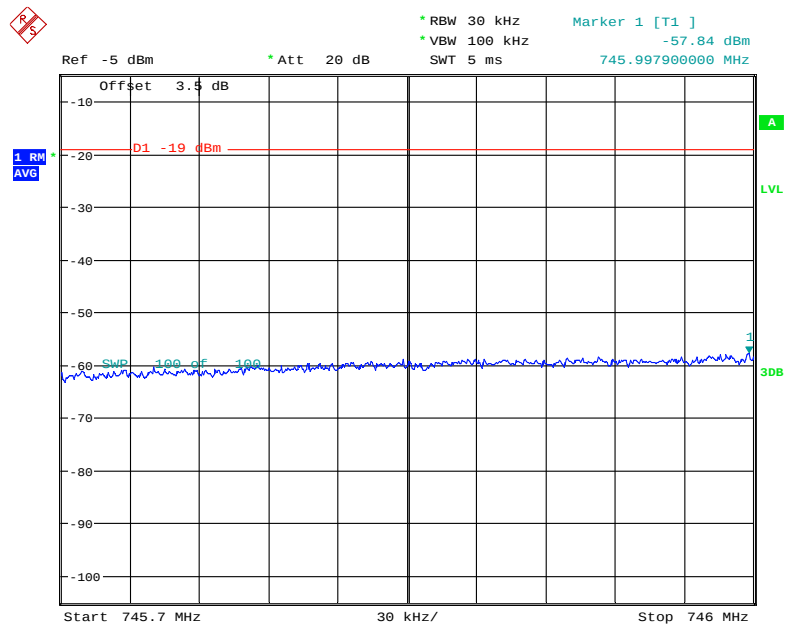


Date: 8.AUG.2019 14:27:53

### Upper 700MHz GSM Left Side Pre-AGC

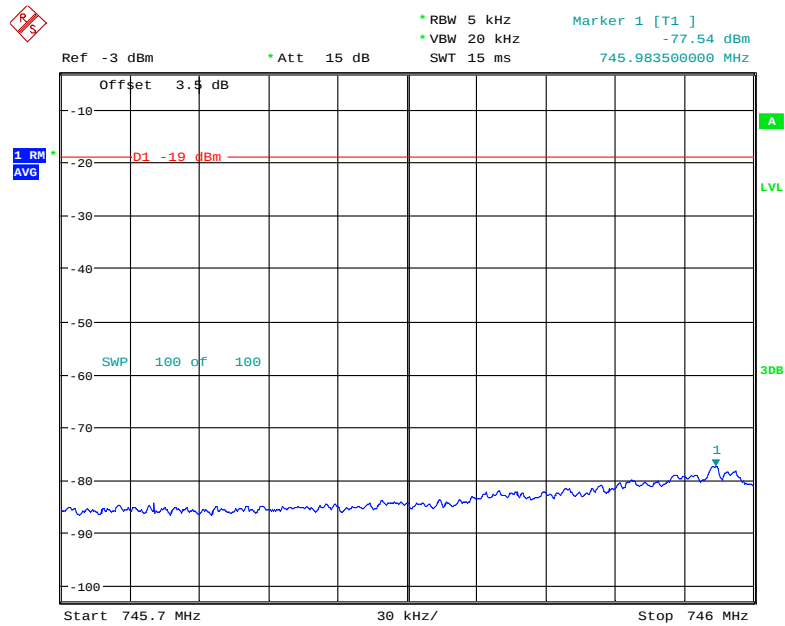


Date: 8.AUG.2019 13:32:03

### Upper 700MHz GSM Left Side Above AGC

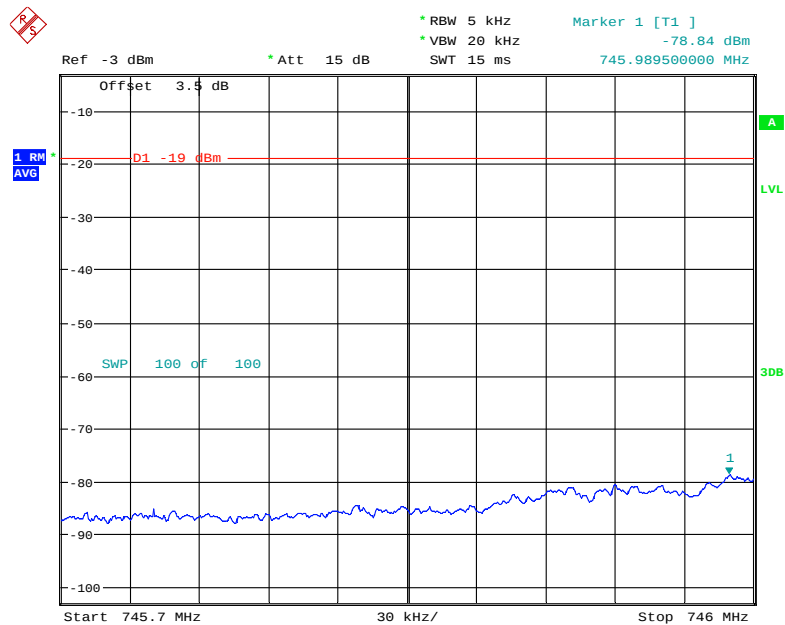


Date: 8.AUG.2019 13:32:35

### Upper 700MHz LTE Left Side Pre-AGC

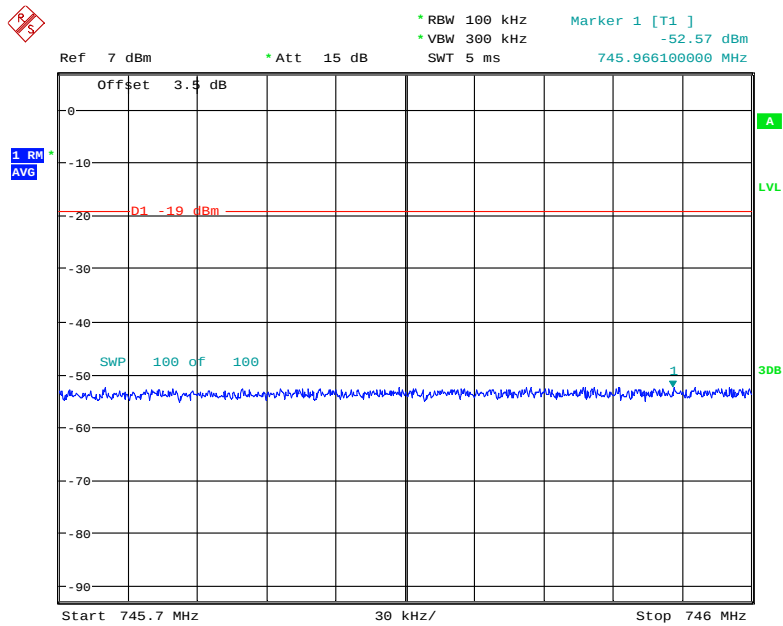


Date: 8.AUG.2019 12:59:07

### Upper 700MHz LTE Left Side Above AGC

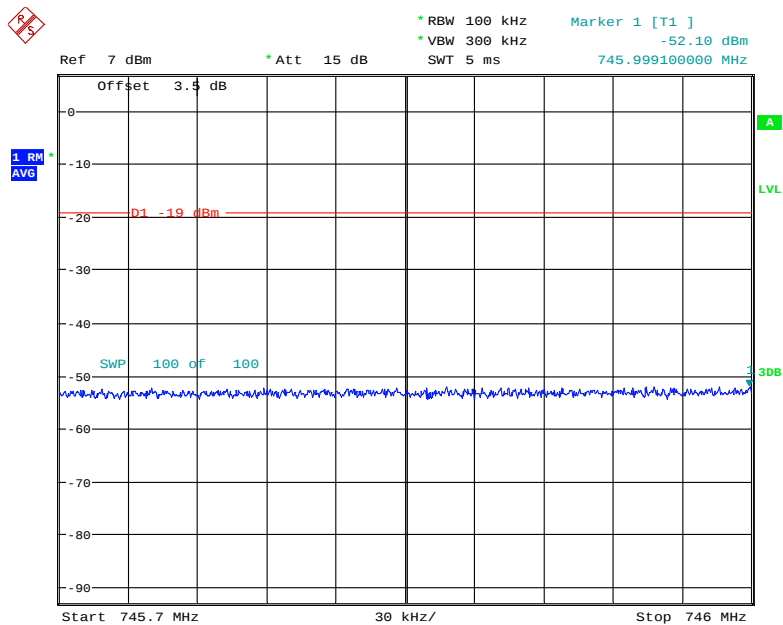


Date: 8.AUG.2019 12:59:46

### Upper 700MHz CDMA Right Side Pre-AGC

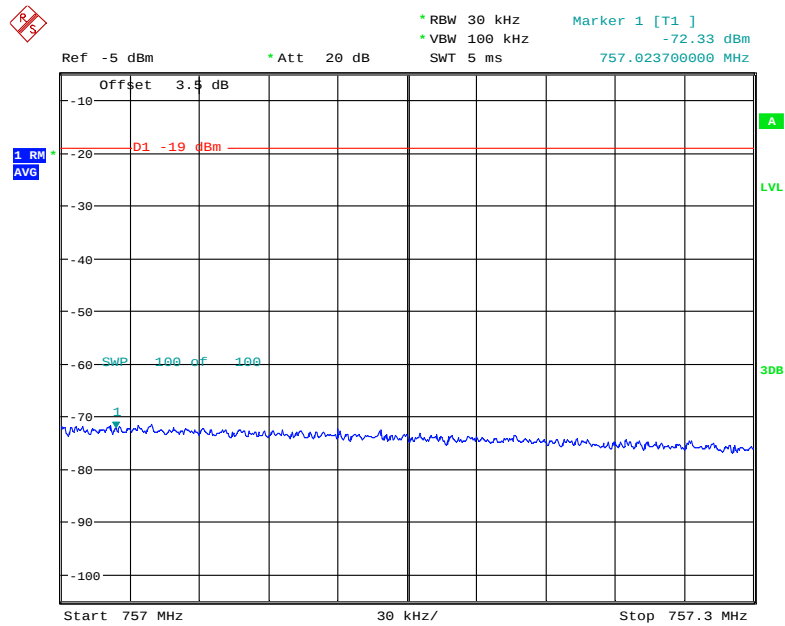


Date: 8.AUG.2019 14:28:49

### Upper 700MHz CDMA Right Side Above AGC

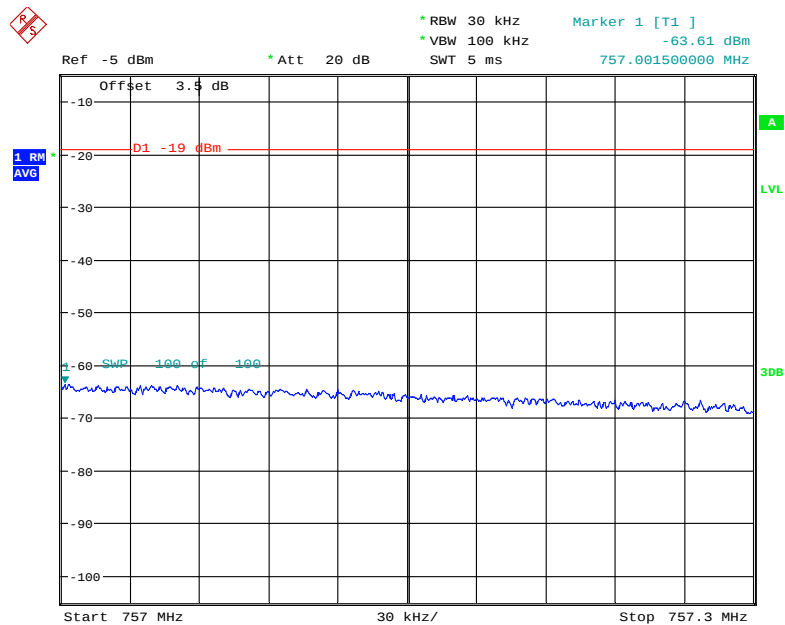


Date: 8.AUG.2019 14:29:28

### Upper 700MHz GSM Right Side Pre-AGC

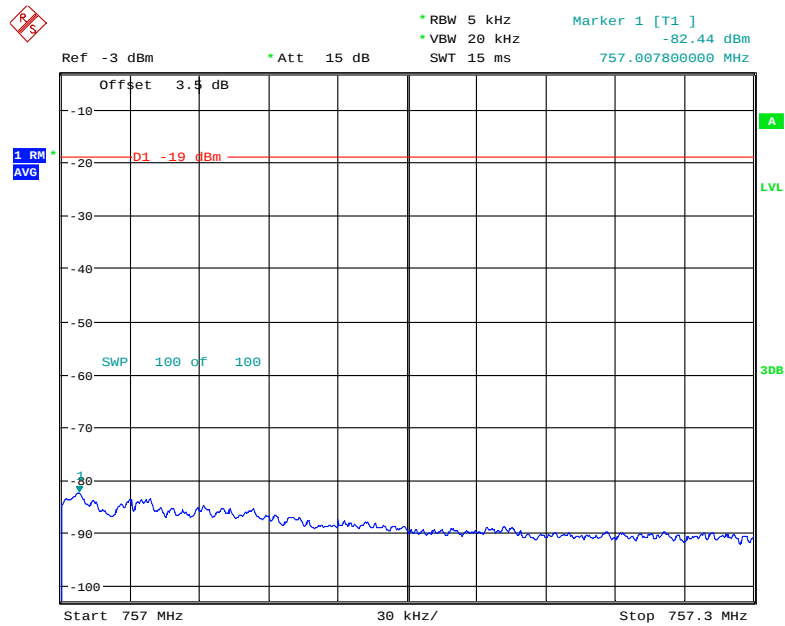

Date: 8.AUG.2019 13:33:17

### Upper 700MHz GSM Right Side Above AGC

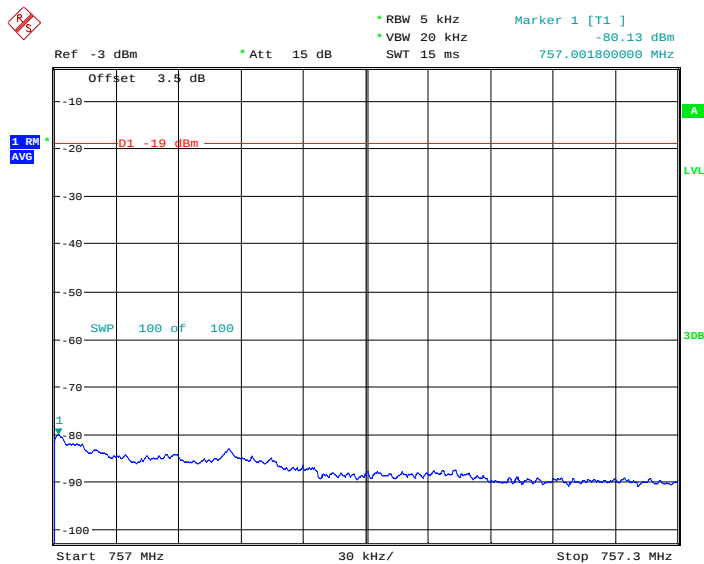

Date: 8.AUG.2019 13:34:02

Ref 7 dBm \* Att 15 dB \* RBW 100 kHz VBW 300 kHz SWT 5 ms Marker 1 [T1] -59.99 dBm 757.000600000 MHz

Offset 3.5 dB


1 RM AVG

D1 -19 dBm

SWP 100 of 100


Start 757 MHz 30 kHz/ Stop 757.3 MHz

### Upper 700MHz LTE Right Side Above AGC

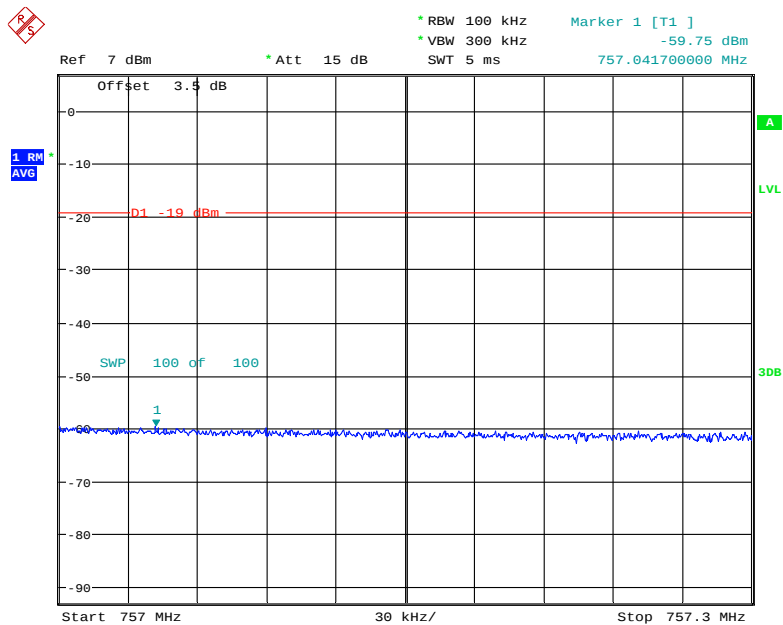


Page 49 of 190

### Cellular Band CDMA Left Side Pre-AGC

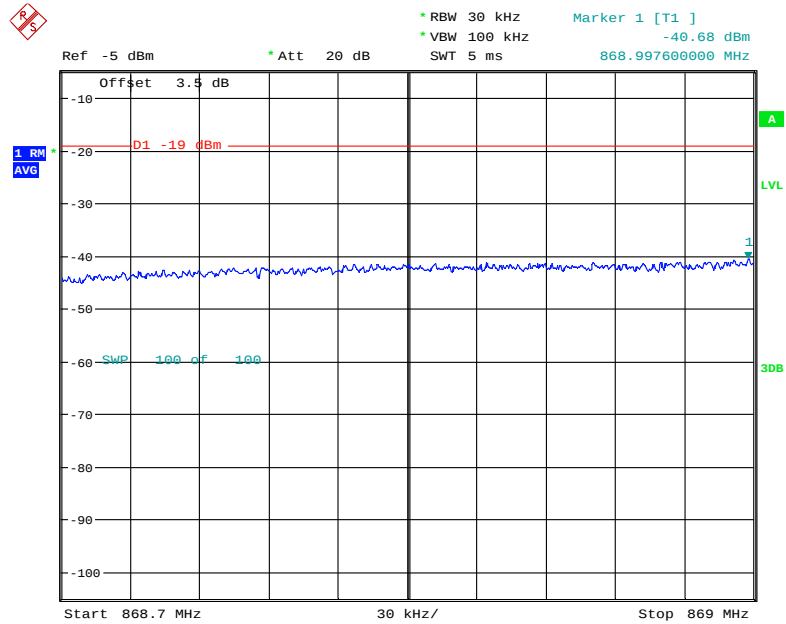


Date: 8.AUG.2019 14:30:20

### Cellular Band CDMA Left Side Above AGC

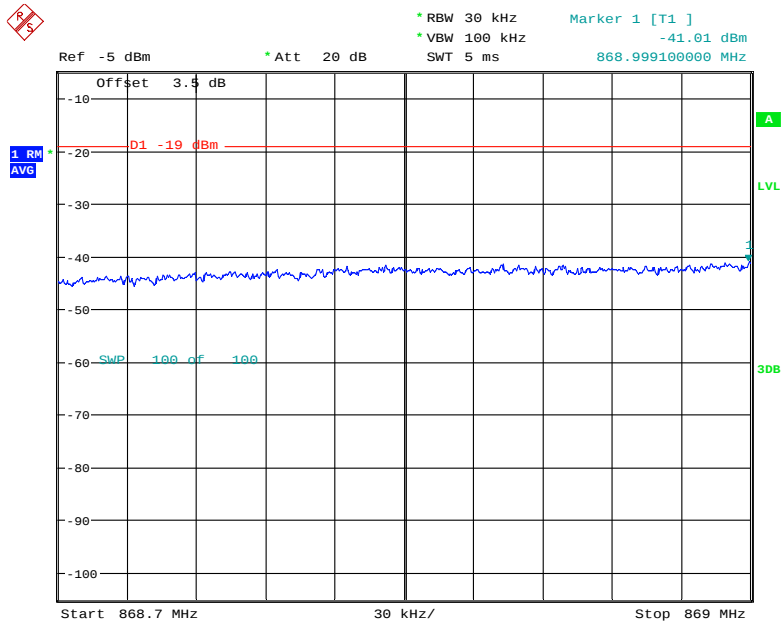


Date: 8.AUG.2019 14:30:37

### Cellular Band GSM Left Side Pre-AGC

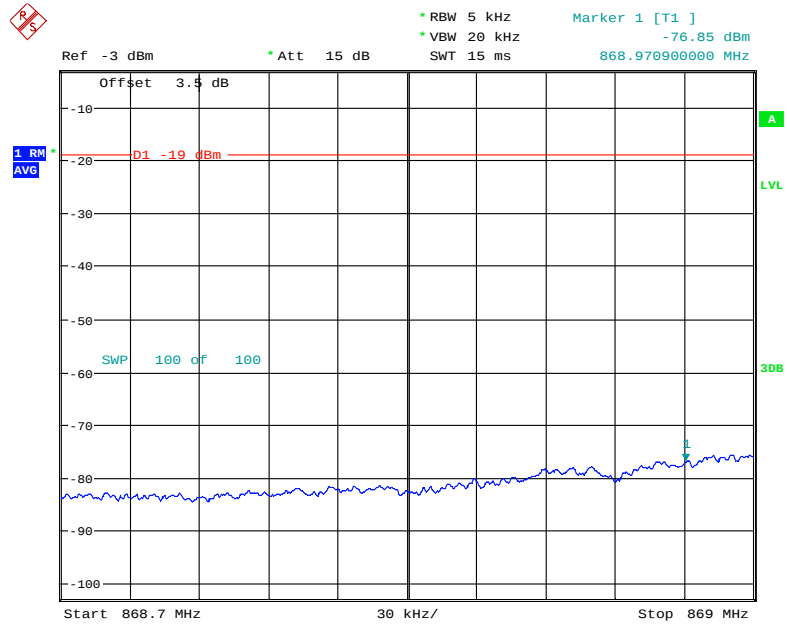


Date: 8.AUG.2019 13:23:13

### Cellular Band GSM Left Side Above AGC

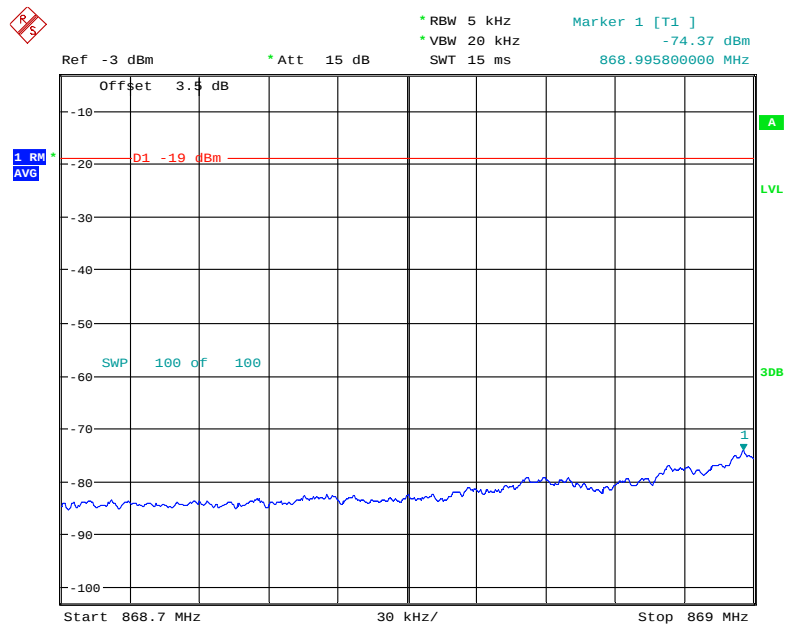


Date: 8.AUG.2019 13:23:54

### Cellular Band LTE Left Side Pre-AGC

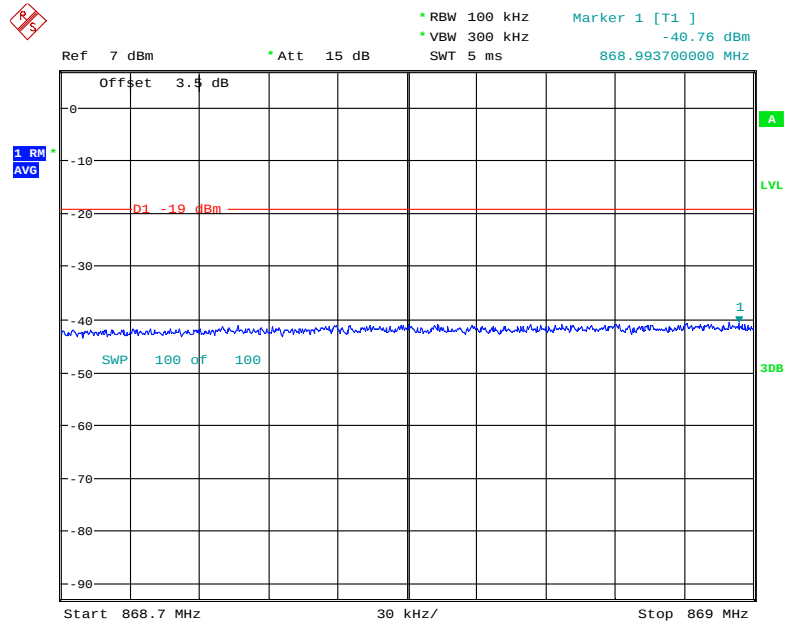


Date: 8.AUG.2019 13:00:33

### Cellular Band LTE Left Side Above AGC

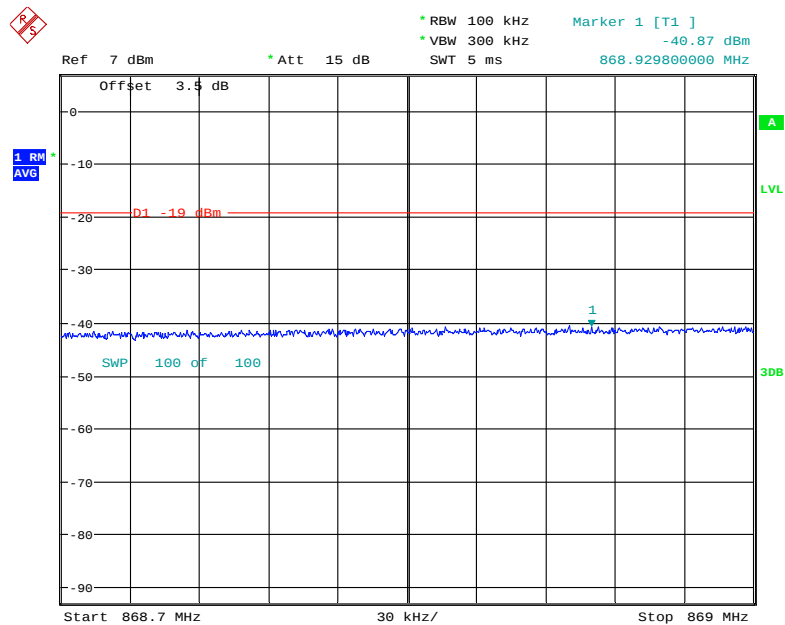


Date: 8.AUG.2019 13:00:49

### Cellular Band CDMA Right Side Pre-AGC

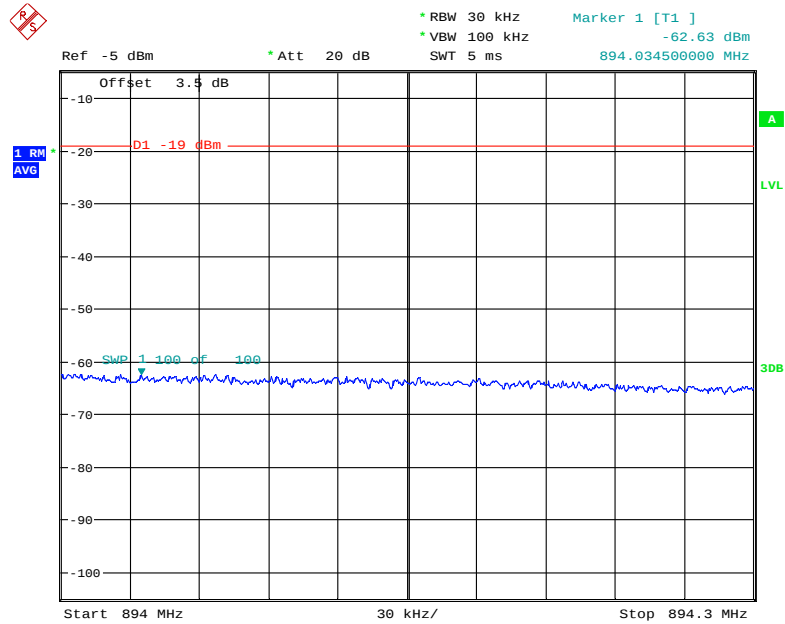


Date: 8.AUG.2019 14:31:12

### Cellular Band CDMA Right Side Above AGC

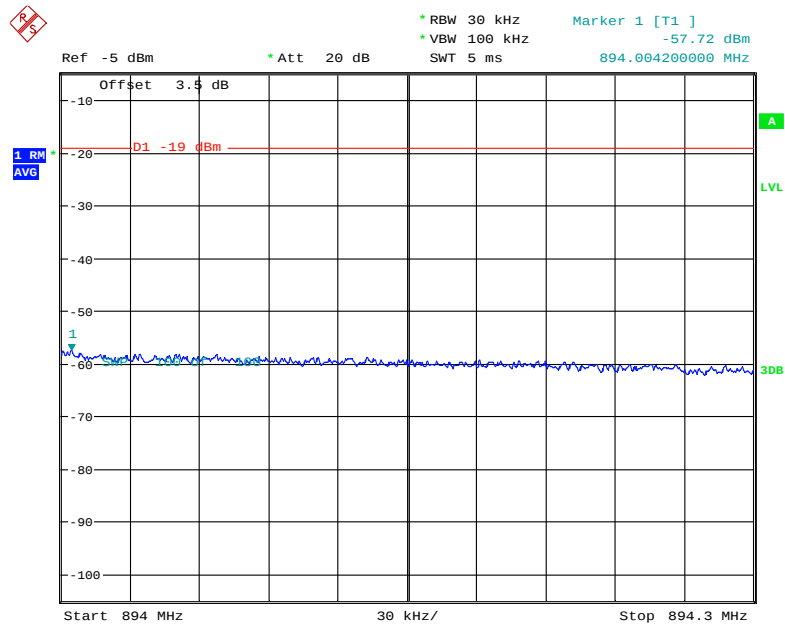


Date: 8.AUG.2019 14:31:33

### Cellular Band GSM Right Side Pre-AGC

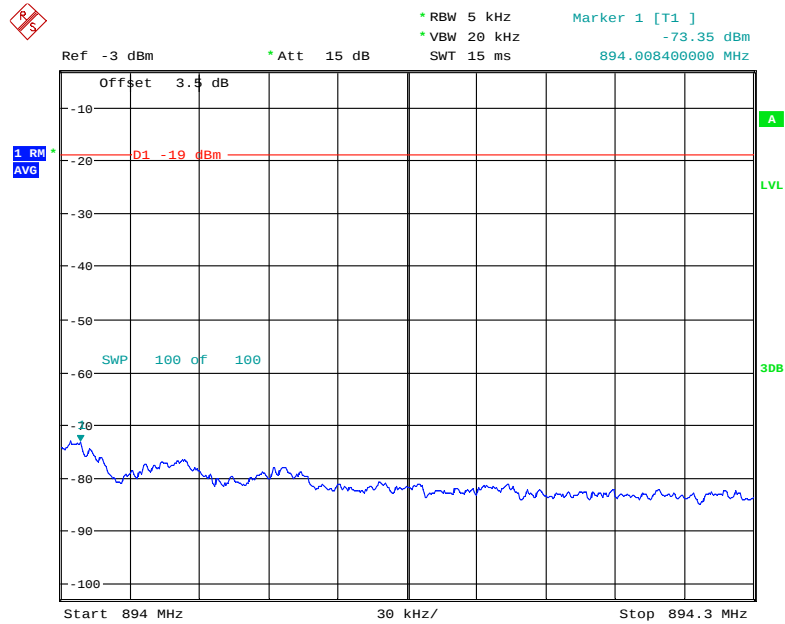


Date: 8.AUG.2019 13:24:23

### Cellular Band GSM Right Side Above AGC

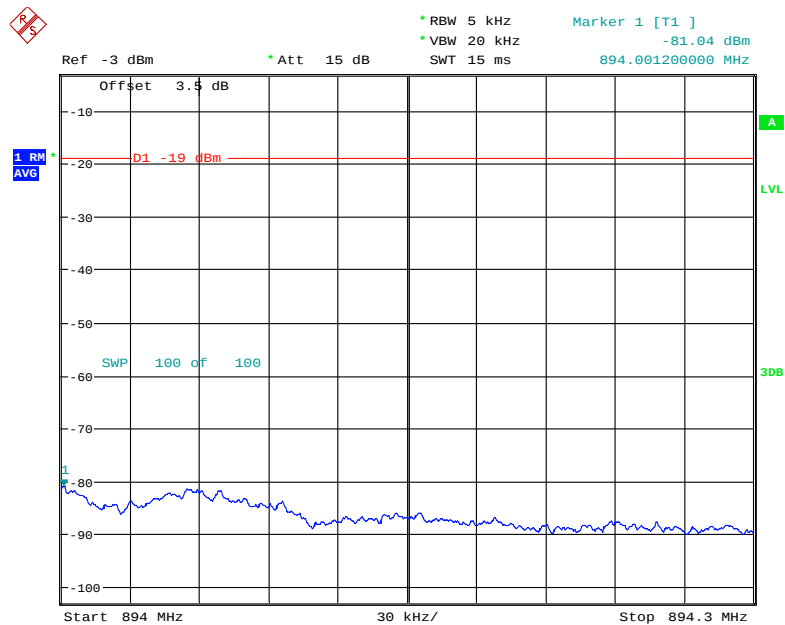


Date: 8.AUG.2019 13:24:44

### Cellular Band LTE Right Side Pre-AGC

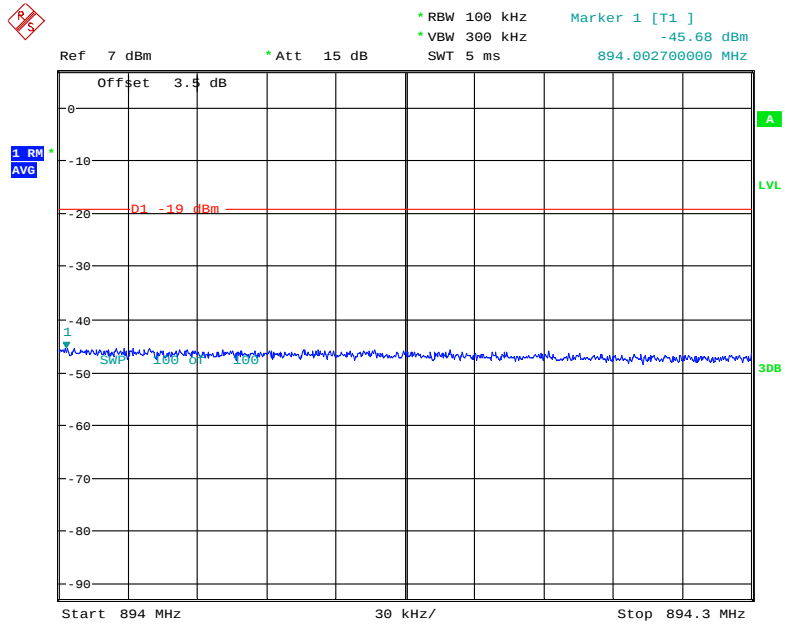


Date: 8.AUG.2019 13:01:21

### Cellular Band LTE Right Side Above AGC

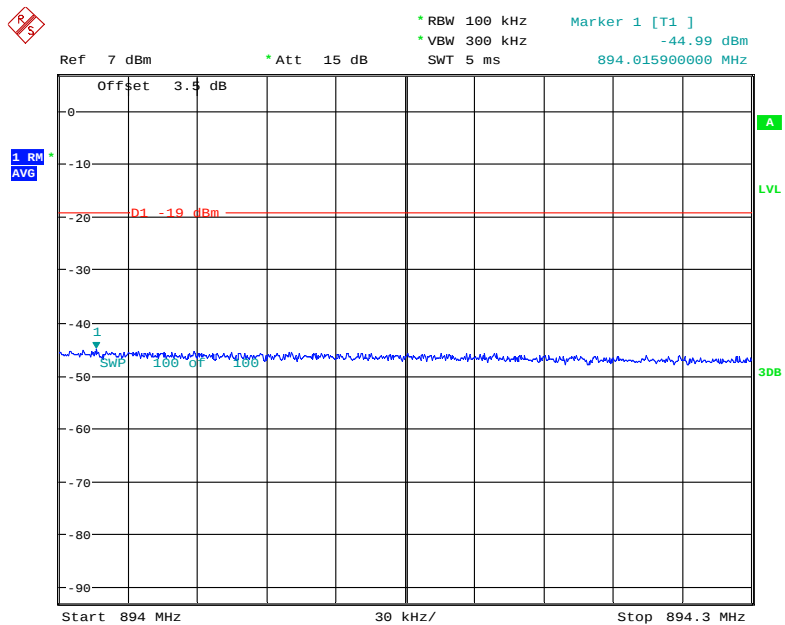


Date: 8.AUG.2019 13:01:42

### PCS Band CDMA Left Side Pre-AGC

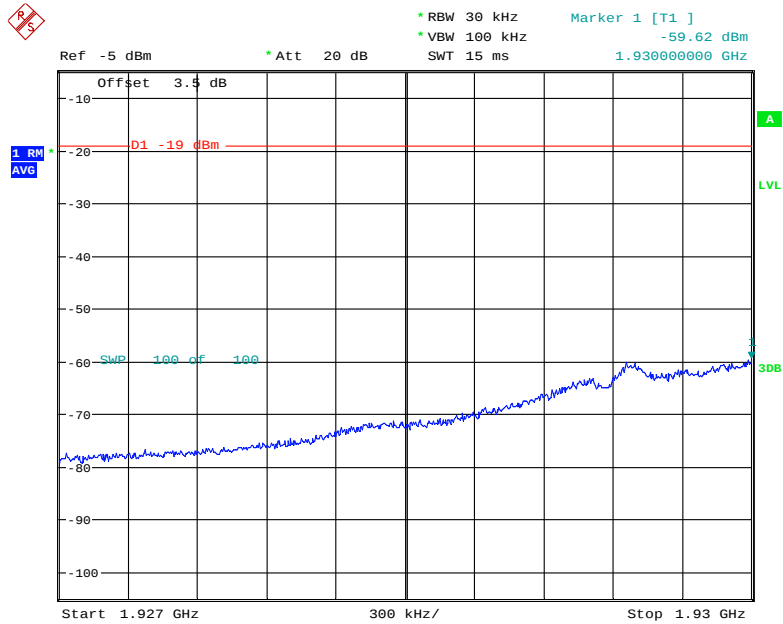


Date: 8.AUG.2019 14:21:50

### PCS Band CDMA Left Side Above AGC

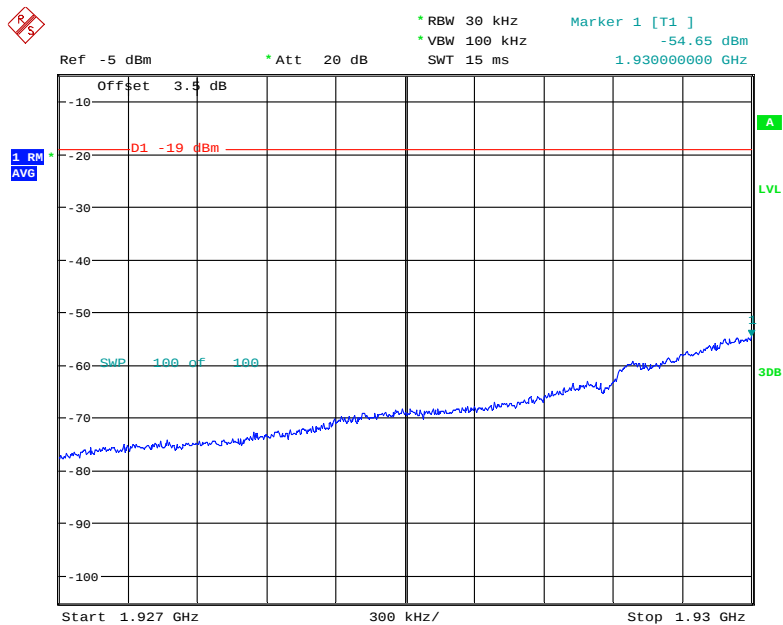


Date: 8.AUG.2019 14:21:24

### PCS Band GSM Left Side Pre-AGC

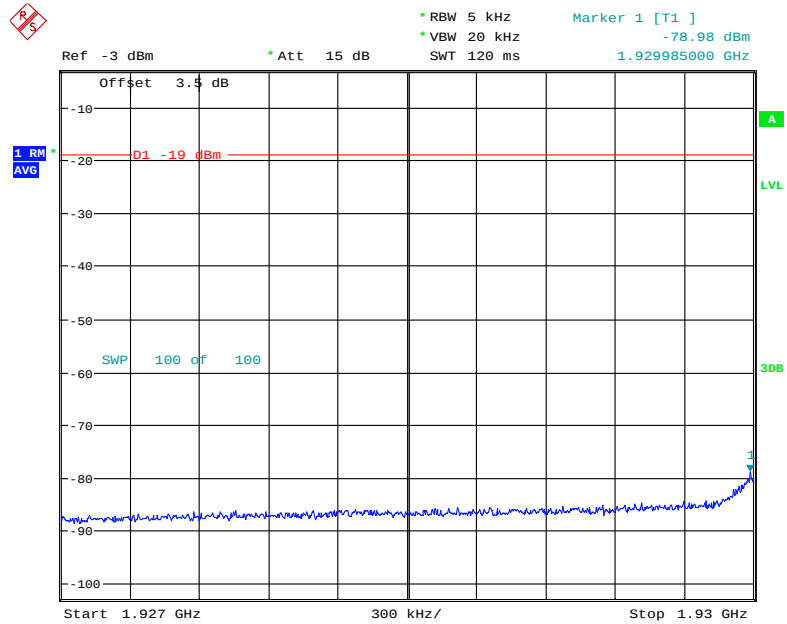


Date: 8.AUG.2019 13:19:19

### PCS Band GSM Left Side Above AGC

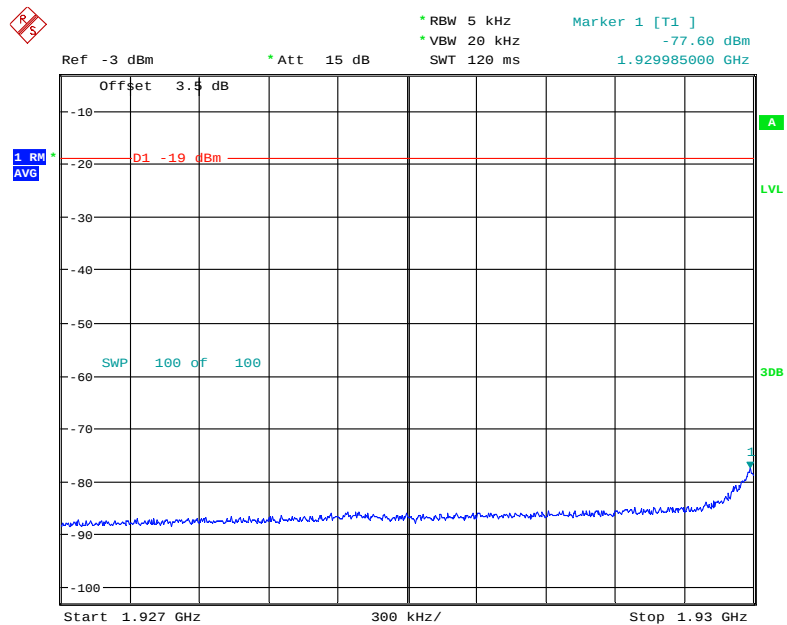


Date: 8.AUG.2019 13:19:41

### PCS Band LTE Left Side Pre-AGC

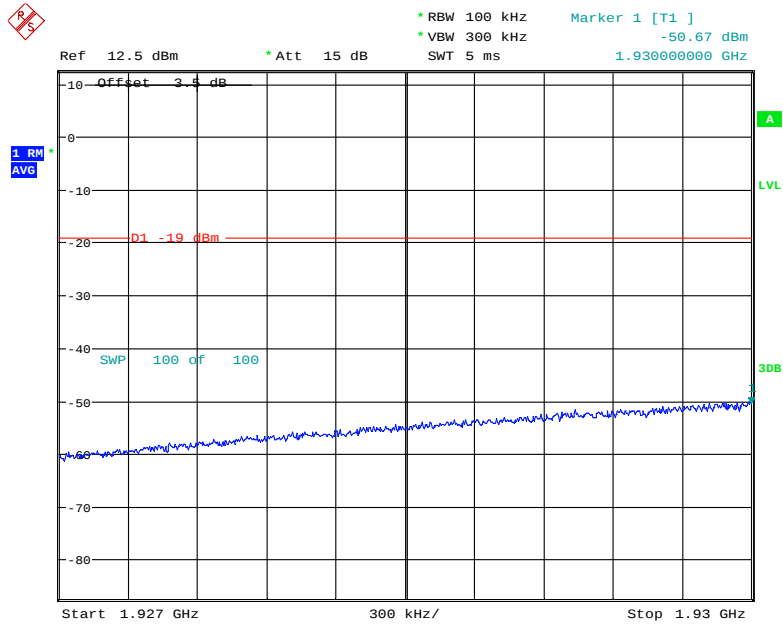


Date: 8.AUG.2019 12:48:14

### PCS Band LTE Left Side Above AGC

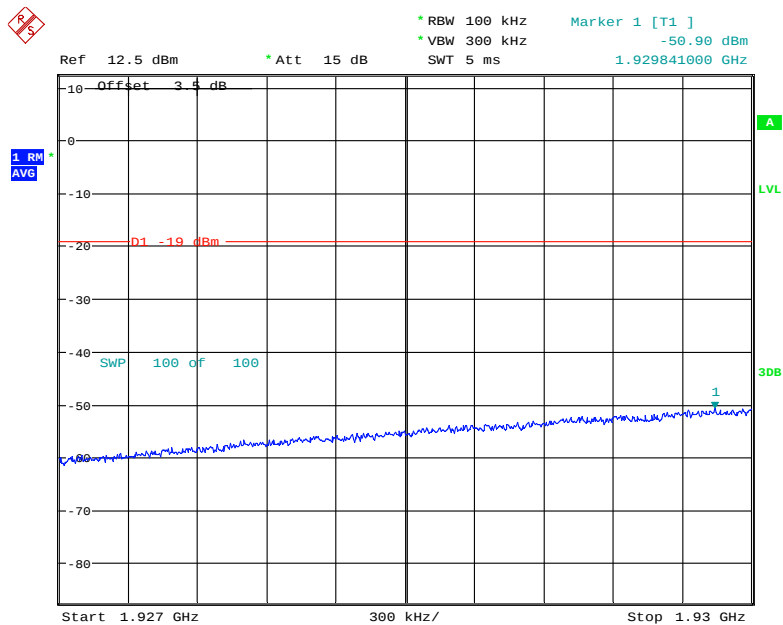


Date: 8.AUG.2019 12:49:37

### PCS Band CDMA Right Side Pre-AGC

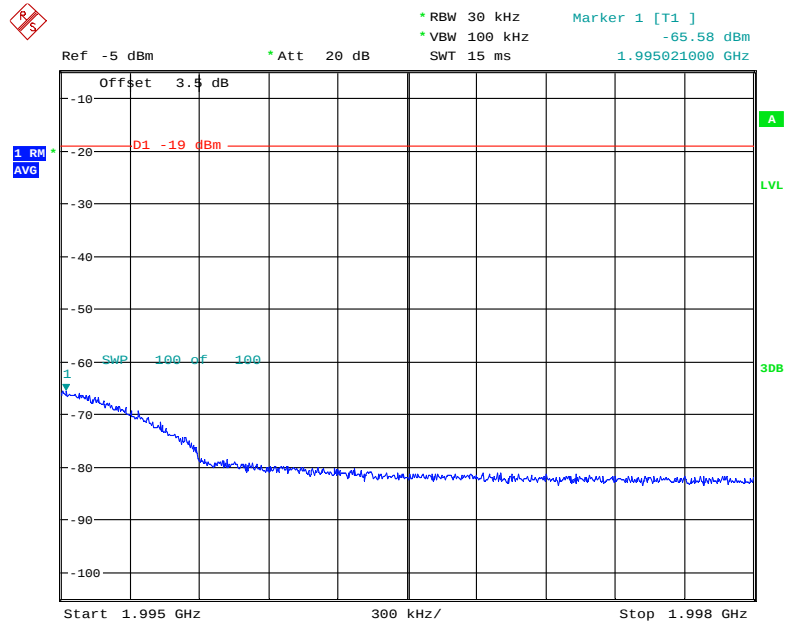


Date: 8.AUG.2019 14:22:42

### PCS Band CDMA Right Side Above AGC

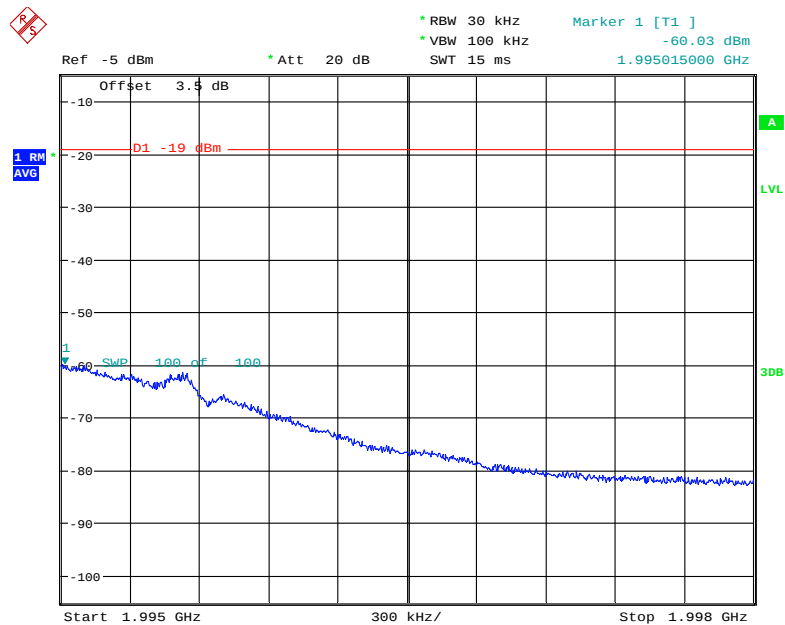


Date: 8.AUG.2019 14:23:01

### PCS Band GSM Right Side Pre-AGC

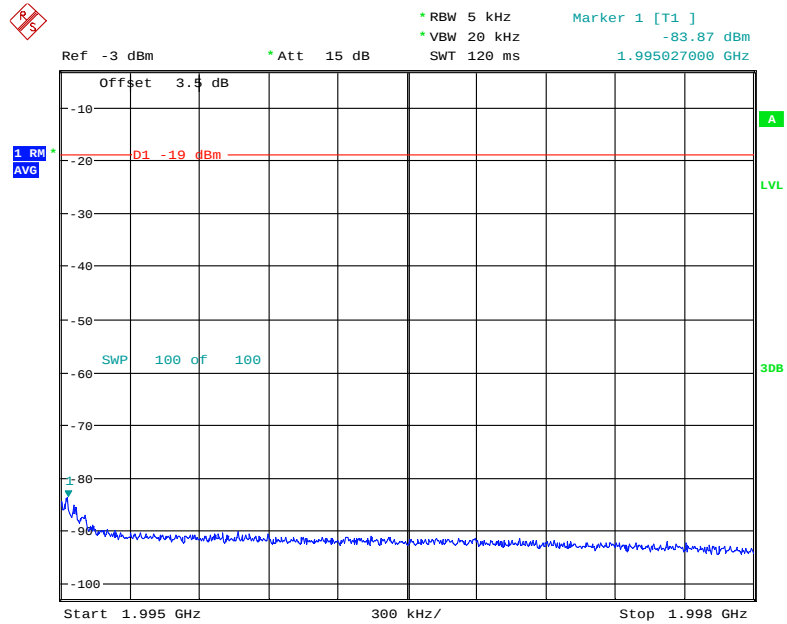


Date: 8.AUG.2019 13:21:06

### PCS Band GSM Right Side Above AGC

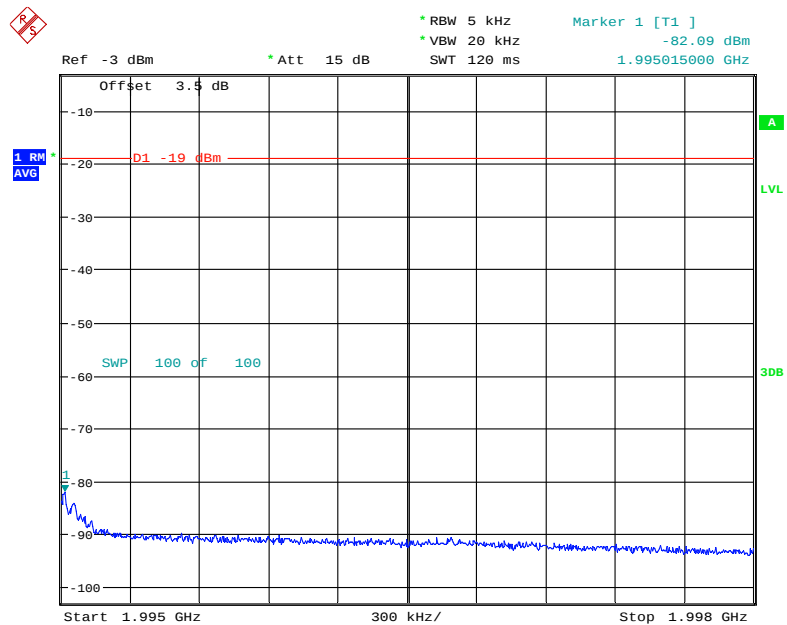


Date: 8.AUG.2019 13:21:18

### PCS Band LTE Right Side Pre-AGC

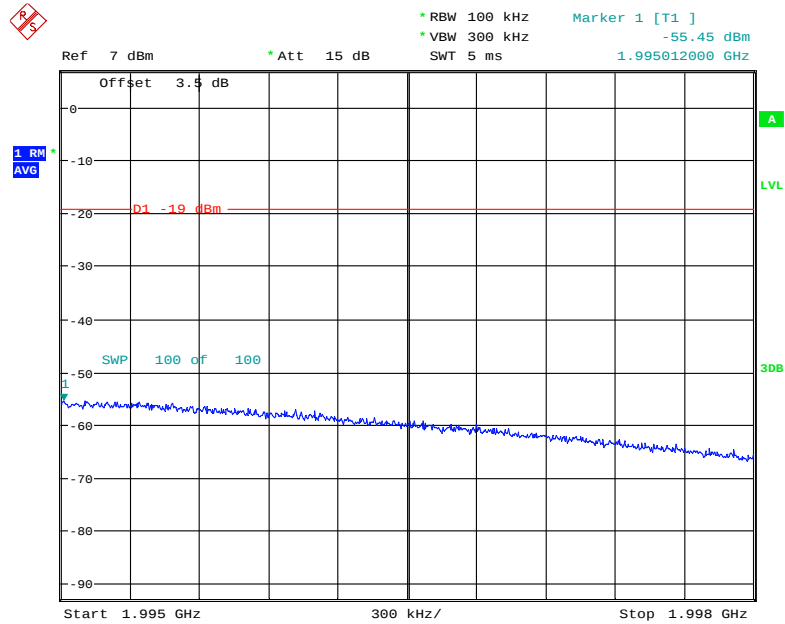


Date: 8.AUG.2019 12:50:56

### PCS Band LTE Right Side 2107MHz Above AGC

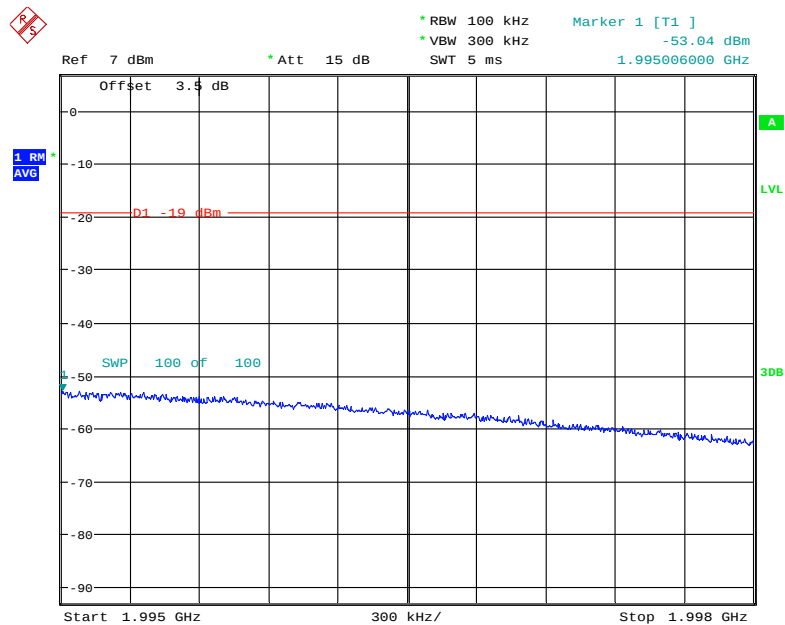


Date: 8.AUG.2019 12:51:31

### AWS Band CDMA Left Side Pre-AGC

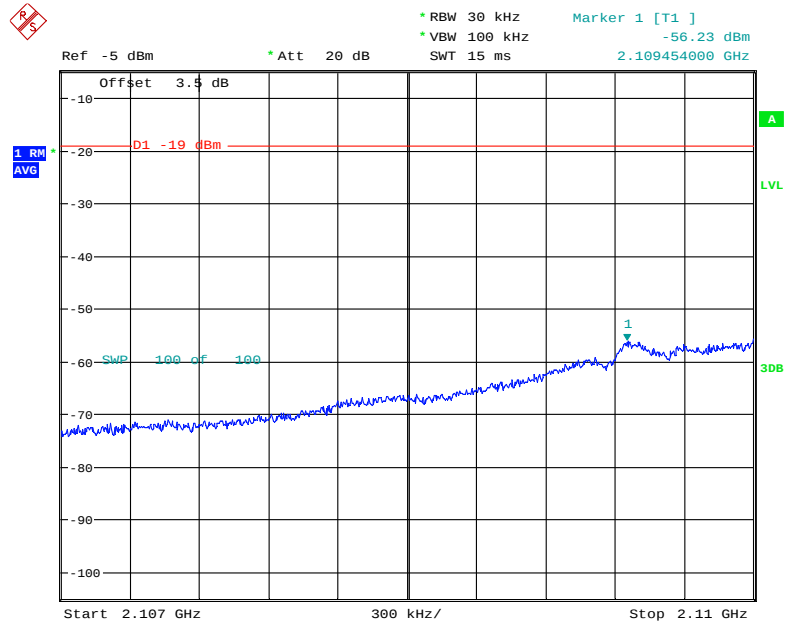


Date: 8.AUG.2019 14:23:48

### AWS Band CDMA Left Side Above AGC

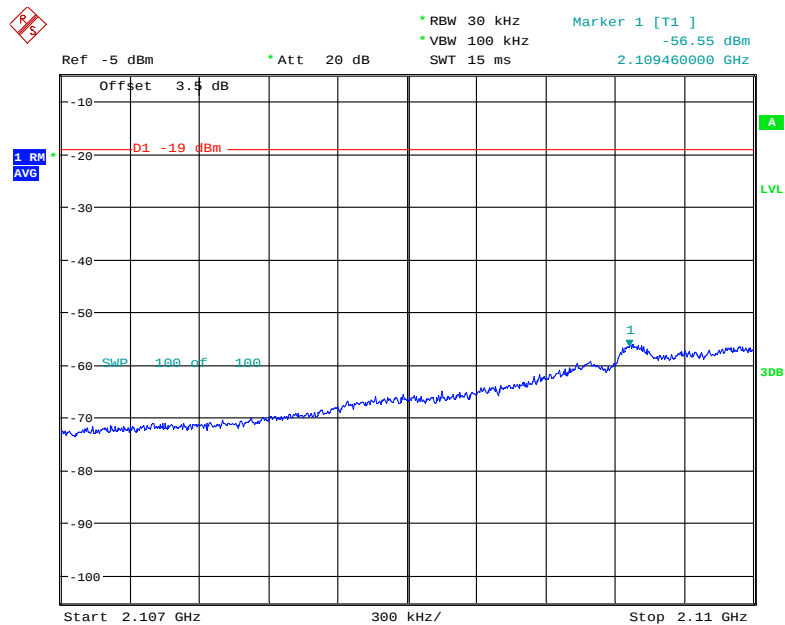


Date: 8.AUG.2019 14:24:04

### AWS Band GSM Left Side Pre-AGC

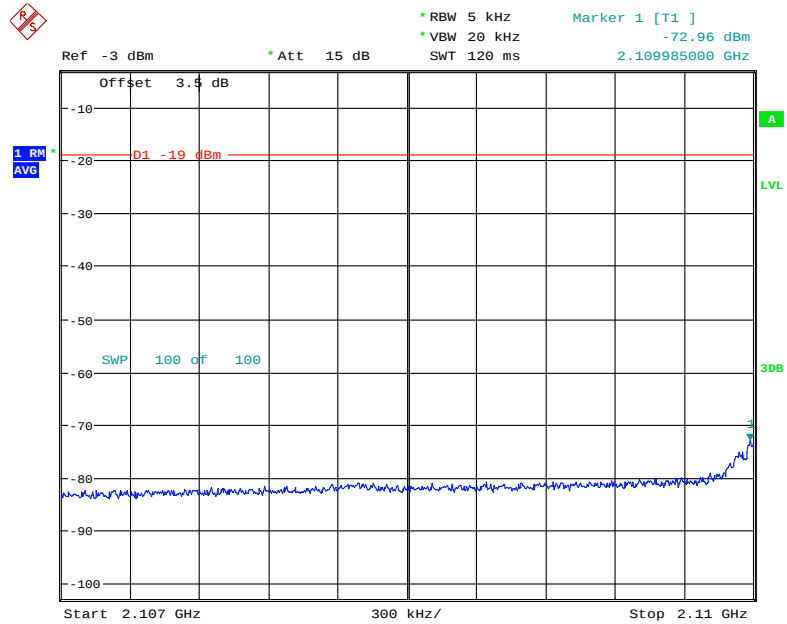


Date: 8.AUG.2019 13:25:49

### AWS Band GSM Left Side Above AGC

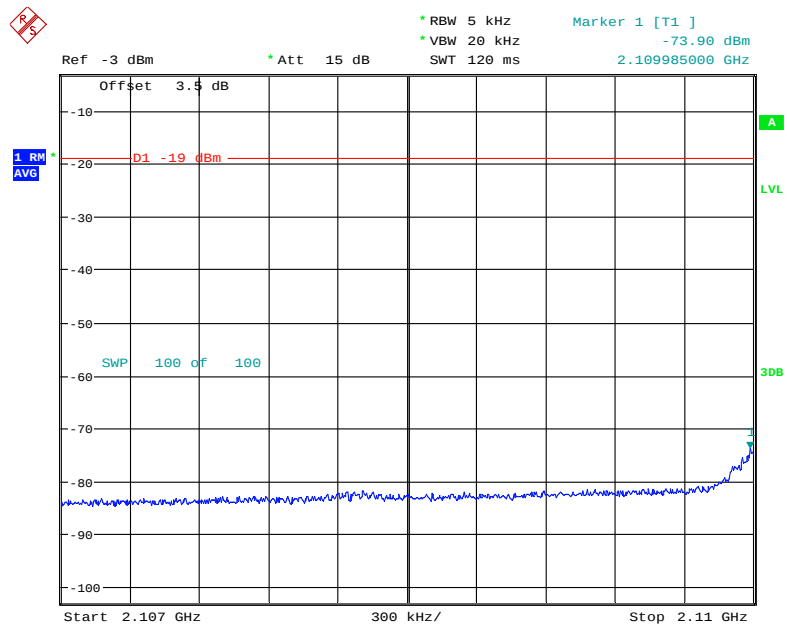


Date: 8.AUG.2019 13:26:26

### AWS Band LTE Left Side Pre-AGC

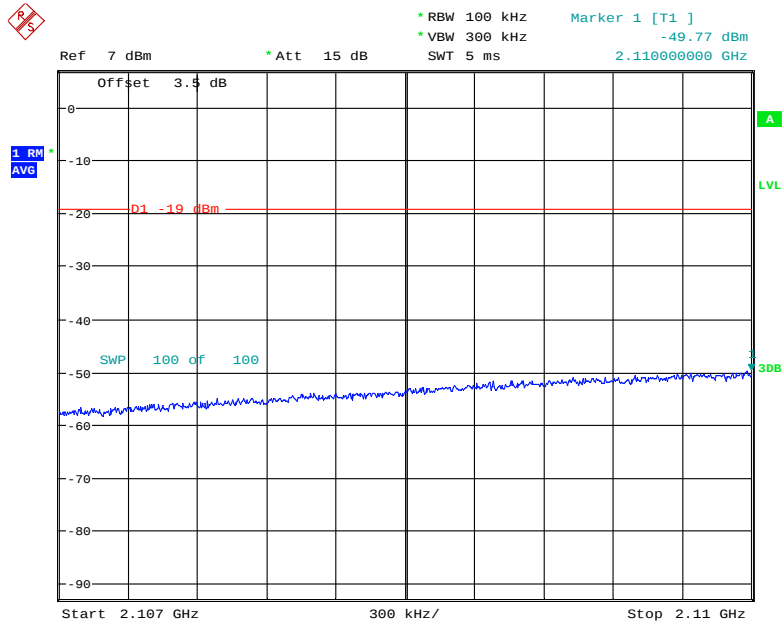


Date: 8.AUG.2019 12:52:46

### AWS Band LTE Left Side Above AGC

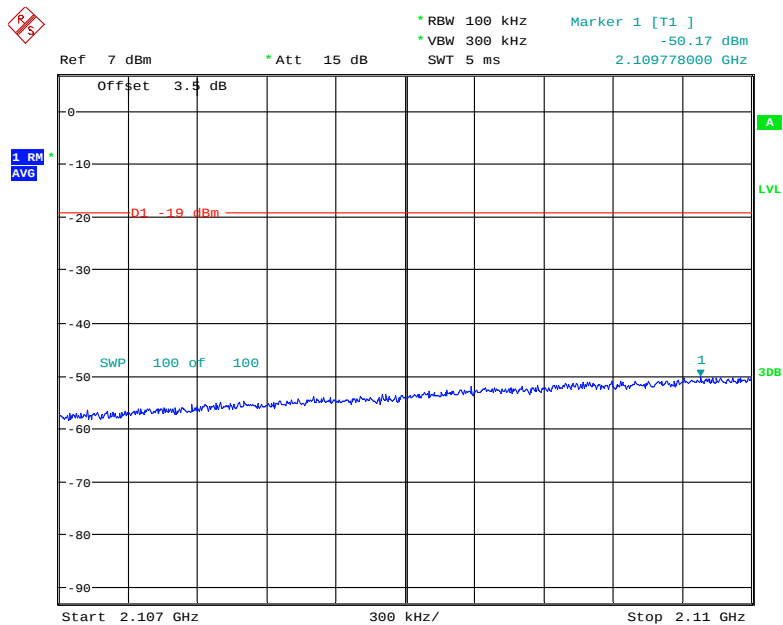


Date: 8.AUG.2019 12:53:29

### AWS Band CDMA Right Side Pre-AGC

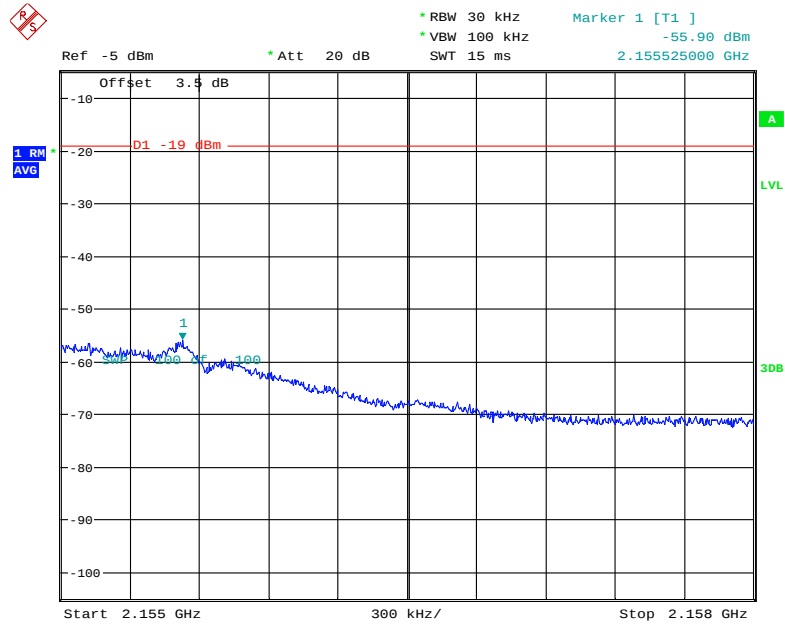


Date: 8.AUG.2019 14:24:34

### AWS Band CDMA Right Side Above AGC

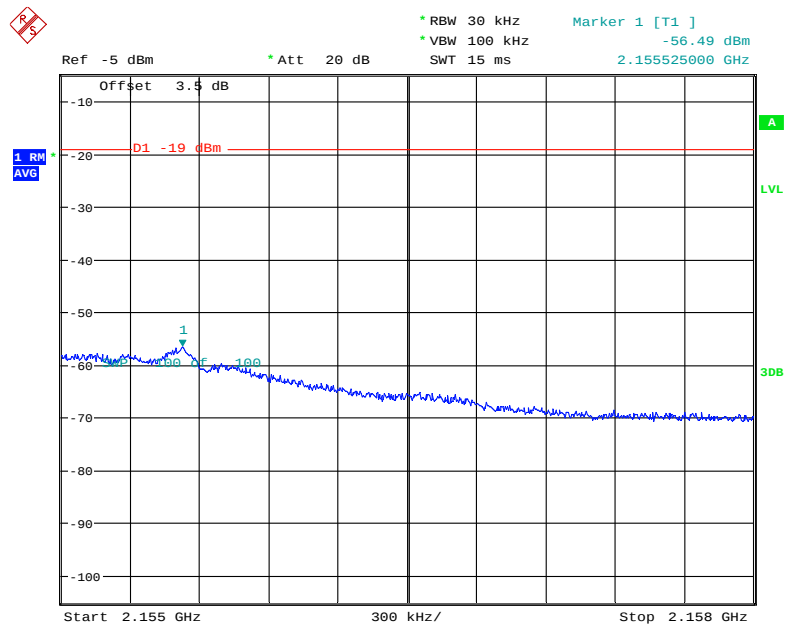


Date: 8.AUG.2019 14:24:55

### AWS Band GSM Right Side Pre-AGC

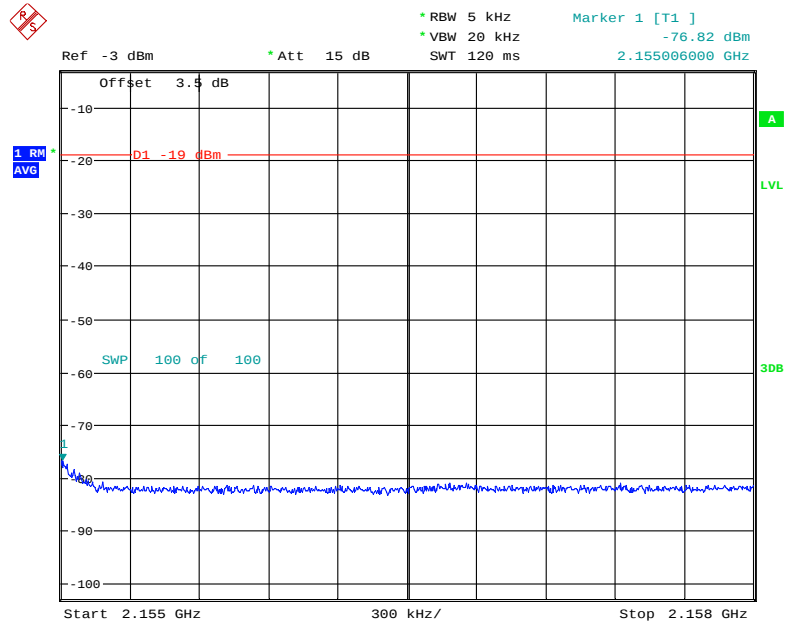


Date: 8.AUG.2019 13:27:51

### AWS Band GSM Right Side Above AGC

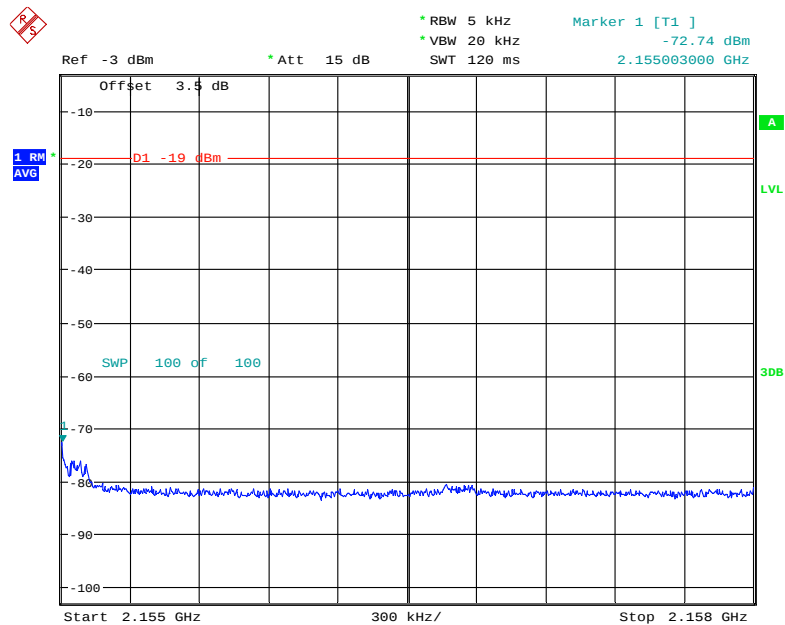


Date: 8.AUG.2019 13:27:27

### AWS Band LTE Right Side Pre-AGC

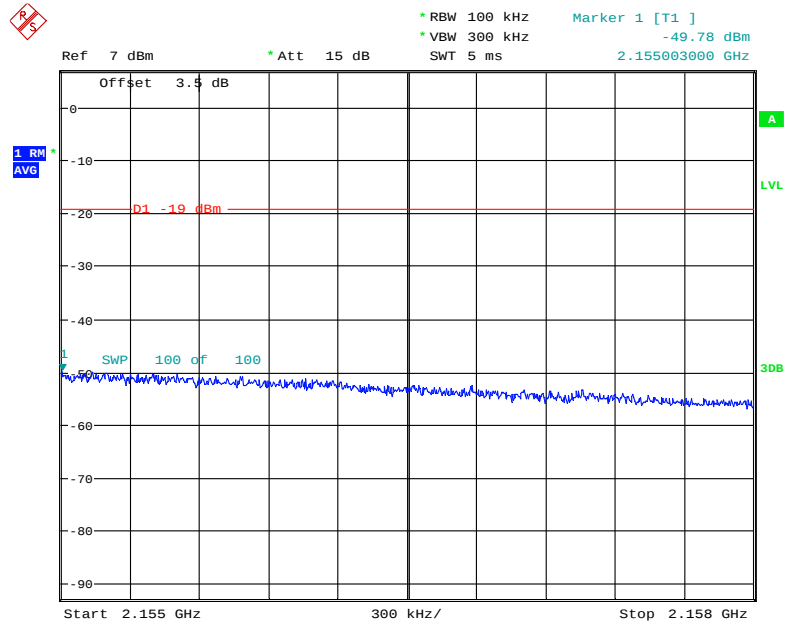

Date: 8.AUG.2019 12:54:03


### AWS Band LTE Right Side Above AGC

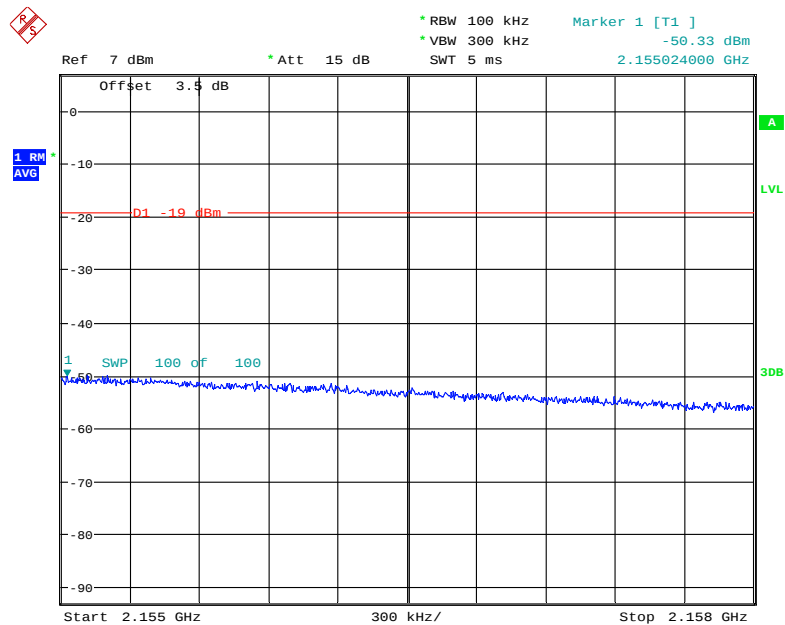

Date: 8.AUG.2019 12:54:23


Uplink

Lower 700MHz CDMA Left Side Pre-AGC

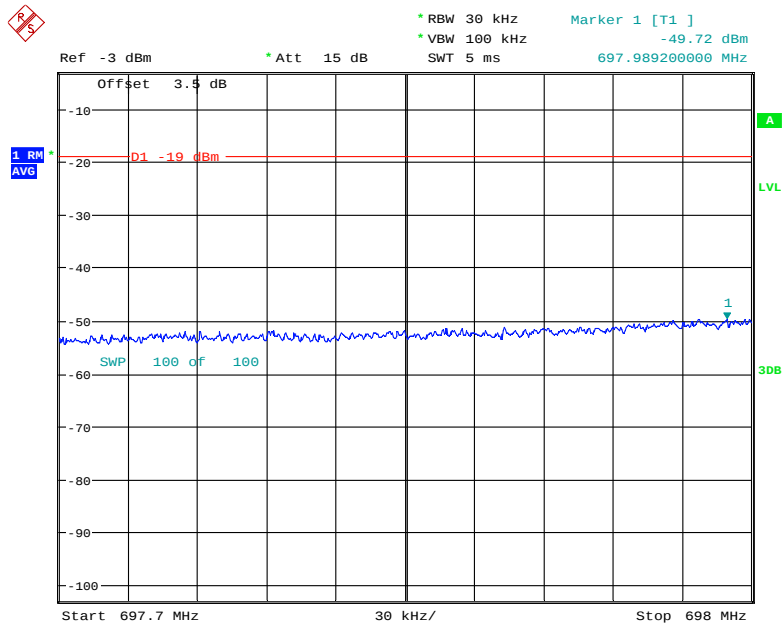


Date: 8.AUG.2019 14:01:11

Lower 700MHz CDMA Left Side Above AGC

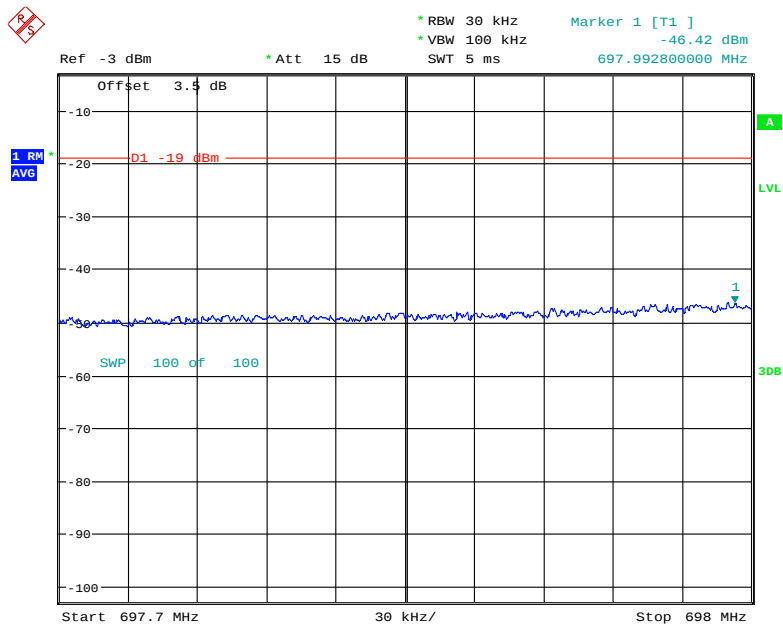


Date: 8.AUG.2019 14:02:38

### Lower 700MHz GSM Left Side Pre-AGC

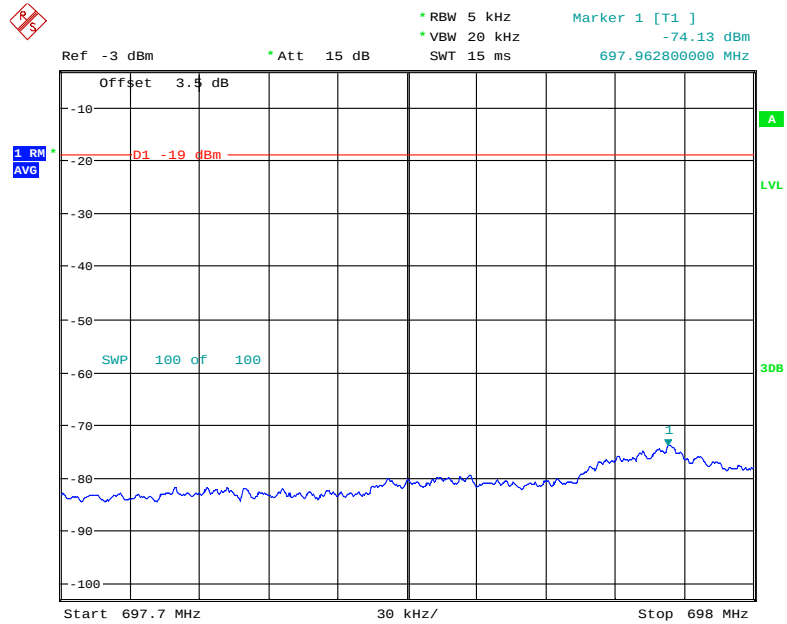


Date: 8.AUG.2019 13:43:43

### Lower 700MHz GSM Left Side Above AGC

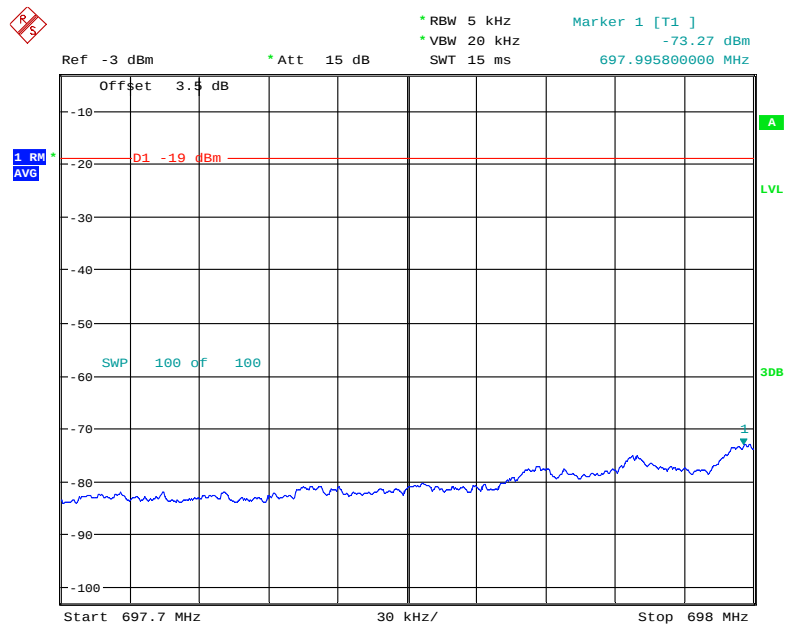


Date: 8.AUG.2019 13:44:12

### Lower 700MHz LTE Left Side Pre-AGC

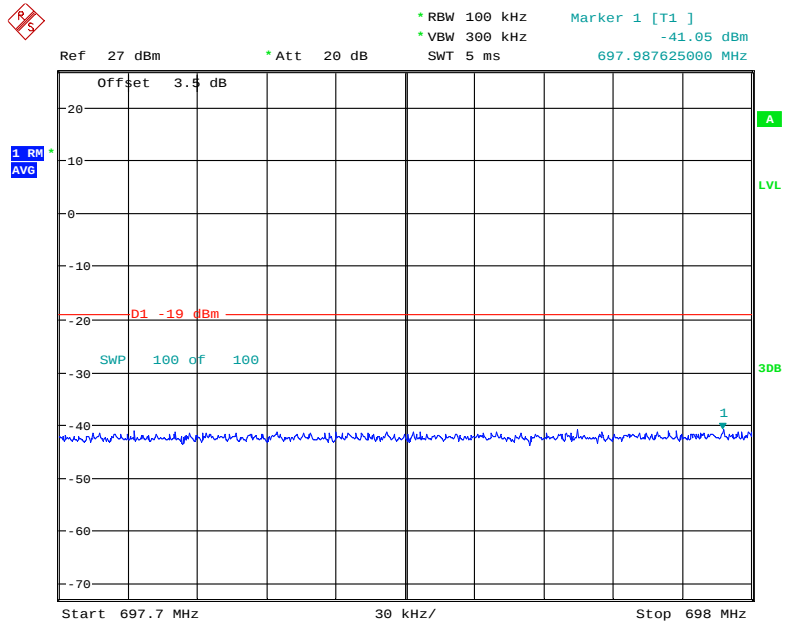


Date: 30.JUL.2019 18:49:27

### Lower 700MHz LTE Left Side Above AGC

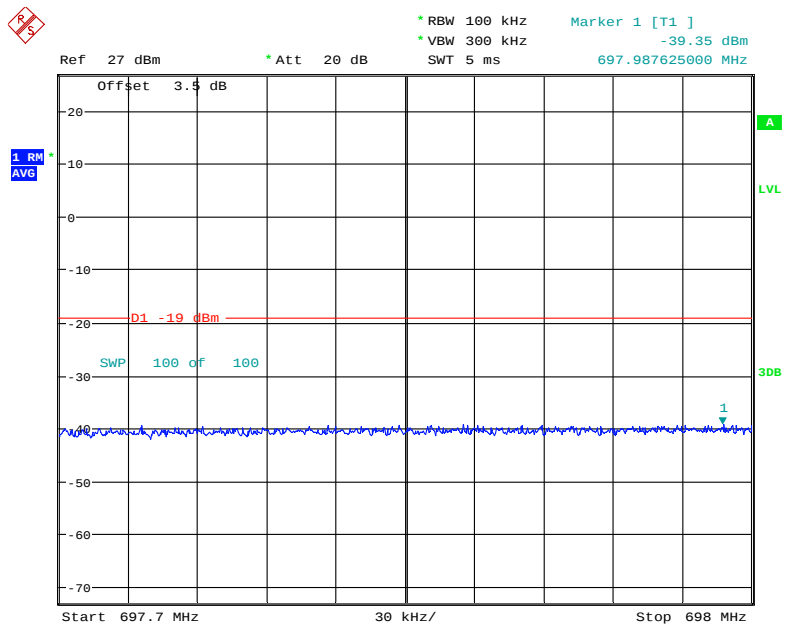


Date: 30.JUL.2019 18:49:47

### Lower 700MHz CDMA Right Side Pre-AGC

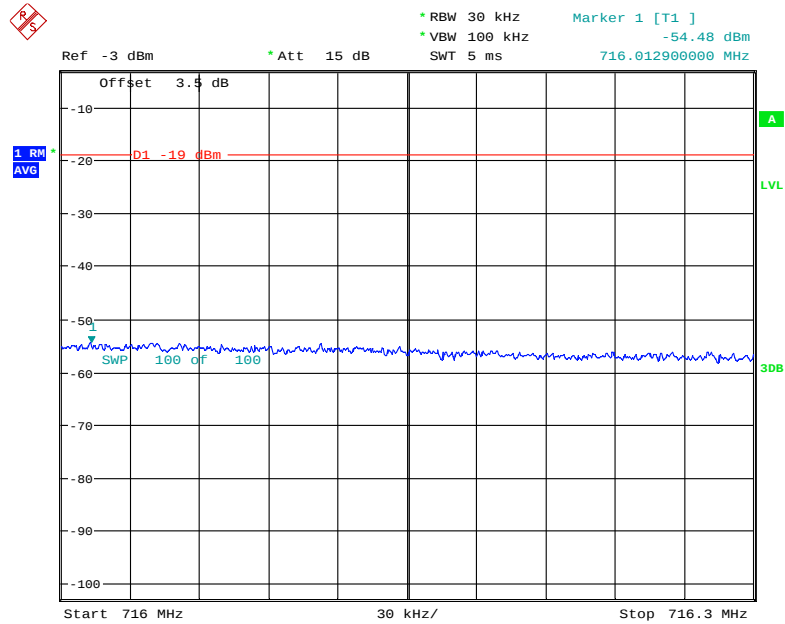


Date: 8.AUG.2019 14:03:41

### Lower 700MHz CDMA Right Side Above AGC

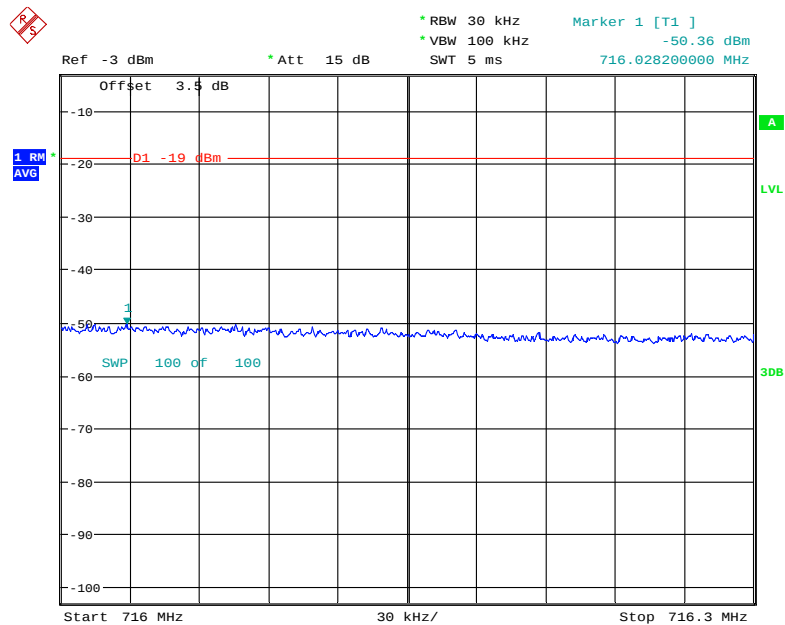


Date: 8.AUG.2019 14:04:10

### Lower 700MHz GSM Right Side Pre-AGC

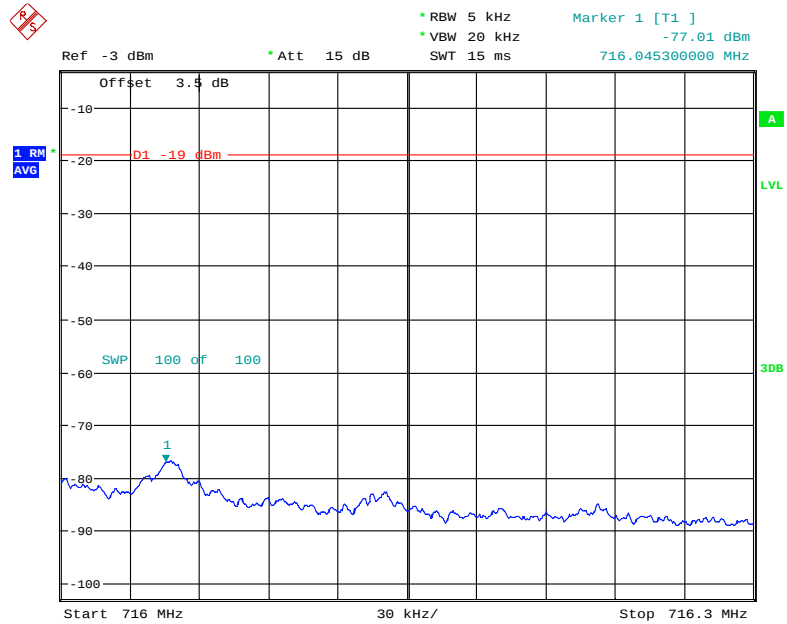


Date: 8.AUG.2019 13:44:39

### Lower 700MHz GSM Right Side Above AGC

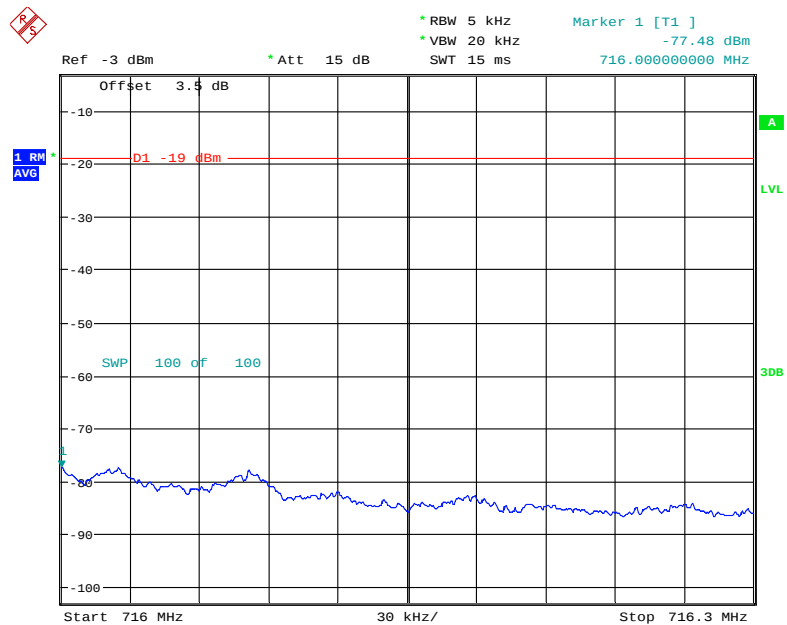


Date: 8.AUG.2019 13:44:52

### Lower 700MHz LTE Right Side Pre-AGC

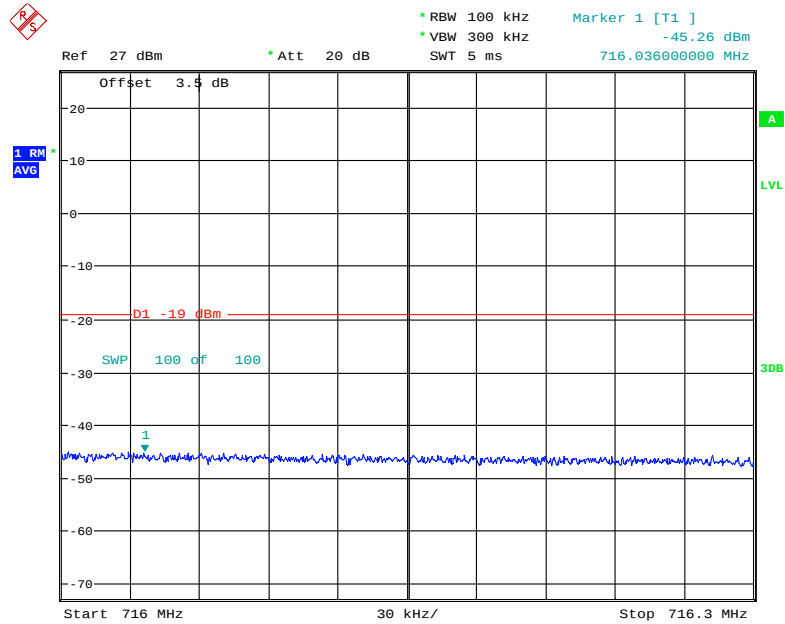


Date: 30.JUL.2019 18:47:21

### Lower 700MHz LTE Right Side Above AGC

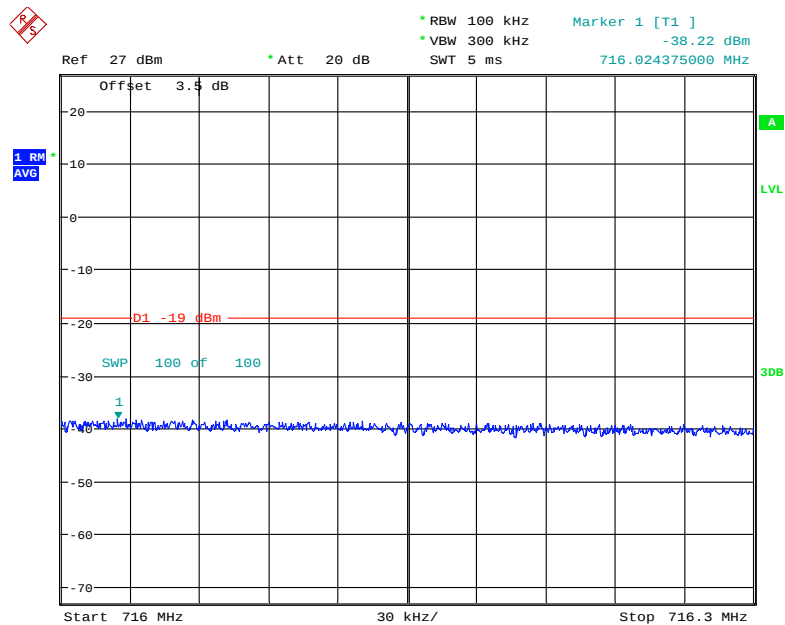


Date: 30.JUL.2019 18:47:42

### Upper 700MHz CDMA Left Side Pre-AGC

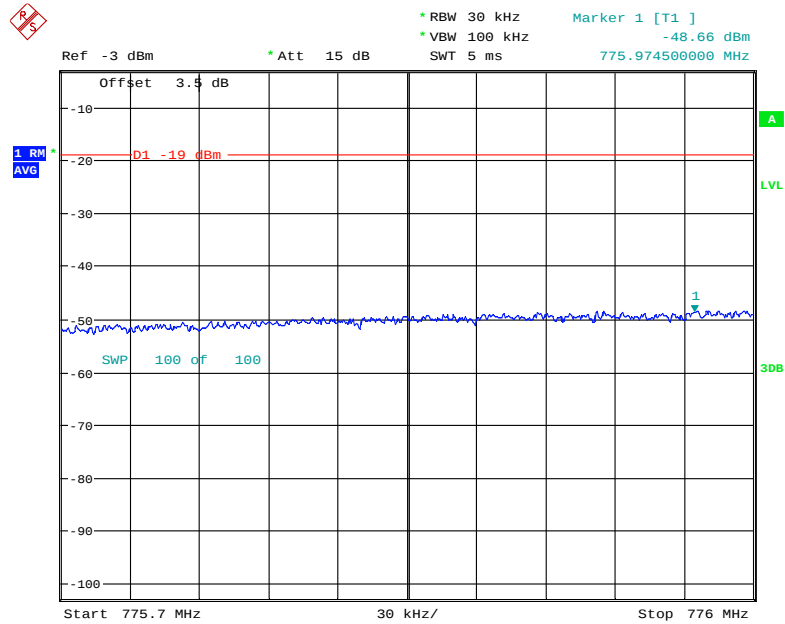


Date: 8.AUG.2019 14:04:49

### Upper 700MHz CDMA Left Side Above AGC

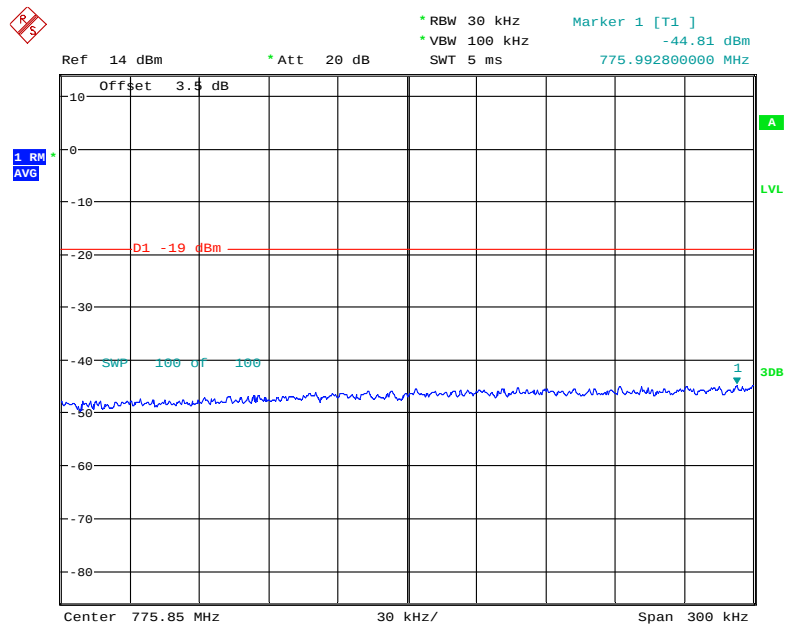


Date: 8.AUG.2019 14:10:31

### Upper 700MHz GSM Left Side Pre-AGC

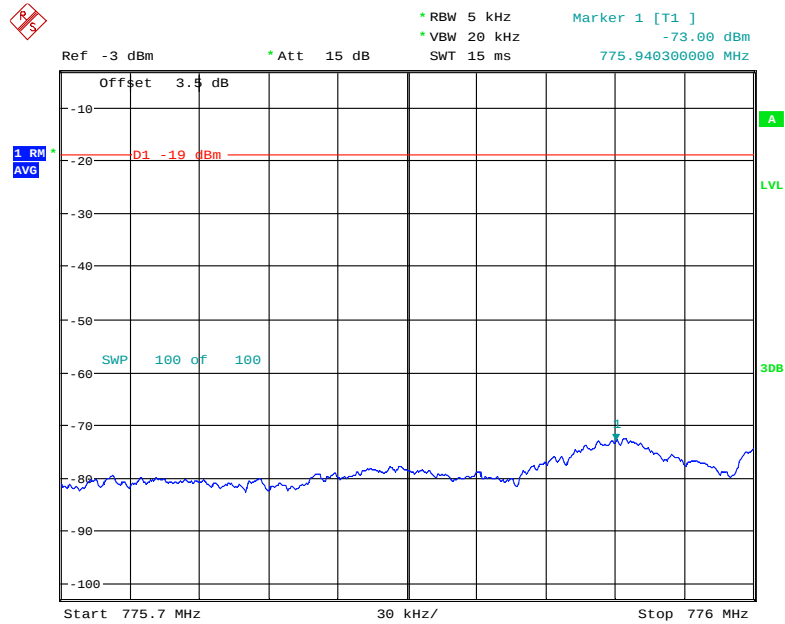


Date: 8.AUG.2019 13:46:56

### Upper 700MHz GSM Left Side Above AGC

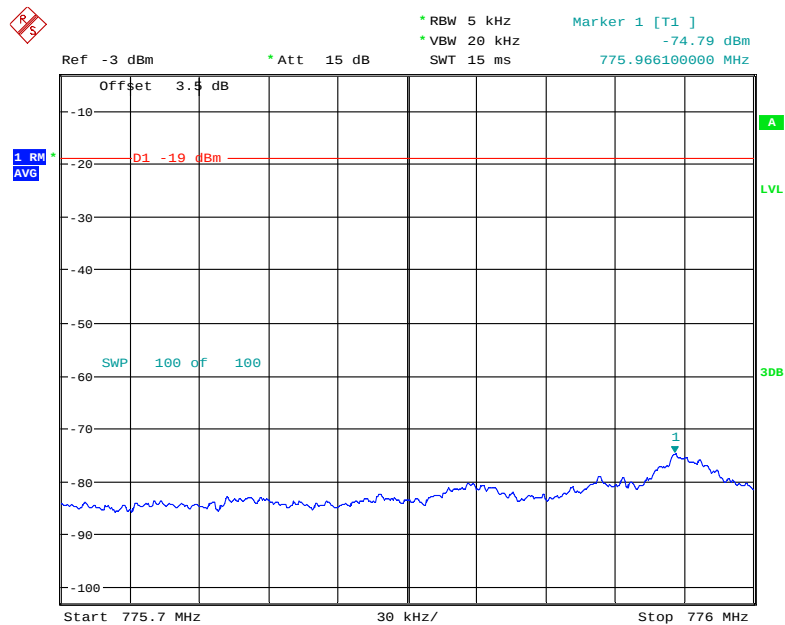


Date: 8.AUG.2019 13:47:23

### Upper 700MHz LTE Left Side Pre-AGC

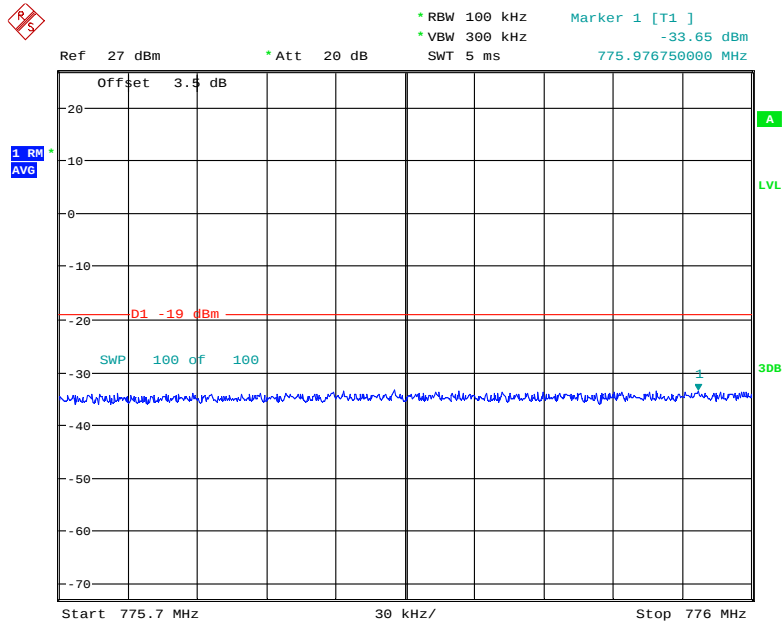


Date: 30.JUL.2019 18:45:08

### Upper 700MHz LTE Left Side Above AGC

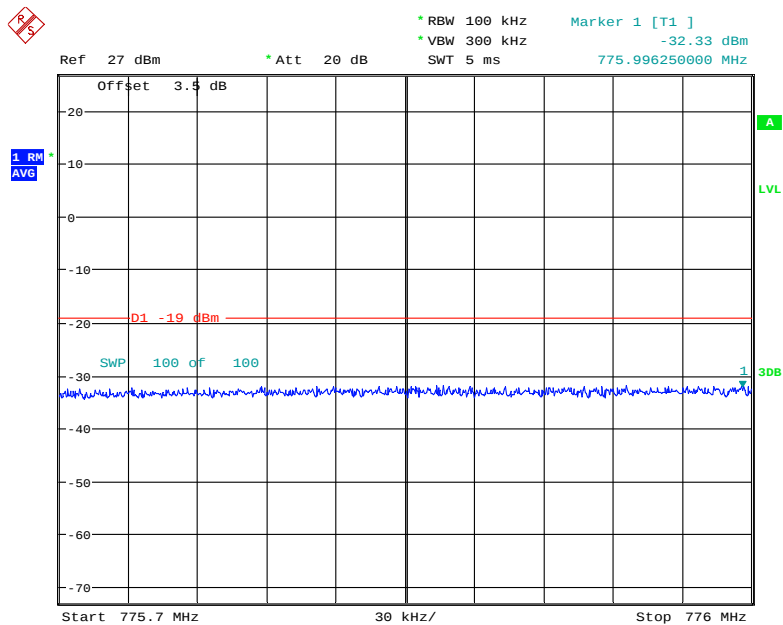


Date: 30.JUL.2019 18:45:22

### Upper 700MHz CDMA Right Side Pre-AGC

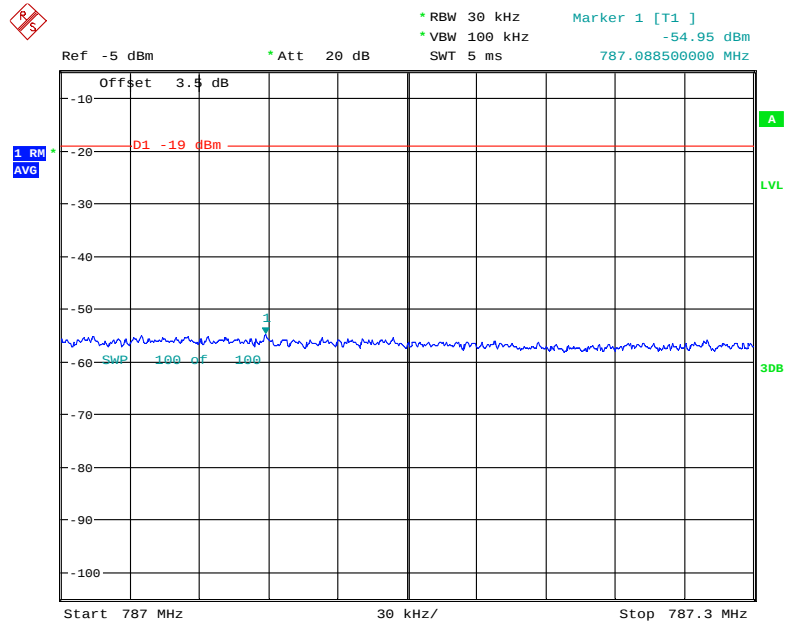


Date: 8.AUG.2019 14:18:46

### Upper 700MHz CDMA Right Side Above AGC

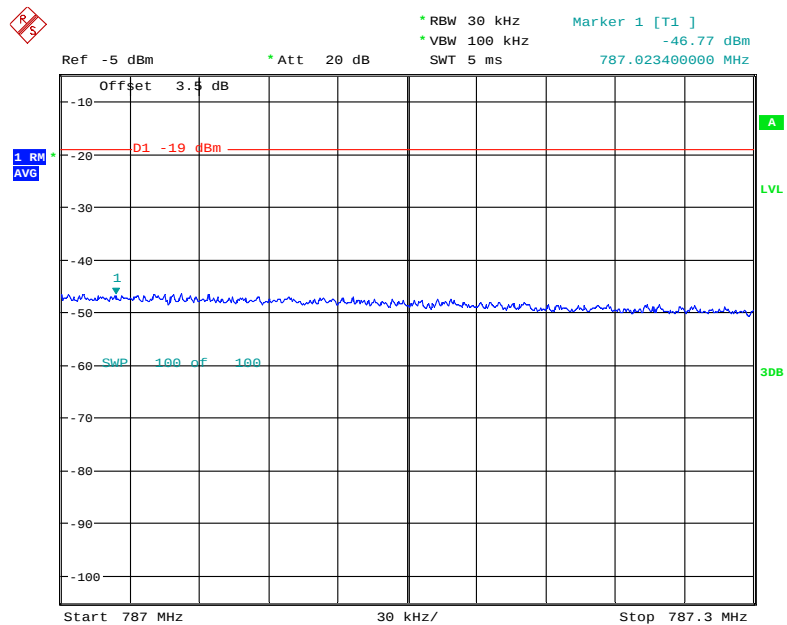


Date: 8.AUG.2019 14:19:36

### Upper 700MHz GSM Right Side Pre-AGC

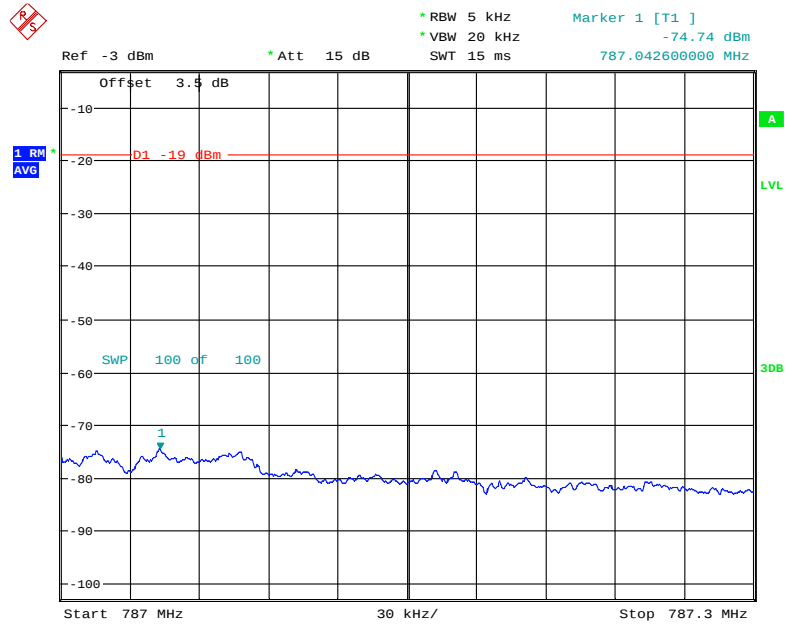


Date: 8.AUG.2019 13:49:05

### Upper 700MHz GSM Right Side Above AGC

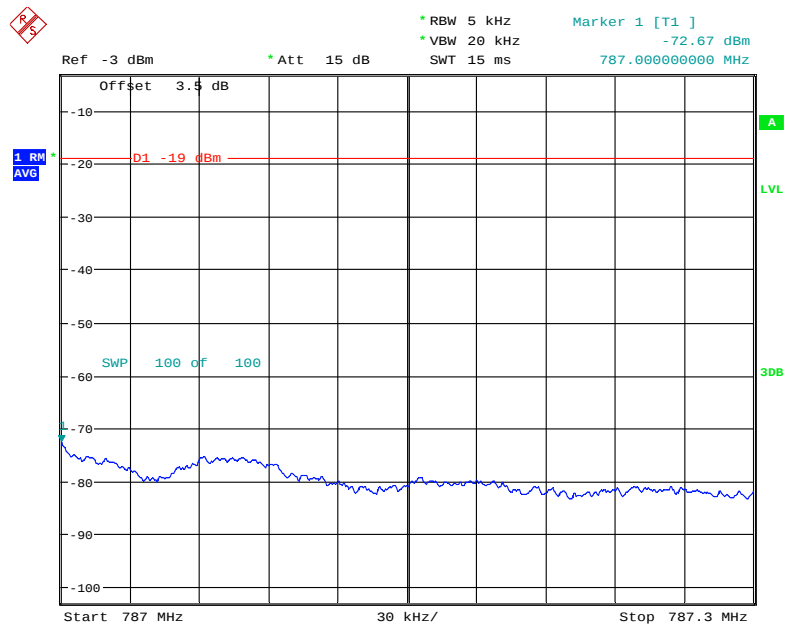


Date: 8.AUG.2019 13:49:23

### Upper 700MHz LTE Right Side Pre-AGC

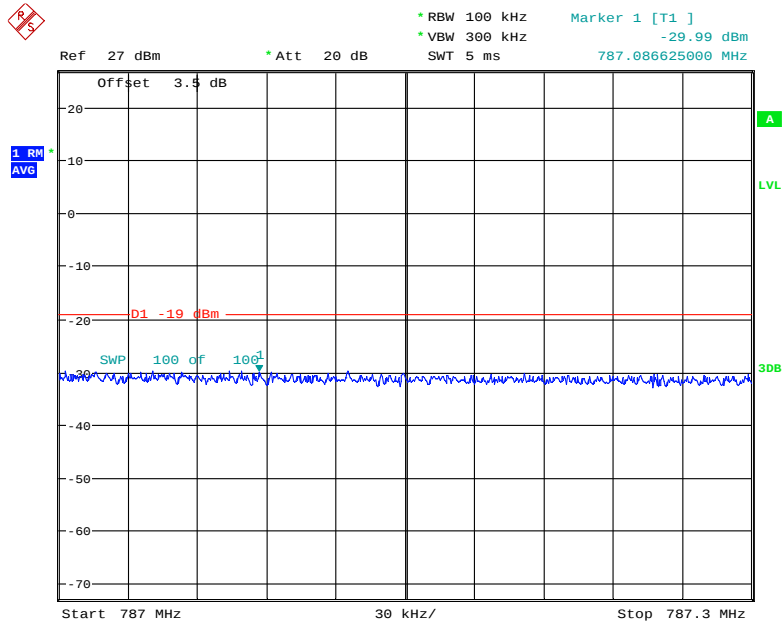


Date: 30.JUL.2019 18:43:08

### Upper 700MHz LTE Right Side Above AGC

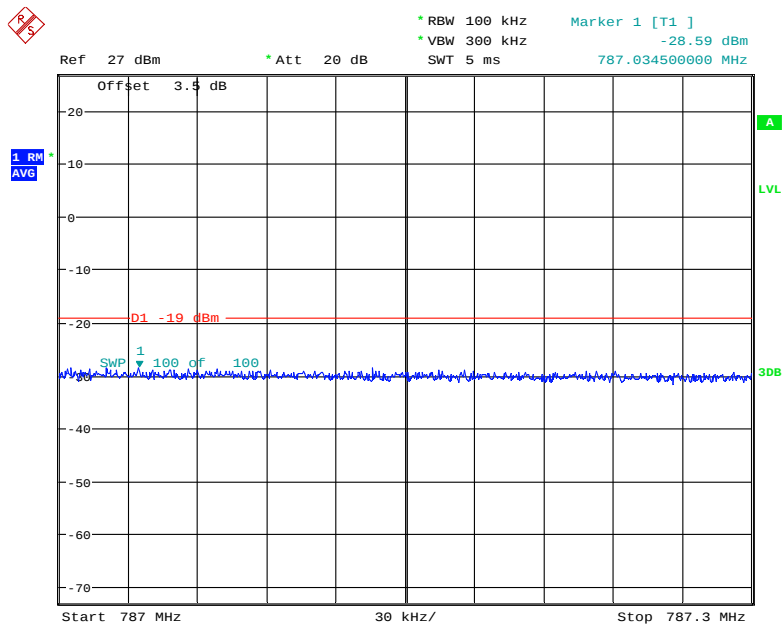


Date: 30.JUL.2019 18:43:34

### Cellular Band CDMA Left Side Pre-AGC

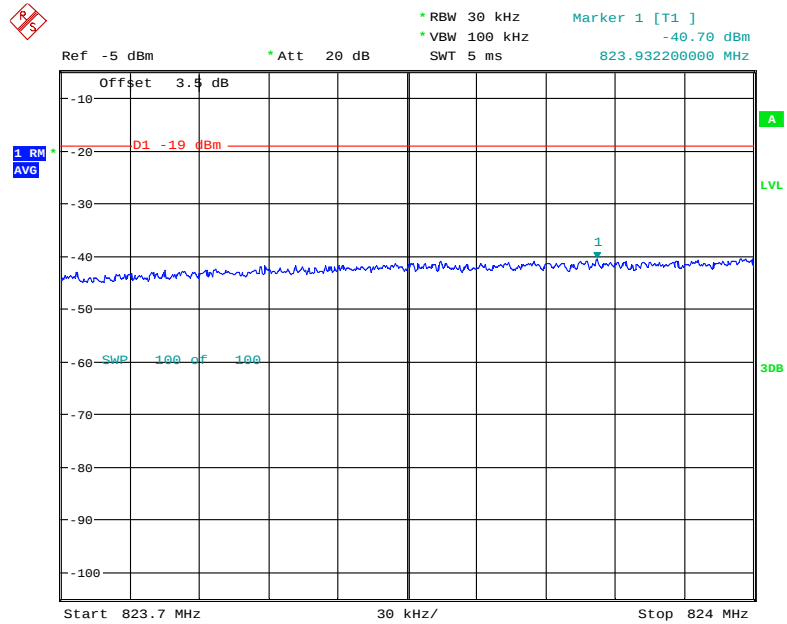


Date: 8.AUG.2019 14:14:08

### Cellular Band CDMA Left Side Above AGC

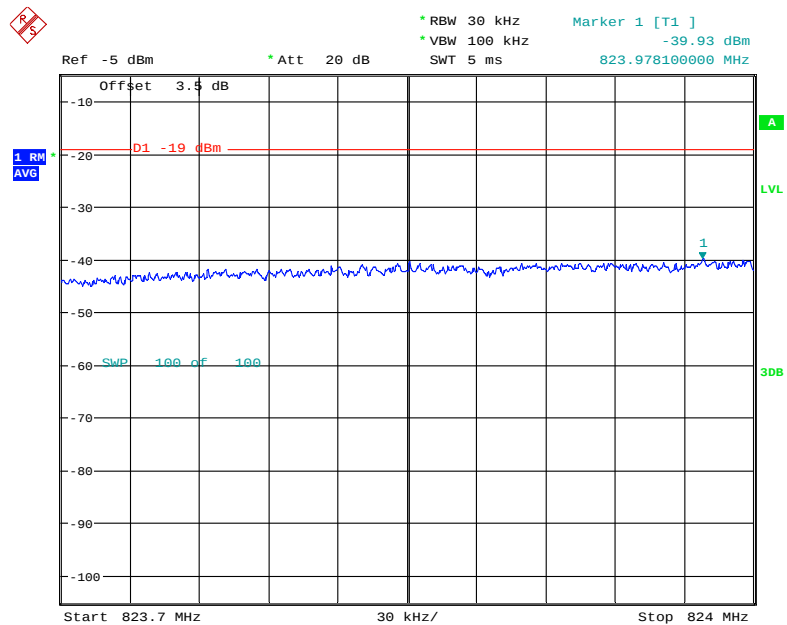


Date: 8.AUG.2019 14:14:48

### Cellular Band GSM Left Side Pre-AGC

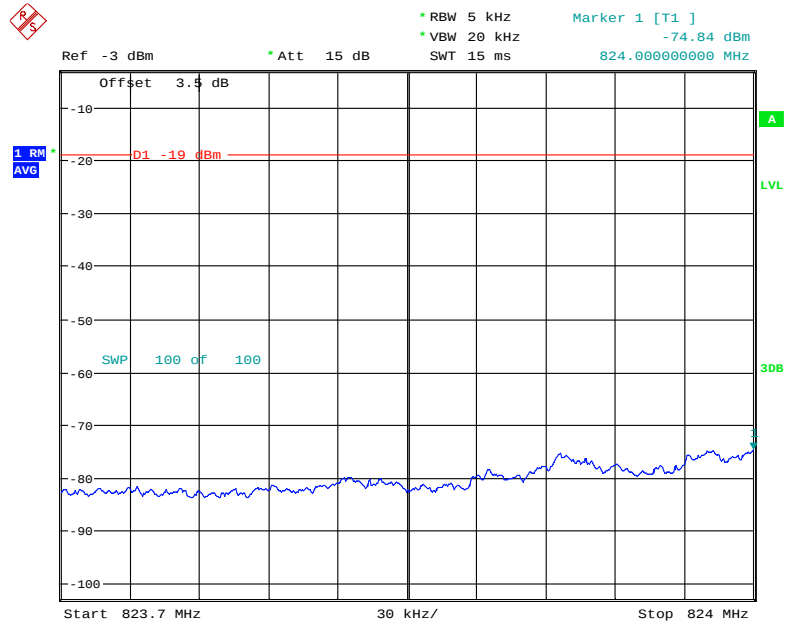


Date: 8.AUG.2019 13:39:33

### Cellular Band GSM Left Side Above AGC

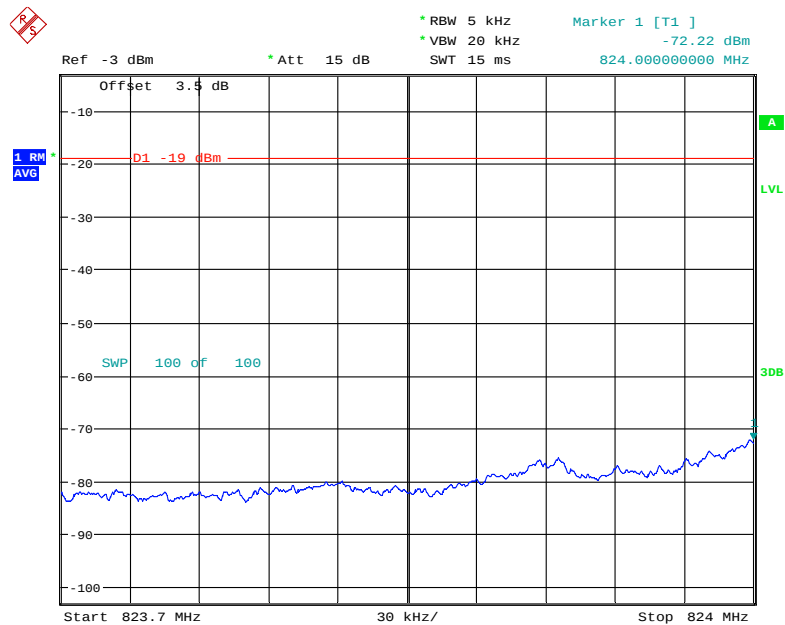


Date: 8.AUG.2019 13:39:50

### Cellular Band LTE Left Side Pre-AGC

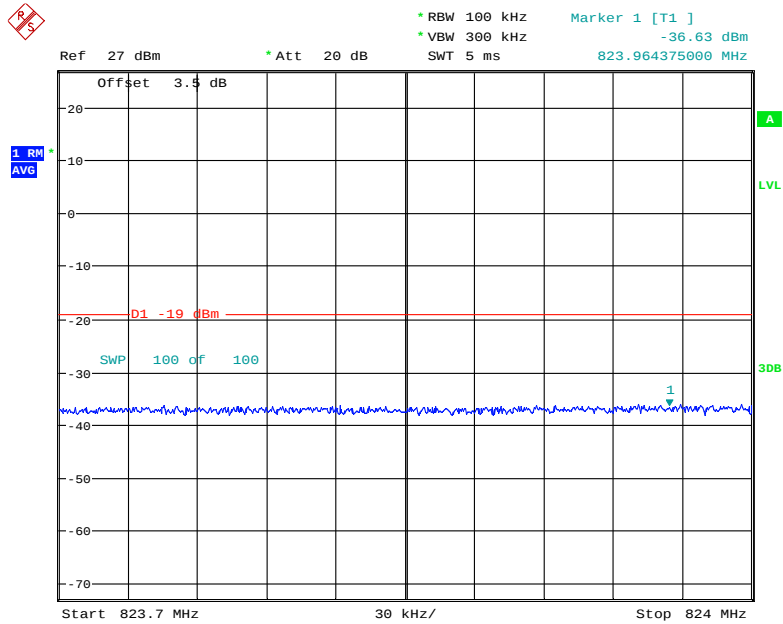


Date: 30.JUL.2019 18:32:23

### Cellular Band LTE Left Side Above AGC

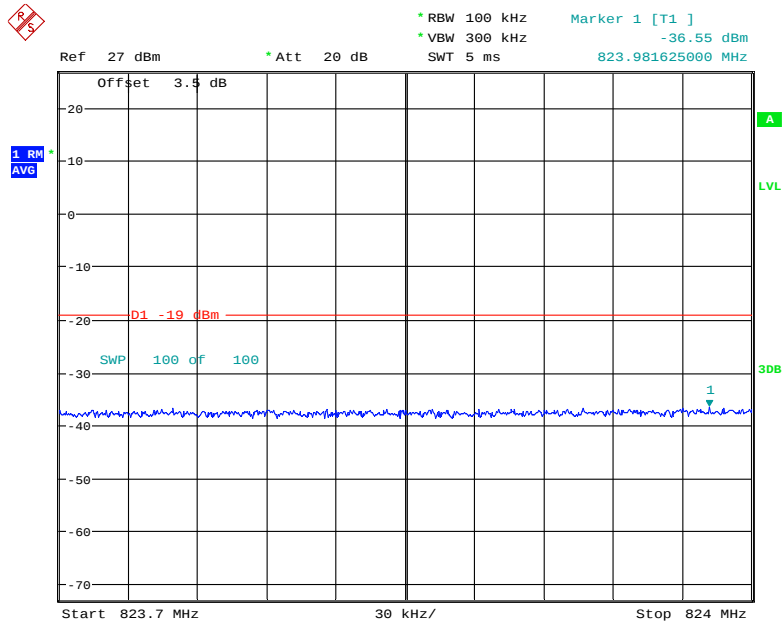


Date: 30.JUL.2019 18:33:26

### Cellular Band CDMA Right Side Pre-AGC

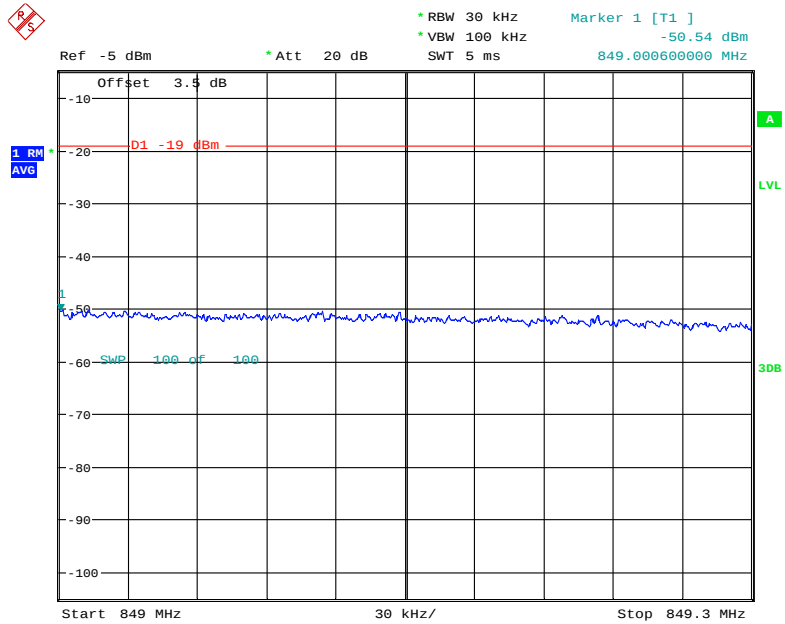


Date: 8.AUG.2019 14:15:28

### Cellular Band CDMA Right Side Above AGC

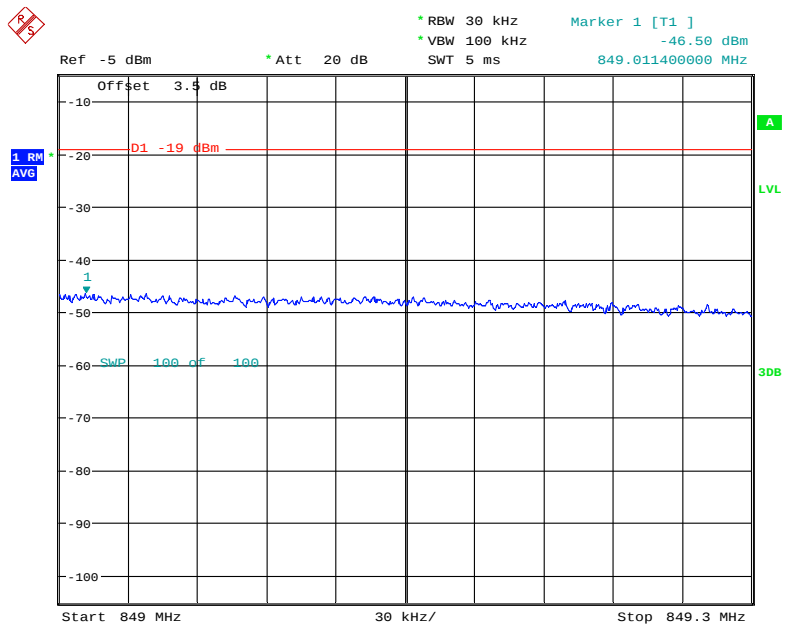


Date: 8.AUG.2019 14:16:06

### Cellular Band GSM Right Side Pre-AGC

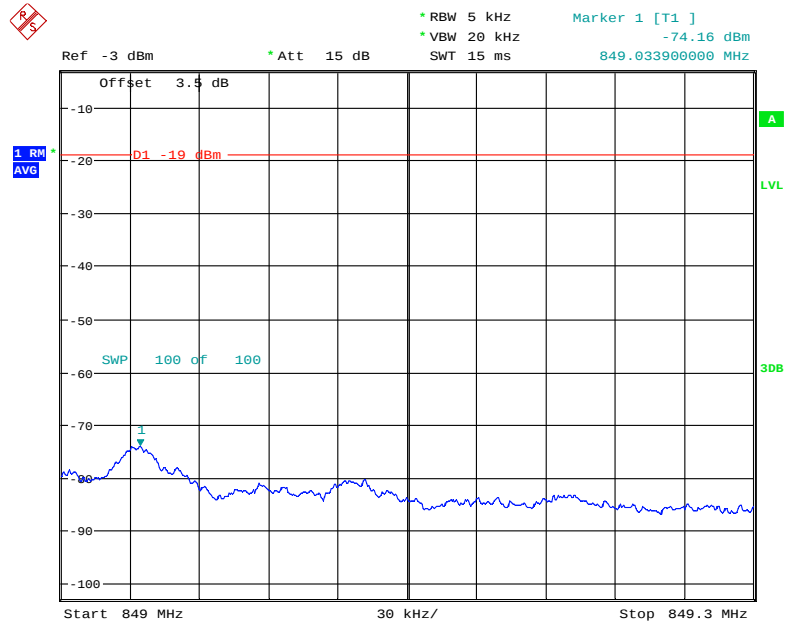


Date: 8.AUG.2019 13:40:30

### Cellular Band GSM Right Side Above AGC

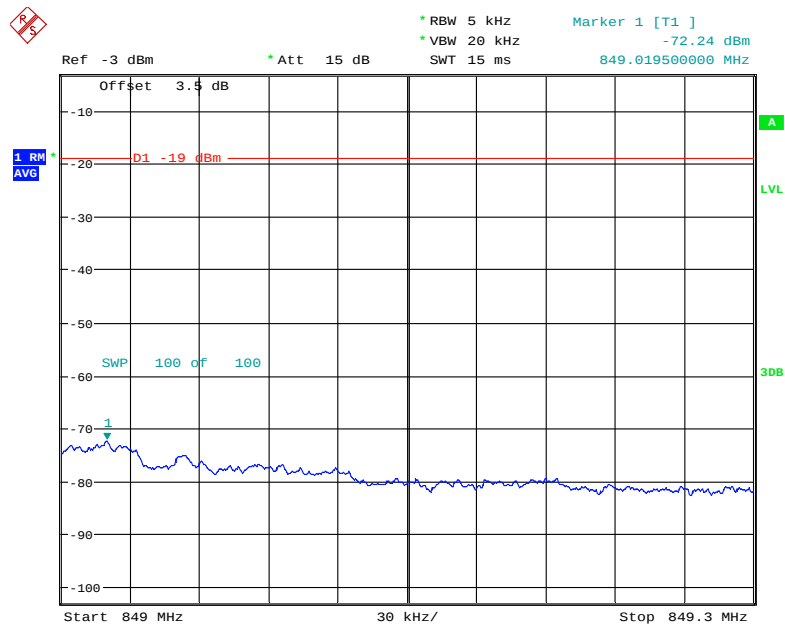


Date: 8.AUG.2019 13:40:44

### Cellular Band LTE Right Side Pre-AGC

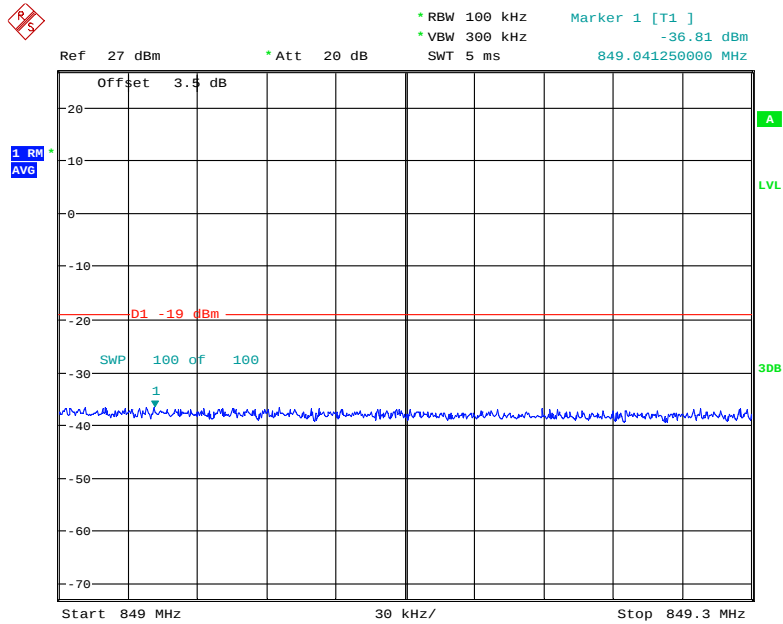


Date: 30.JUL.2019 18:40:34

### Cellular Band LTE Right Side Above AGC

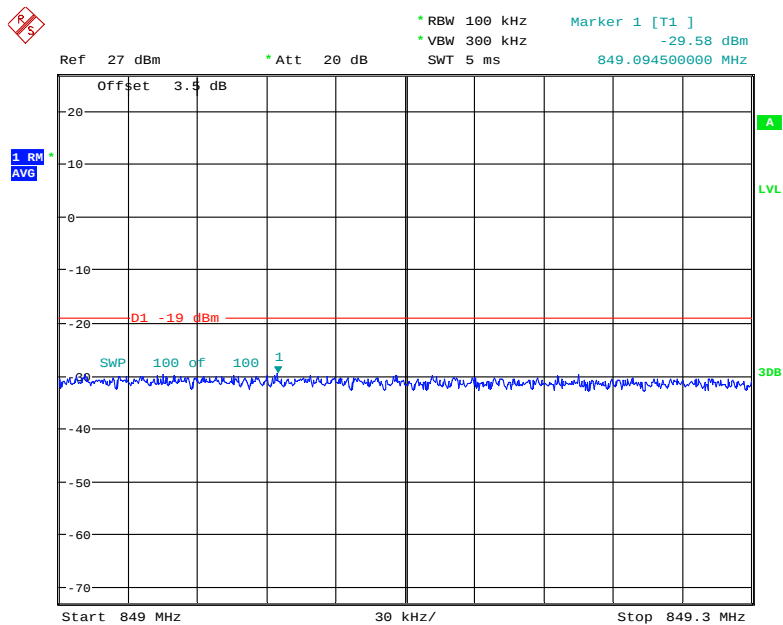


Date: 30.JUL.2019 18:41:04

### PCS Band CDMA Left Side Pre-AGC

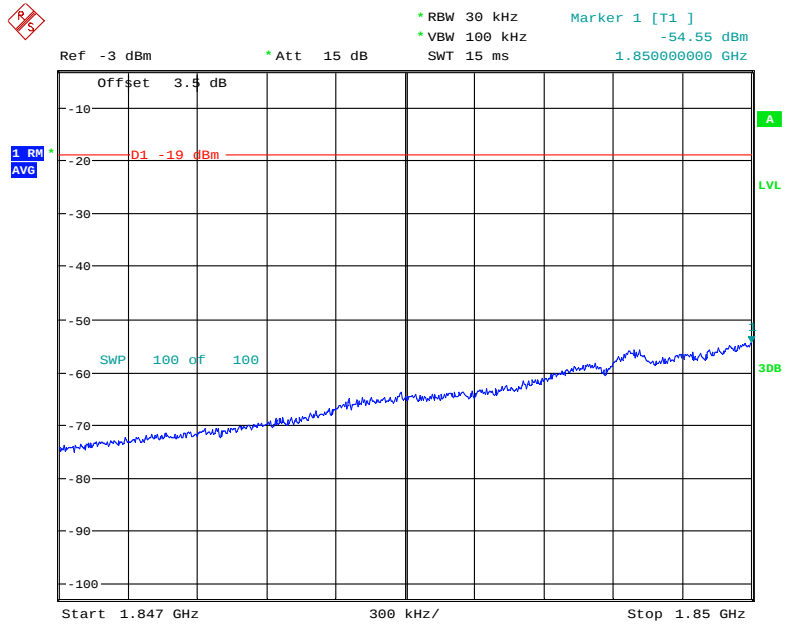


Date: 8.AUG.2019 13:52:53

### PCS Band CDMA Left Side Above AGC

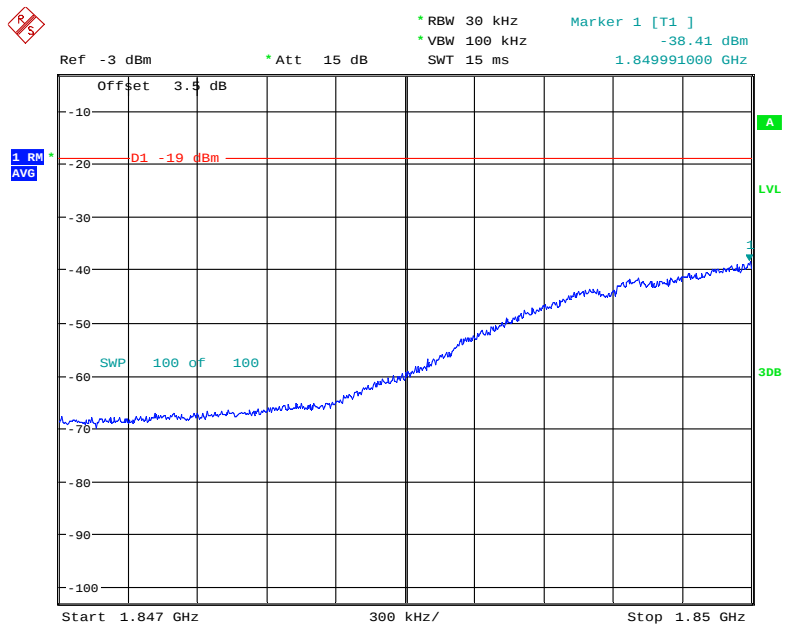


Date: 8.AUG.2019 13:54:52

### PCS Band GSM Left Side Pre-AGC

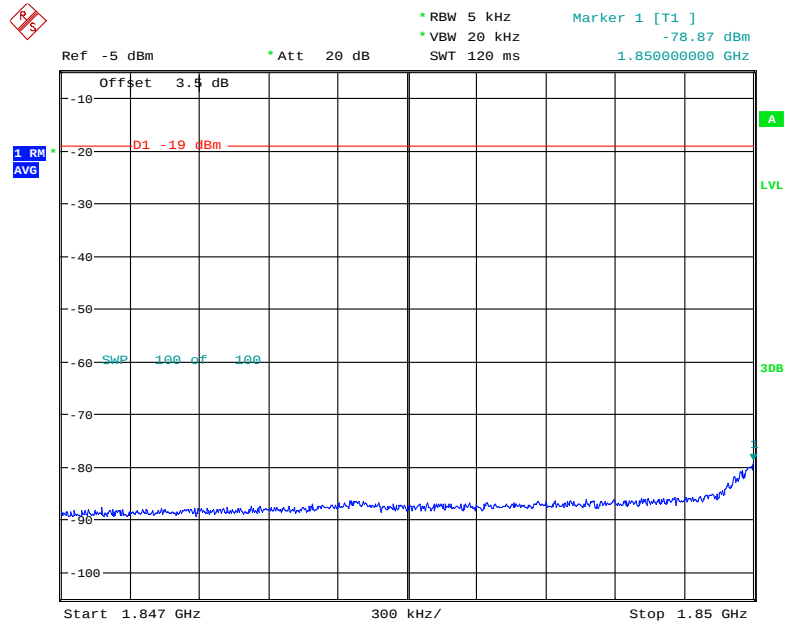


Date: 8.AUG.2019 14:52:16

### PCS Band GSM Left Side Above AGC

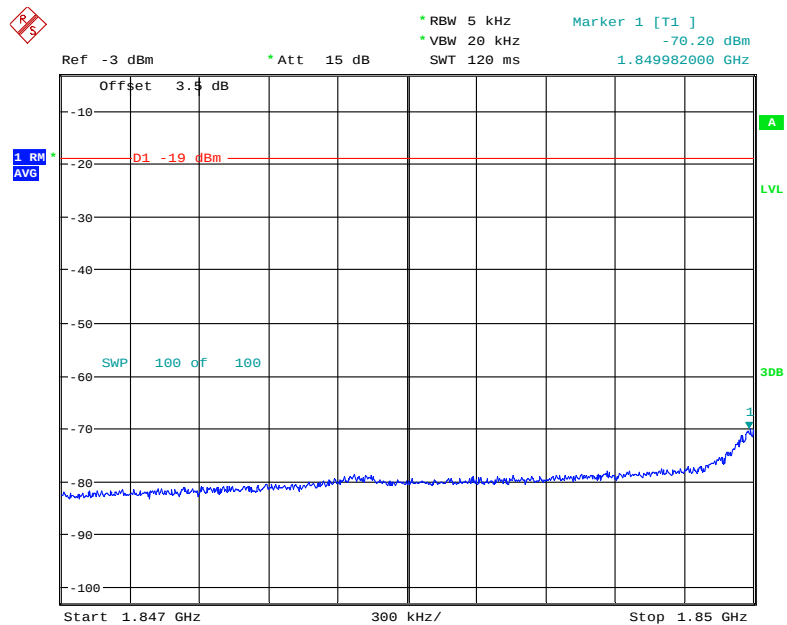


Date: 8.AUG.2019 13:37:12

### PCS Band LTE Left Side Pre-AGC

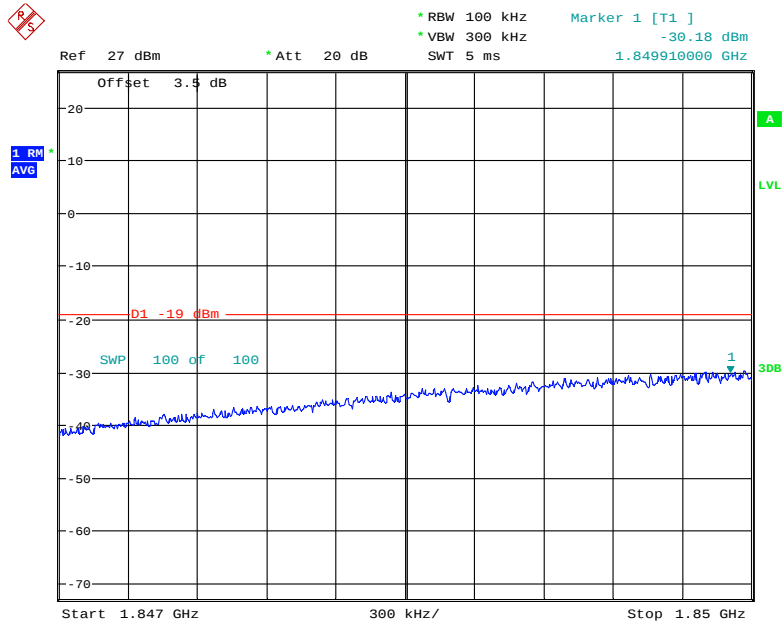


Date: 30.JUL.2019 18:07:09

### PCS Band LTE Left Side Above AGC

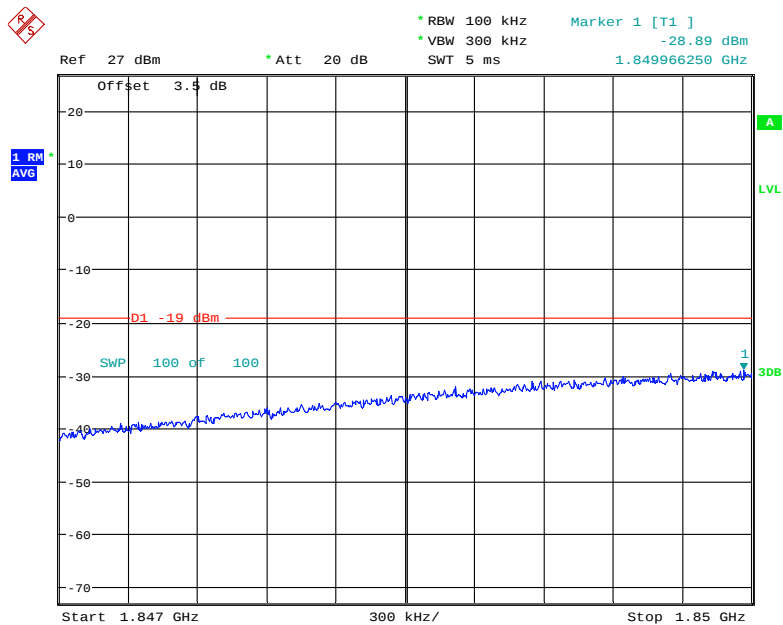


Date: 30.JUL.2019 18:09:41

### PCS Band CDMA Right Side Pre-AGC

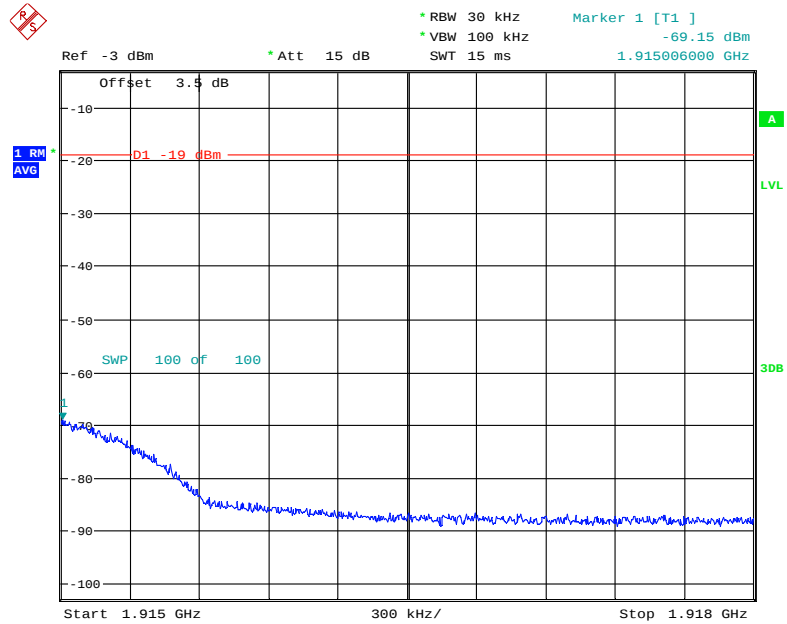


Date: 8.AUG.2019 13:55:27

### PCS Band CDMA Right Side Above AGC

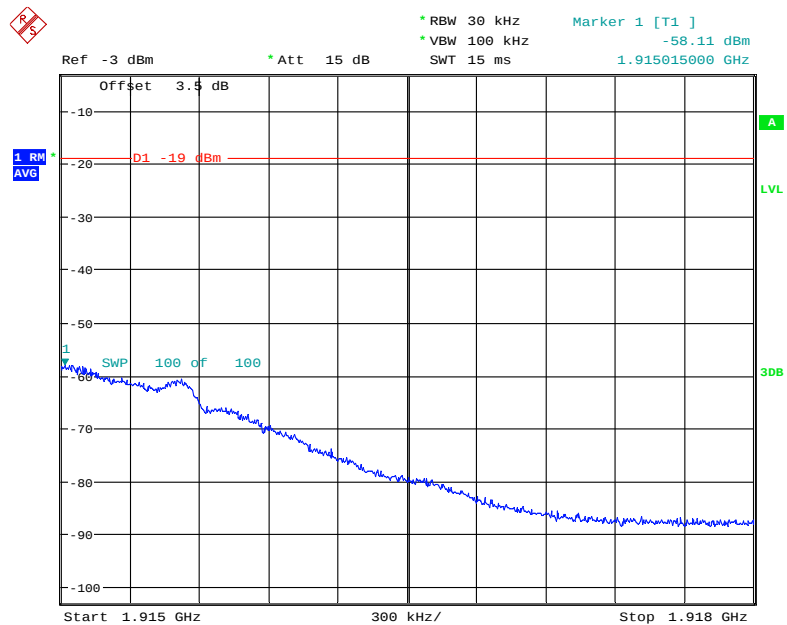


Date: 8.AUG.2019 13:55:50

### PCS Band GSM Right Side Pre-AGC

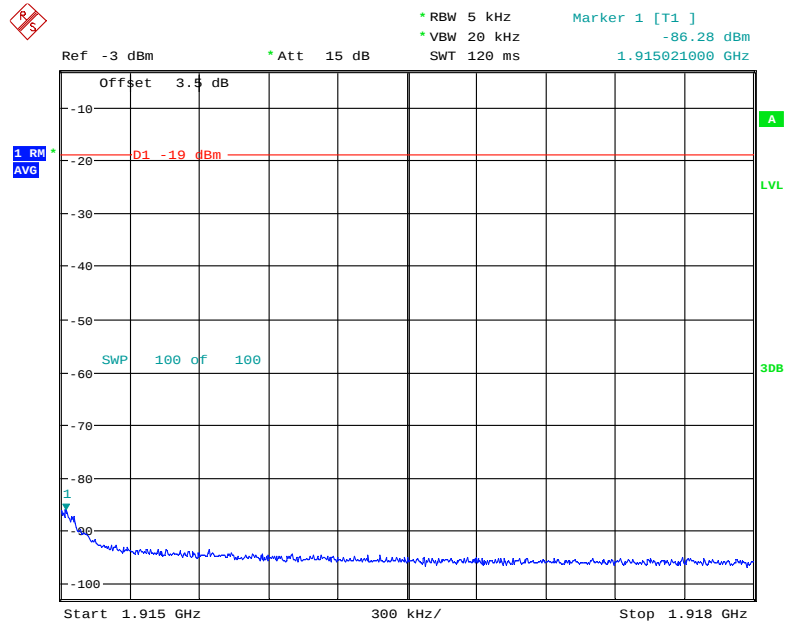


Date: 8.AUG.2019 13:38:23

### PCS Band GSM Right Side Above AGC

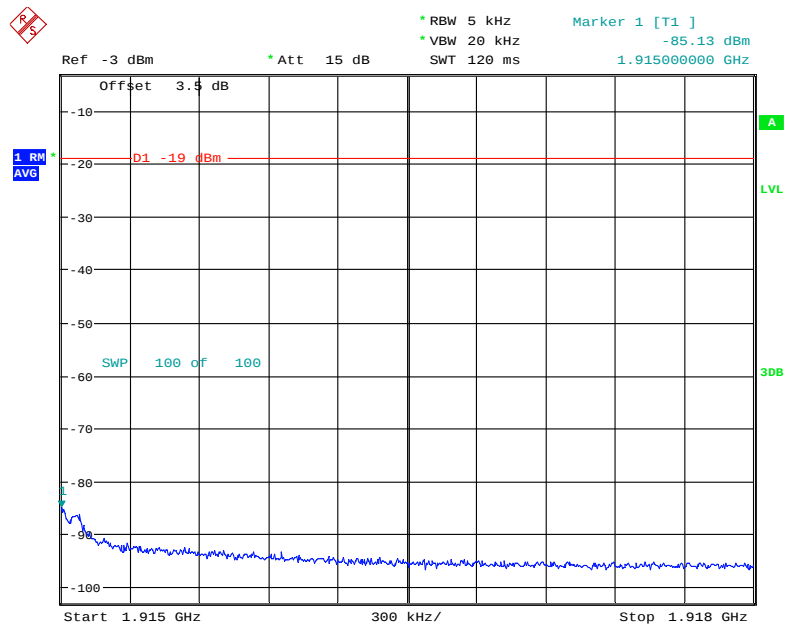


Date: 8.AUG.2019 13:38:35

### PCS Band LTE Right Side Pre-AGC

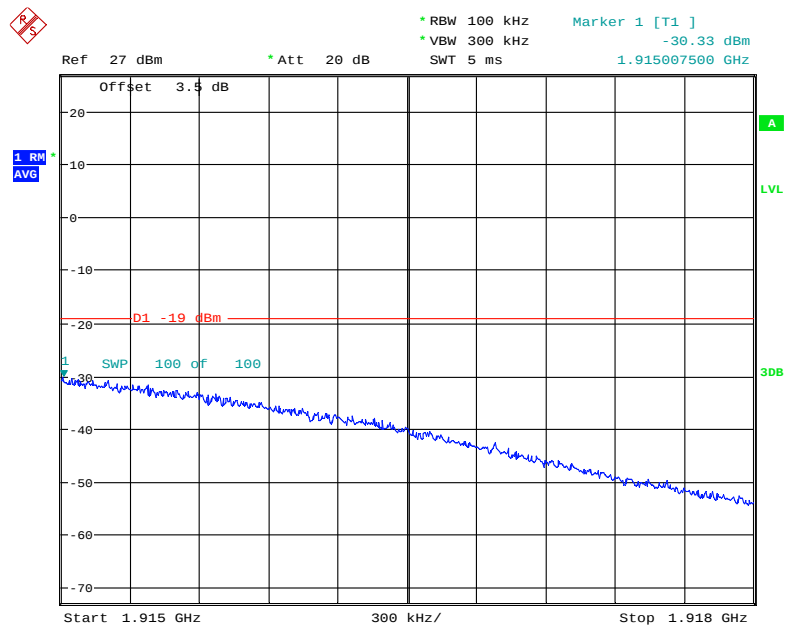


Date: 30.JUL.2019 18:16:19

### PCS Band LTE Right Side Above AGC

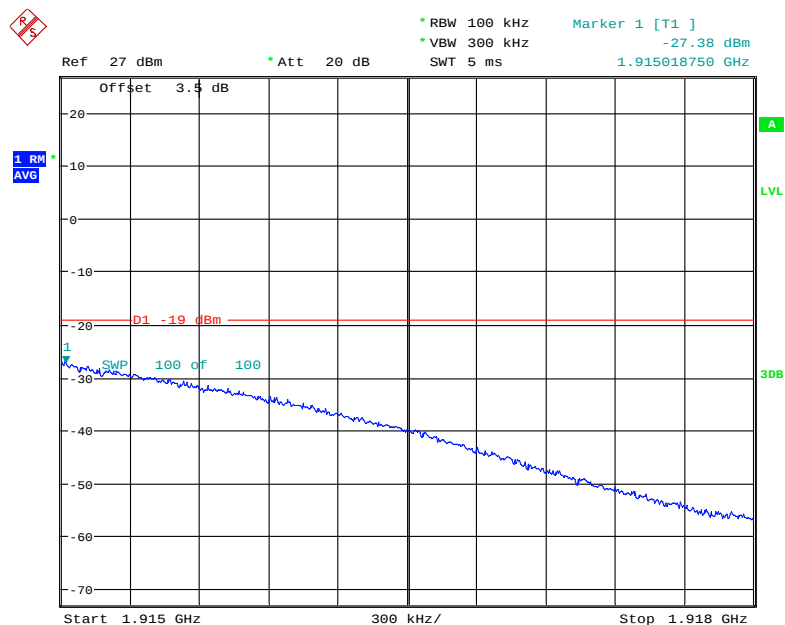


Date: 30.JUL.2019 18:23:12

### AWS Band CDMA Left Side Pre-AGC

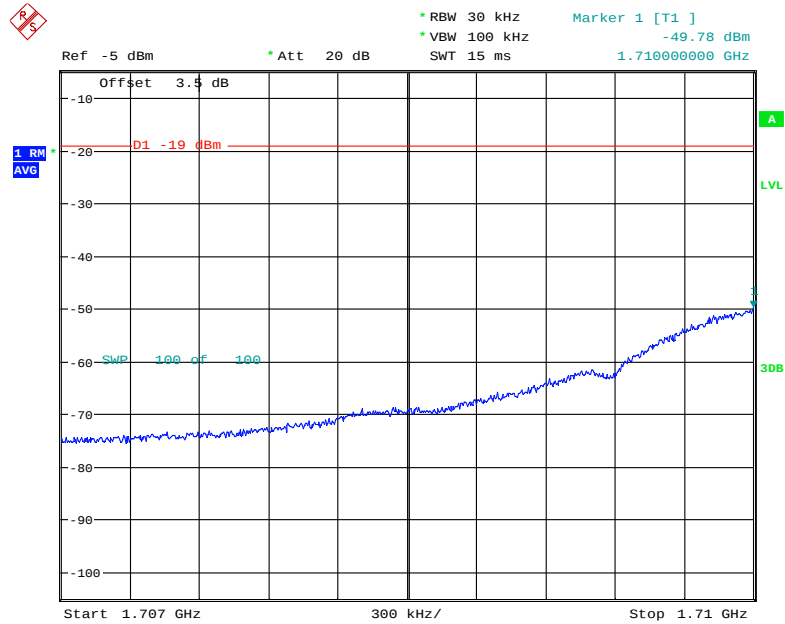


Date: 8.AUG.2019 14:48:29

### AWS Band CDMA Left Side Above AGC

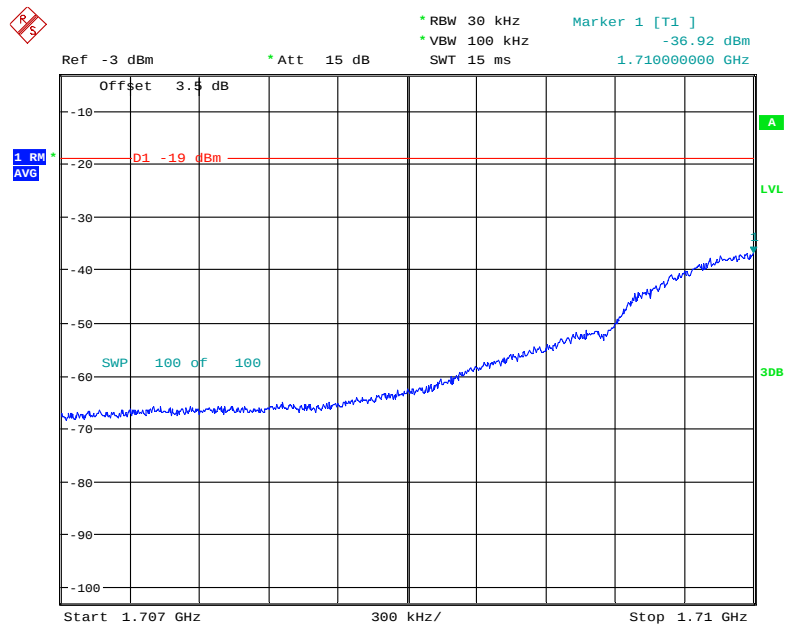


Date: 8.AUG.2019 13:57:34

**AWS Band GSM Left Side Pre-AGC**

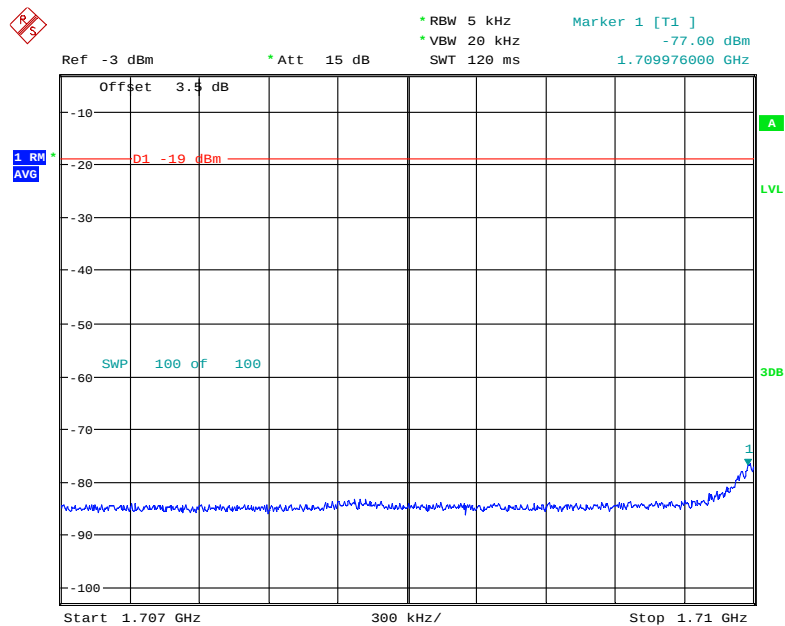


Date: 8.AUG.2019 13:41:39

### AWS Band GSM Left Side Above AGC

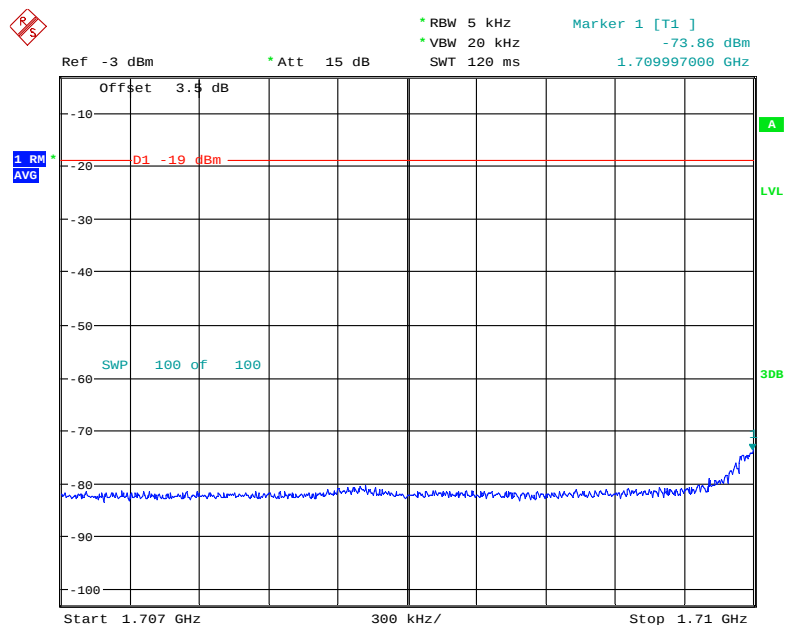


Date: 8.AUG.2019 13:41:56

### AWS Band LTE Left Side Pre-AGC

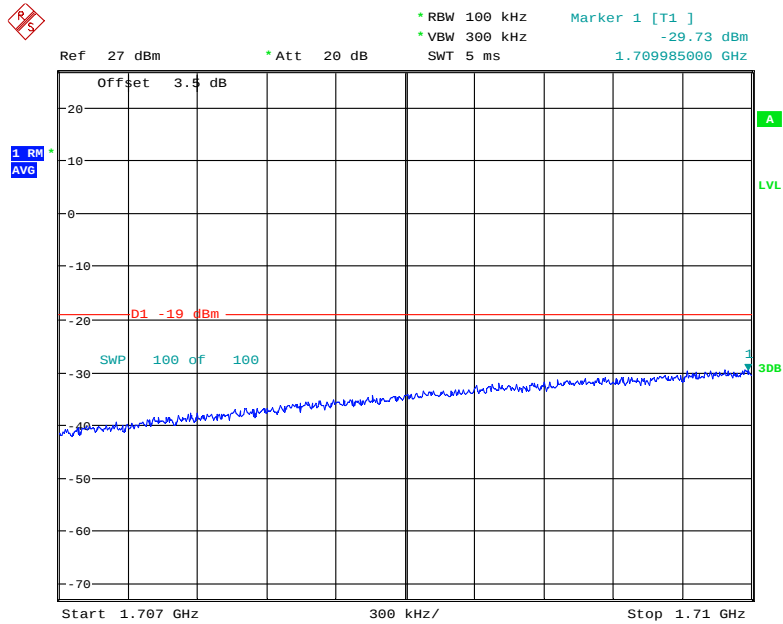


Date: 30.JUL.2019 18:25:39

### AWS Band LTE Left Side Above AGC

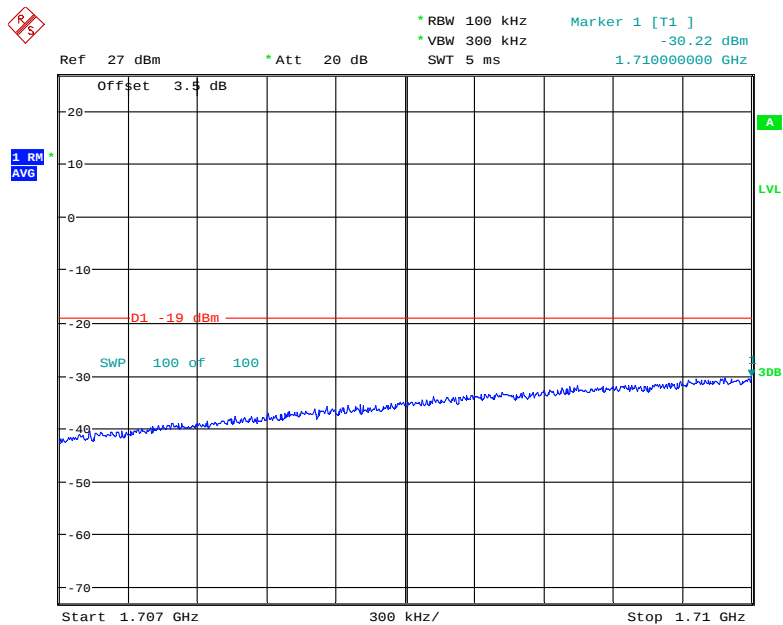


Date: 30.JUL.2019 18:26:29

### AWS Band CDMA Right Side Pre-AGC

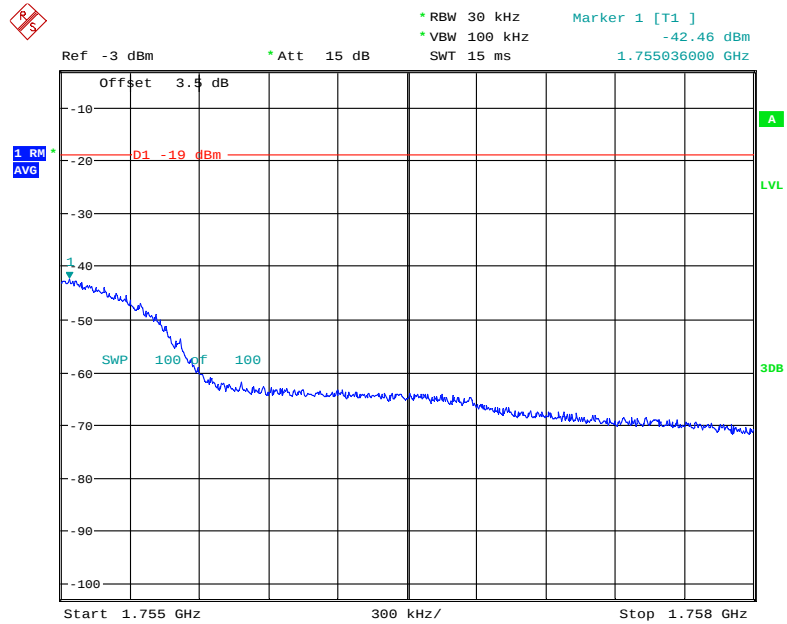


Date: 8.AUG.2019 13:59:32

### AWS Band CDMA Right Side Above AGC

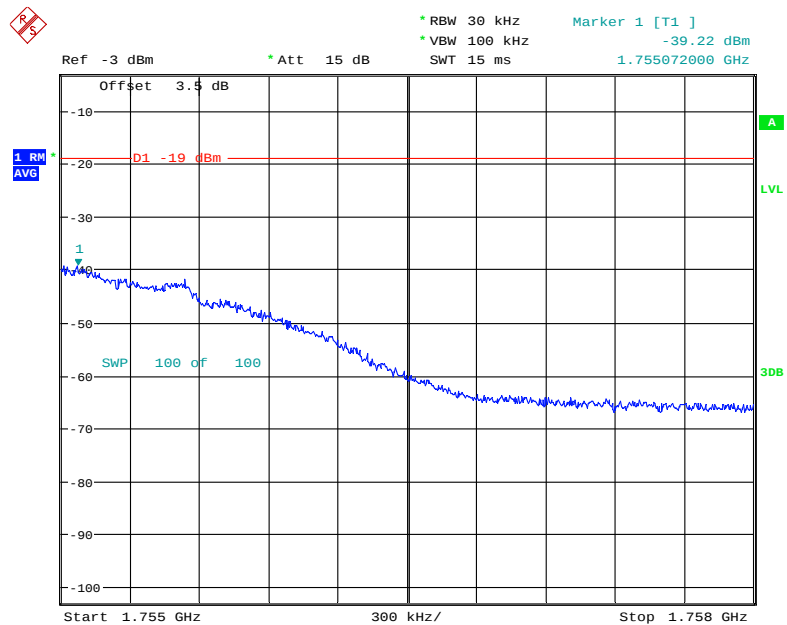


Date: 8.AUG.2019 13:59:08

### AWS Band GSM Right Side Pre-AGC

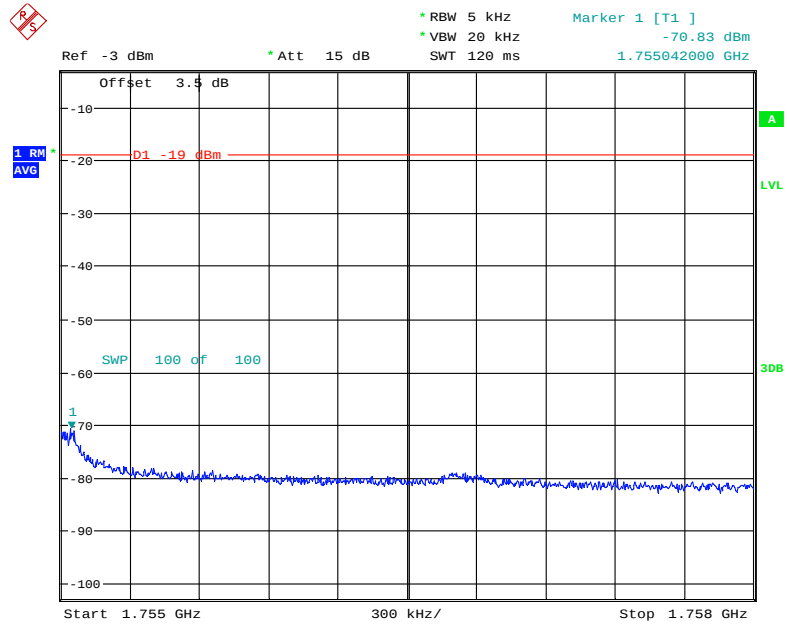


Date: 8.AUG.2019 13:42:31

### AWS Band GSM Right Side Above AGC

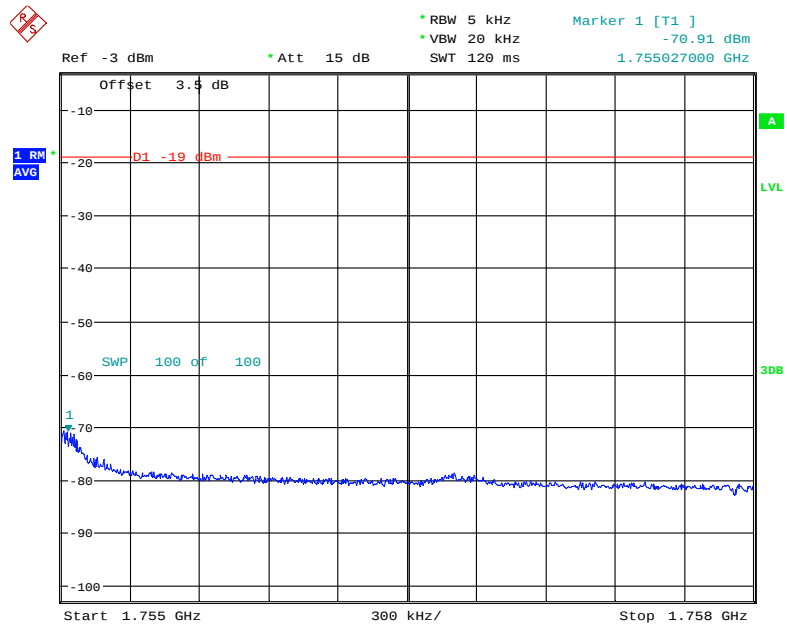


Date: 8.AUG.2019 13:42:47

### AWS Band LTE Right Side Pre-AGC

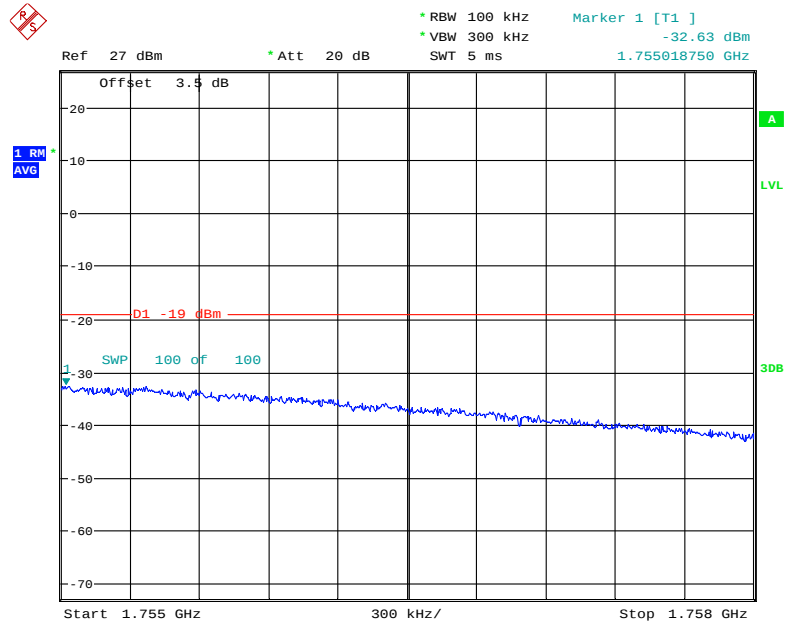

Date: 30.JUL.2019 18:29:10

### AWS Band LTE Right Side Above AGC

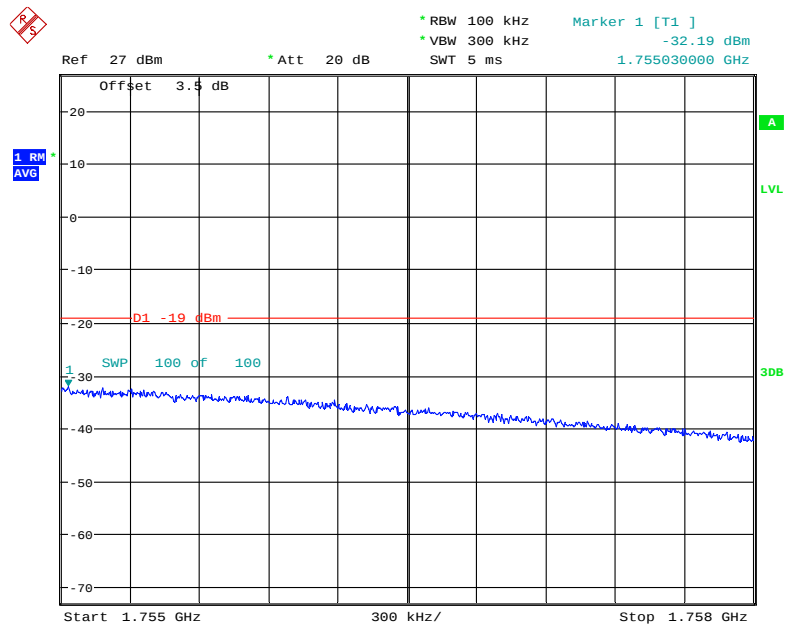

Date: 30.JUL.2019 18:29:56

## § 20.21(e)(8)(i)(A), § 20.21(e)(8)(i)(H) & § 20.21(e)(4) - NOISE LIMITS

### Applicable Standards

According to § 20.21(e)(8)(i)(A) Noise Limits; § 20.21(e)(8)(i)(H) Transmit Power Off Mode (uplink and downlink noise power); § 20.21(e)(4) Self-monitoring.

### Test Procedure

Maximum transmitter noise power level


- a) Connect the EUT to the test equipment as shown in **Figure 3**. Begin with the uplink output connected to the spectrum analyzer. When measuring downlink noise, connect the downlink output to the spectrum analyzer.
- b) Set the spectrum analyzer RBW to 1 MHz with the VBW  $\geq 3 \times$  RBW.
- c) Select the power averaging (RMS) detector and trace average over at least 100 traces.
- d) Set the center frequency of the spectrum analyzer to the center of the CMRS band under test with the span  $\geq 2 \times$  the CMRS band.
- e) Measure the maximum transmitter noise power level.
- f) Save the spectrum analyzer plot as necessary for inclusion in the final test report.
- g) Repeat 7.7b) to 7.7f) for all operational uplink and downlink bands.
- h) Connect the EUT to the test equipment as shown in **Figure 4** for uplink. Affirm the coupled path of the RF coupler is connected to the spectrum analyzer.
- i) Configure the signal generator for 4.1 MHz AWGN operation.
- j) Set the spectrum analyzer RBW for 1 MHz with the VBW  $\geq 3 \times$  RBW with a power averaging (rms) detector with at least 100 trace averages.
- k) Set the center frequency of the spectrum analyzer to the center of the CMRS band under test with the span  $\geq 2 \times$  the CMRS band. This shall include all spectrum blocks in the particular CMRS band under test (see Annex A).
- l) For uplink noise measurements, set the spectrum analyzer center frequency for the uplink band under test and tune the signal generator to the center of the paired downlink band.
- m) Measure the maximum transmitter noise power level when varying the downlink signal generator output level from -90 dBm to -20 dBm, as measured at the input port, in 1 dB steps inside the RSSI-dependent region and in 10 dB steps outside the RSSI-dependent region. Report the six values closest to the limit with at least two points within the RSSI-dependent region of the limit. See noise limit in Annex D.
- n) Repeat 7.7.1h) through 7.7.1m) for all operational uplink.

Variable uplink noise timing

Variable uplink noise timing is to be measured as follows.

- a) Set the spectrum analyzer to the uplink frequency to be measured.
- b) Set the span to 0 Hz with a sweep time of 10 seconds.
- c) Set the power level of signal generator 1 to the lowest level of the RSSI-dependent noise.
- d) Select MAX HOLD and increase the power level of signal generator 1 by 10 dB for mobile boosters and 20 dB for fixed boosters.
- e) Confirm that the uplink noise decreases to the specified level within 1 second for mobile devices and 3 seconds for fixed devices
- f) Repeat 7.7.2a) to 7.7.2e) for all operational uplink bands.
- g) Include plots and summary table in test report.

**Note:** Some signal boosters will require a signal generator input because they will not operate unless a signal is received at the input terminals. If this is the case, connect a second signal generator and cycle the RF output to simulate this function.

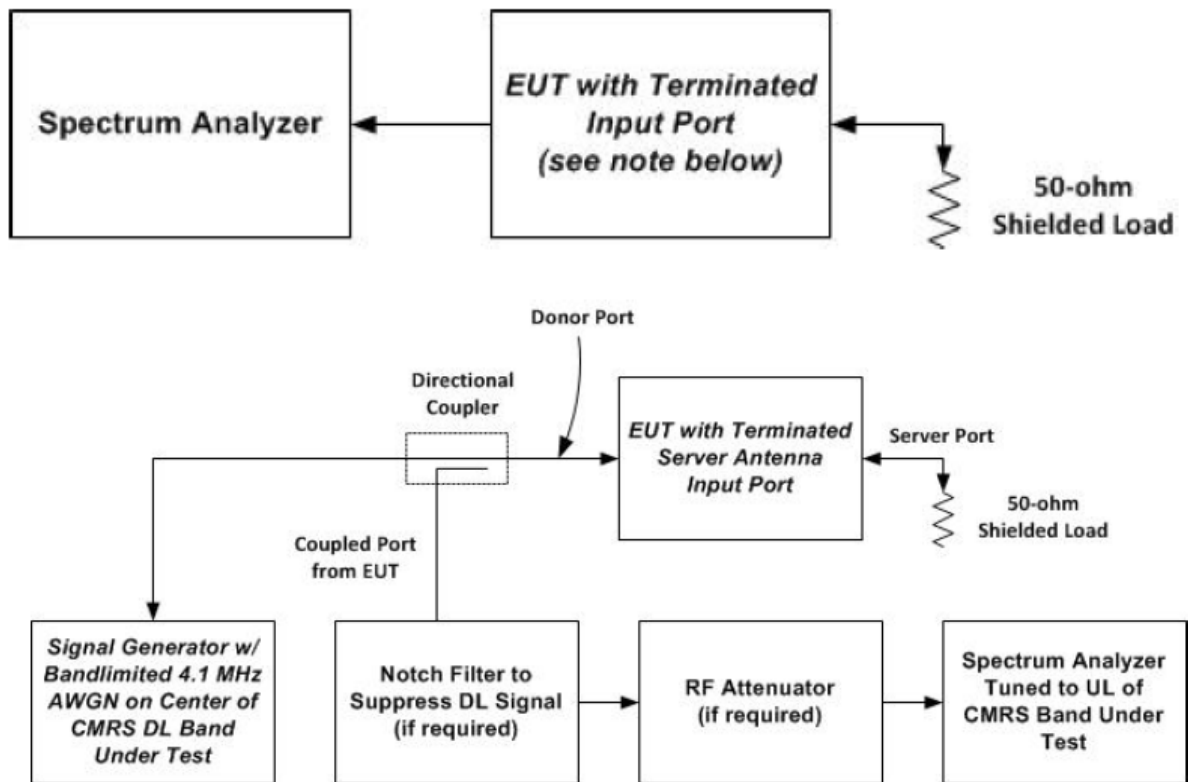

## Test Data

### Environmental Conditions

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 52 %      |
| <b>ATM Pressure:</b>      | 101.2 kPa |

*The testing was performed by Kieron Luo on 2019-07-30.*

**Test Result:** Compliance. Please refer to following table.

**Maximum Noise:**

| Mode     | Operation Bands | Measured Value | Limit   | Result     |
|----------|-----------------|----------------|---------|------------|
|          |                 | dBm/MHz        | dBm/MHz |            |
| Uplink   | cellular        | -61.57         | -59     | Compliance |
|          | PCS             | -61.45         | -59     | Compliance |
|          | AWS             | -60.41         | -59     | Compliance |
|          | Lower 700MHz    | -61.79         | -59     | Compliance |
|          | Upper 700MHz    | -61.85         | -59     | Compliance |
| Downlink | cellular        | -60.02         | -59     | Compliance |
|          | PCS             | -60.91         | -59     | Compliance |
|          | AWS             | -59.88         | -59     | Compliance |
|          | Lower 700MHz    | -61.18         | -59     | Compliance |
|          | Upper 700MHz    | -63.69         | -59     | Compliance |

Note: Mobile booster maximum noise power shall not exceed -59 dBm/MHz.

**Variable uplink Noise limit test result:**


| Operation Bands | RSSI | Measured Value | Limit   | Results    |
|-----------------|------|----------------|---------|------------|
|                 | dBm  | dBm/MHz        | dBm/MHz |            |
| cellular        | -90  | -60.30         | -59     | Compliance |
|                 | -60  | -60.52         | -59     | Compliance |
|                 | -53  | -60.71         | -59     | Compliance |
|                 | -52  | -61.65         | -59     | Compliance |
|                 | -51  | -61.74         | -59     | Compliance |
|                 | -50  | -62.13         | -59     | Compliance |
| PCS             | -90  | -59.25         | -59     | Compliance |
|                 | -51  | -59.75         | -59     | Compliance |
|                 | -50  | -60.65         | -59     | Compliance |
|                 | -49  | -61.45         | -59     | Compliance |
|                 | -48  | -62.15         | -59     | Compliance |
|                 | -47  | -62.45         | -59     | Compliance |
| AWS             | -90  | -59.77         | -59     | Compliance |
|                 | -52  | -60.07         | -59     | Compliance |
|                 | -51  | -60.57         | -59     | Compliance |
|                 | -50  | -61.68         | -59     | Compliance |
|                 | -49  | -62.17         | -59     | Compliance |
|                 | -48  | -62.37         | -59     | Compliance |
| Lower 700MHz    | -90  | -60.72         | -59     | Compliance |
|                 | -60  | -60.78         | -59     | Compliance |
|                 | -55  | -60.93         | -59     | Compliance |
|                 | -54  | -61.01         | -59     | Compliance |
|                 | -53  | -61.92         | -59     | Compliance |
|                 | -52  | -62.11         | -59     | Compliance |
| Upper 700MHz    | -90  | -60.52         | -59     | Compliance |
|                 | -60  | -60.83         | -59     | Compliance |
|                 | -55  | -61.01         | -59     | Compliance |
|                 | -53  | -61.92         | -59     | Compliance |
|                 | -52  | -62.01         | -59     | Compliance |
|                 | -51  | -62.38         | -59     | Compliance |

Note 1: The Limit refer to KDB935210 D03 APPENDIX D Figure D1.

Note 2: The EUT shut down before entering RSSI-dependent region, so not recorded.


Note 3: RSSI is the downlink composite received signal power in dBm at the booster donor port for all base stations in the band of operation.

### Uplink Cellular Band

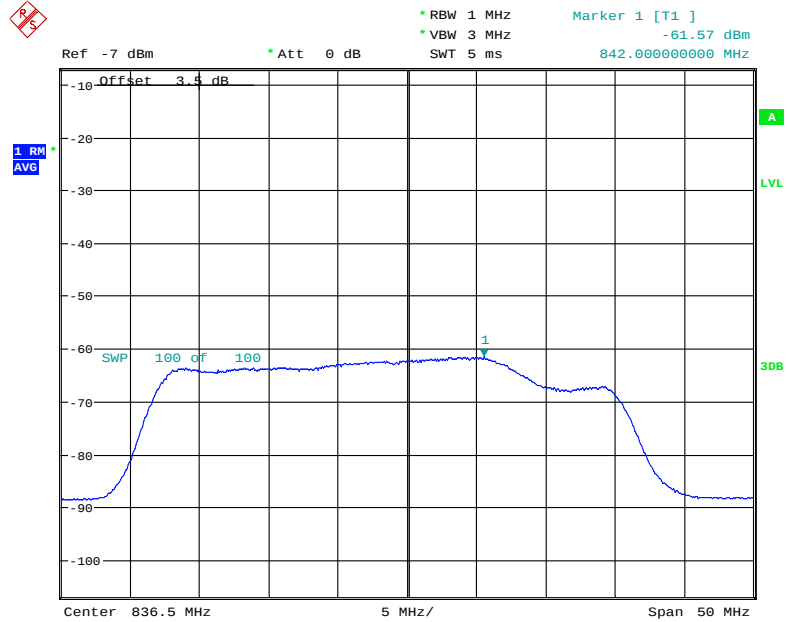


Date: 30.JUL.2019 15:07:36

### Uplink PCS Band

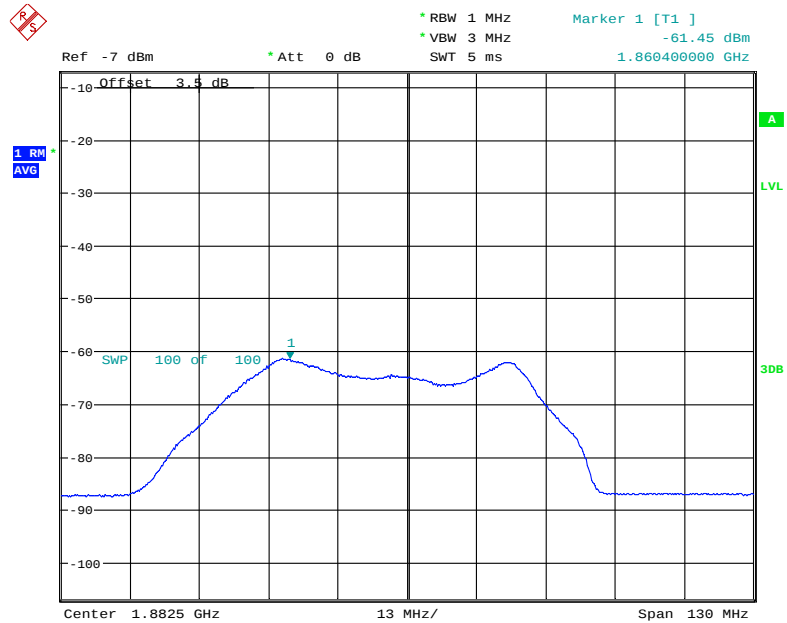


Date: 30.JUL.2019 15:06:07

### Uplink AWS

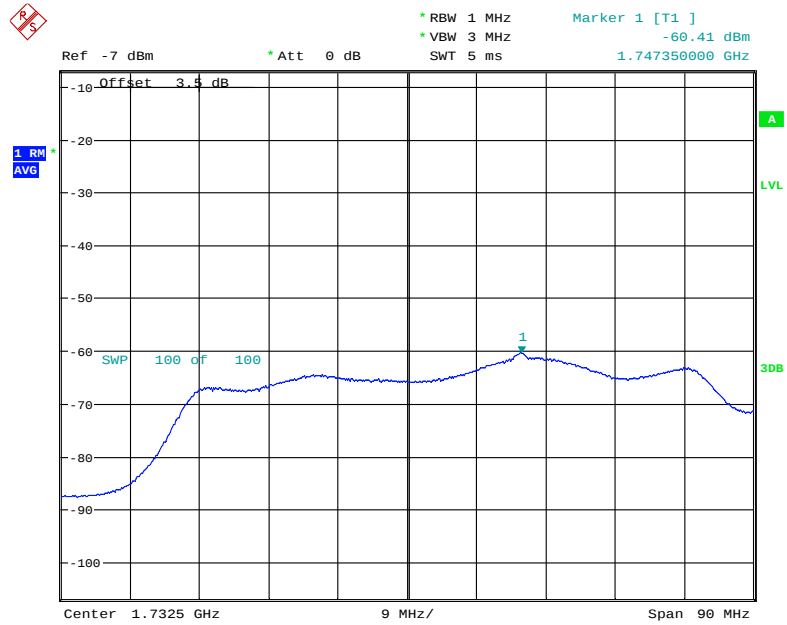


Date: 30.JUL.2019 15:08:23

### Uplink Lower 700MHz

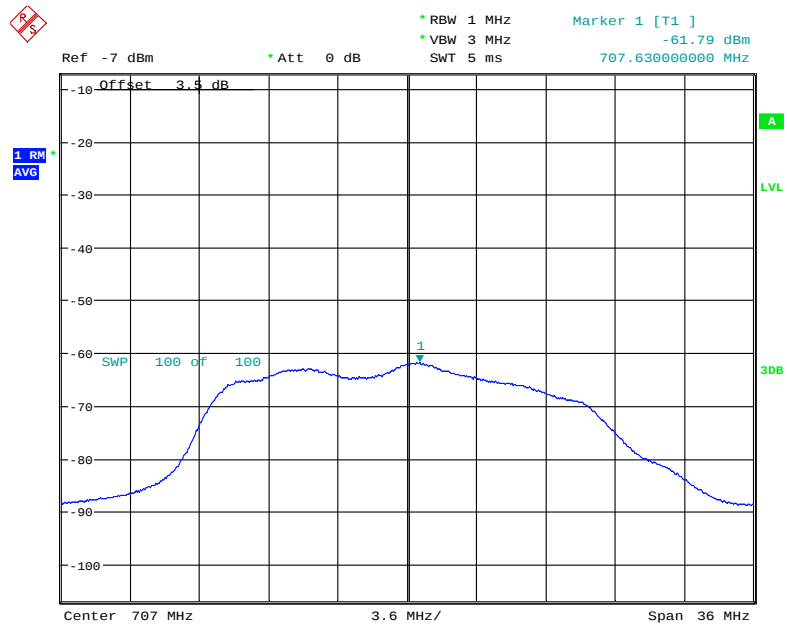


Date: 30.JUL.2019 15:09:54

### Uplink Upper 700MHz

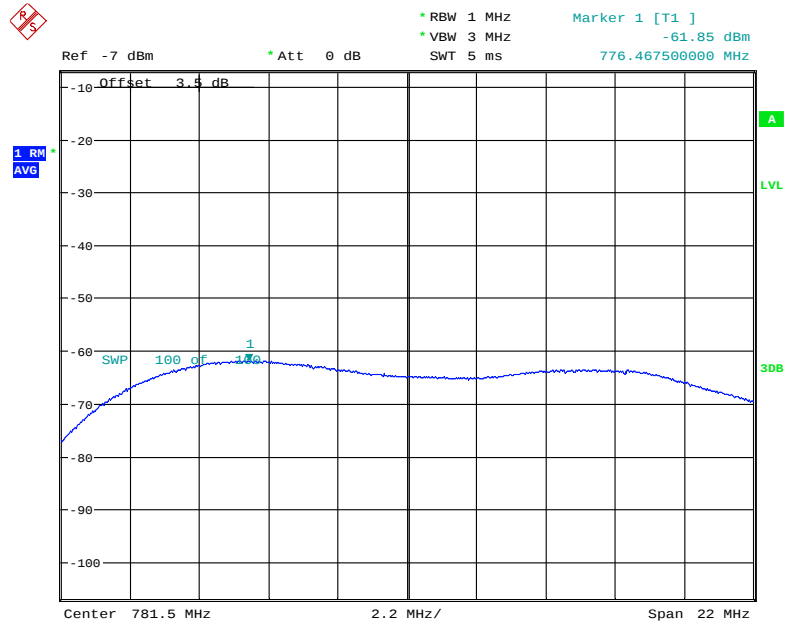


Date: 30.JUL.2019 15:11:05

### Downlink Cellular Band

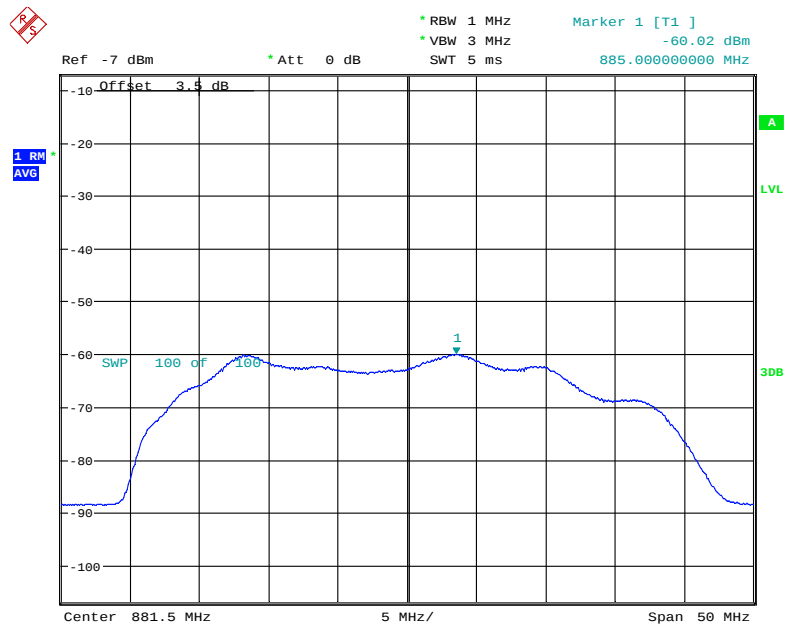


Date: 30.JUL.2019 15:15:10

### Downlink PCS Band

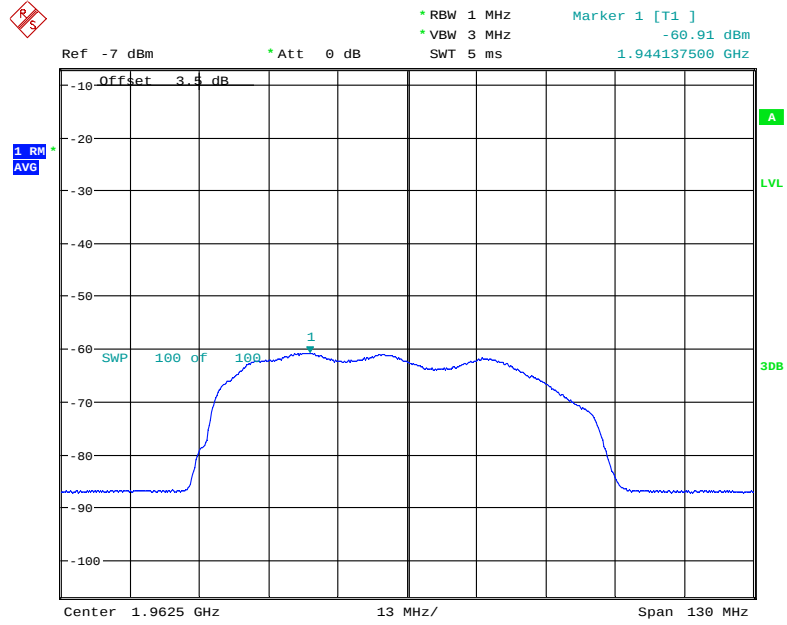


Date: 30.JUL.2019 15:16:08

### Downlink AWS Band

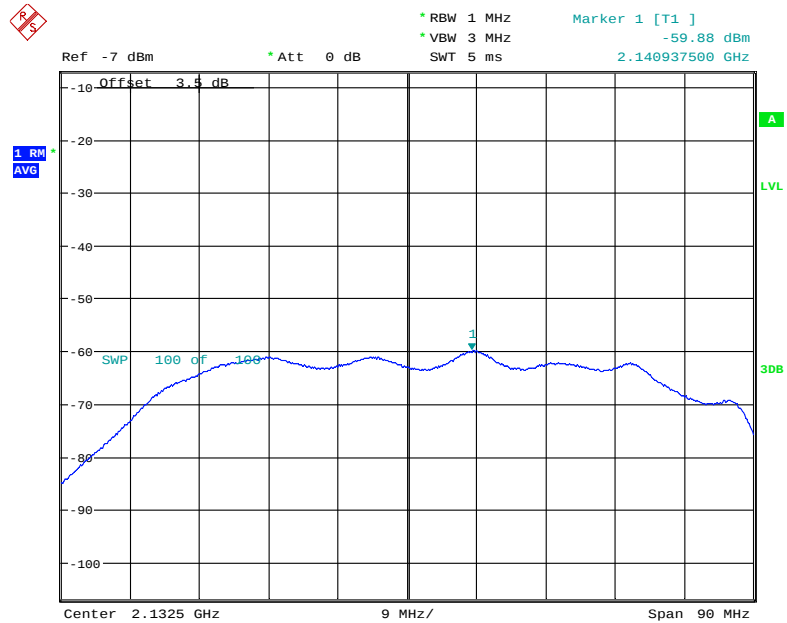


Date: 30.JUL.2019 15:14:26

### Downlink Lower 700MHz

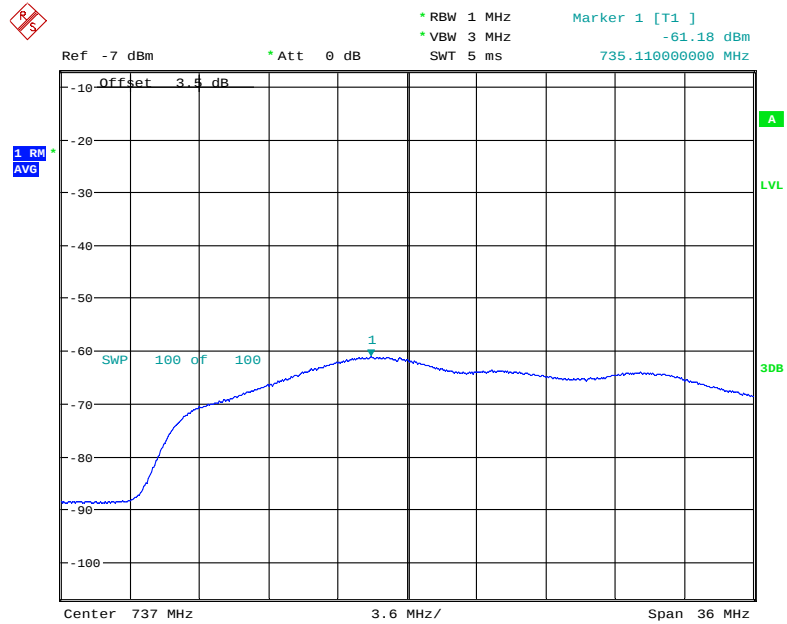

Date: 30.JUL.2019 15:13:45

### Downlink Upper 700MHz

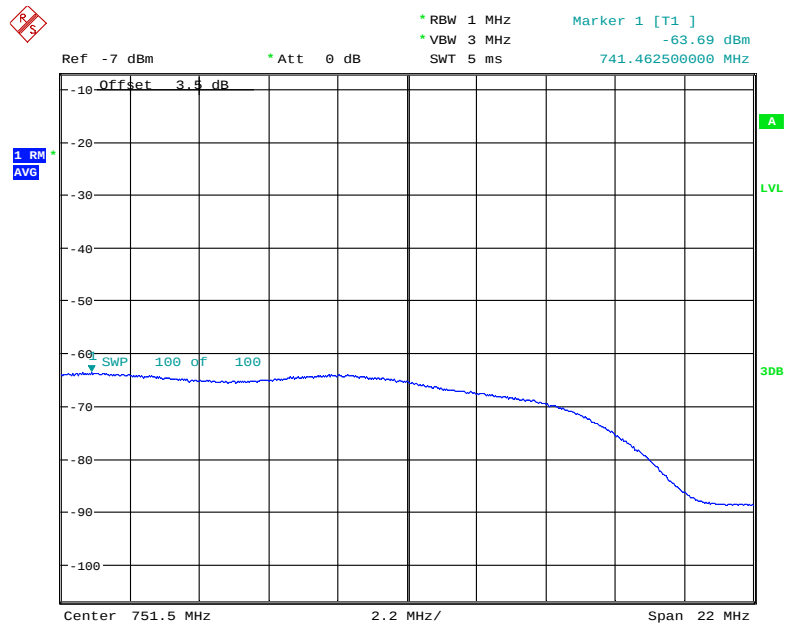


Date: 30.JUL.2019 15:13:13

**Variable Uplink Noise Timing:**


| Operating Band | Measured Value | Limit | Results    |
|----------------|----------------|-------|------------|
|                | s              | s     |            |
| PCS            | 0.057          | 1     | Compliance |
| cellular       | 0.016          | 1     | Compliance |
| AWS            | 0.032          | 1     | Compliance |
| Lower 700MHz   | 0.022          | 1     | Compliance |
| Upper 700MHz   | 0.016          | 1     | Compliance |

Note: The uplink noise decreases to the specified level within 1 second for mobile devices and 3 seconds for fixed devices.

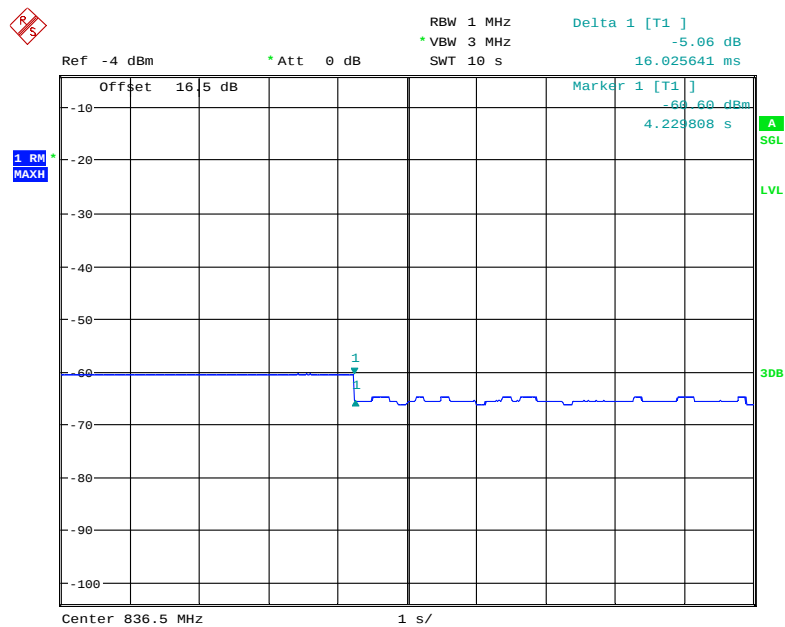**Cellular Band**


Date: 30.JUL.2019 17:14:09

### PCS Band

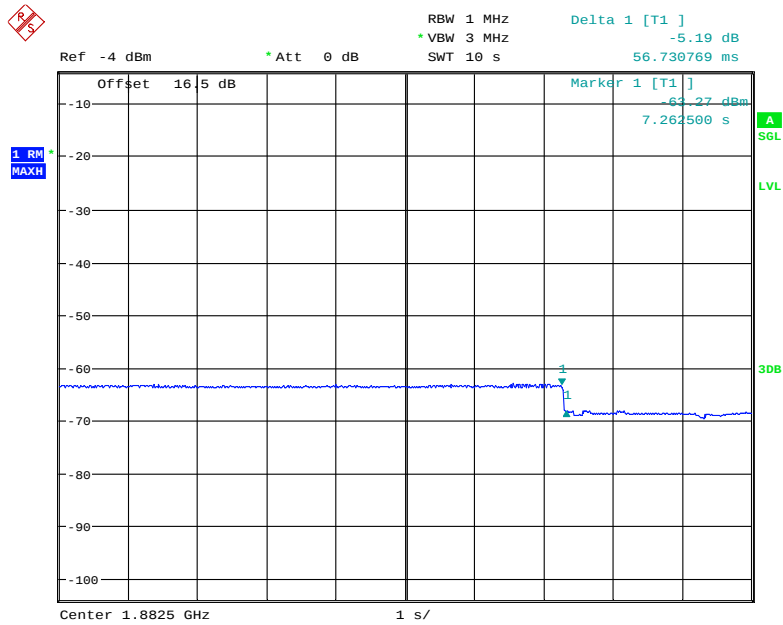


Date: 30.JUL.2019 17:08:47

### AWS Band

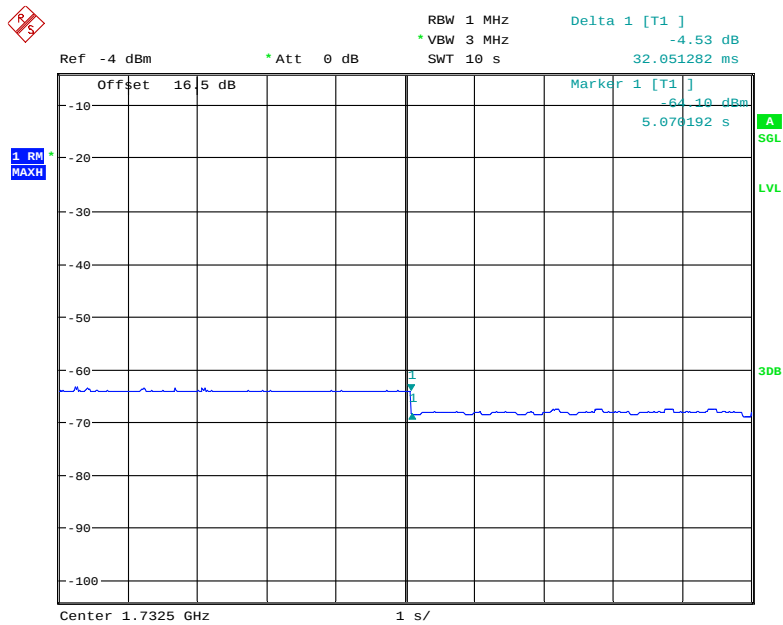


Date: 30.JUL.2019 17:15:39

### Lower 700MHz

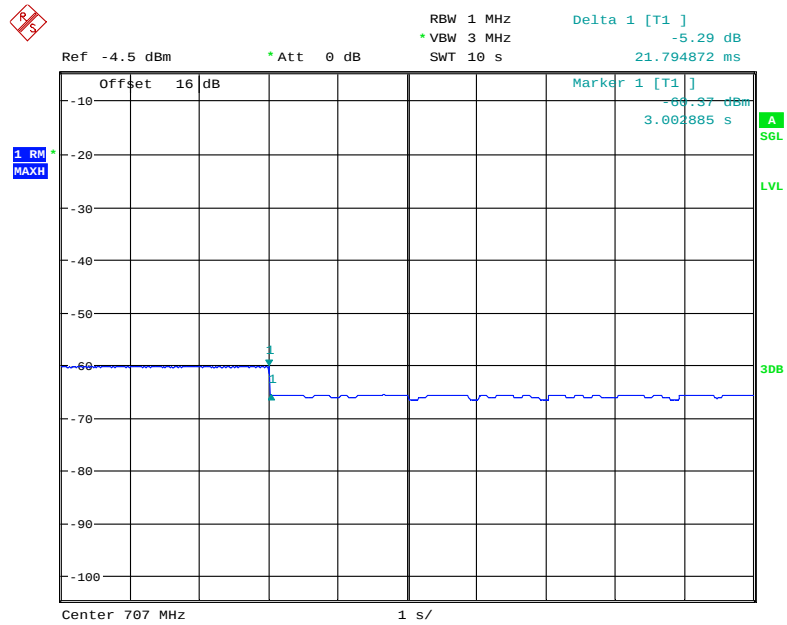

Date: 30.JUL.2019 17:16:48

### Upper 700MHz

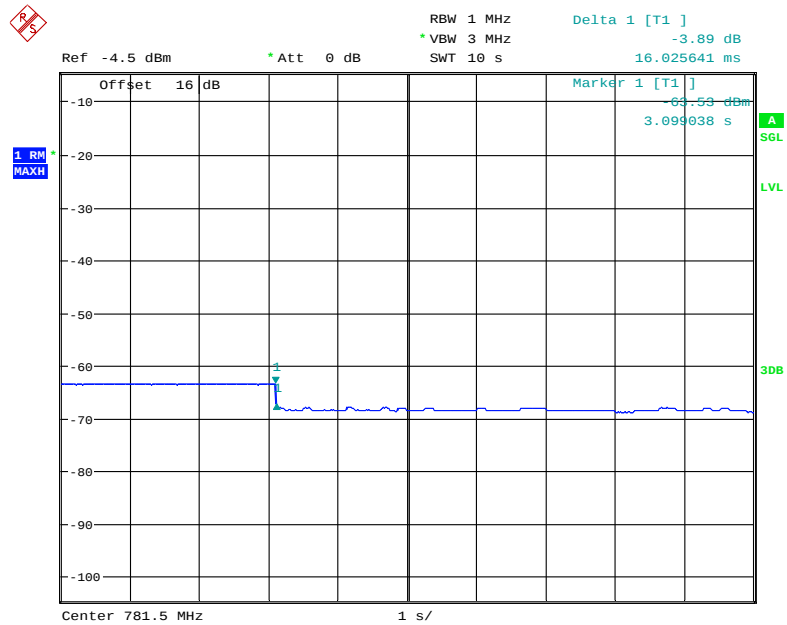

Date: 30.JUL.2019 17:17:56

## § 20.21(e)(8)(i)(I) & §20.21(e)(4) - UPLINK INACTIVITY

### Applicable Standards


According to § 20.21(e)(8)(i)(I) Uplink Inactivity & §20.21(e)(4); §20.21(e)(4) Self-monitoring.

### Test Procedure

This measurement procedure is intended to demonstrate compliance to the uplink inactivity requirements specified for wideband consumer signal boosters in § 20.21(e)(8)(i)(I).

- Connect the EUT to the test equipment as shown in **Figure 3** with the uplink output connected to the spectrum analyzer.
- Select the RMS power averaging detector.
- Set the spectrum analyzer RBW for 1 MHz with the  $VBW \geq 3 \times RBW$ .
- Set the center frequency of the spectrum analyzer to the center of the uplink operational band.
- Set the span for 0 Hz with a single sweep time for a minimum of 330 seconds.
- Start to capture a new trace using MAX HOLD.
- After approximately 15 seconds turn on the EUT power.
- Once the full spectrum analyzer trace is complete place a MARKER on the leading edge of the pulse and use the DELTA MARKER METHOD to measure the time until the uplink becomes inactive.
- Affirm that the noise level for the squelched signal is below the uplink inactivity noise power limit, as specified by the rules.
- Capture the plot for inclusion in the test report.
- Measure noise using procedures in 7.7.1a) to 7.7.1f).
- Repeat 7.8d) through 7.8k) for all operational uplink bands.

**Note:** Some signal boosters will require a signal generator input because they will not operate unless a signal is received at the input terminals. If this is the case, connect a signal generator and cycle the RF output to simulate this function.

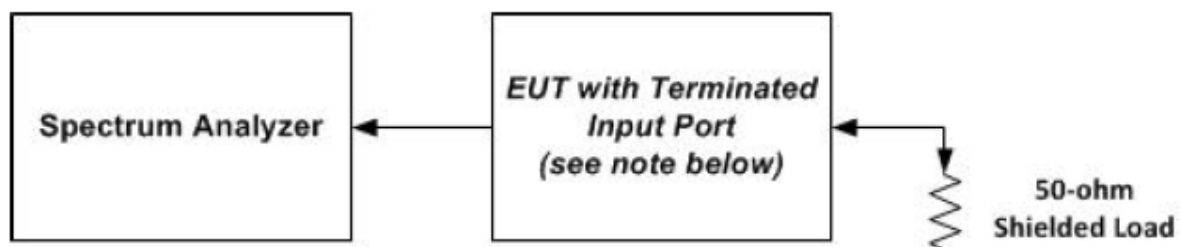

**Test Data****Environmental Conditions**


|                           |                 |
|---------------------------|-----------------|
| <b>Temperature:</b>       | 23~25 °C        |
| <b>Relative Humidity:</b> | 50~52 %         |
| <b>ATM Pressure:</b>      | 101.0~101.2 kPa |

The testing was performed by Kieron Luo on 2019-08-02.

**Test Result:** Compliance. Please refer to following table.


| Operation Band | Measured value | Limit | Result     |
|----------------|----------------|-------|------------|
|                | s              | s     |            |
| cellular       | 295.96         | 300   | Compliance |
| PCS            | 297.21         |       | Compliance |
| AWS            | 296.15         |       | Compliance |
| Lower 700MHz   | 295.63         |       | Compliance |
| Upper 700MHz   | 295.63         |       | Compliance |

Note: When the consumer booster is not serving an active device connection after 5 minutes the uplink noise power not exceed  $-70$  dBm/MHz.

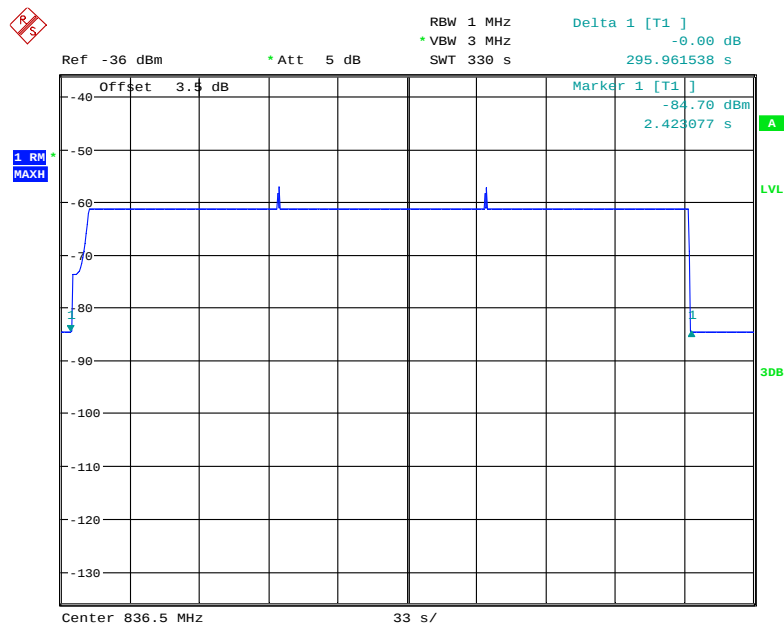**Cellular Band**


Date: 2.AUG.2019 14:09:33

### PCS Band

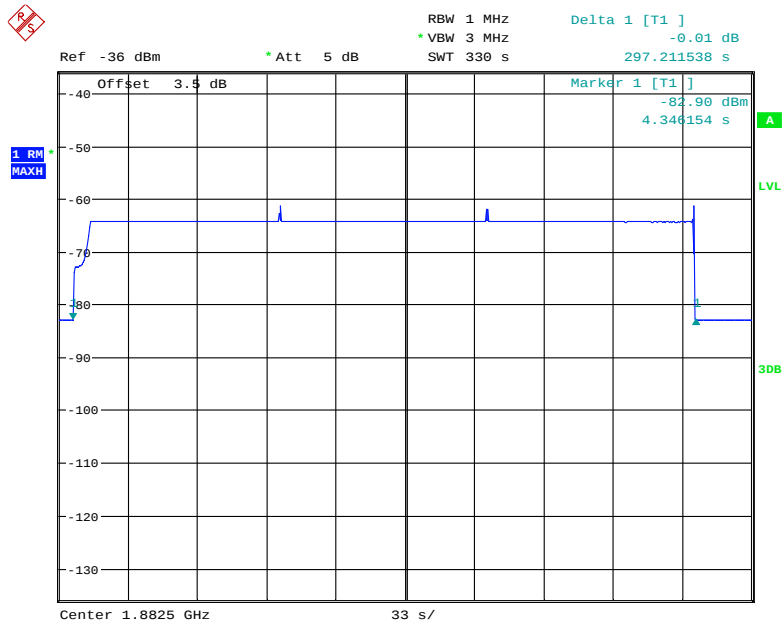


Date: 2.AUG.2019 14:16:04

### AWS Band

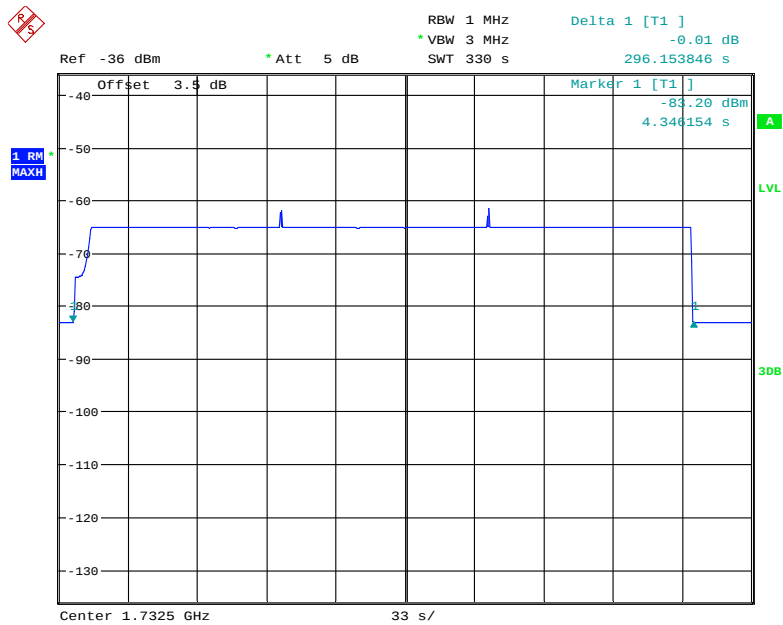


Date: 2.AUG.2019 14:54:19

Lower 700MHz

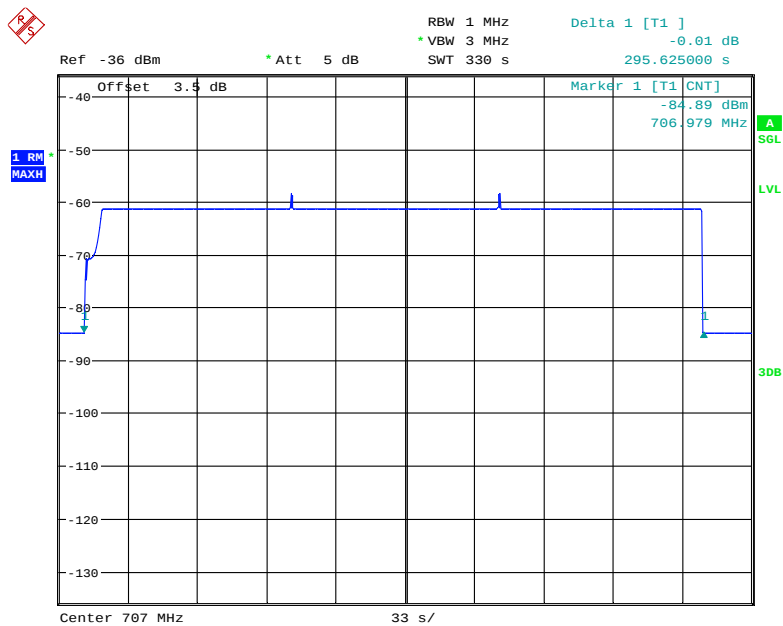

Date: 2.AUG.2019 15:07:14

Upper 700MHz

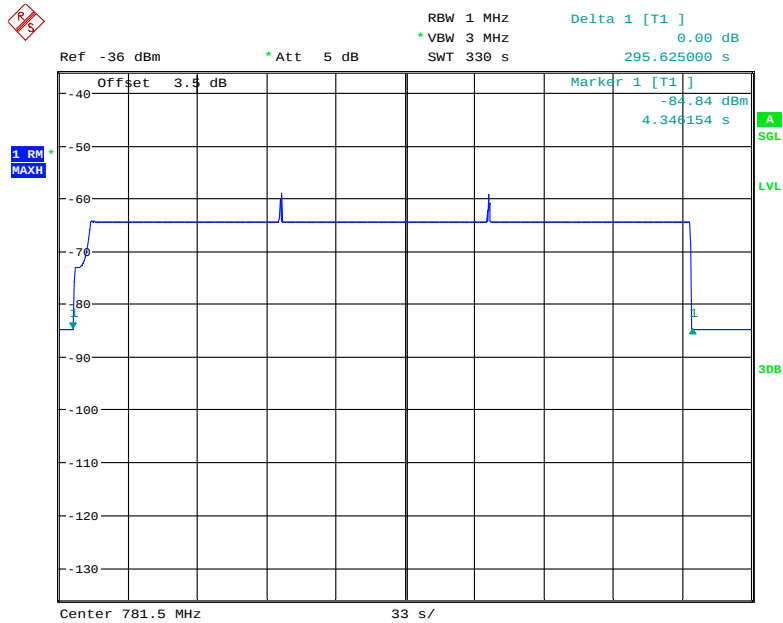

Date: 2.AUG.2019 15:13:19

## § 20.21(e)(8)(i)(C)(1) & § 20.21(e)(8)(i)(H) - VARIABLE BOOSTER GAIN

### Applicable Standards

Rule paragraph(s): § 20.21(e)(8)(i)(C)(1) *Booster Gain Limits* (variable gain); § 20.21(e)(8)(i)(H) *Transmit Power Off Mode* (uplink gain).

### Test Procedure

#### Maximum gain

This procedure shall be used to demonstrate compliance to the booster gain limits specified for wideband consumer signal boosters in § 20.21(e)(8)(i)(C) or § 20.21(e)(8)(i)(H). The variable booster gain limits are expressed as a function of RSSI and MSCL. The RSSI is varied over a range of values as specified within the procedure. Refer to Annex B of this document for guidance on determining the applicable MSCL value.

- Connect the EUT to the test equipment as shown in **Figure 5** with the uplink output connected to signal generator 1. Confirm that the coupled path of the RF coupler is connected to the spectrum analyzer.
- Configure downlink signal generator 1 for AWGN operation with a 99% occupied bandwidth of 4.1 MHz tuned to the center of the operational band.
- Set the power level and frequency of signal generator 2 to a value 5 dB below the AGC level determined from 7.2. The signal type is AWGN with a 99% OBW of 4.1 MHz.
- Set RBW = 100 kHz.
- Set VBW  $\geq$  300 kHz.
- Select the CHANNEL POWER measurement mode.
- Select the RMS (power averaging) detector.
- Ensure that the number of measurement points per sweep  $\geq (2 \times \text{span})/\text{RBW}$ .
- Sweep time = auto couple or as necessary (but no less than auto couple value).
- Trace average at least 10 traces in power averaging (i.e., RMS) mode.
- Measure the maximum channel power and compute maximum gain when varying the signal generator 1 output to a level from -90 dBm to -20 dBm as measured at the input port in 1 dB steps inside the RSSI-dependent region and 10 dB steps outside the RSSI-dependent region and report the six values closest to the limit, including at least two points from within the RSSI-dependent region of operation. See gain limit in charts in Annex D for uplink gain requirements. Additionally, document that the EUT provides equivalent uplink and downlink gain, and when operating in shutoff mode the uplink and downlink gain is within the transmit power off mode gain limits.
- Repeat 7.9.1b) to 7.9.1k) for all operational uplink bands.

#### Variable uplink gain timing

Variable uplink gain timing is to be measured as follows.

- Set the spectrum analyzer to the uplink frequency to be measured.
- Set the span to 0 Hz with a sweep time of 10 seconds.
- Set the power level of signal generator 1 to the lowest level of the RSSI-dependent gain.
- Select MAX HOLD and increase the power level of signal generator 1 by 10 dB for mobile boosters and 20 dB for fixed indoor boosters. Signal generator 2 remains same, as described in 7.9.1c).
- Confirm that the uplink gain decreases to the specified levels within 1 second for mobile devices and 3 seconds for fixed devices.
- Repeat 7.9.2a) to 7.9.2e) for all operational uplink bands.

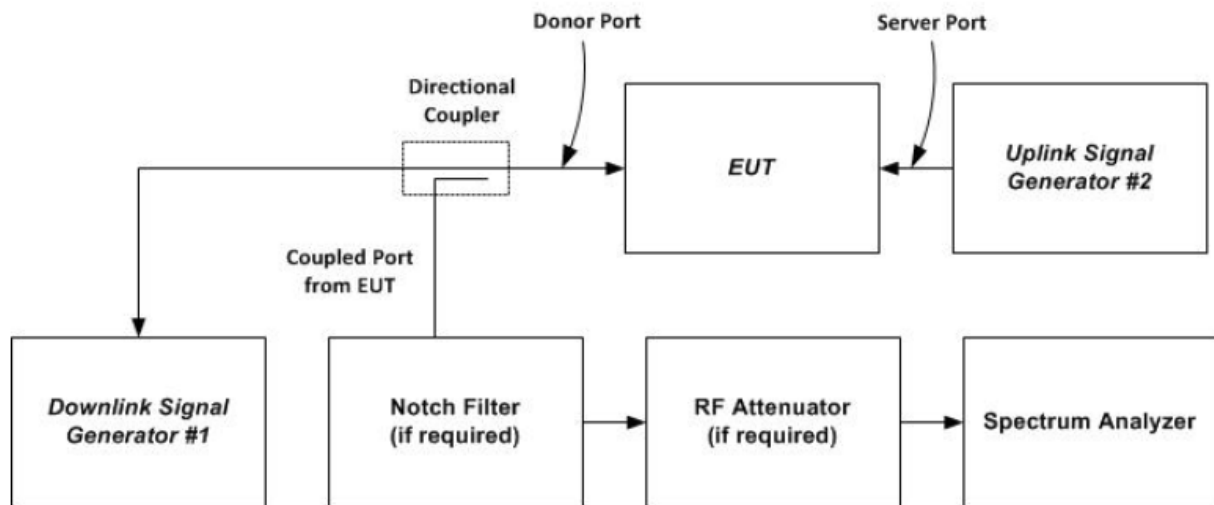


Figure 5 – Variable gain instrumentation test setup

## Test Data

### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 24 °C     |
| Relative Humidity: | 52 %      |
| ATM Pressure:      | 101.2 kPa |

The testing was performed by Kieron Luo on 2019-08-08.

**Test Result:** Compliance. Please refer to following table.

### MSCL calculation:

| Operation Bands | Frequency<br>MHz | Distance<br>m | Path Loss<br>dB | Indoor Antenna Gain<br>(dBi) | Indoor Cable Loss<br>(dB) | Polarity Loss<br>(dB) | MSCL  |
|-----------------|------------------|---------------|-----------------|------------------------------|---------------------------|-----------------------|-------|
| Cellular        | 836.5            | 0.5           | 24.93           | -1.5                         | 0                         | 3.01                  | 29.44 |
| PCS             | 1882.5           | 0.5           | 31.97           | 2.5                          | 0                         | 3.01                  | 32.48 |
| AWS             | 1732.5           | 0.5           | 31.25           | 2                            | 0                         | 3.01                  | 32.26 |
| Upper 700MHz    | 781.5            | 0.5           | 24.34           | -1.5                         | 0                         | 3.01                  | 28.85 |
| Lower 700MHz    | 707.0            | 0.5           | 23.47           | -1.5                         | 0                         | 3.01                  | 27.98 |

Note:

Path loss= $20\log f + 20\log d - 27.50$

Polarity loss= $20\log(1/\sin(45)) = 3.01$

MSCL= Path loss + Indoor Cable Loss - Mobile Antenna Gain- Indoor Antenna Gain+ Polarity Loss

Mobile Antenna Gain=0

The above table was list the lowest MSCL value using all the authorized antennas and cables.

**Variable booster gain:**

| Operation Bands | RSSI | P <sub>in</sub> | P <sub>out</sub> | MSCL  | Measured Value | Limit | Result     |
|-----------------|------|-----------------|------------------|-------|----------------|-------|------------|
|                 | dBm  | dBm             | dBm              | dB    | dB             | dB    |            |
| Cellular        | -58  | -36.45          | 13.2             | 29.44 | 49.65          | 50    | Compliance |
|                 | -57  | -36.45          | 13.0             | 29.44 | 49.45          | 50    | Compliance |
|                 | -56  | -36.45          | 12.9             | 29.44 | 49.35          | 50    | Compliance |
|                 | -55  | -36.45          | 12.6             | 29.44 | 49.05          | 50    | Compliance |
|                 | -54  | -36.45          | 11.8             | 29.44 | 48.25          | 49.44 | Compliance |
|                 | -53  | -36.45          | 11.0             | 29.44 | 47.45          | 48.44 | Compliance |
| PCS             | -54  | -36.50          | 13.0             | 32.48 | 49.50          | 50    | Compliance |
|                 | -53  | -36.50          | 12.8             | 32.48 | 49.30          | 50    | Compliance |
|                 | -52  | -36.50          | 12.0             | 32.48 | 48.50          | 50    | Compliance |
|                 | -51  | -36.50          | 11.0             | 32.48 | 47.50          | 49.48 | Compliance |
|                 | -50  | -36.50          | 10.0             | 32.48 | 46.50          | 48.48 | Compliance |
|                 | -49  | -36.50          | 9.0              | 32.48 | 45.50          | 47.48 | Compliance |
| AWS             | -55  | -38.50          | 11.2             | 32.26 | 49.70          | 50    | Compliance |
|                 | -54  | -38.50          | 11.2             | 32.26 | 49.70          | 50    | Compliance |
|                 | -53  | -38.50          | 11.0             | 32.26 | 49.50          | 50    | Compliance |
|                 | -52  | -38.50          | 10.3             | 32.26 | 48.80          | 50    | Compliance |
|                 | -51  | -38.50          | 9.0              | 32.26 | 47.50          | 49.26 | Compliance |
|                 | -50  | -38.50          | 8.0              | 32.26 | 46.50          | 48.26 | Compliance |
| Lower 700MHz    | -60  | -35.50          | 14.2             | 27.98 | 49.70          | 50    | Compliance |
|                 | -59  | -35.50          | 13.3             | 27.98 | 48.80          | 50    | Compliance |
|                 | -58  | -35.50          | 13.0             | 27.98 | 48.50          | 50    | Compliance |
|                 | -57  | -35.50          | 12.5             | 27.98 | 48.00          | 50    | Compliance |
|                 | -56  | -35.50          | 12.0             | 27.98 | 47.50          | 49.98 | Compliance |
|                 | -55  | -35.50          | 11.5             | 27.98 | 47.00          | 48.98 | Compliance |
| Upper 700MHz    | -58  | -36.50          | 11.5             | 28.85 | 48.00          | 50    | Compliance |
|                 | -57  | -36.50          | 11.0             | 28.85 | 47.50          | 50    | Compliance |
|                 | -56  | -36.50          | 10.8             | 28.85 | 47.30          | 50    | Compliance |
|                 | -55  | -36.50          | 10.3             | 28.85 | 46.80          | 49.85 | Compliance |
|                 | -54  | -36.50          | 9.6              | 28.85 | 46.10          | 48.85 | Compliance |
|                 | -53  | -36.50          | 9.3              | 28.85 | 45.80          | 47.85 | Compliance |

Note 1: According to KDB 935210 D03 Signal Booster Measurements v04r03 Annex D, the Variable booster gain is -34dB-RSSI+MSCL in RSSI-Dependent Region, out of RSSI-Dependent Region, it is 50dB.


Note 2: RSSI is the downlink composite received signal power in dBm at the booster donor port for all base stations in the band of operation.

**Variable gain timing:**

| Operation Bands | Measured value | Limit | Results    |
|-----------------|----------------|-------|------------|
| MHz             | s              | s     |            |
| PCS             | 0.027          | 1     | Compliance |
| Cellular        | 0.020          |       | Compliance |
| AWS             | 0.034          |       | Compliance |
| Lower 700MHz    | 0.029          |       | Compliance |
| Upper 700MHz    | 0.029          |       | Compliance |


Note: The uplink gain decreases to the specified level within 1 second for mobile devices and 3 seconds for fixed devices.

### Cellular Band

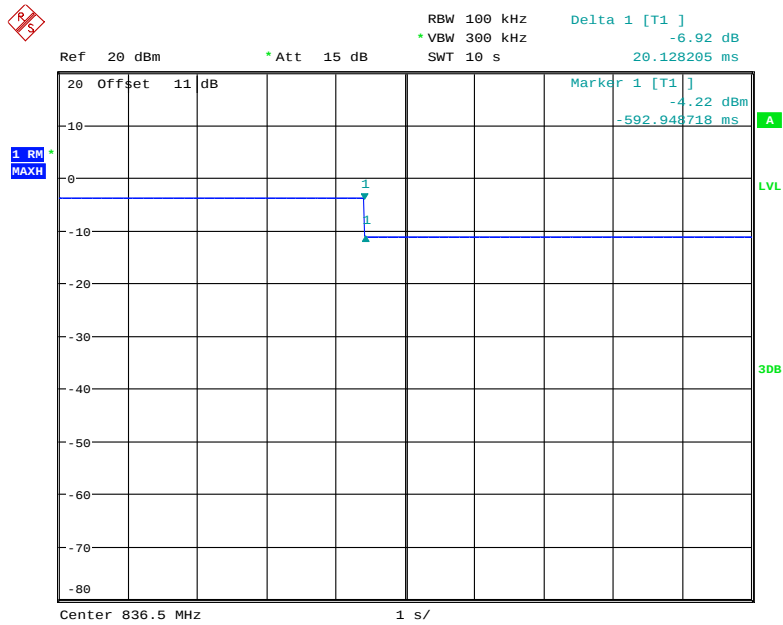


Date: 8.AUG.2019 12:21:45

### PCS Band

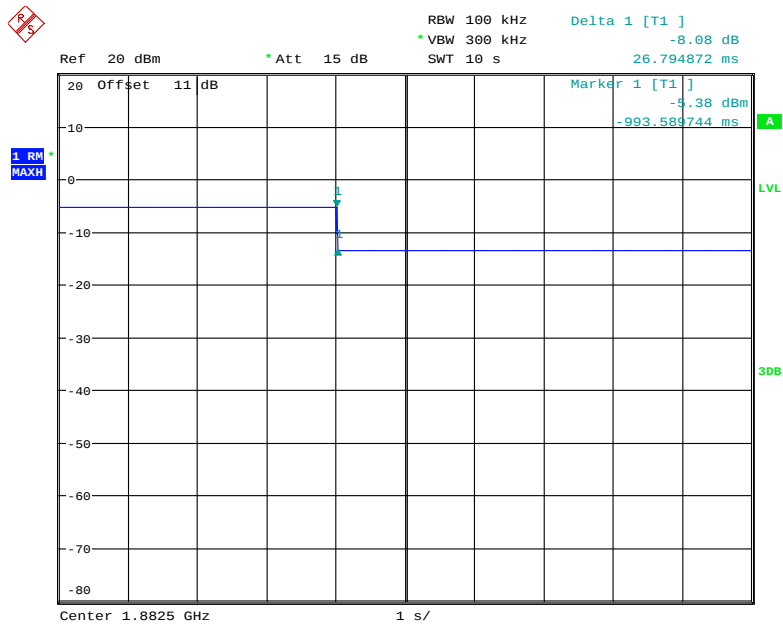


Date: 8.AUG.2019 12:26:31

### AWS Band

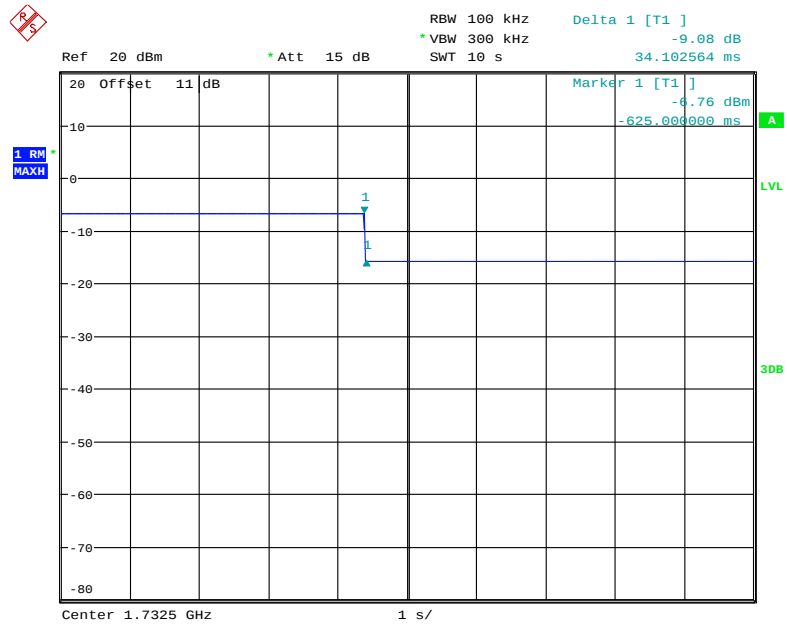


Date: 8.AUG.2019 12:27:28

### Lower 700MHz

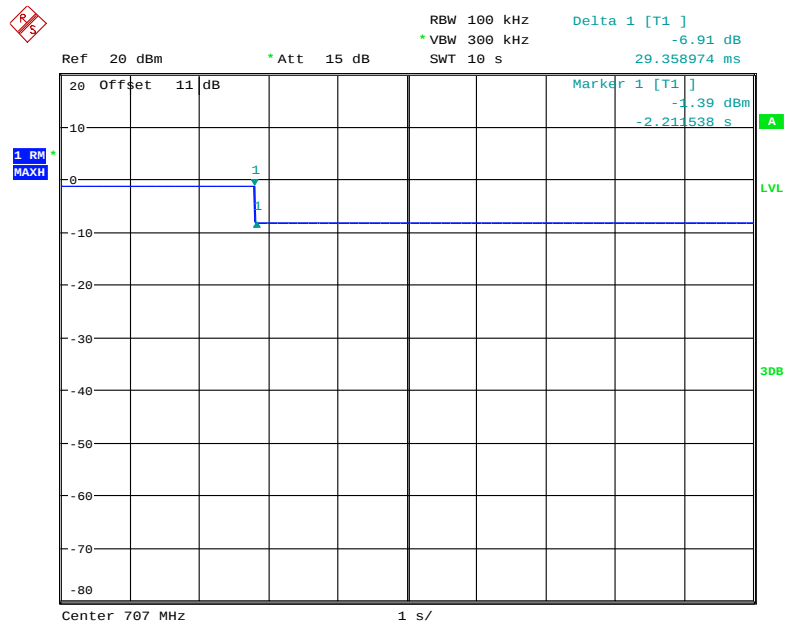

Date: 8.AUG.2019 12:25:10

Upper 700MHz

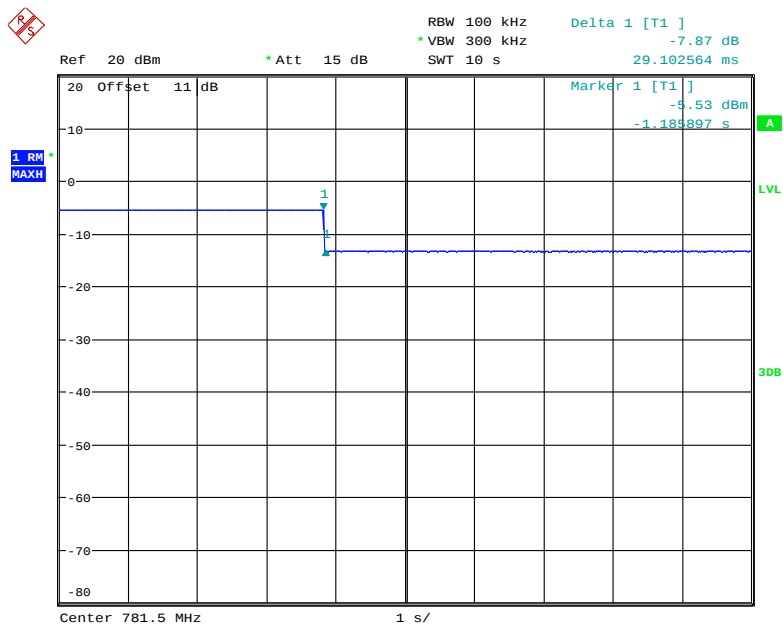

Date: 8.AUG.2019 12:29:53

## § 2.1049 - OCCUPIED BANDWIDTH

### Applicable Standards

According to § 2.1049 Measurements required: Occupied bandwidth.

### Test Procedure

This measurement is required to compare the uniformity of the output signal relative to the input signal and to satisfy the requirements of § 2.1049.

- Connect the test equipment as shown in **Figure 6** to measure the characteristics of the test signals produced by the signal generator.
- Set VBW to  $\geq 3 \times \text{RBW}$ .
- Set the center frequency of the spectrum analyzer to the center of the operational band. The span will be adjusted for each modulation type and occupied bandwidth as necessary for accurately viewing the signals.
- Set the signal generator for power level to match the values obtained in 7.2.
- Set the signal generator modulation type for GSM with a PRBS pattern and allow the trace on the signal generator to stabilize adjusting the span as necessary.
- Set the spectrum analyzer RBW for 1% to 5% of the emissions bandwidth.
- Capture the spectrum analyzer trace for inclusion in the test report.
- Repeat 7.10c) to 7.10g) for CDMA and W-CDMA modulation adjusting the span as necessary for all uplink and downlink operational bands. AWGN or LTE may be used in place of W-CDMA, as an option.
- Connect the test equipment as shown in **Figure 1**. Begin with the uplink output connected to the spectrum analyzer.
- Repeat 7.10c) to 7.10h) in this new configuration.

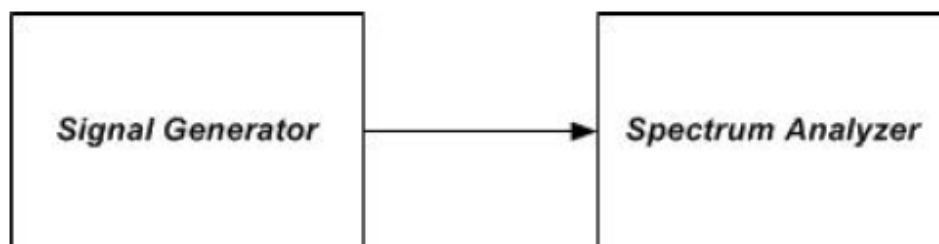


Figure 6 – Occupied bandwidth instrumentation test setup

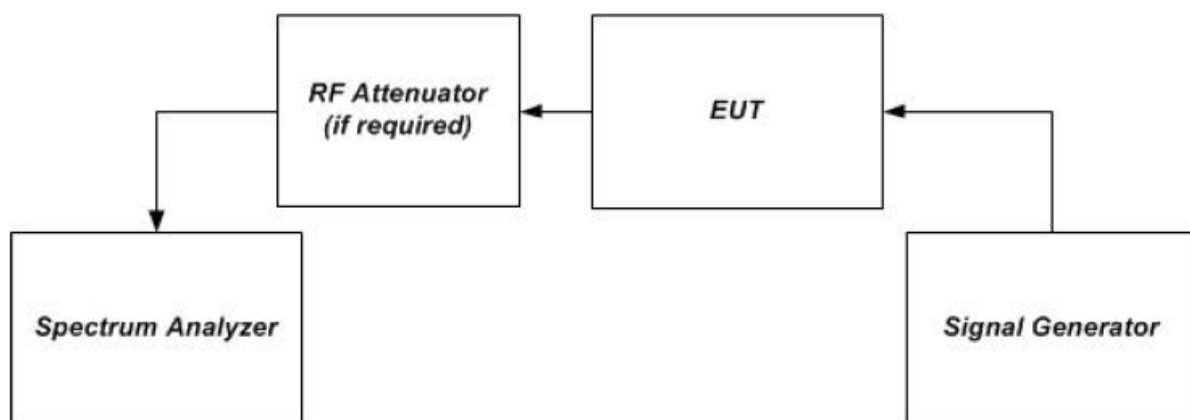


Figure 1 – Band verification test instrumentation setup

**Test Data****Environmental Conditions**

|                           |                 |
|---------------------------|-----------------|
| <b>Temperature:</b>       | 24 °C           |
| <b>Relative Humidity:</b> | 52 %            |
| <b>ATM Pressure:</b>      | 101.0~101.2 kPa |


*The testing was performed by Kieron Luo on 2019-08-02.*

**Test Result:** Compliance. Please refer to following table.

**Input-versus-output signal comparison**


| Mode     | Operation Band | Signal type | Input | Output | Results    |
|----------|----------------|-------------|-------|--------|------------|
|          |                |             | MHz   | MHz    |            |
| Uplink   | cellular       | GSM         | 0.247 | 0.242  | Compliance |
|          |                | CDMA        | 1.274 | 1.274  | Compliance |
|          |                | WCDMA       | 4.215 | 4.167  | Compliance |
|          | PCS            | GSM         | 0.244 | 0.245  | Compliance |
|          |                | CDMA        | 1.279 | 1.274  | Compliance |
|          |                | WCDMA       | 4.199 | 4.183  | Compliance |
|          | AWS            | GSM         | 0.245 | 0.242  | Compliance |
|          |                | CDMA        | 1.279 | 1.279  | Compliance |
|          |                | WCDMA       | 4.215 | 4.215  | Compliance |
|          | Lower 700MHz   | GSM         | 0.245 | 0.244  | Compliance |
|          |                | CDMA        | 1.274 | 1.274  | Compliance |
|          |                | WCDMA       | 4.263 | 4.183  | Compliance |
| Downlink | cellular       | GSM         | 0.245 | 0.245  | Compliance |
|          |                | CDMA        | 1.274 | 1.274  | Compliance |
|          |                | WCDMA       | 4.199 | 4.199  | Compliance |
|          | PCS            | GSM         | 0.247 | 0.247  | Compliance |
|          |                | CDMA        | 1.284 | 1.284  | Compliance |
|          |                | WCDMA       | 4.327 | 4.215  | Compliance |
|          | AWS            | GSM         | 0.247 | 0.245  | Compliance |
|          |                | CDMA        | 1.279 | 1.274  | Compliance |
|          |                | WCDMA       | 4.407 | 4.183  | Compliance |
|          | Lower 700MHz   | GSM         | 0.250 | 0.244  | Compliance |
|          |                | CDMA        | 1.284 | 1.279  | Compliance |
|          |                | WCDMA       | 4.519 | 4.199  | Compliance |
|          | Upper 700MHz   | GSM         | 0.245 | 0.240  | Compliance |
|          |                | CDMA        | 1.284 | 1.279  | Compliance |
|          |                | WCDMA       | 4.263 | 4.183  | Compliance |
|          | Upper 700MHz   | GSM         | 0.247 | 0.240  | Compliance |
|          |                | CDMA        | 1.284 | 1.279  | Compliance |
|          |                | WCDMA       | 4.295 | 4.167  | Compliance |

### Uplink, 836.5MHz -CDMA (Input)

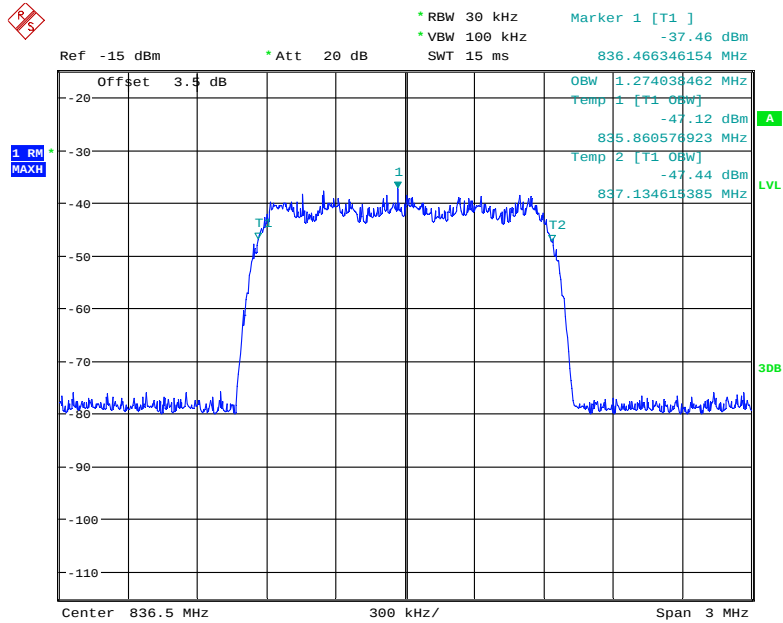


Date: 2.AUG.2019 06:52:59

### Uplink, 836.5MHz -CDMA (Output)

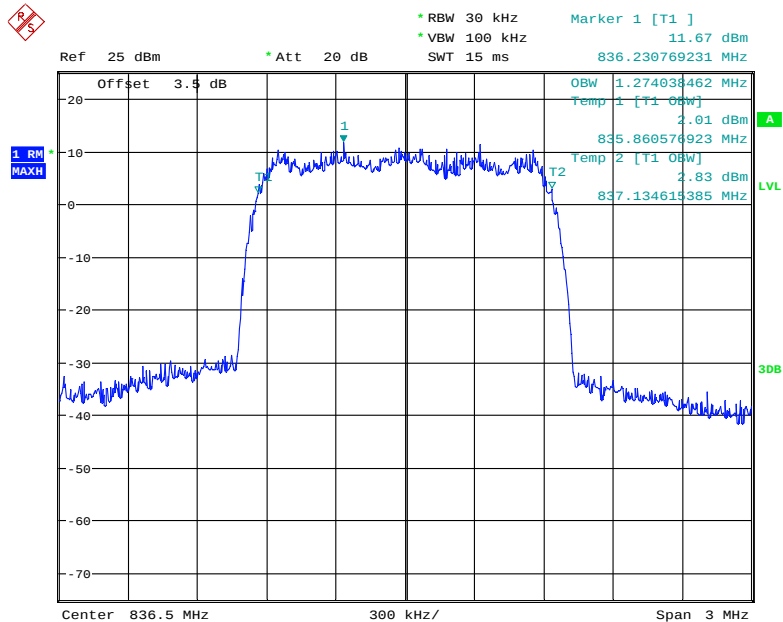


Date: 2.AUG.2019 07:07:14

### Uplink, 836.5MHz -GSM(Input)

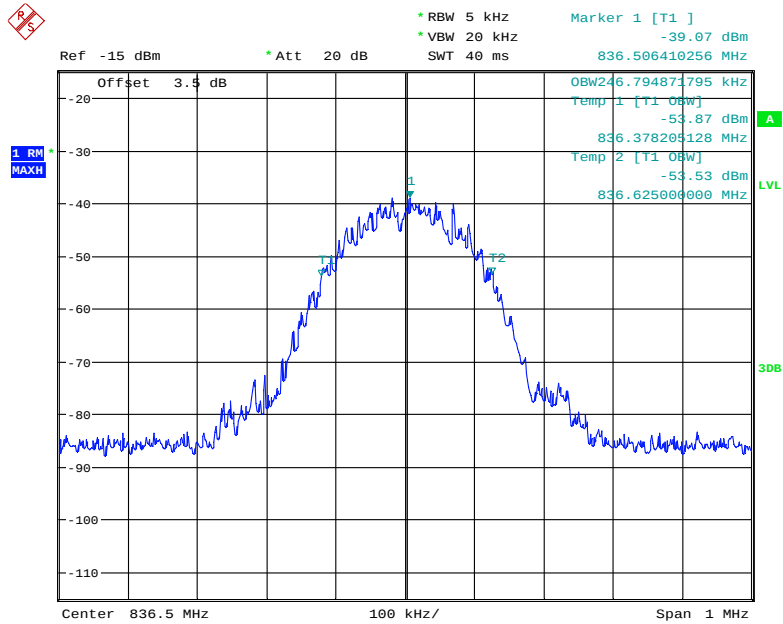


Date: 2.AUG.2019 06:40:59

### Uplink, 836.5MHz -GSM (Output)

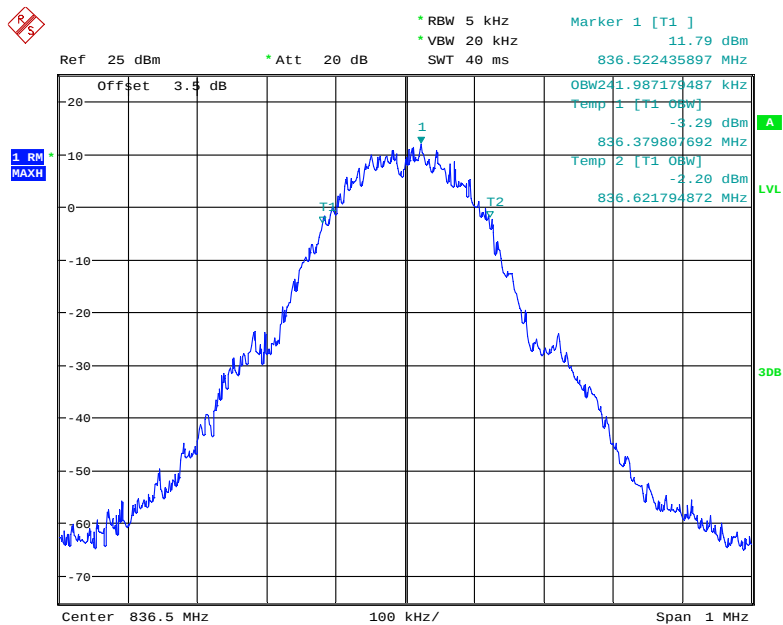


Date: 2.AUG.2019 06:31:48

### Uplink, 836.5MHz –WCDMA (Input)

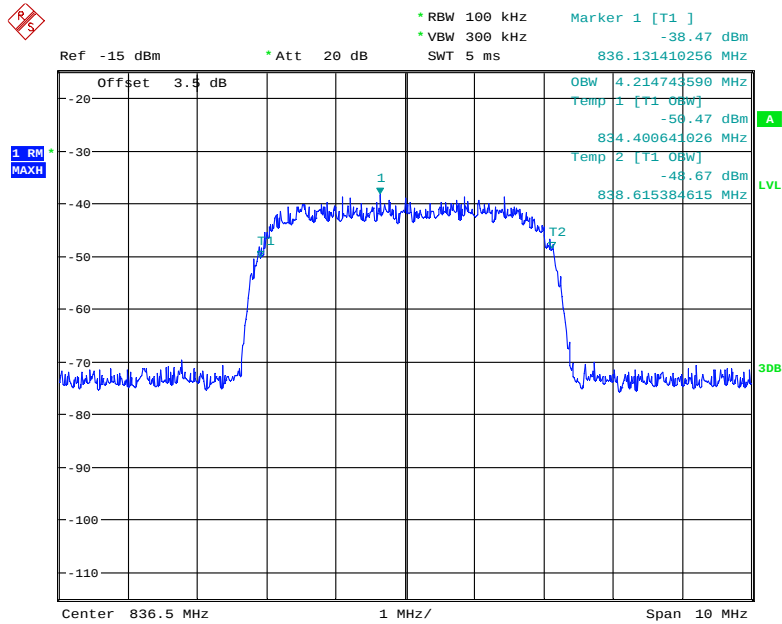


Date: 2.AUG.2019 06:58:30

### Uplink, 836.5MHz –WCDMA (Output)

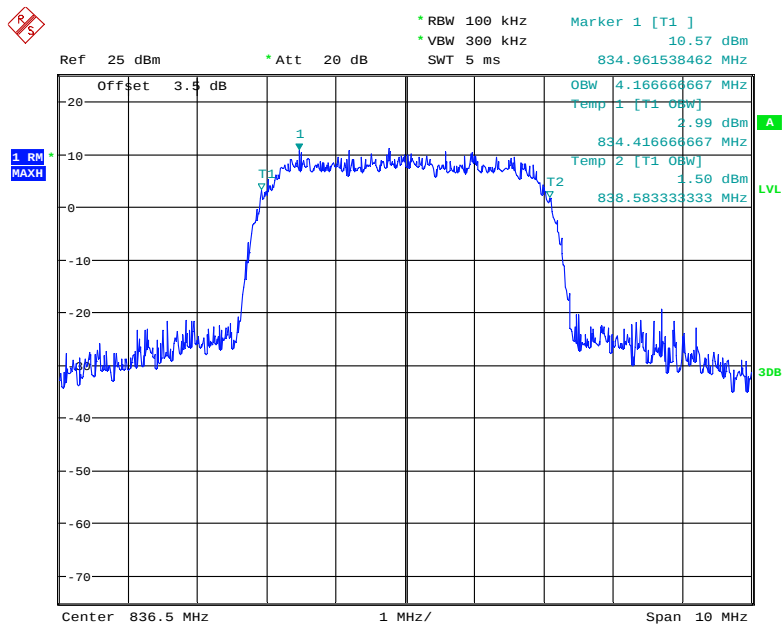


Date: 2.AUG.2019 07:04:10

### Uplink, 1882.5MHz-CDMA(Input)

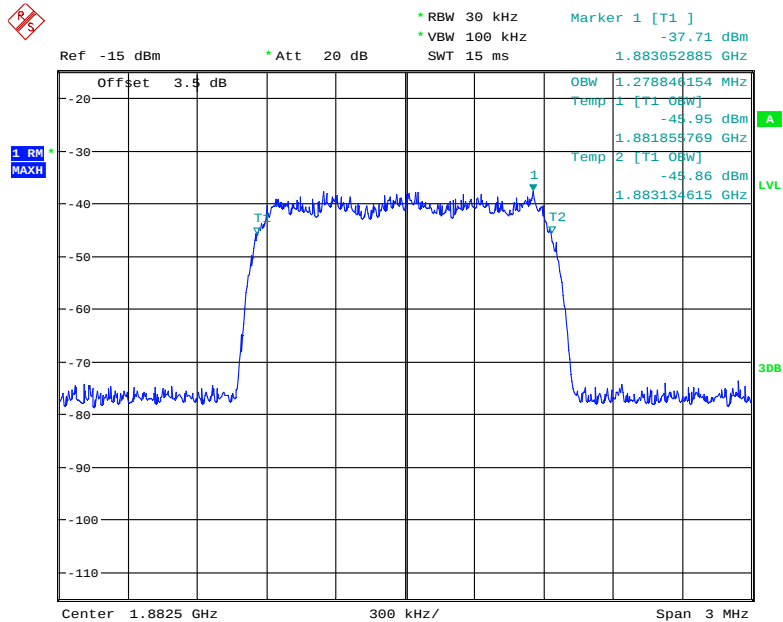


Date: 2.AUG.2019 06:52:27

### Uplink, 1882.5MHz-CDMA (Output)

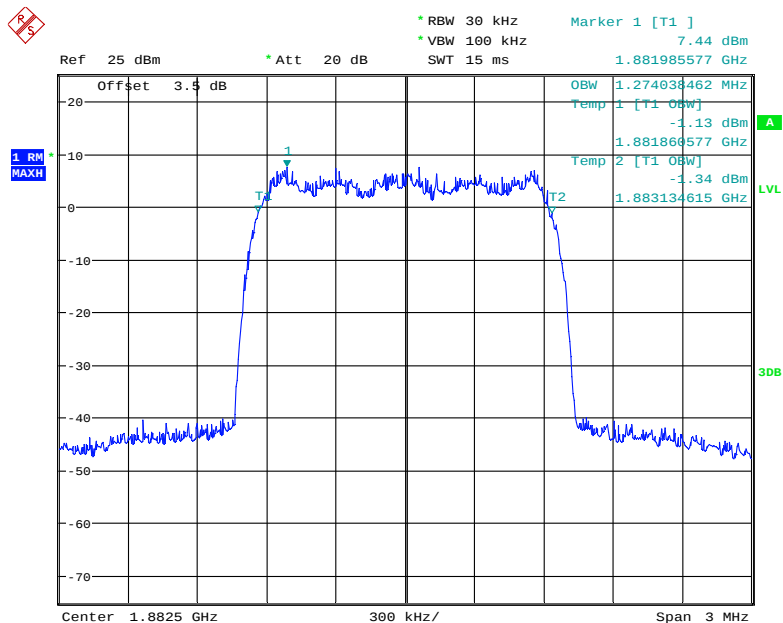


Date: 2.AUG.2019 07:07:33

### Uplink, 1882.5MHz-GSM(Input)

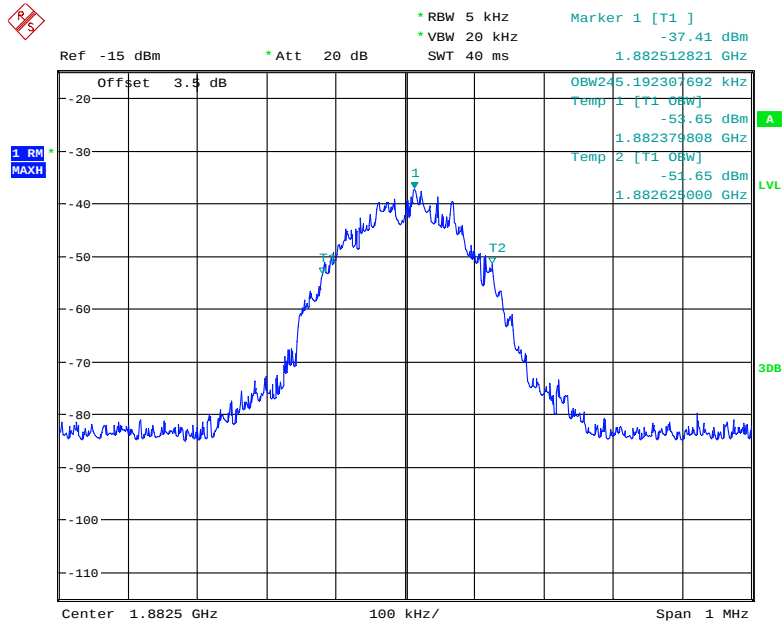


Date: 2.AUG.2019 06:41:26

### Uplink, 1882.5MHz-GSM (Output)

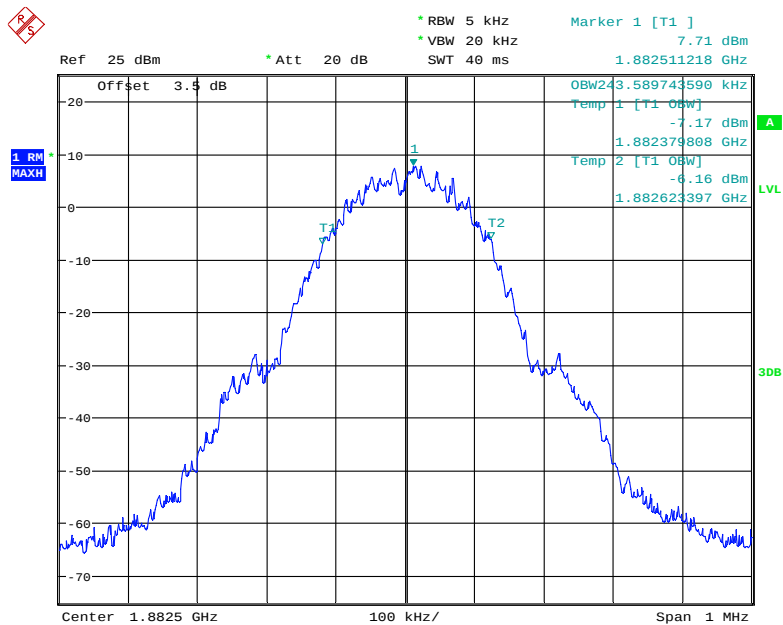


Date: 2.AUG.2019 06:30:03

### Uplink, 1882.5MHz-WCDMA (Input)

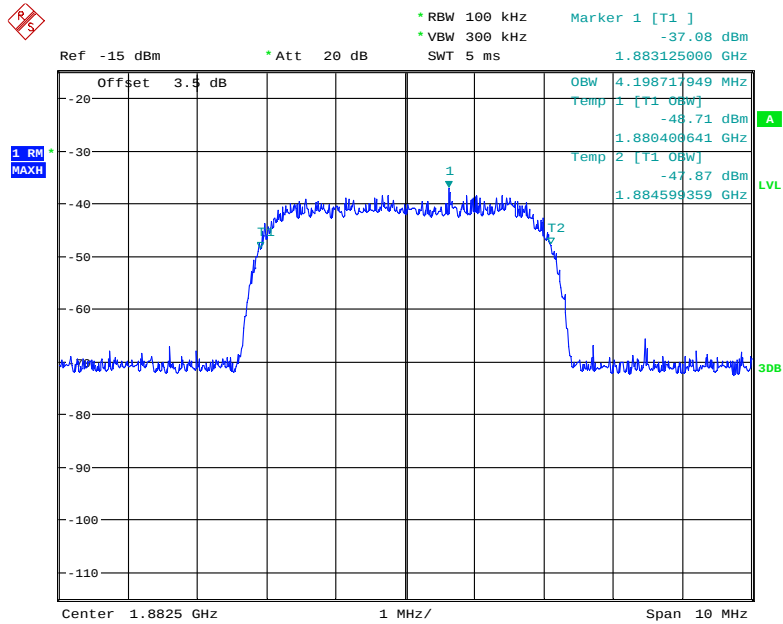


Date: 2.AUG.2019 06:58:49

### Uplink, 1882.5MHz- WCDMA (Output)

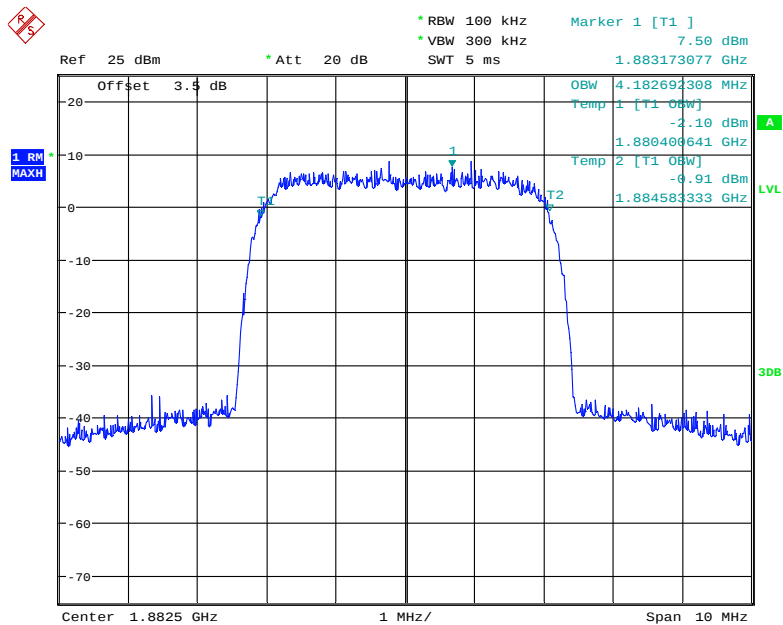


Date: 2.AUG.2019 07:03:05

### Uplink, 1732.5MHz -CDMA (Input)

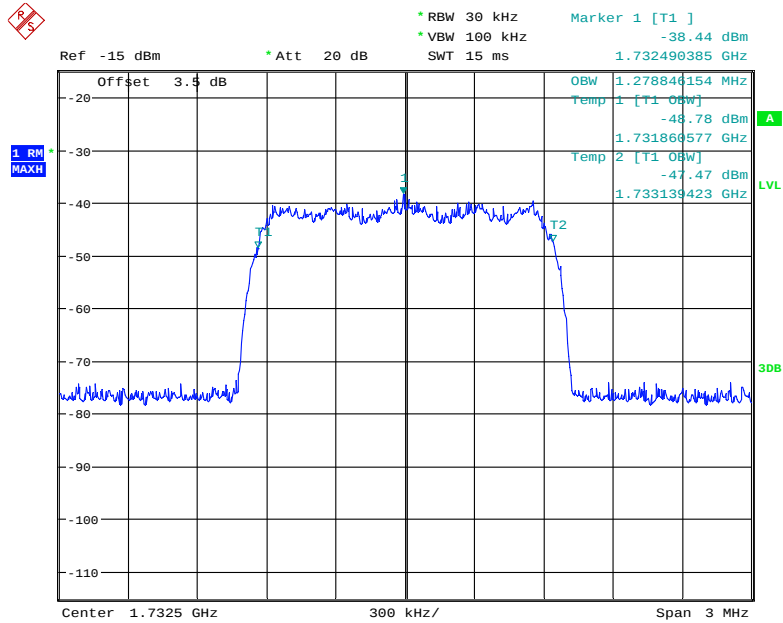


Date: 2.AUG.2019 06:53:32

### Uplink, 1732.5MHz -CDMA (Output)

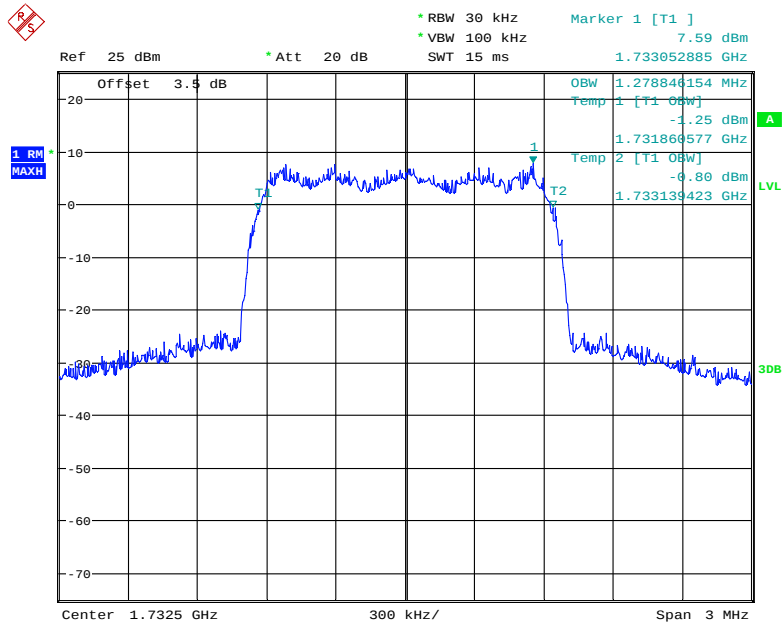


Date: 2.AUG.2019 07:06:57

**Uplink, 1732.5MHz -GSM(Input)**

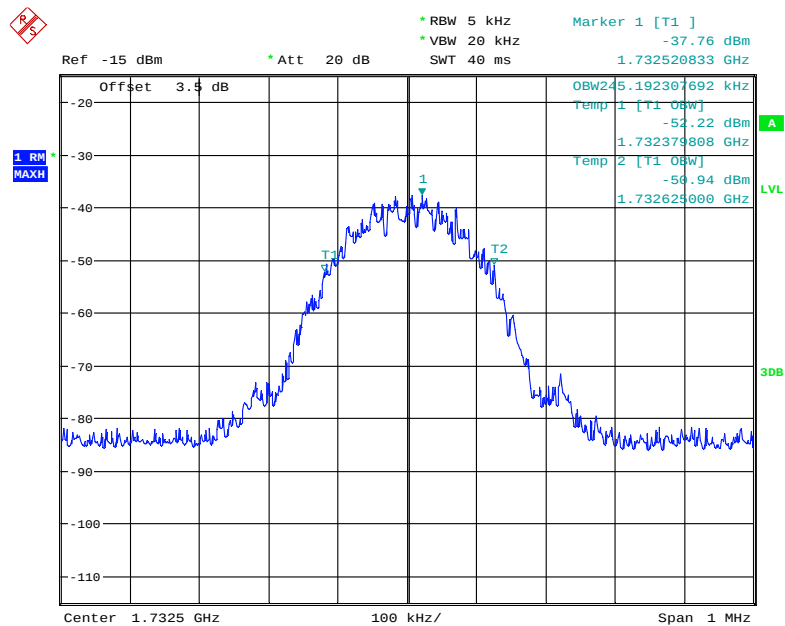


Date: 2.AUG.2019 06:40:25

**Uplink, 1732.5MHz -GSM (Output)**

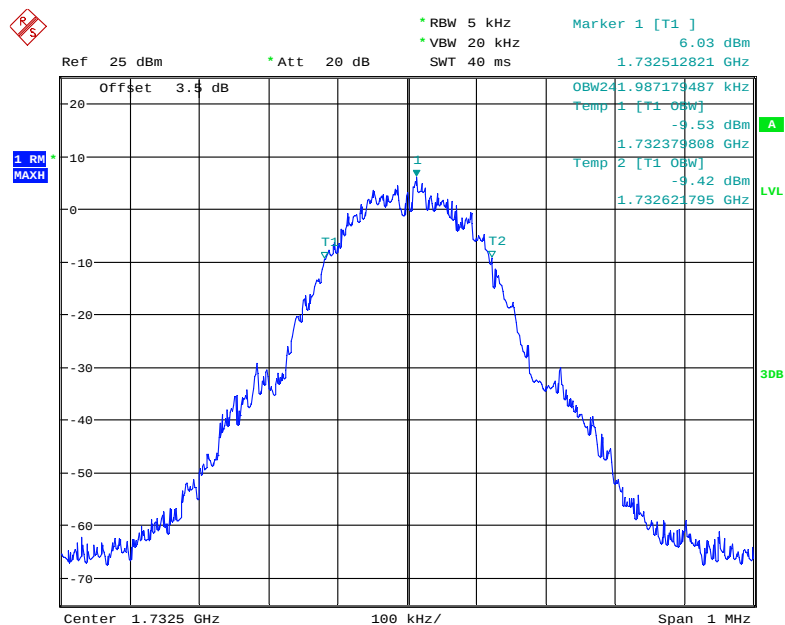


Date: 2.AUG.2019 06:32:34

### Uplink, 1732.5MHz –WCDMA (Input)

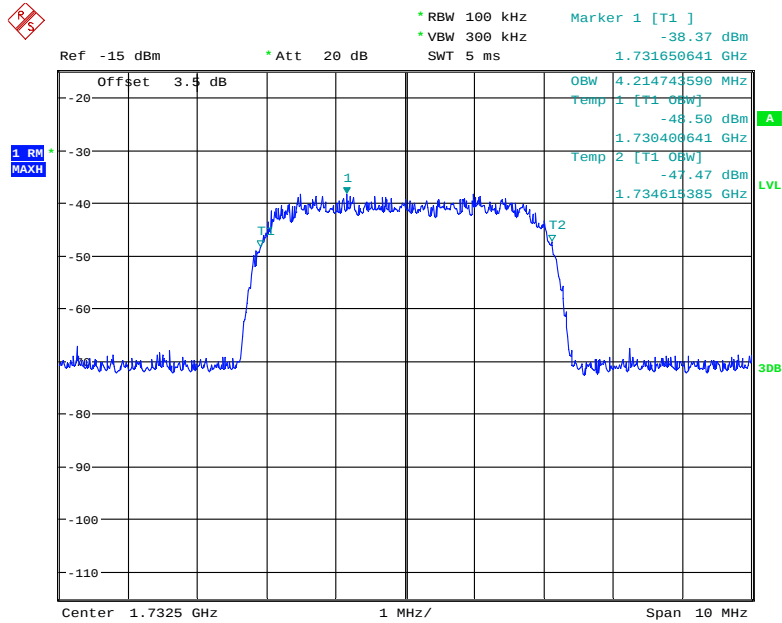


Date: 2.AUG.2019 06:58:13

### Uplink, 1732.5MHz –WCDMA (Output)

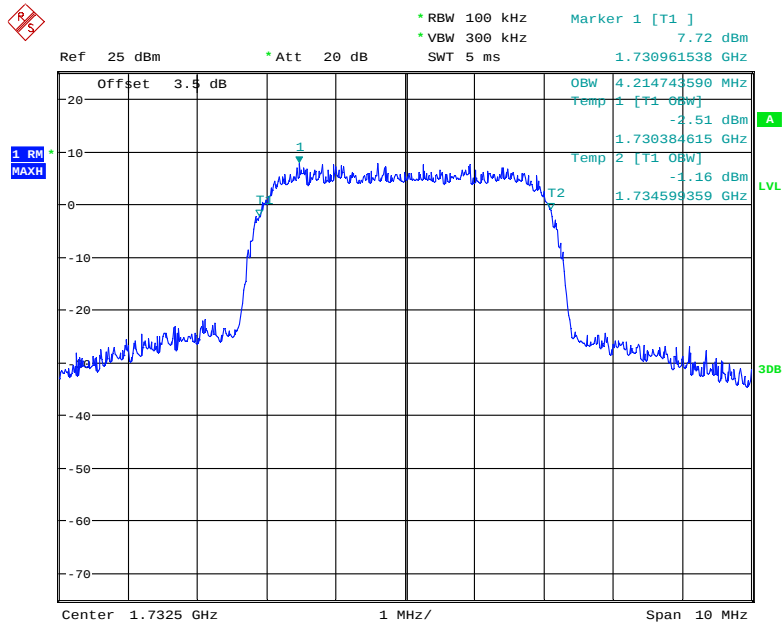


Date: 2.AUG.2019 07:04:30

### Uplink, 707MHz-CDMA(Input)

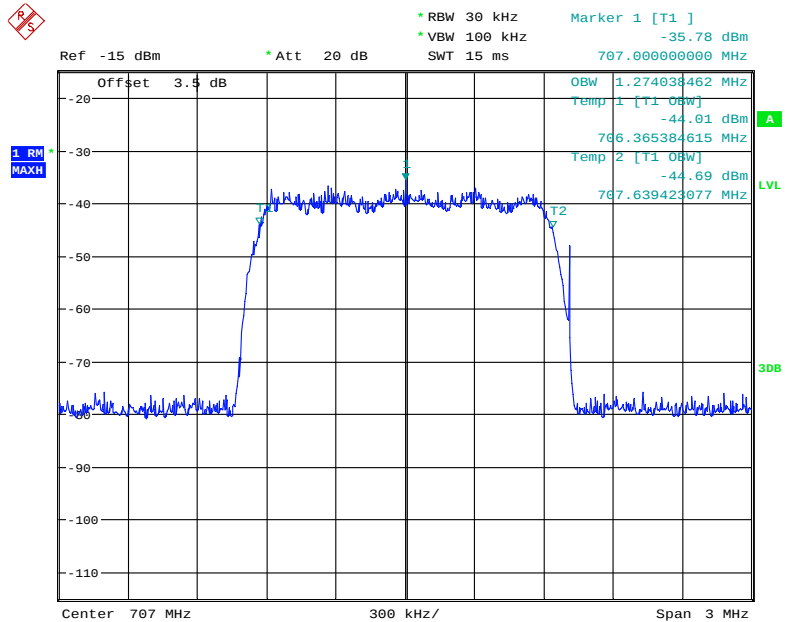


Date: 2.AUG.2019 06:53:57

### Uplink, 707MHz-CDMA (Output)

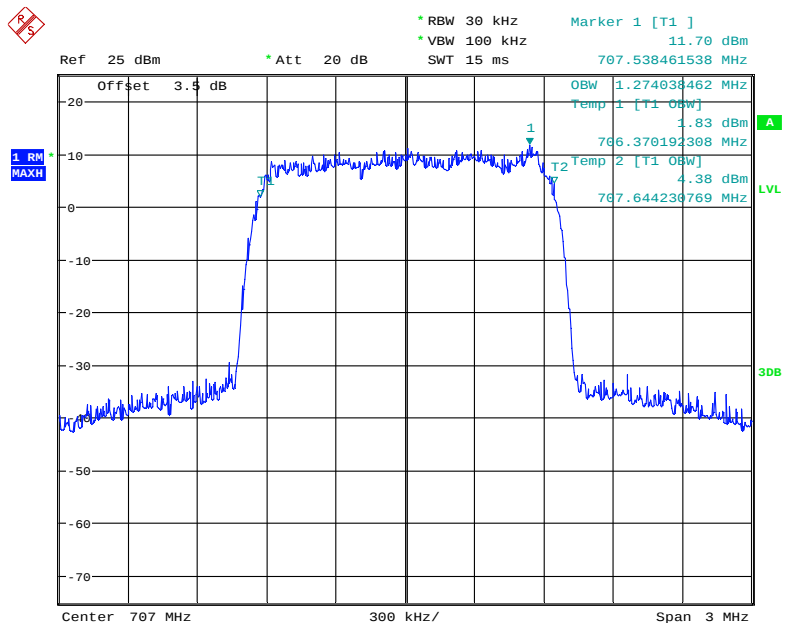


Date: 2.AUG.2019 07:06:38

### Uplink, 707MHz -GSM (Input)

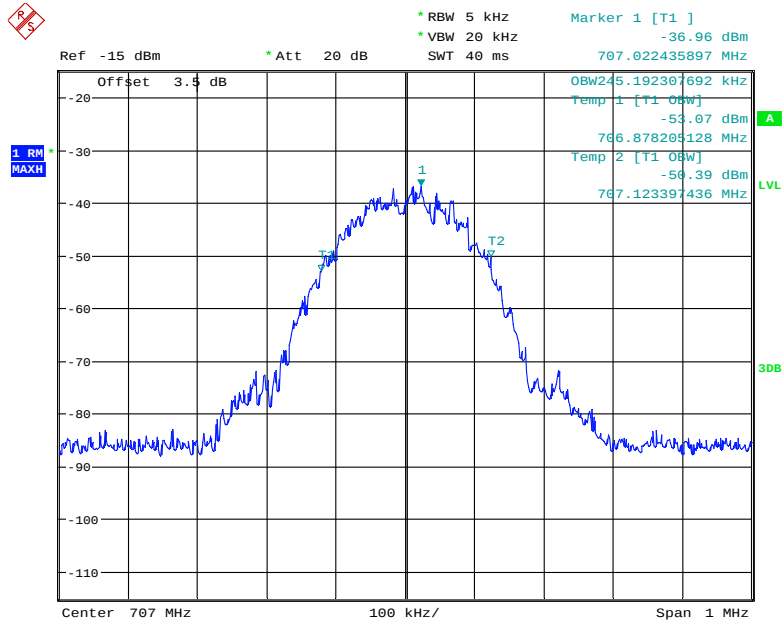


Date: 2.AUG.2019 06:39:27

### Uplink, 707MHz -GSM (Output)

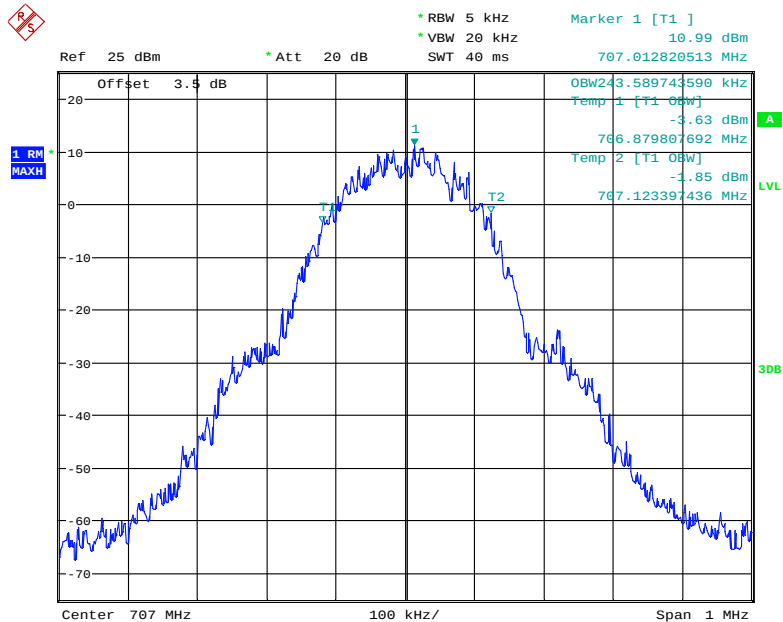


Date: 2.AUG.2019 06:35:23

### Uplink, 707MHz –WCDMA (Input)

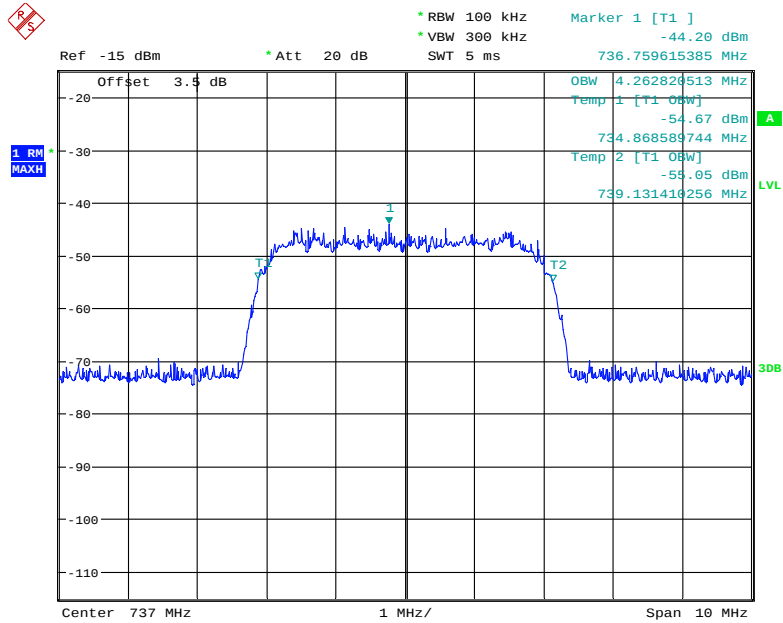


Date: 2.AUG.2019 07:00:28

### Uplink, 707MHz –WCDMA (Output)

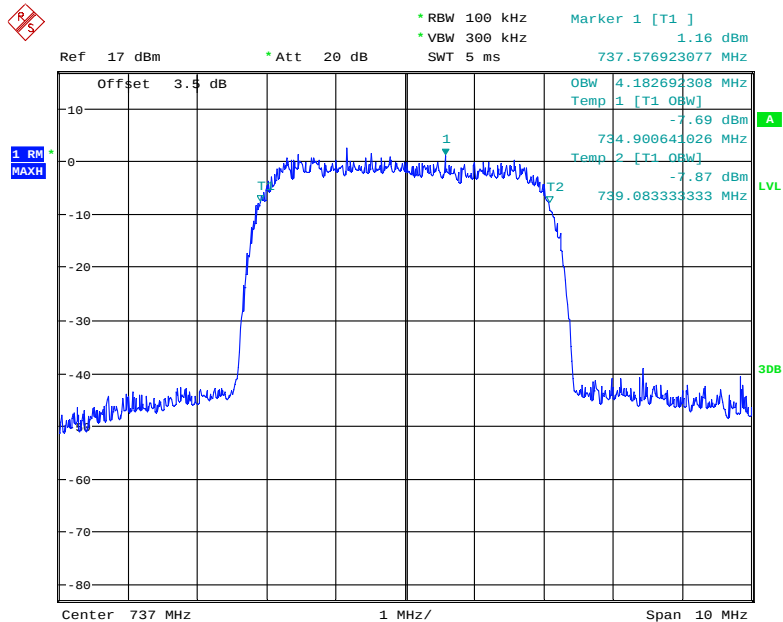


Date: 2.AUG.2019 07:11:37

### Uplink, 781.5MHz-CDMA (Input)

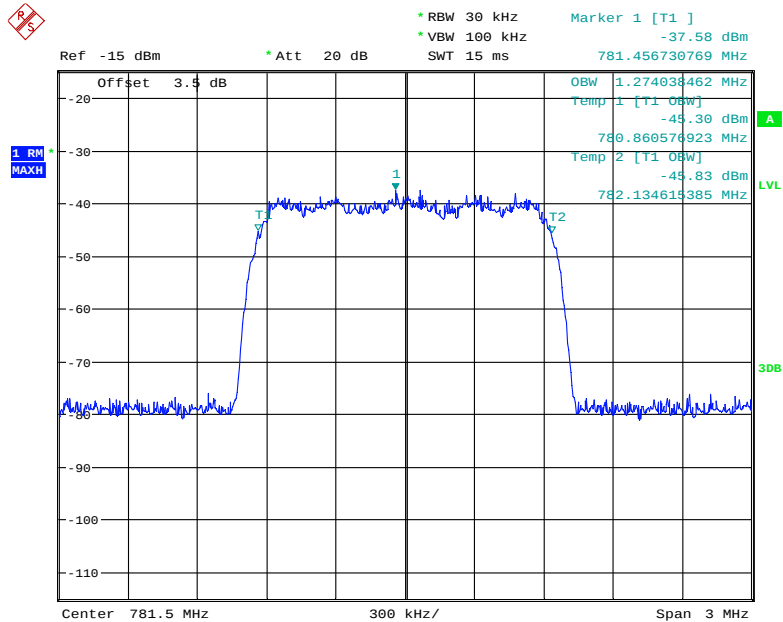


Date: 2.AUG.2019 06:54:23

### Uplink, 781.5MHz-CDMA (Output)

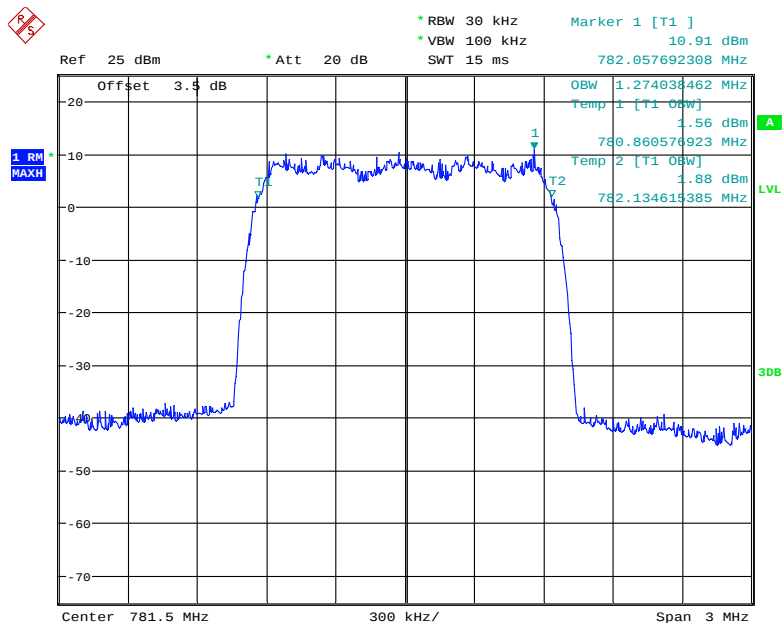


Date: 2.AUG.2019 07:06:16

### Uplink, 781.5MHz –GSM (Input)

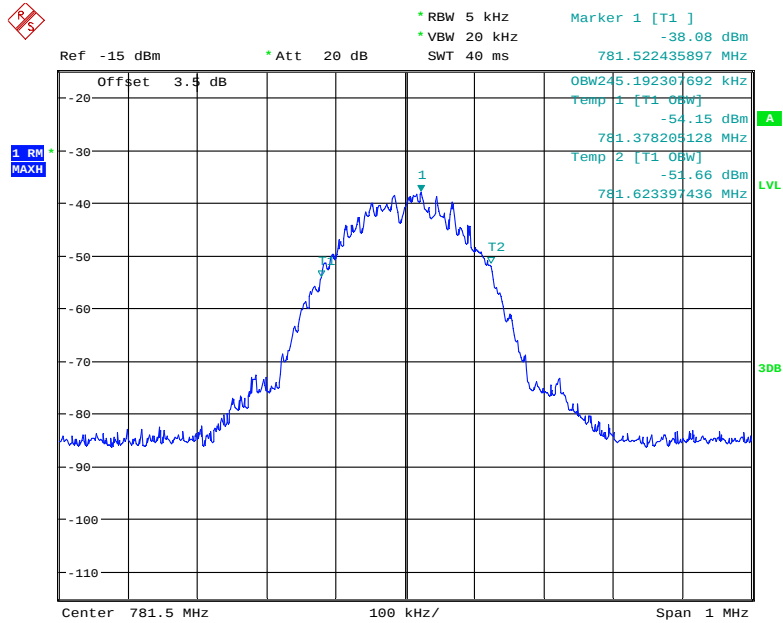


Date: 2.AUG.2019 06:38:43

### Uplink, 781.5MHz -GSM (Output)

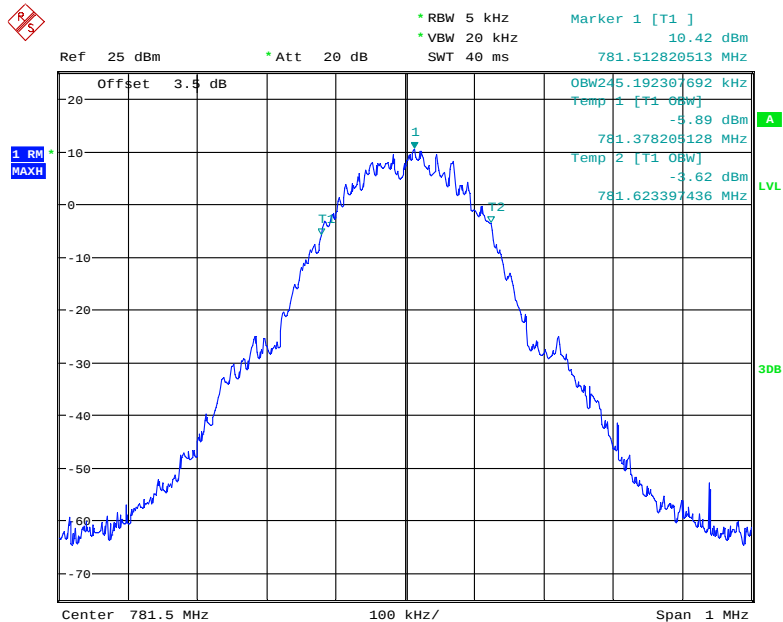


Date: 2.AUG.2019 06:36:32

## Uplink, 781.5MHz –WCDMA (Input)

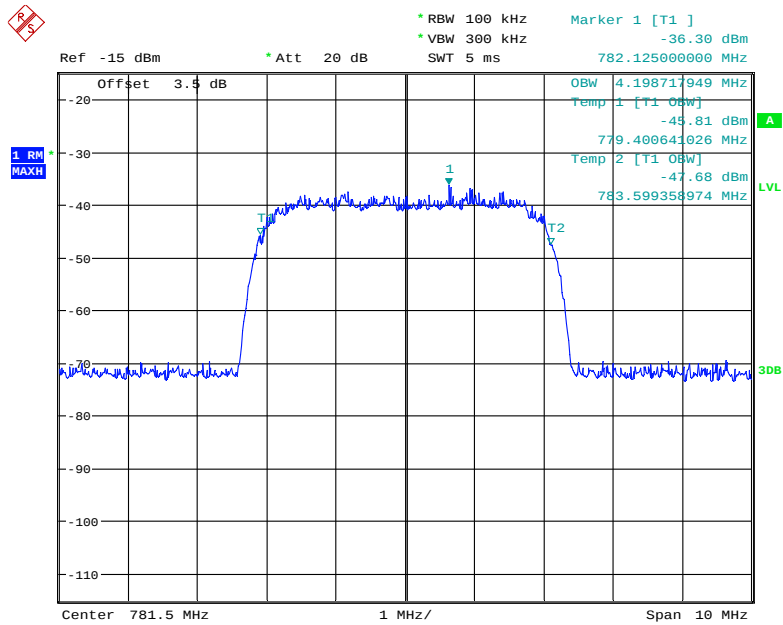


Date: 2.AUG.2019 06:57:07

## Uplink, 781.5MHz –WCDMA (Output)

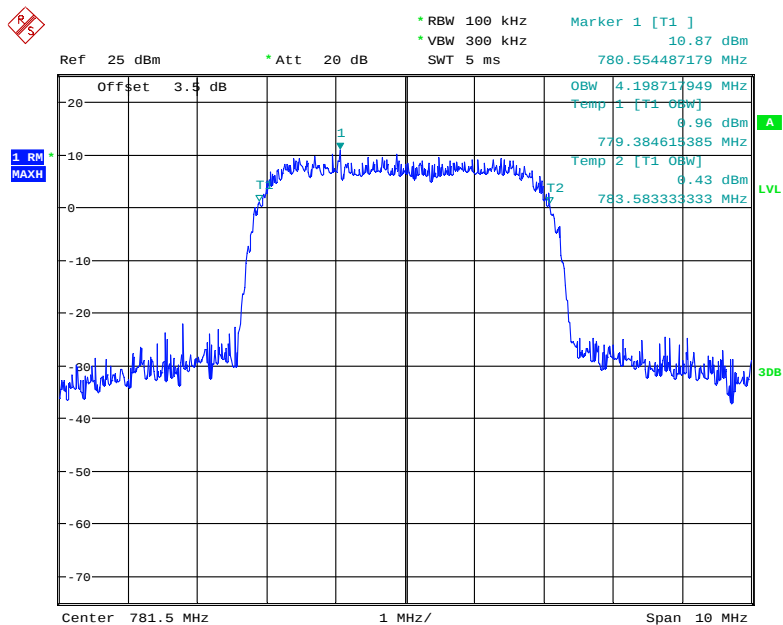


Date: 2.AUG.2019 07:05:15

### Downlink, 881.5MHz –CDMA (Input)

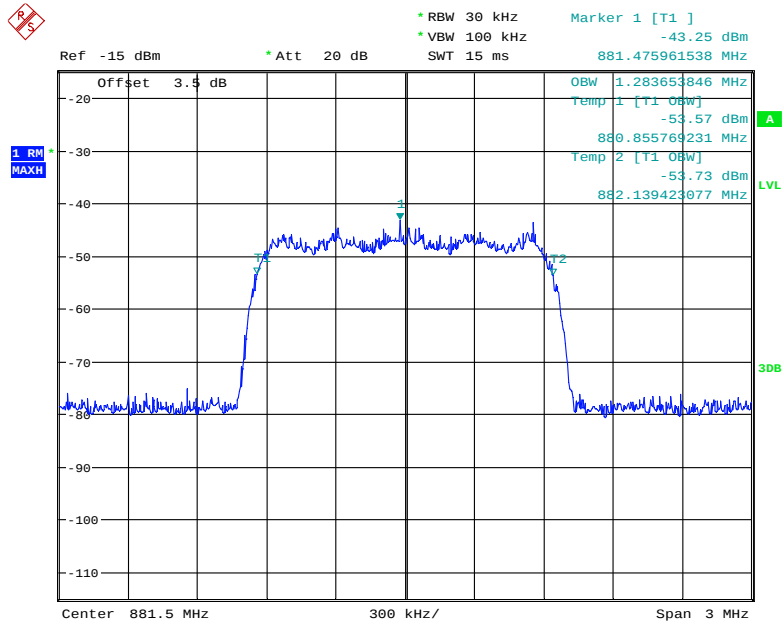


Date: 2.AUG.2019 06:51:37

### Downlink, 881.5MHz -CDMA (Output)

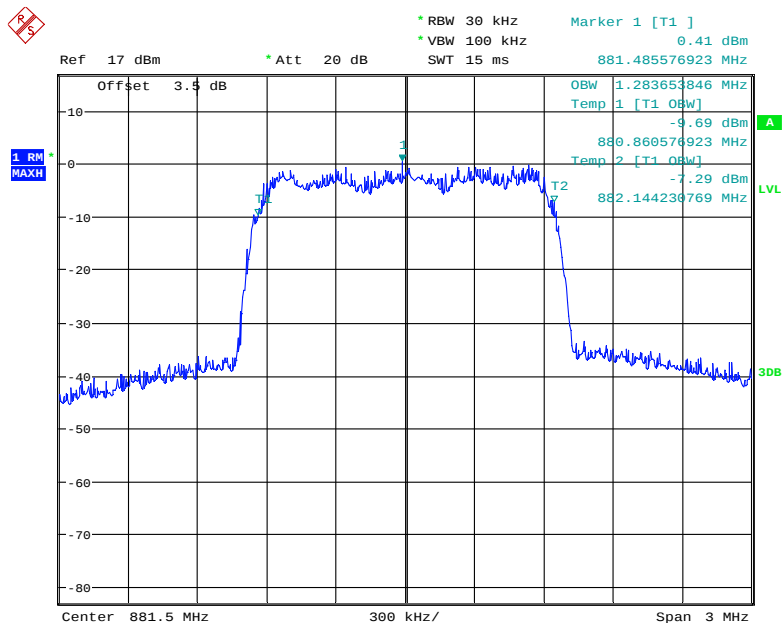


Date: 2.AUG.2019 07:09:21

### Downlink, 881.5MHz -GSM (Input)

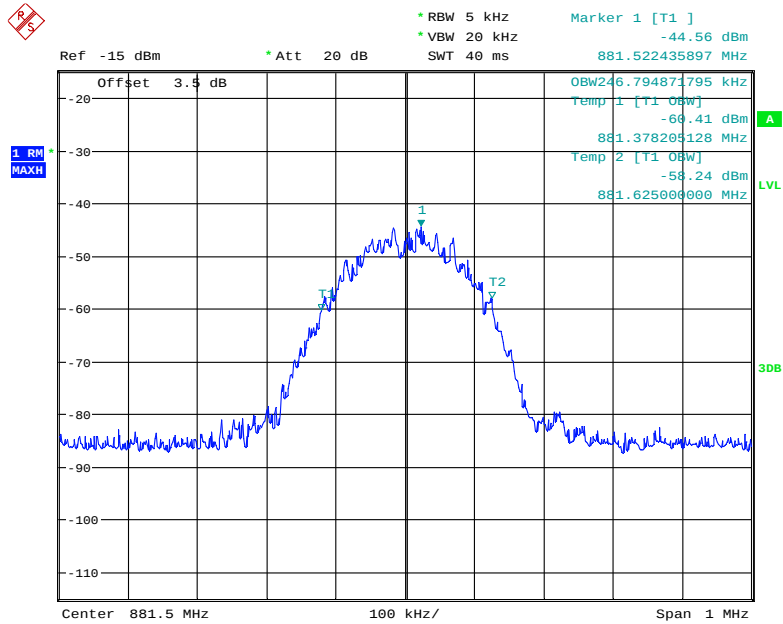


Date: 2.AUG.2019 06:42:38

### Downlink, 881.5MHz -GSM (Output)

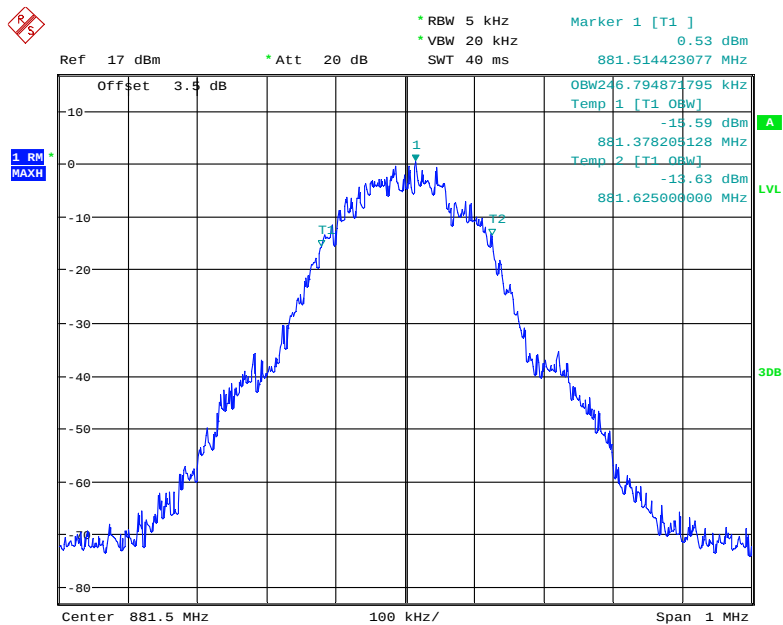


Date: 2.AUG.2019 07:14:48

### Downlink, 881.5MHz - WCDMA (Input)

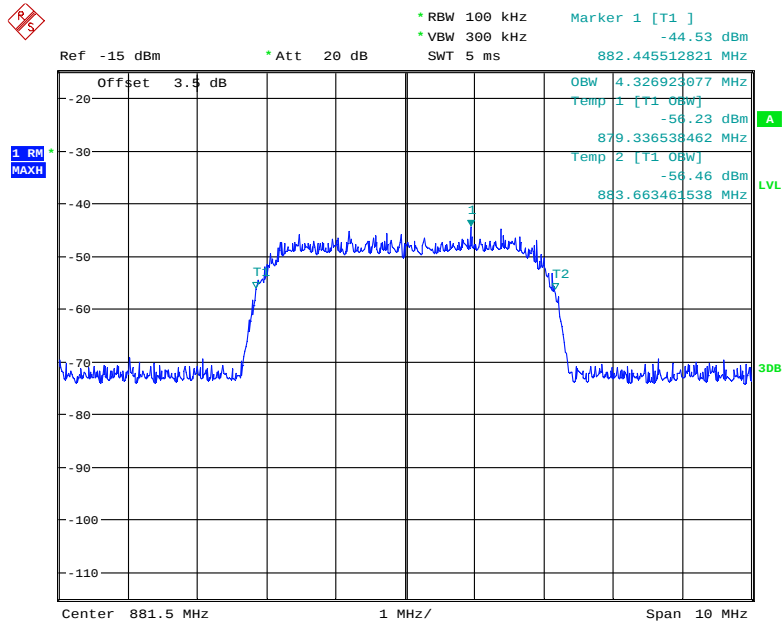


Date: 2.AUG.2019 06:59:46

### Downlink, 881.5MHz - WCDMA (Output)

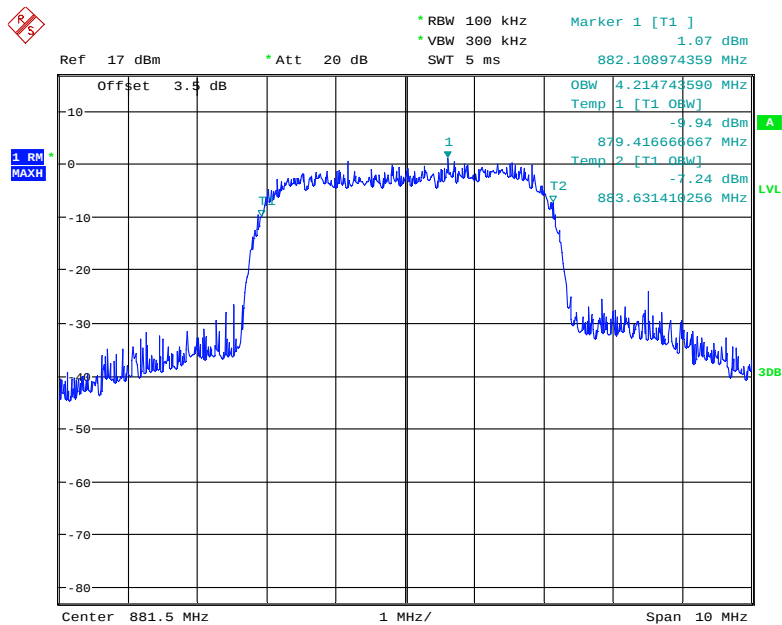


Date: 2.AUG.2019 07:12:14

### Downlink, 1962.5MHz –CDMA (Input)

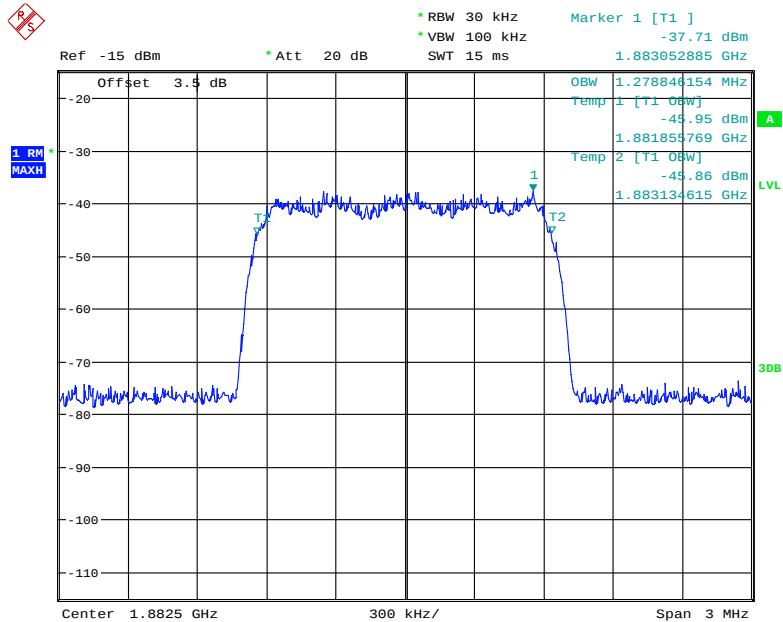


Date: 2.AUG.2019 06:52:27

### Downlink, 1962.5MHz -CDMA (Output)

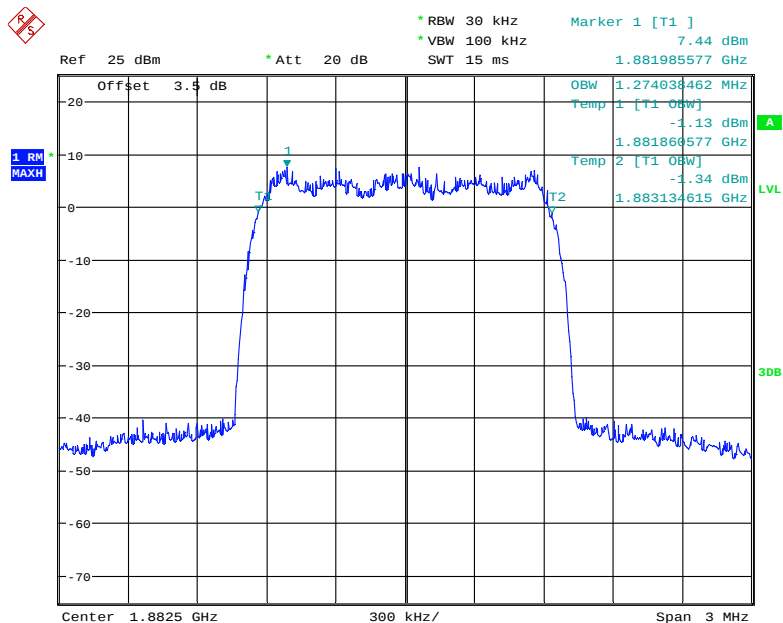


Date: 2.AUG.2019 07:07:33

### Downlink, 1962.5MHz –GSM (Input)

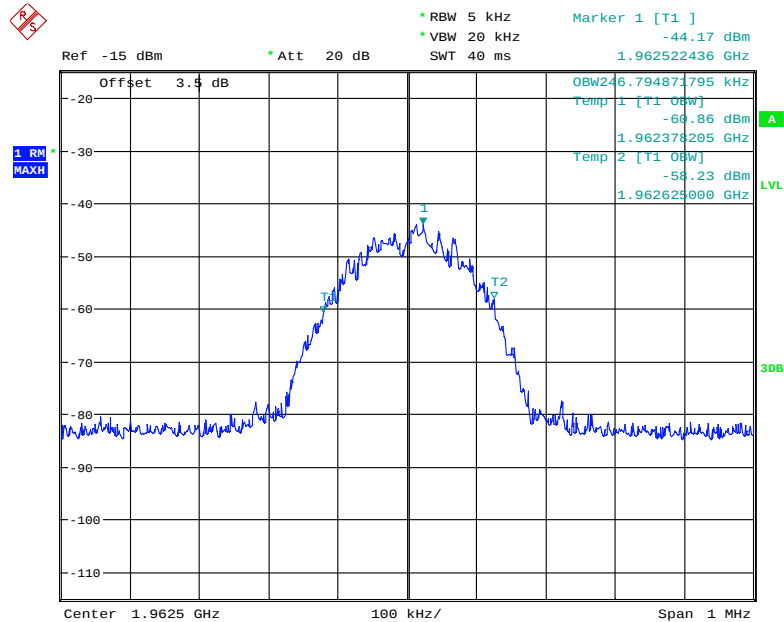


Date: 2.AUG.2019 06:42:03

### Downlink, 1962.5MHz -GSM (Output)

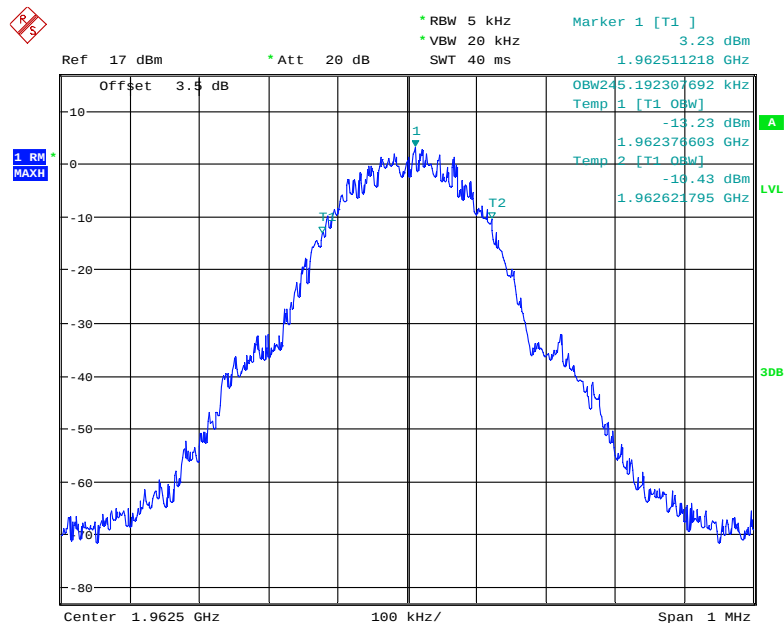


Date: 2.AUG.2019 07:14:20

### Downlink, 1962.5MHz -WCDMA (Input)

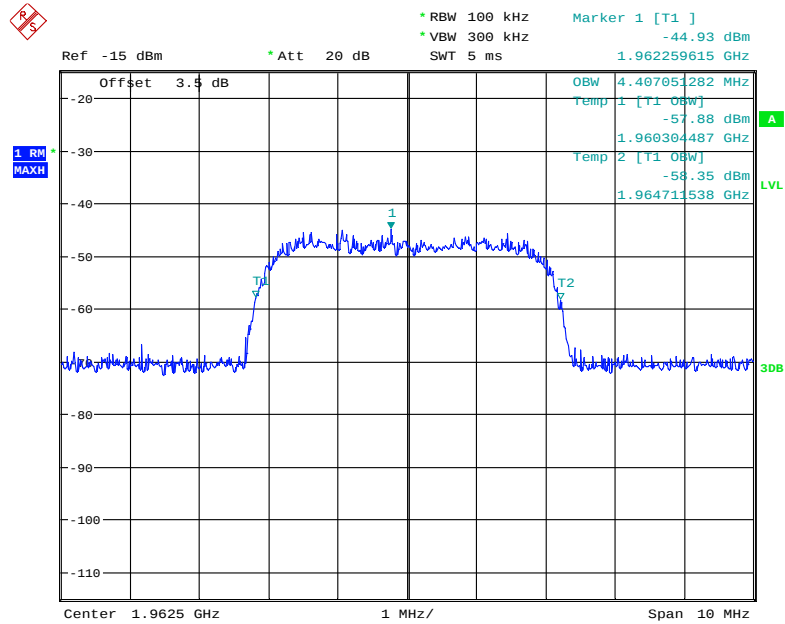


Date: 2.AUG.2019 06:59:22

### Downlink, 1962.5MHz -WCDMA (Output)

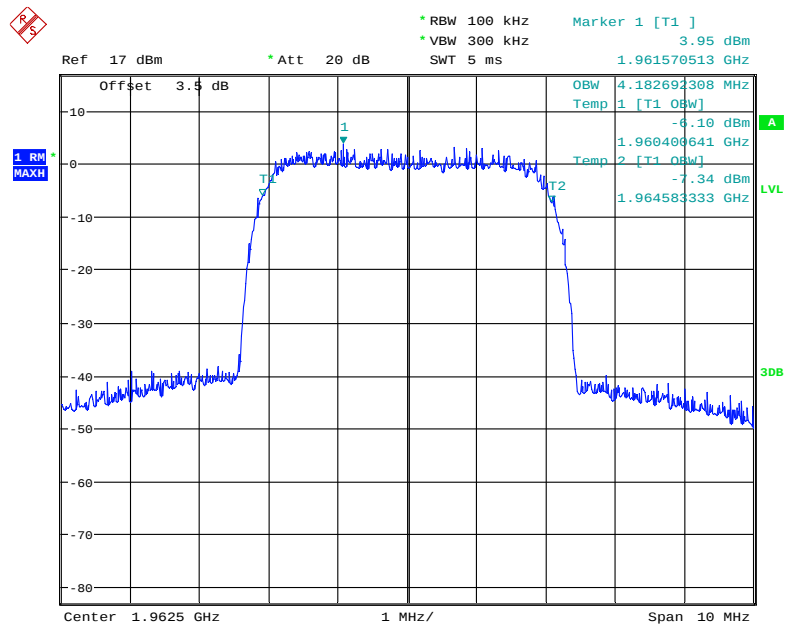


Date: 2.AUG.2019 07:12:31

### Downlink, 2132.5MHz –CDMA (Input)

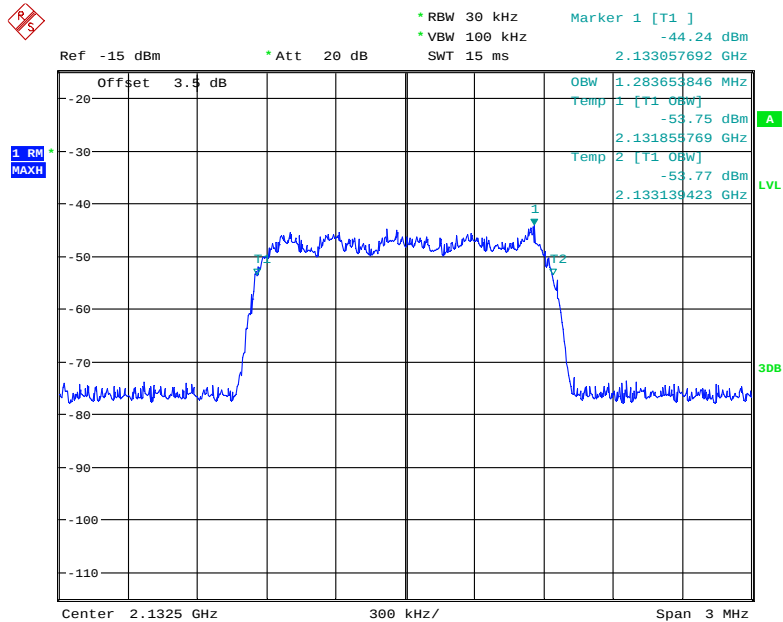


Date: 2.AUG.2019 06:51:04

### Downlink, 2132.5MHz -CDMA (Output)

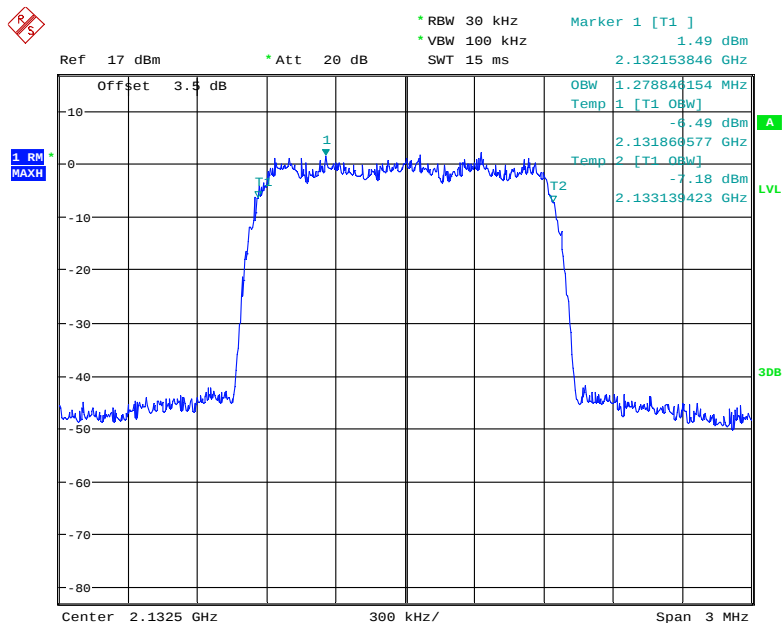


Date: 2.AUG.2019 07:09:45

### Downlink, 2132.5MHz –GSM (Input)

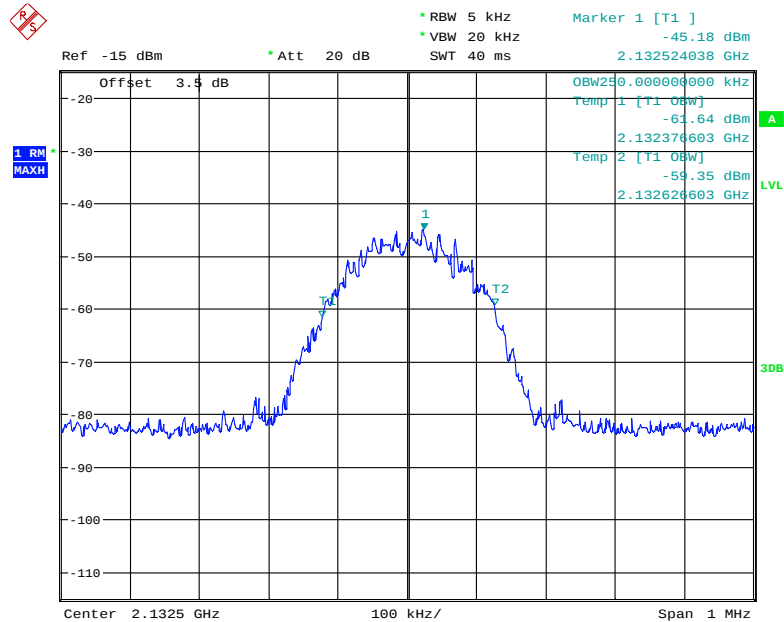


Date: 2.AUG.2019 06:43:14

### Downlink, 2132.5MHz -GSM (Output)

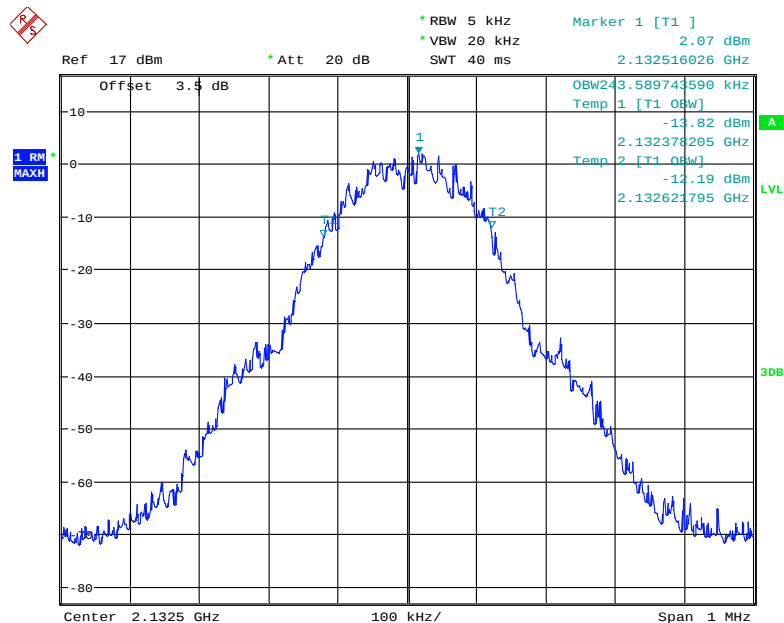


Date: 2.AUG.2019 07:15:36

### Downlink, 2132.5MHz -WCDMA (Input)

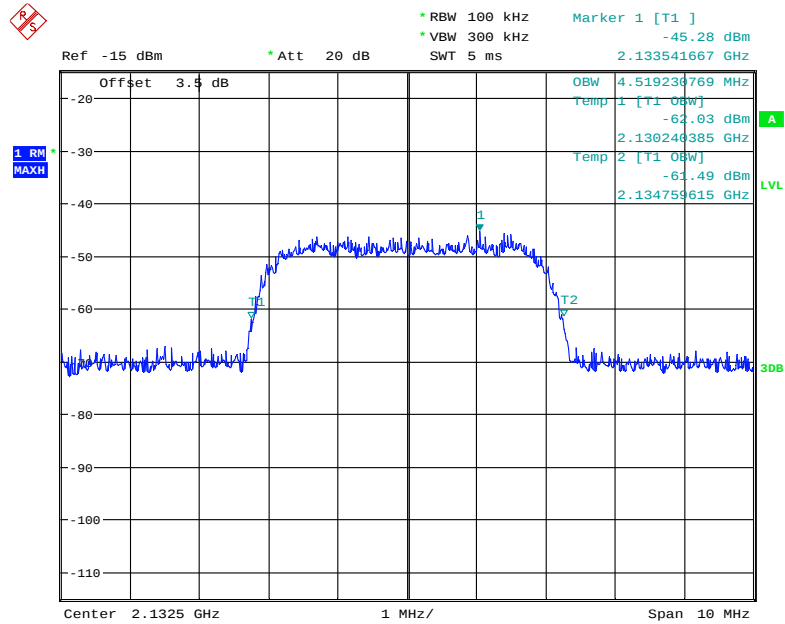


Date: 2.AUG.2019 07:00:08

### Downlink, 2132.5MHz -WCDMA (Output)

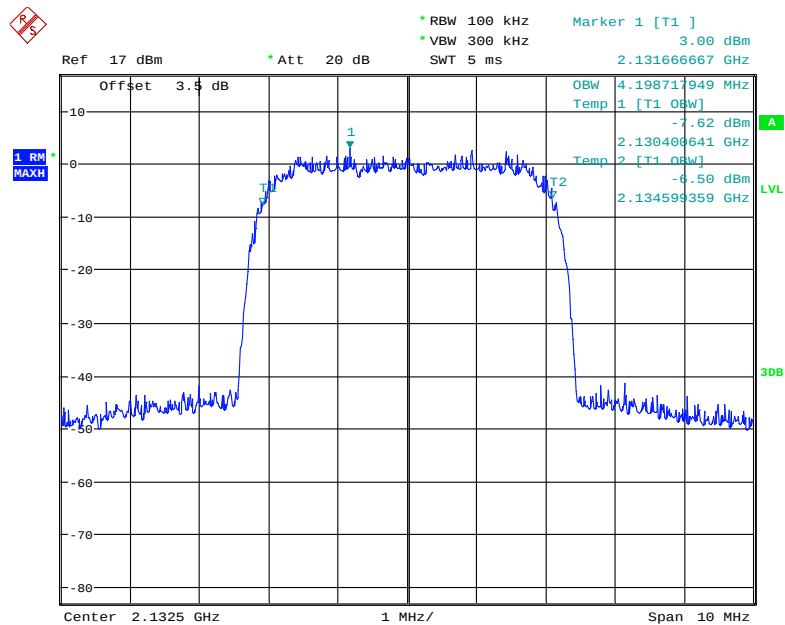


Date: 2.AUG.2019 07:11:56

### Downlink, 737MHz –CDMA (Input)

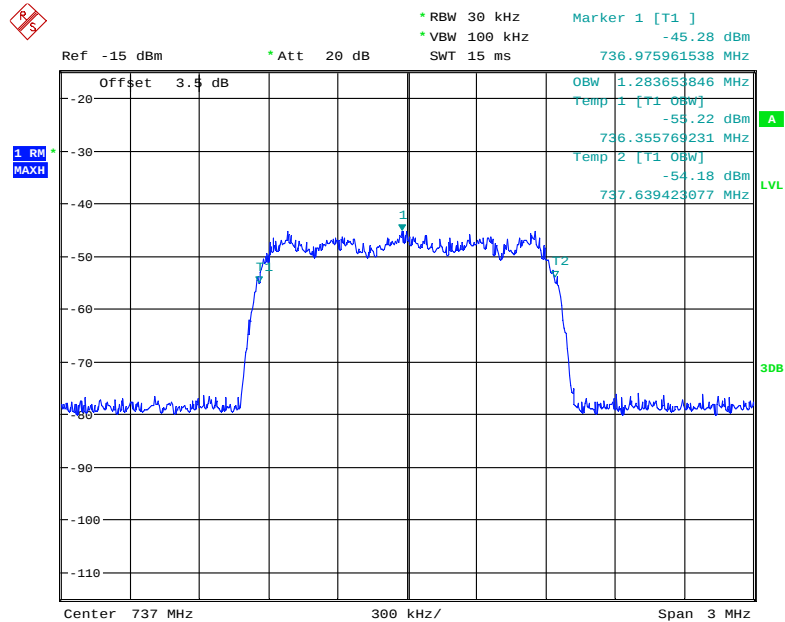


Date: 2.AUG.2019 06:50:40

### Downlink, 737MHz -CDMA (Output)

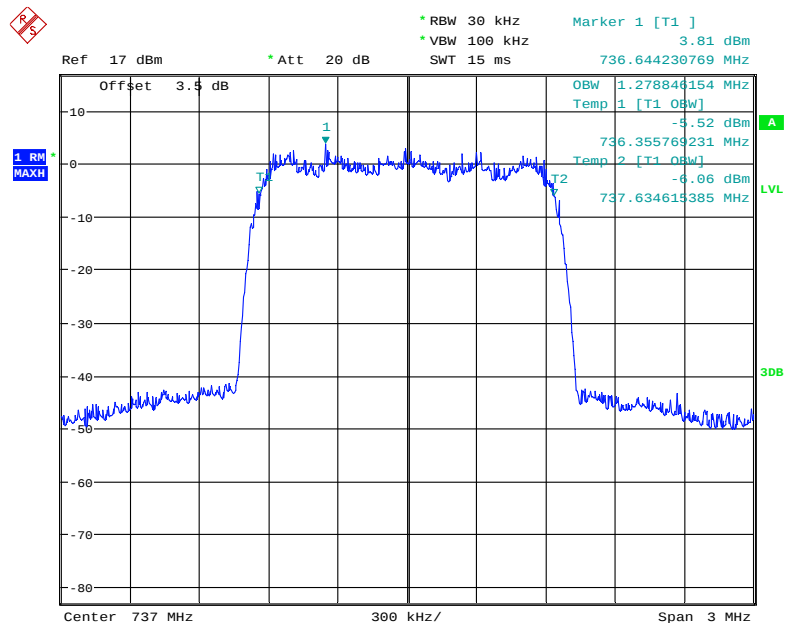


Date: 2.AUG.2019 07:10:03

### Downlink, 737MHz –GSM (Input)

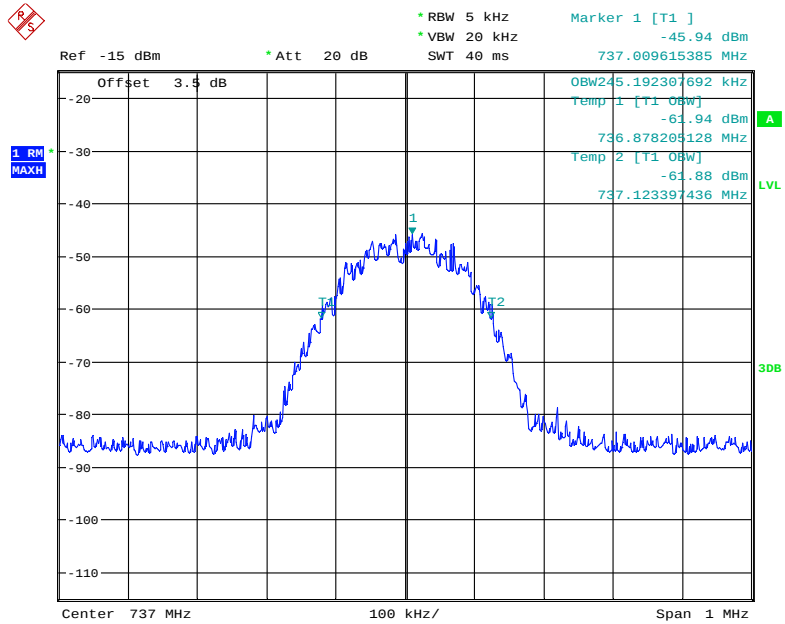


Date: 2.AUG.2019 06:43:49

### Downlink, 737MHz -GSM (Output)

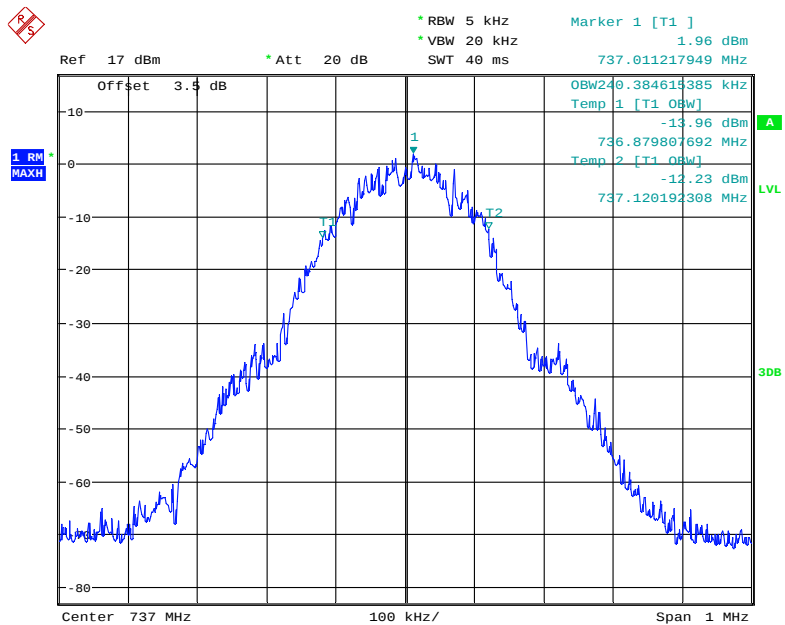


Date: 2.AUG.2019 07:16:02

### Downlink, 737MHz -WCDMA (Input)

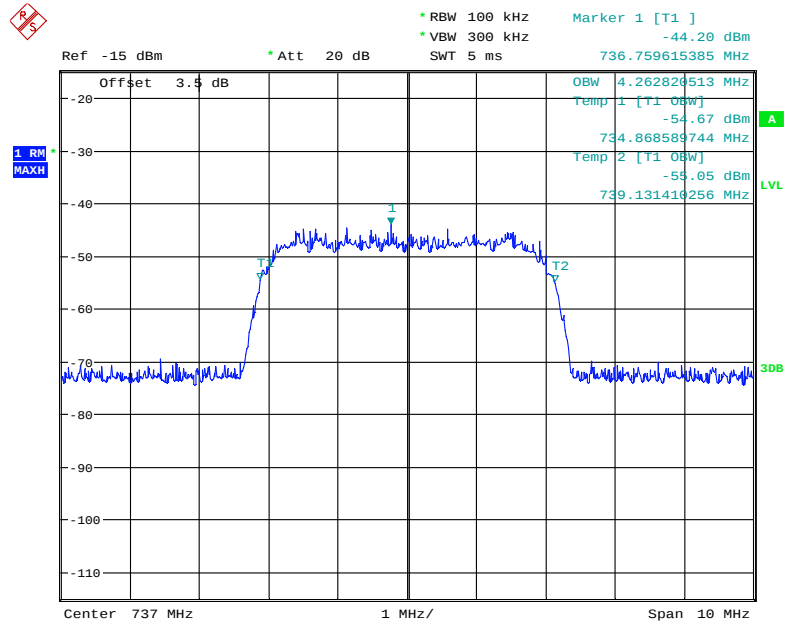


Date: 2.AUG.2019 07:00:28

### Downlink, 737MHz -WCDMA (Output)

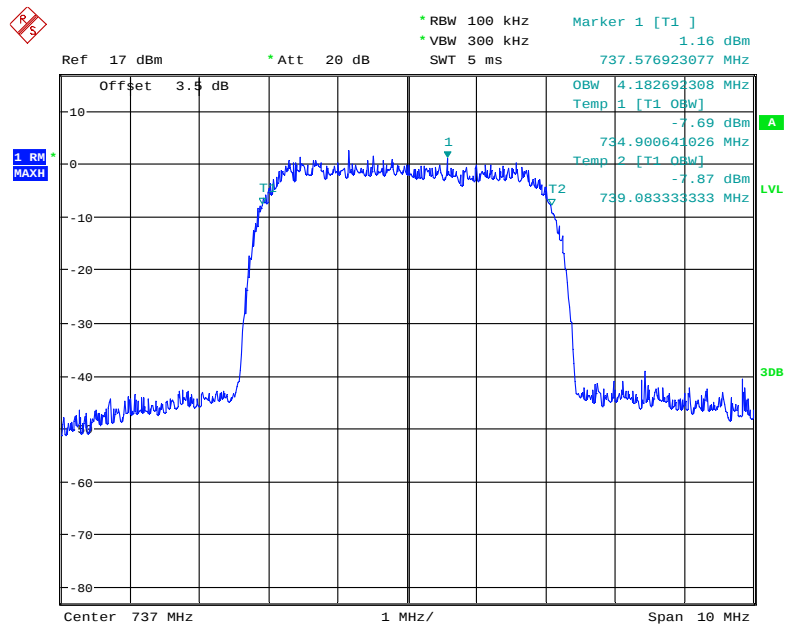


Date: 2.AUG.2019 07:11:37

### Downlink, 751.5MHz –CDMA (Input)

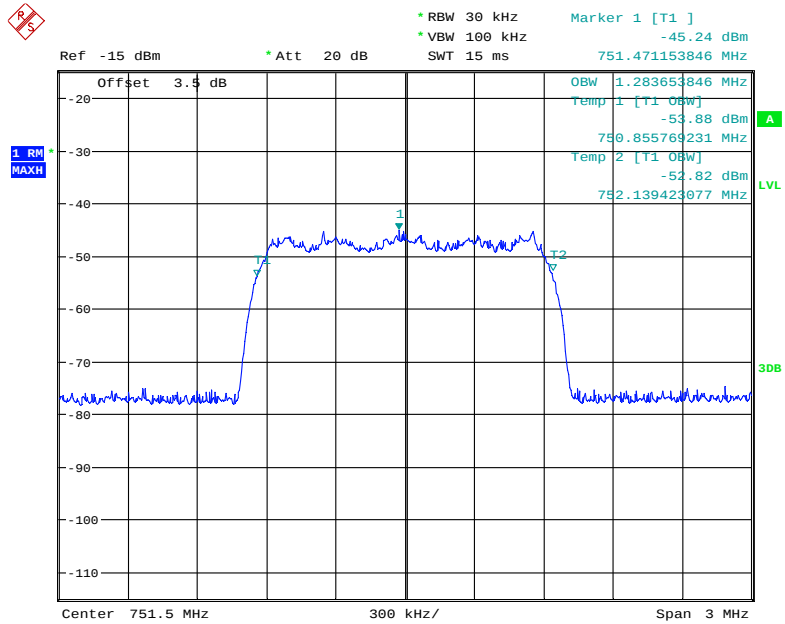


Date: 2.AUG.2019 06:49:49

### Downlink, 751.5MHz -CDMA (Output)

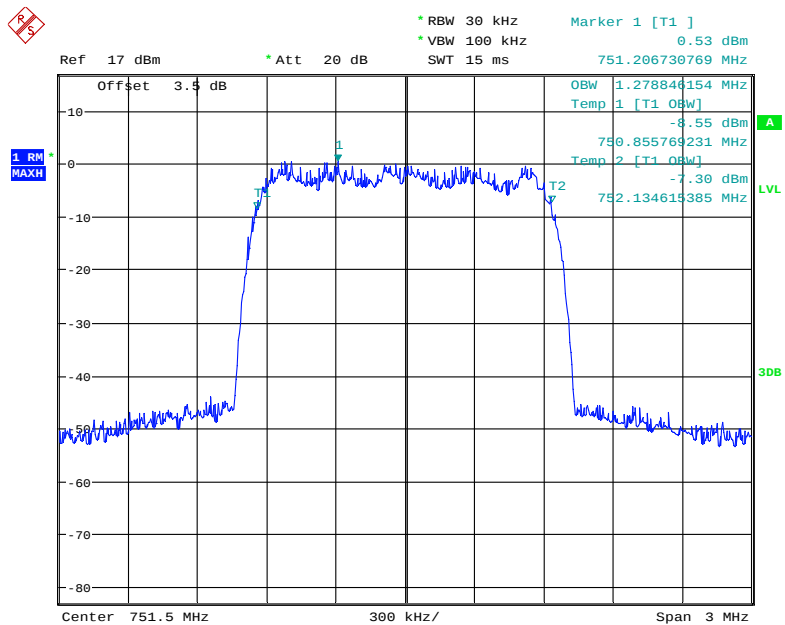


Date: 2.AUG.2019 07:10:23

### Downlink, 751.5MHz –GSM (Input)

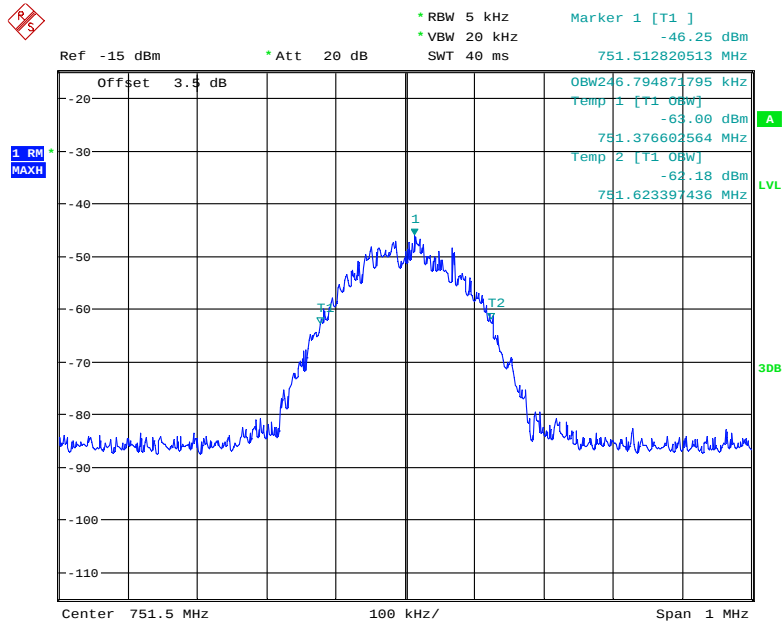


Date: 2.AUG.2019 06:44:21

### Downlink, 751.5MHz –GSM (Output)

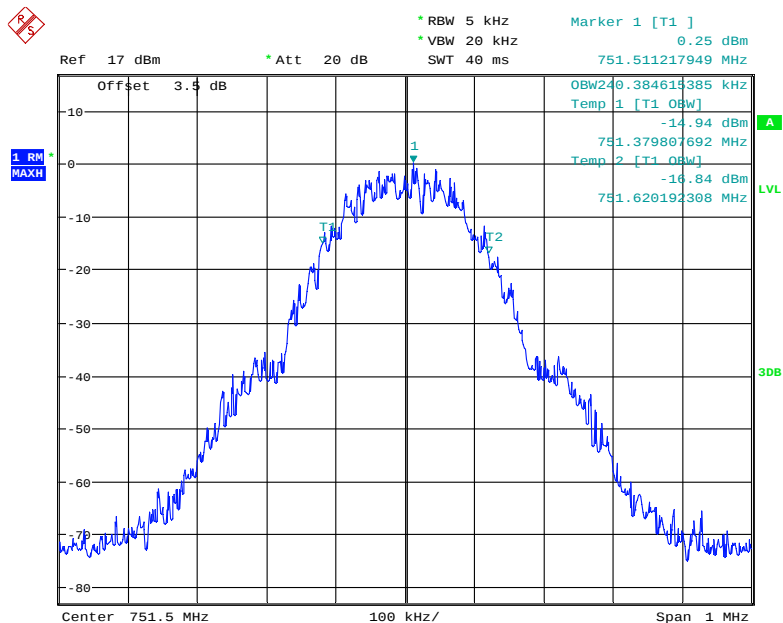


Date: 2.AUG.2019 07:16:26

### Downlink, 751.5MHz -WCDMA (Input)

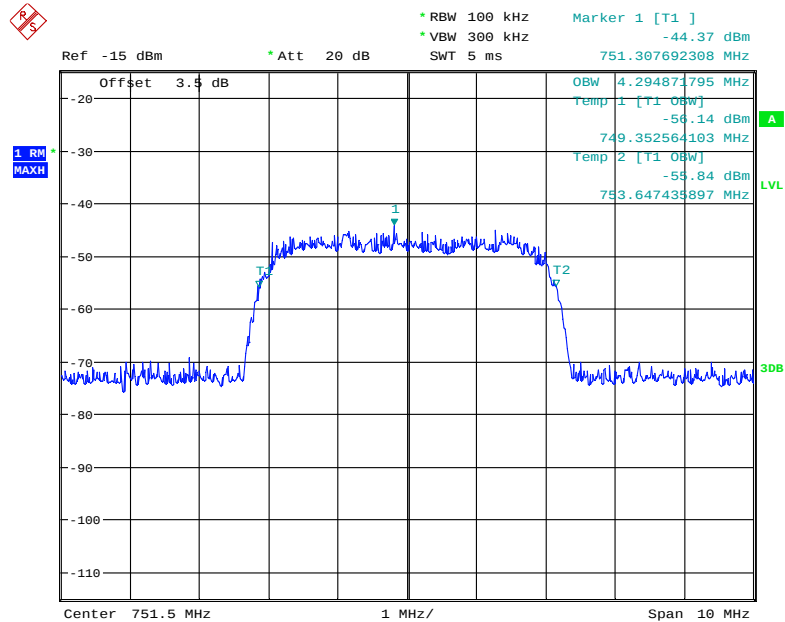

Date: 2.AUG.2019 07:00:48

### Downlink, 751.5MHz -WCDMA (Output)

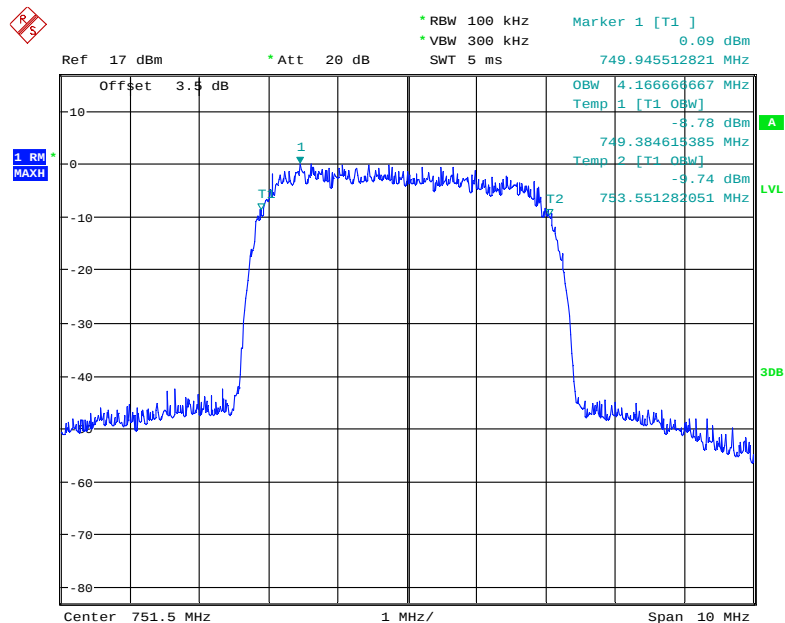

Date: 2.AUG.2019 07:11:14

## § 20.21(e)(8)(ii)(A) & §20.21(e)(4) - OSCILLATION DETECTION

### Applicable Standards

Rule paragraph(s): § 20.21(e)(8)(ii)(A) Anti-Oscillation, §20.21(e)(4) Self-monitoring

For this measurement two EUTs will be permitted, one operating in a normal mode and the second operating in a test mode that is capable of disabling the uplink inactivity squelching and or a reduction of the time between restarts to 5 seconds. This will greatly decrease the test time required.

NOTE — Consumer boosters certified as direct connection mobile boosters having gain of less than or equal to 15 dB are exempt from compliance to testing procedures in 7.11.3 and 7.11.4.

### Test Procedure

According to KDB 935210 D03 Signal Booster Measurements v04, §7.11.2 Oscillation restart tests and §7.11.3 Test procedure for measuring oscillation mitigation or shutdown

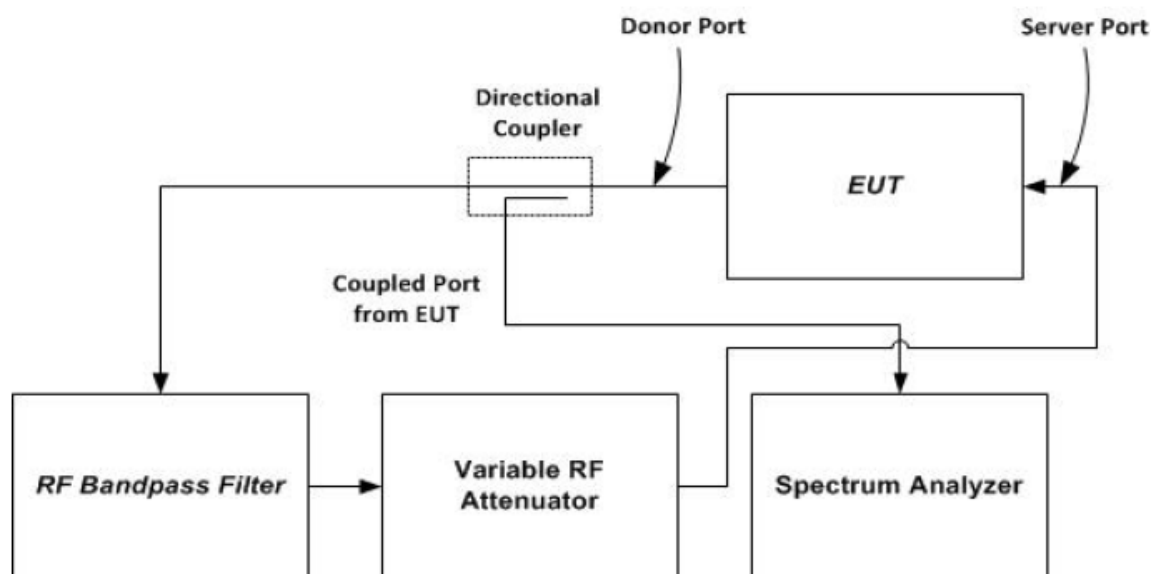


Figure 7 – Oscillation detection instrumentation test setup

### Test Data

#### Environmental Conditions

|                    |                 |
|--------------------|-----------------|
| Temperature:       | 23~25 °C        |
| Relative Humidity: | 50~52 %         |
| ATM Pressure:      | 101.0~101.5 kPa |

The testing was performed by Kieron Luo from 2019-08-02 to 2019-08-08.

**Test Result:** Compliance. Please refer to following table.

**Oscillation Restart Time:**

| Mode     | Operation Bands | Detection Time (s) |       | Power level<br>dBm | Between restart time (s) |       | Number of restart |       | Result     |
|----------|-----------------|--------------------|-------|--------------------|--------------------------|-------|-------------------|-------|------------|
|          |                 | Reading            | Limit |                    | Reading                  | Limit | Reading           | Limit |            |
| Uplink   | Cellular        | 0.144              | 0.3   | 28.73              | 62.02                    | 60    | 4                 | 5     | Compliance |
|          | PCS             | 0.136              |       | 25.57              | 62.02                    |       | 4                 |       | Compliance |
|          | AWS             | 0.093              |       | 27.22              | 62.02                    |       | 4                 |       | Compliance |
|          | Lower 700       | 0.217              |       | 29.60              | 62.02                    |       | 4                 |       | Compliance |
|          | Upper 700       | 0.220              |       | 28.35              | 62.02                    |       | 4                 |       | Compliance |
| Downlink | Cellular        | 0.080              | 1     | 20.38              | 62.02                    |       | 4                 |       | Compliance |
|          | PCS             | 0.160              |       | 25.75              | 62.02                    |       | 4                 |       | Compliance |
|          | AWS             | 0.048              |       | 23.56              | 61.54                    |       | 4                 |       | Compliance |
|          | Lower 700       | 0.120              |       | 27.05              | 62.02                    |       | 4                 |       | Compliance |
|          | Upper 700       | 0.129              |       | 24.80              | 61.54                    |       | 4                 |       | Compliance |

**Oscillation Mitigation or Shutdown:**

| Mode   | Operation Band | Max gain dB | Isolation dB | Difference dB | Limit dB | Result     |
|--------|----------------|-------------|--------------|---------------|----------|------------|
| Uplink | PCS            | 49.5        | +5           | /             | 12.00    | Compliance |
|        |                |             | +4           | /             | 12.00    | Compliance |
|        |                |             | +3           | /             | 12.00    | Compliance |
|        |                |             | +2           | /             | 12.00    | Compliance |
|        |                |             | +1           | /             | 12.00    | Compliance |
|        |                |             | +0           | /             | 12.00    | Compliance |
|        |                |             | -1           | /             | 12.00    | Compliance |
|        |                |             | -2           | /             | 12.00    | Compliance |
|        |                |             | -3           | /             | 12.00    | Compliance |
|        |                |             | -4           | /             | 12.00    | Compliance |
|        |                |             | -5           | /             | 12.00    | Compliance |
|        | Cellular       | 49.95       | +5           | /             | 12.00    | Compliance |
|        |                |             | +4           | /             | 12.00    | Compliance |
|        |                |             | +3           | /             | 12.00    | Compliance |
|        |                |             | +2           | /             | 12.00    | Compliance |
|        |                |             | +1           | /             | 12.00    | Compliance |
|        |                |             | +0           | /             | 12.00    | Compliance |
|        |                |             | -1           | /             | 12.00    | Compliance |
|        |                |             | -2           | /             | 12.00    | Compliance |
|        |                |             | -3           | /             | 12.00    | Compliance |
|        |                |             | -4           | /             | 12.00    | Compliance |
|        |                |             | -5           | /             | 12.00    | Compliance |
|        | AWS            | 49.76       | +5           | /             | 12.00    | Compliance |
|        |                |             | +4           | /             | 12.00    | Compliance |
|        |                |             | +3           | /             | 12.00    | Compliance |
|        |                |             | +2           | /             | 12.00    | Compliance |
|        |                |             | +1           | /             | 12.00    | Compliance |
|        |                |             | +0           | /             | 12.00    | Compliance |
|        |                |             | -1           | /             | 12.00    | Compliance |
|        |                |             | -2           | /             | 12.00    | Compliance |
|        |                |             | -3           | /             | 12.00    | Compliance |
|        |                |             | -4           | /             | 12.00    | Compliance |
|        |                |             | -5           | /             | 12.00    | Compliance |
|        | Lower 700MHz   | 49.82       | +5           | /             | 12.00    | Compliance |
|        |                |             | +4           | /             | 12.00    | Compliance |
|        |                |             | +3           | /             | 12.00    | Compliance |
|        |                |             | +2           | /             | 12.00    | Compliance |
|        |                |             | +1           | /             | 12.00    | Compliance |
|        |                |             | +0           | /             | 12.00    | Compliance |
|        |                |             | -1           | /             | 12.00    | Compliance |
|        |                |             | -2           | /             | 12.00    | Compliance |
|        |                |             | -3           | /             | 12.00    | Compliance |
|        |                |             | -4           | /             | 12.00    | Compliance |
|        |                |             | -5           | /             | 12.00    | Compliance |


| Mode     | Operation Band  | Max gain<br>dB | Isolation<br>dB | Difference<br>dB | Limit<br>dB | Result     |
|----------|-----------------|----------------|-----------------|------------------|-------------|------------|
| Uplink   | Upper<br>700MHz | 49.14          | +5              | /                | 12.00       | Compliance |
|          |                 |                | +4              | /                | 12.00       | Compliance |
|          |                 |                | +3              | /                | 12.00       | Compliance |
|          |                 |                | +2              | /                | 12.00       | Compliance |
|          |                 |                | +1              | /                | 12.00       | Compliance |
|          |                 |                | +0              | /                | 12.00       | Compliance |
|          |                 |                | -1              | /                | 12.00       | Compliance |
|          |                 |                | -2              | /                | 12.00       | Compliance |
|          |                 |                | -3              | /                | 12.00       | Compliance |
|          |                 |                | -4              | /                | 12.00       | Compliance |
|          |                 |                | -5              | /                | 12.00       | Compliance |
| Downlink | PCS             | 48.8           | +5              | 4.15             | 12.00       | Compliance |
|          |                 |                | +4              | /                | 12.00       | Compliance |
|          |                 |                | +3              | /                | 12.00       | Compliance |
|          |                 |                | +2              | /                | 12.00       | Compliance |
|          |                 |                | +1              | /                | 12.00       | Compliance |
|          |                 |                | +0              | /                | 12.00       | Compliance |
|          |                 |                | -1              | /                | 12.00       | Compliance |
|          |                 |                | -2              | /                | 12.00       | Compliance |
|          |                 |                | -3              | /                | 12.00       | Compliance |
|          |                 |                | -4              | /                | 12.00       | Compliance |
|          |                 |                | -5              | /                | 12.00       | Compliance |
|          | Cellular        | 49.56          | +5              | 7.00             | 12.00       | Compliance |
|          |                 |                | +4              | /                | 12.00       | Compliance |
|          |                 |                | +3              | /                | 12.00       | Compliance |
|          |                 |                | +2              | /                | 12.00       | Compliance |
|          |                 |                | +1              | /                | 12.00       | Compliance |
|          |                 |                | +0              | /                | 12.00       | Compliance |
|          |                 |                | -1              | /                | 12.00       | Compliance |
|          |                 |                | -2              | /                | 12.00       | Compliance |
|          |                 |                | -3              | /                | 12.00       | Compliance |
|          |                 |                | -4              | /                | 12.00       | Compliance |
|          |                 |                | -5              | /                | 12.00       | Compliance |
|          | AWS             | 49.2           | +5              | 5.49             | 12.00       | Compliance |
|          |                 |                | +4              | /                | 12.00       | Compliance |
|          |                 |                | +3              | /                | 12.00       | Compliance |
|          |                 |                | +2              | /                | 12.00       | Compliance |
|          |                 |                | +1              | /                | 12.00       | Compliance |
|          |                 |                | +0              | /                | 12.00       | Compliance |
|          |                 |                | -1              | /                | 12.00       | Compliance |
|          |                 |                | -2              | /                | 12.00       | Compliance |
|          |                 |                | -3              | /                | 12.00       | Compliance |
|          |                 |                | -4              | /                | 12.00       | Compliance |
|          |                 |                | -5              | /                | 12.00       | Compliance |

| Mode     | Operation Band | Max gain | Isolation | Difference | Limit | Result     |
|----------|----------------|----------|-----------|------------|-------|------------|
|          |                | dB       | dB        | dB         | dB    |            |
| Downlink | 700MHz         | 49.75    | +5        | 6.75       | 12.00 | Compliance |
|          |                |          | +4        | 5.11       | 12.00 | Compliance |
|          |                |          | +3        | 6.92       | 12.00 | Compliance |
|          |                |          | +2        | /          | 12.00 | Compliance |
|          |                |          | +1        | /          | 12.00 | Compliance |
|          |                |          | +0        | /          | 12.00 | Compliance |
|          |                |          | -1        | /          | 12.00 | Compliance |
|          |                |          | -2        | /          | 12.00 | Compliance |
|          |                |          | -3        | /          | 12.00 | Compliance |
|          |                |          | -4        | /          | 12.00 | Compliance |
|          |                |          | -5        | /          | 12.00 | Compliance |


# Oscillation restart tests:

Downlink:

## Cellular Band

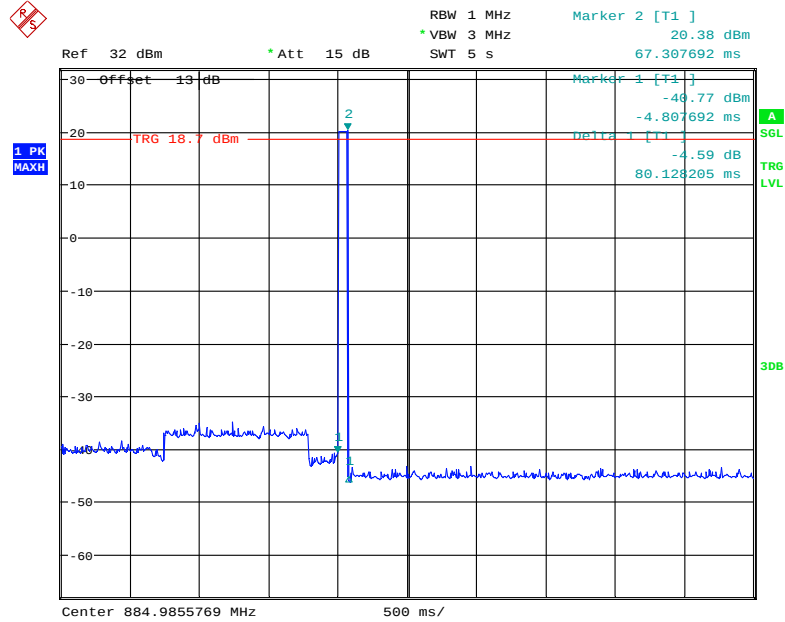


Date: 8.AUG.2019 05:58:28

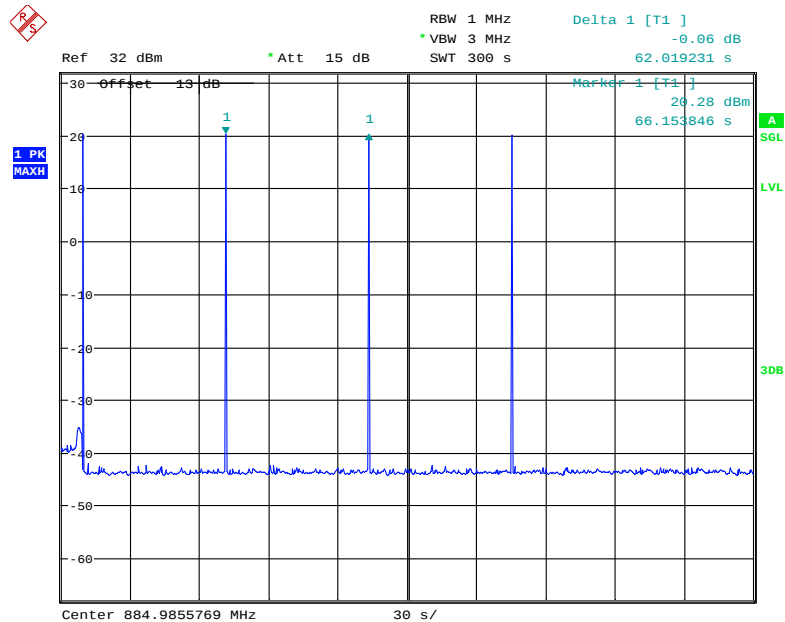


Date: 8.AUG.2019 06:05:18

### PCS Band

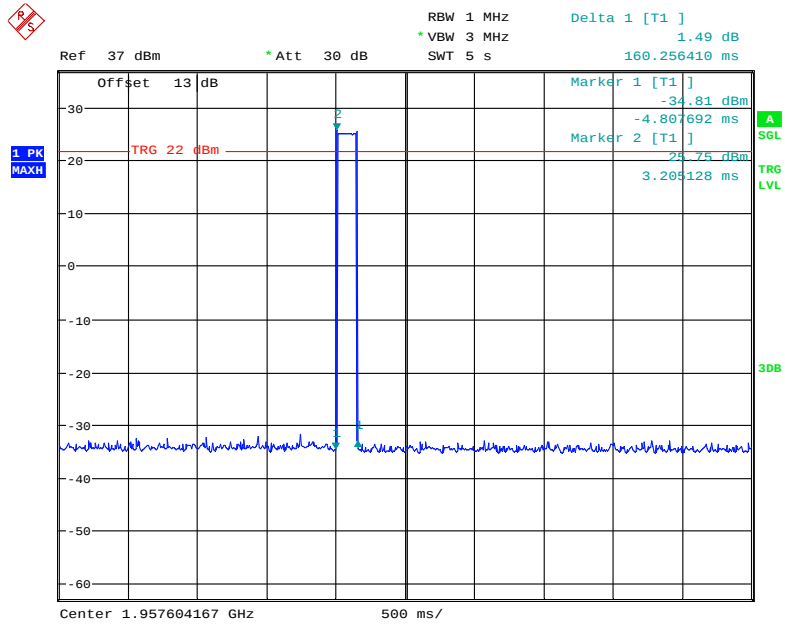


Date: 2.AUG.2019 10:51:17

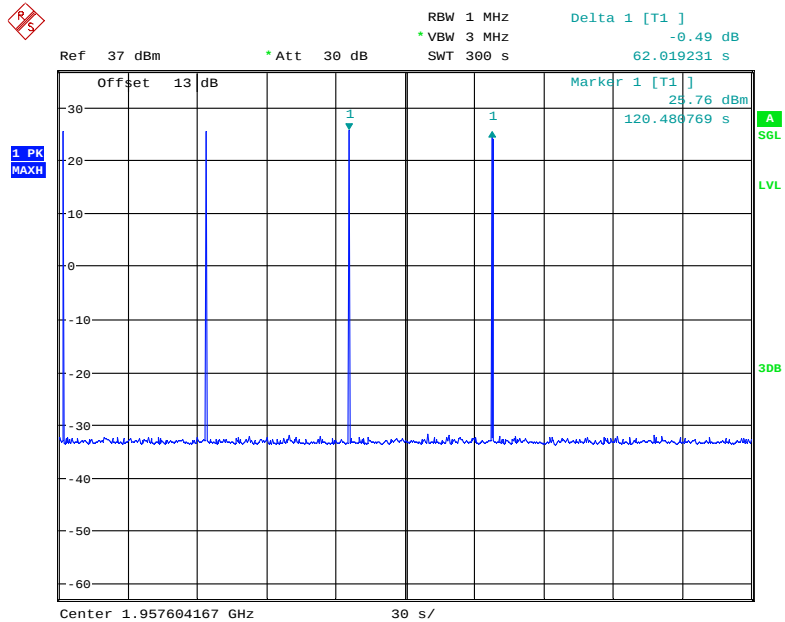


Date: 2.AUG.2019 11:06:23

# AWS Band

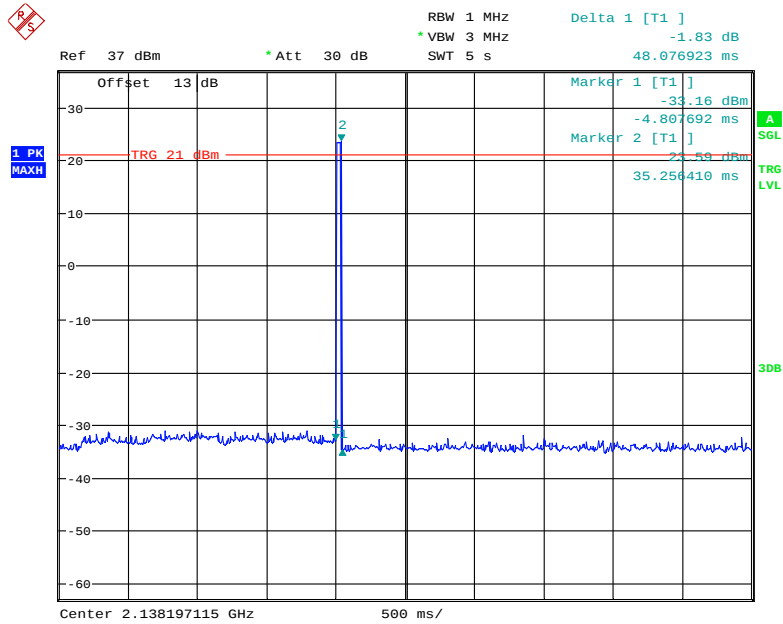


Date: 2.AUG.2019 11:10:46

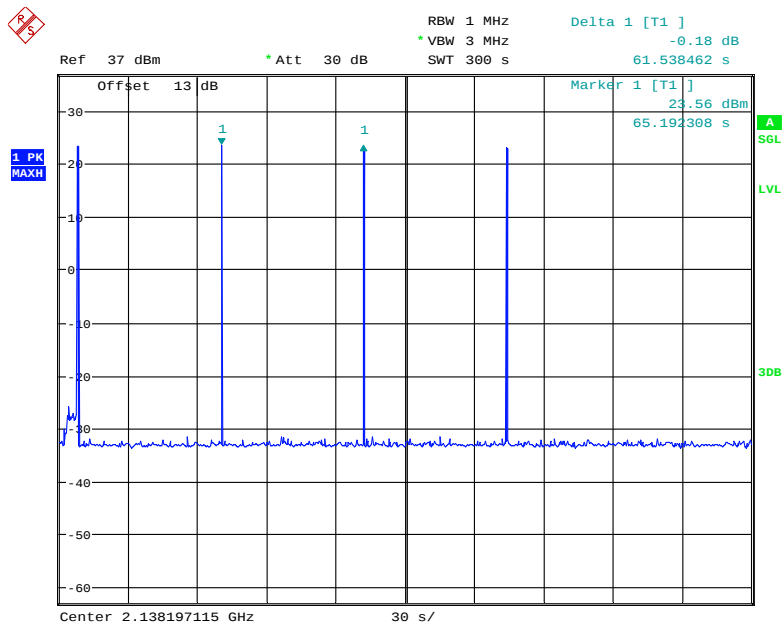


Date: 2.AUG.2019 11:16:55

### Lower 700MHz

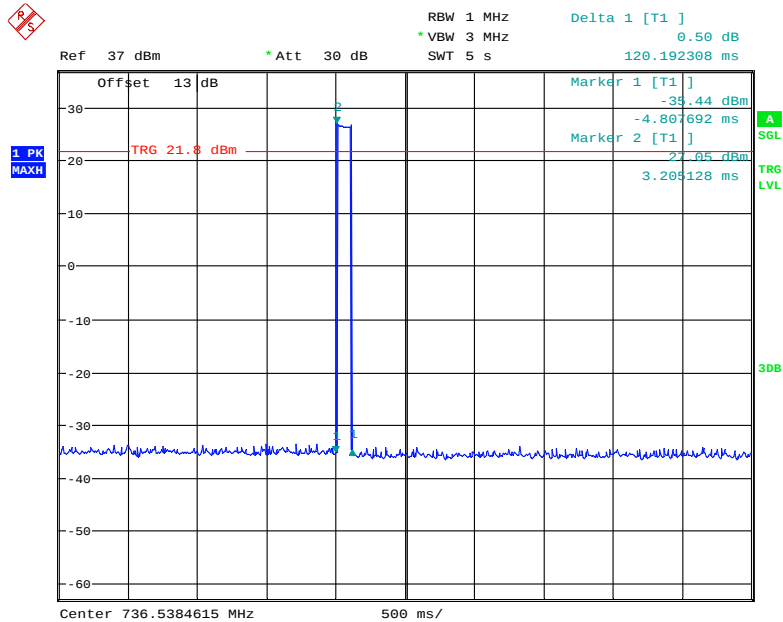


Date: 2.AUG.2019 09:55:02

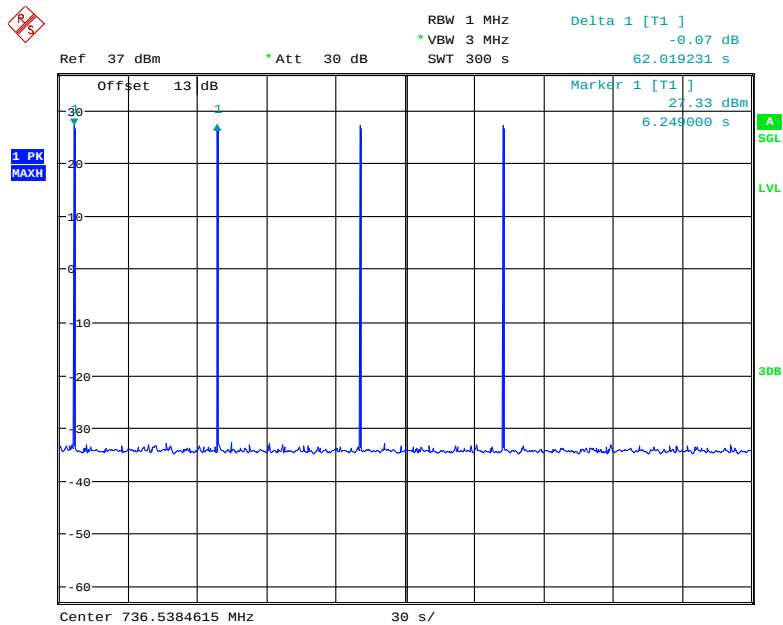


Date: 2.AUG.2019 10:01:15

# Upper 700MHz

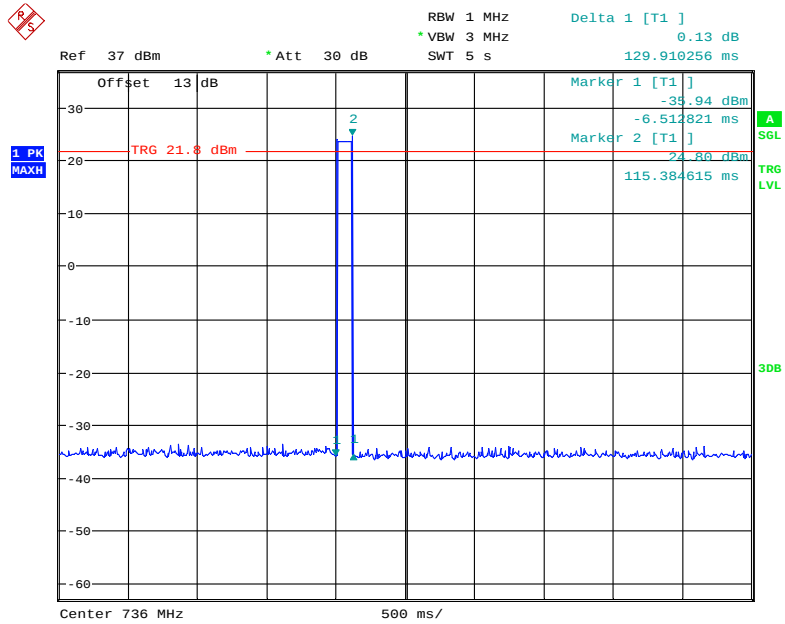


Date: 2.AUG.2019 10:09:37

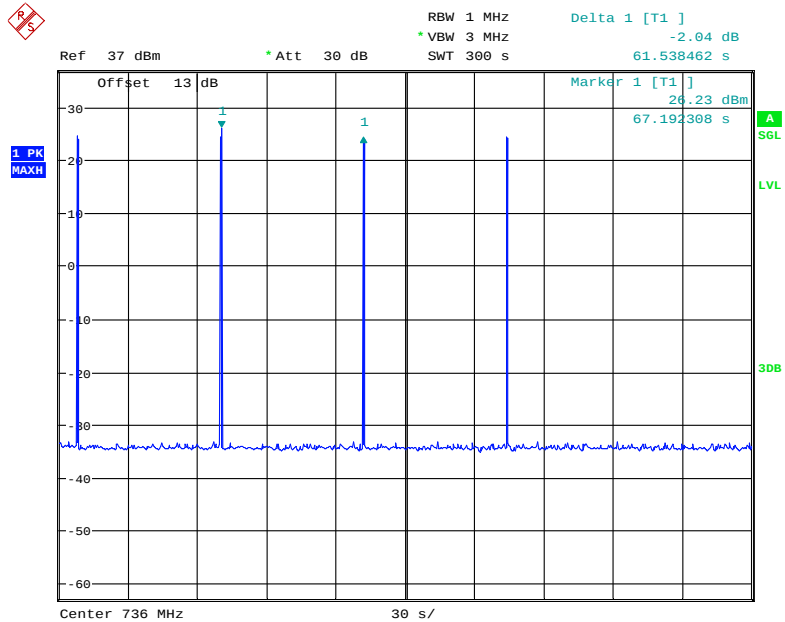


Date: 2.AUG.2019 10:17:30

Uplink:

### Cellular Band

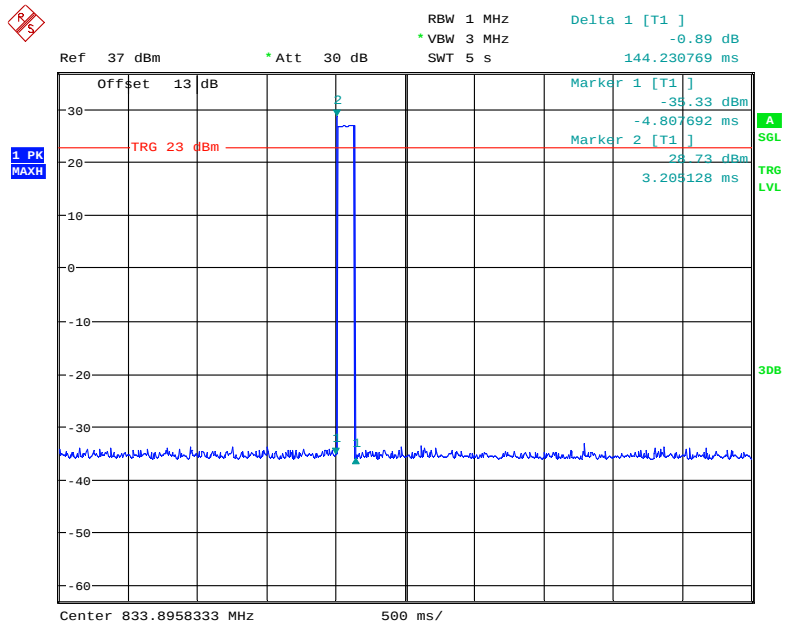


Date: 2.AUG.2019 12:29:45

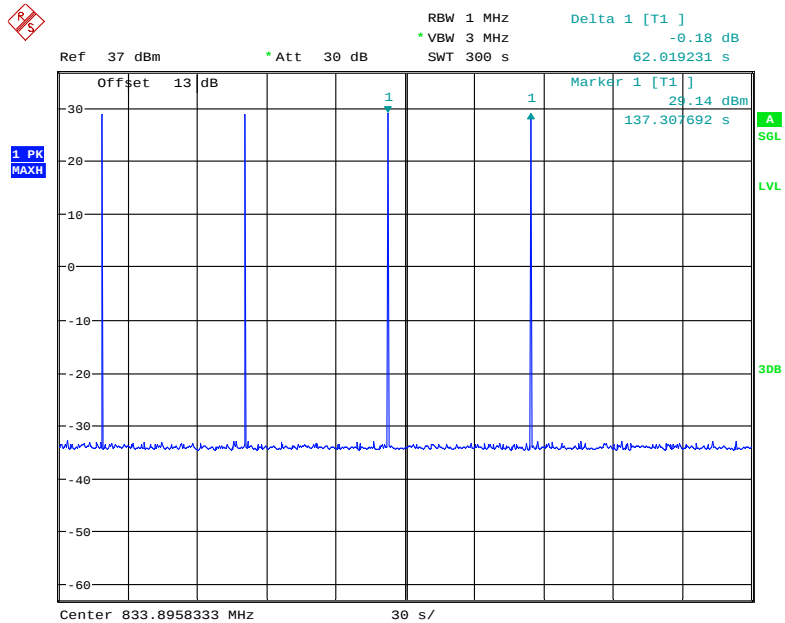


Date: 2.AUG.2019 12:35:42

### PCS Band

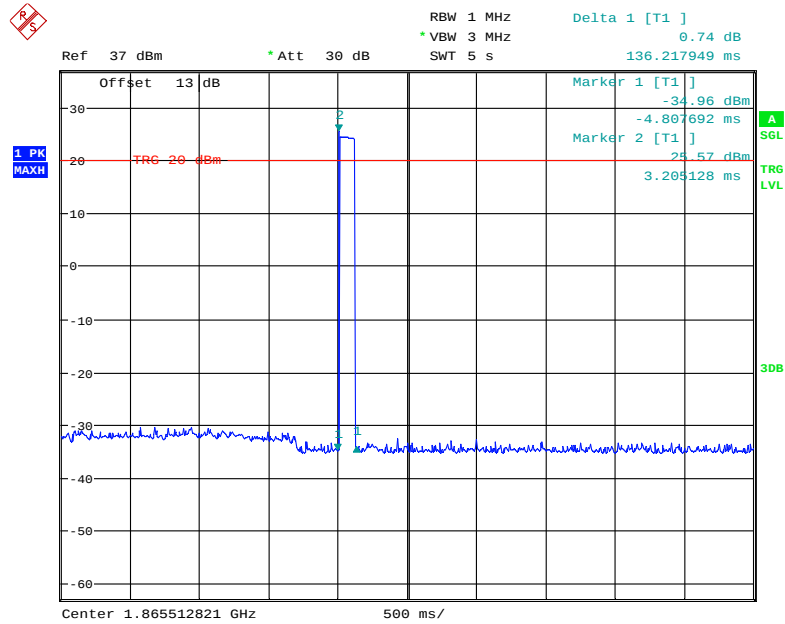


Date: 2.AUG.2019 12:14:32

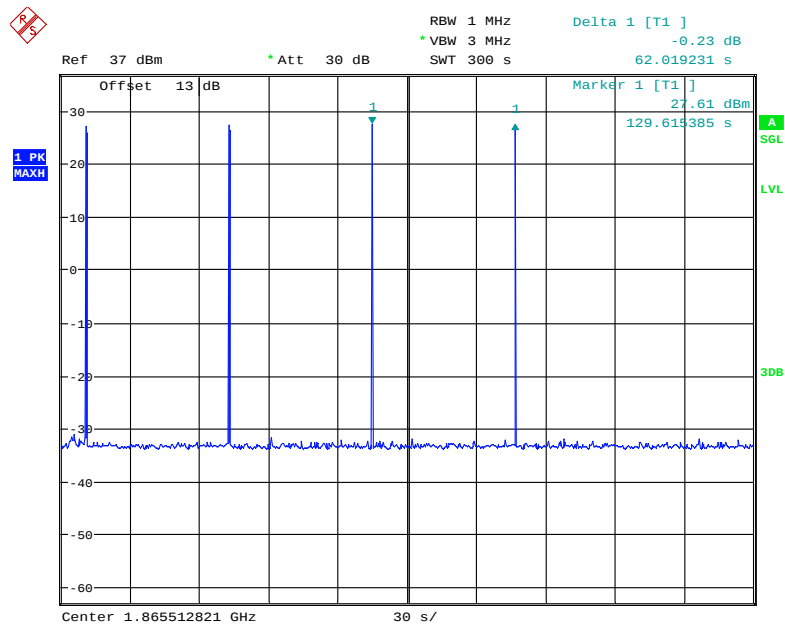


Date: 2.AUG.2019 12:21:28

### AWS Band

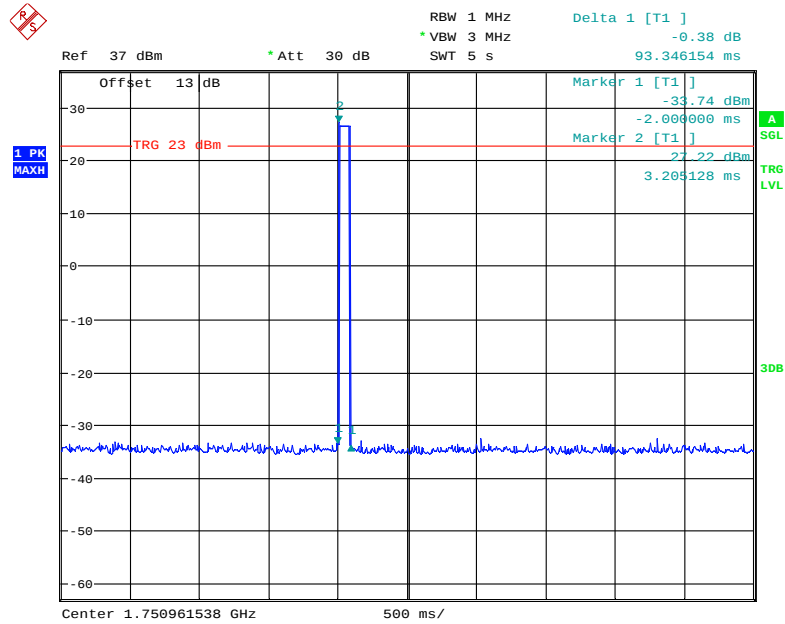


Date: 2.AUG.2019 12:39:19

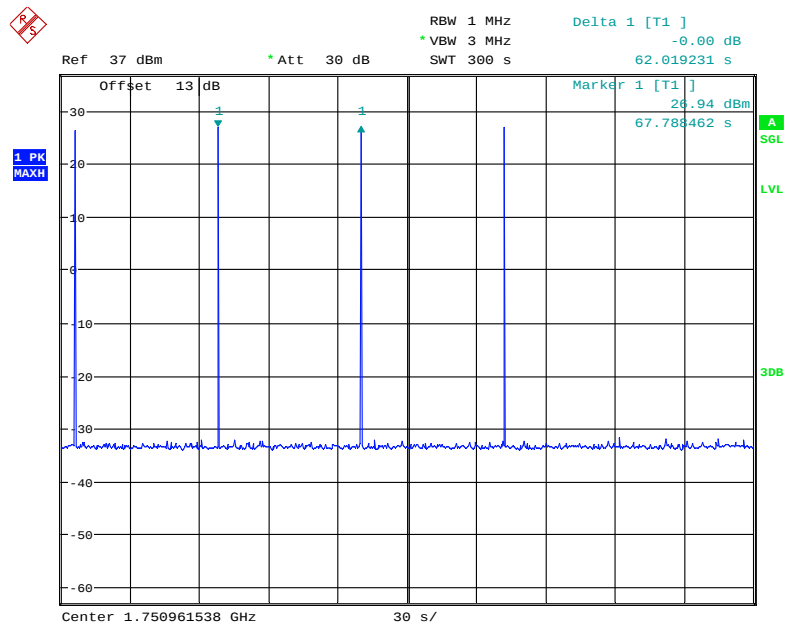


Date: 2.AUG.2019 12:58:58

### Lower 700MHz

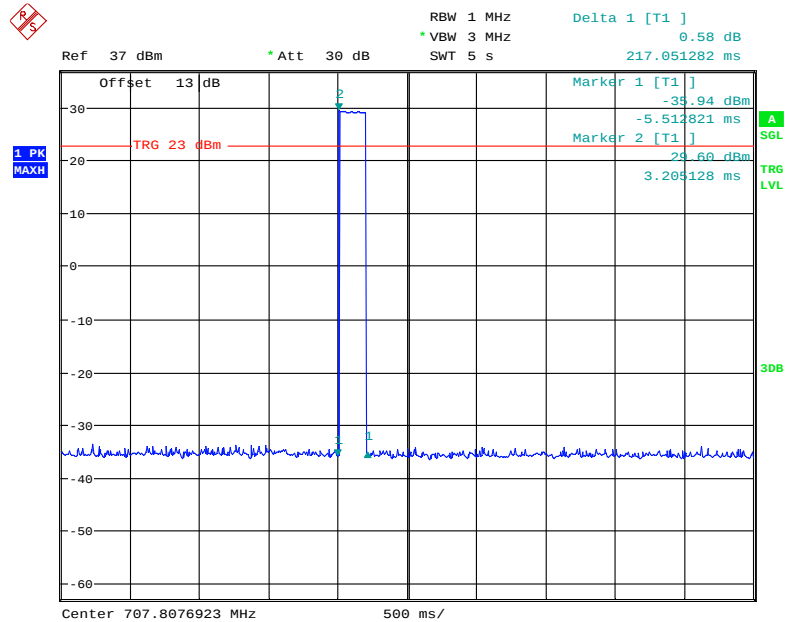


Date: 2.AUG.2019 13:05:39

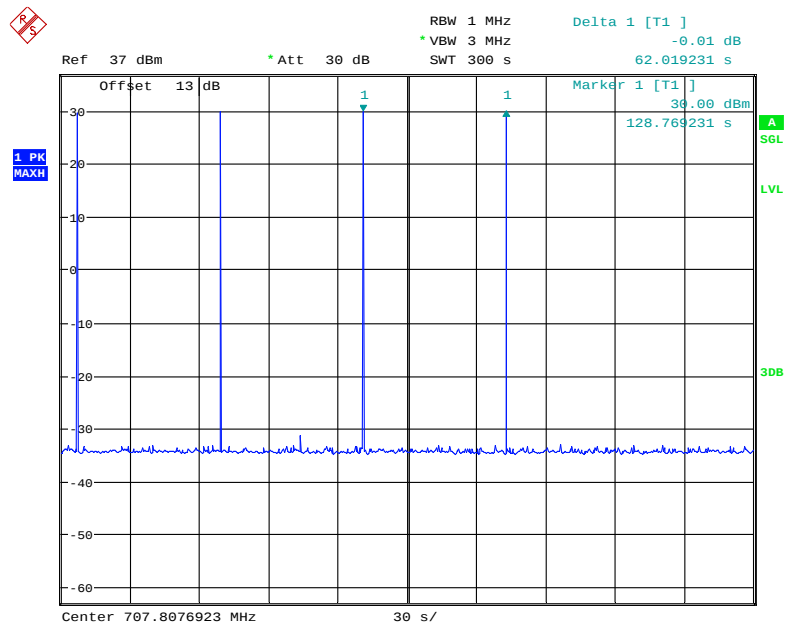


Date: 2.AUG.2019 13:11:43

# Upper 700MHz

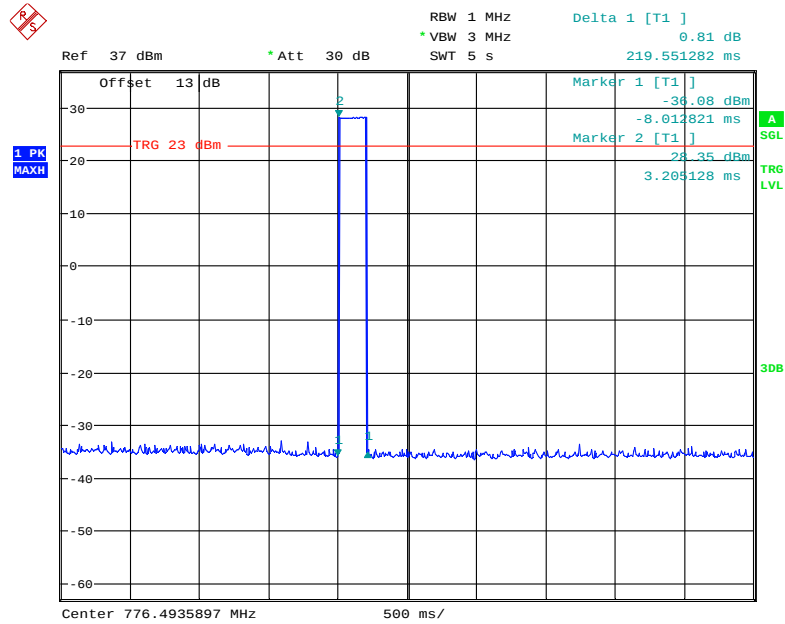

Date: 2.AUG.2019 13:14:03

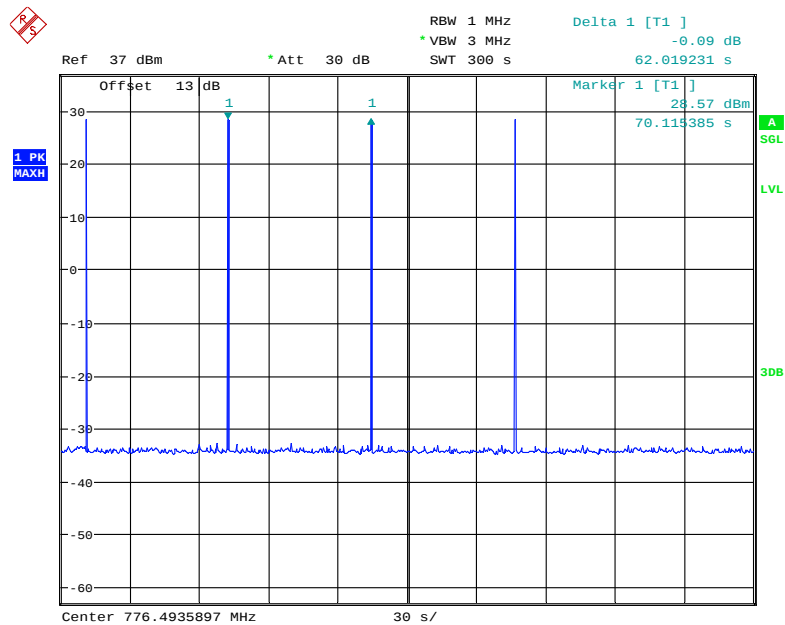

Date: 2.AUG.2019 13:20:09

## §2.1051- SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### Applicable Standards

FCC §2.1051 *Measurements required: Spurious emissions at antenna terminals.*

§20.21(e)(8)(i)(E): Booster out of band emissions (OOBE) shall be at least 6 dB below the FCC's mobile emission limits for the supported bands of operation. Compliance to OOBE limits will utilize high peak-to-average CMRS signal types.

§22.917 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

§24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

§27.53: the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;

### Test Procedure

The following procedures shall be used to demonstrate compliance to the applicable conducted spurious emissions limits as per § 2.1051.

**Note:** *For frequencies below 1 GHz, an RBW of 1 MHz may be used in a preliminary measurement. If non-compliant emissions are detected, a final measurement shall be made with a 100 kHz RBW. Additionally, a peak detector may also be used for the preliminary measurement. If non-compliant emissions are detected then a final measurement of these emissions shall be made with the power averaging (RMS) detector.*

- a) Connect the EUT to the test equipment as shown in **Figure 1**. Begin with the uplink output connected to the spectrum analyzer.
- b) Configure the signal generator for AWGN with a 99% occupied bandwidth of 4.1 MHz with a center frequency corresponding to the center of the CMRS band under test.
- c) Set the signal generator amplitude to the level determined in the power measurement procedure in 7.2.
- d) Turn on the signal generator RF output and measure the spurious emission power levels with an appropriate measurement instrument as follows.
  - 1) Set RBW = measurement bandwidth specified in the applicable rule section for the operational frequency band under consideration (see Annex A for relevant cross-references). Note that many of the individual rule sections permit the use of a narrower RBW (typically  $\geq 1\%$  of the emission bandwidth) to enhance measurement accuracy, but the result must then be integrated over the specified measurement bandwidth.
  - 2) Set VBW =  $3 \times$  RBW.
  - 3) Select the power averaging (RMS) detector. (See above note regarding the use of a peak detector for preliminary measurements.)
  - 4) Sweep time = auto-couple.
  - 5) Set the analyzer start frequency to the lowest radio frequency signal generated in the equipment, without going below 9 kHz, and the stop frequency to the lower band/block edge frequency minus 100 kHz or 1 MHz, as specified in the applicable rule part. Note that the number of measurement points in each sweep


must be  $\geq (2 \times \text{span/RBW})$  which may require that the measurement range defined by the start and stop frequencies above be subdivided, depending on the available number of measurement points provided by the spectrum analyzer. Trace average at least 10 traces in power averaging (i.e., RMS) mode.

6) Use the peak marker function to identify the highest amplitude level over each measured frequency range. Record the frequency and amplitude and capture a plot for inclusion in the test report.

7) Reset the analyzer start frequency to the upper band/block edge frequency plus 100 kHz or 1 MHz, as specified in the applicable rule part, and the analyzer stop frequency to  $10 \times$  the highest frequency of the fundamental emission. Note that the number of measurement points in each sweep must be  $\geq (2 \times \text{span/RBW})$  which may require that the measurement range defined by the start and stop frequencies above be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.

8) Use the peak marker function to identify the highest amplitude level over each of the measured frequency ranges. Record the frequency and amplitude and capture a plot for inclusion in the test report.

e) Repeat 7.6b) through 7.6d) for each supported frequency band of operation.

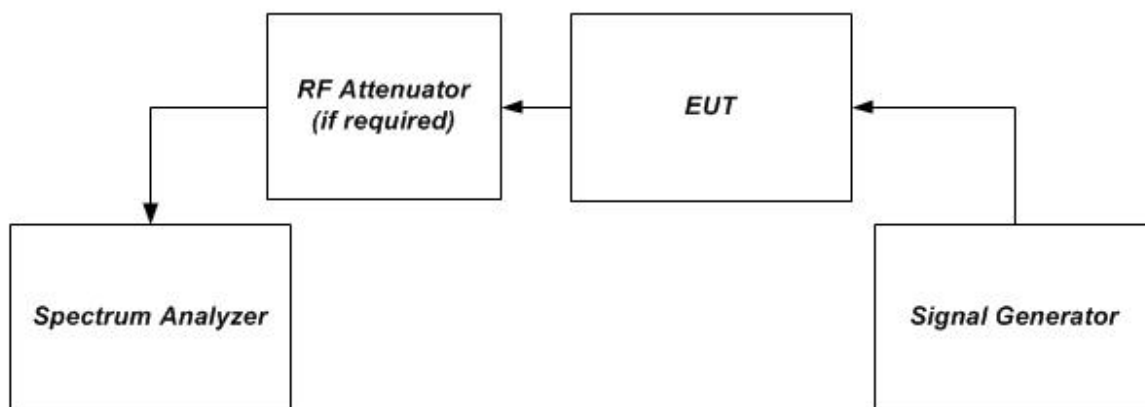

**Figure 1 – Band verification test instrumentation setup**

## Test Data

### Environmental Conditions

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 24 °C     |
| <b>Relative Humidity:</b> | 52 %      |
| <b>ATM Pressure:</b>      | 101.2 kPa |


*The testing was performed by Kieron Luo on 2019-08-15.*

*Test Mode: Transmitting, please refer to the following plots.*


*Test Result: Compliance.*

Downlink:


### Cellular Band

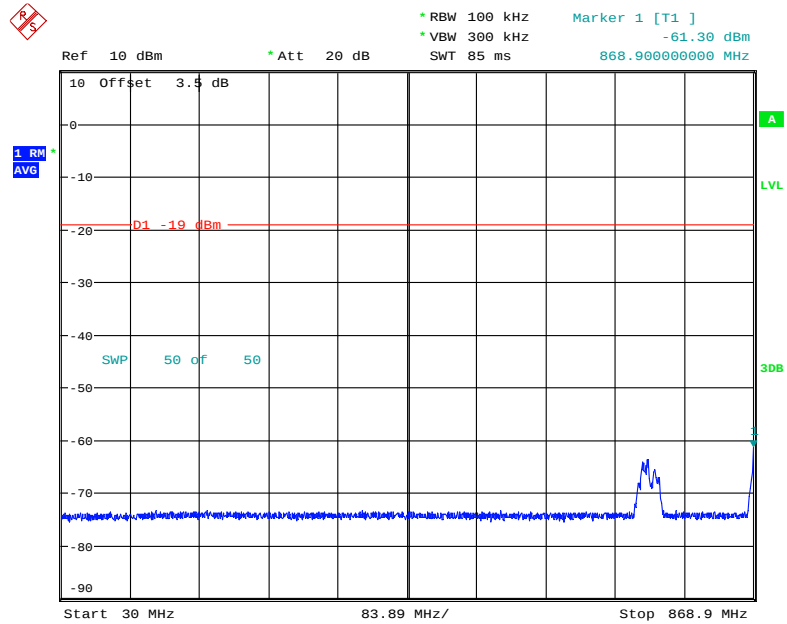

Date: 15.AUG.2019 07:03:31

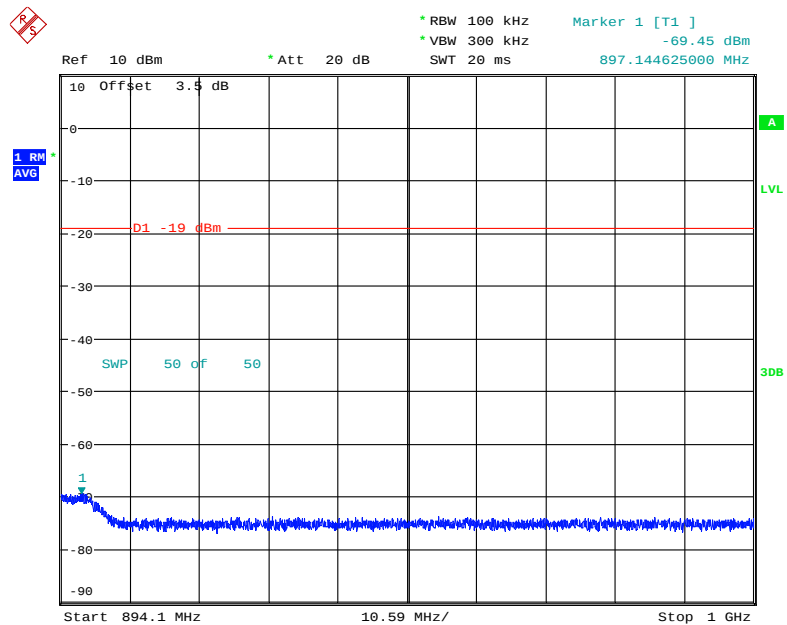


Date: 15.AUG.2019 07:04:29

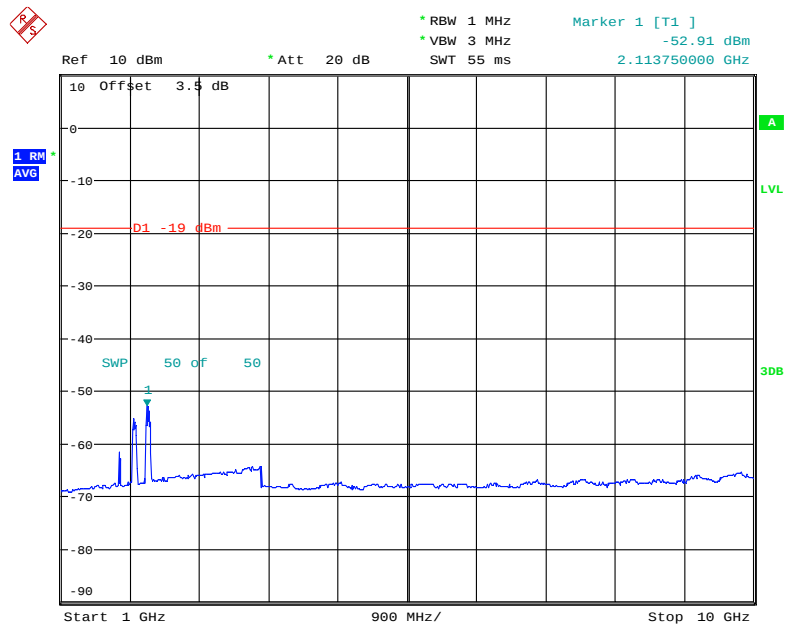


Date: 15.AUG.2019 07:02:30


### PCS Band

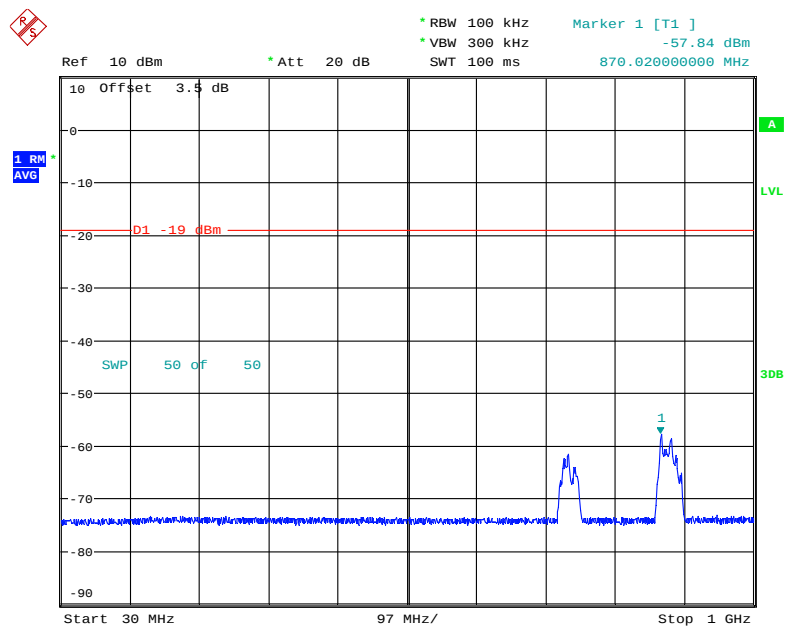

Date: 15.AUG.2019 06:59:30

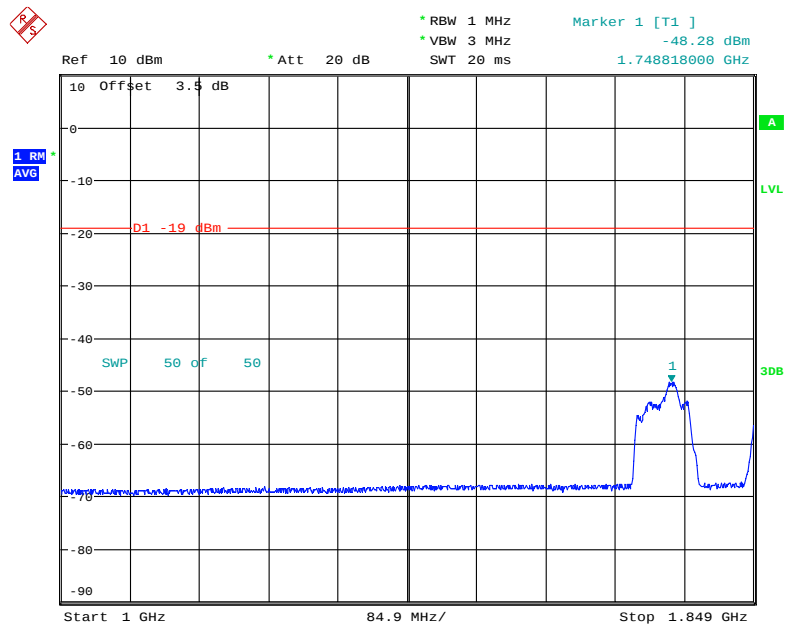


Date: 15.AUG.2019 06:33:10

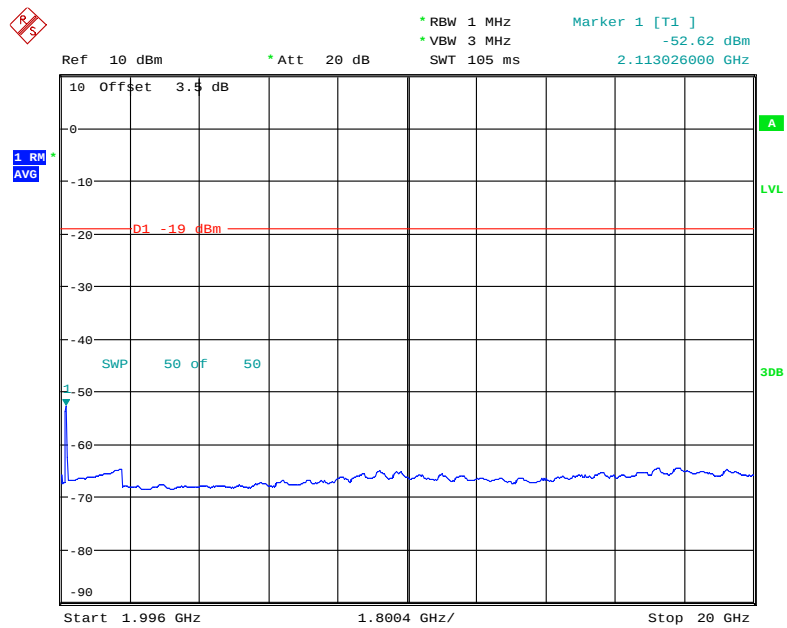


Date: 15.AUG.2019 07:01:17


# AWS Band

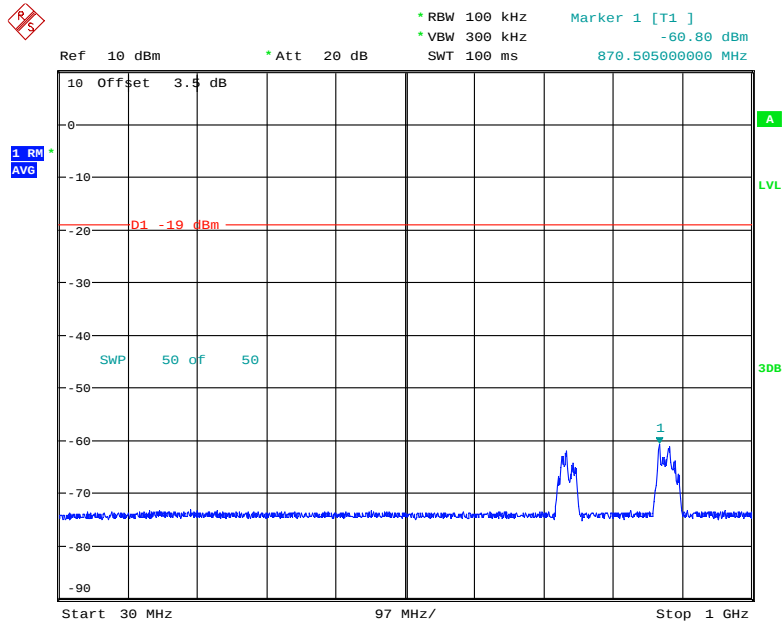

Date: 15.AUG.2019 07:05:51

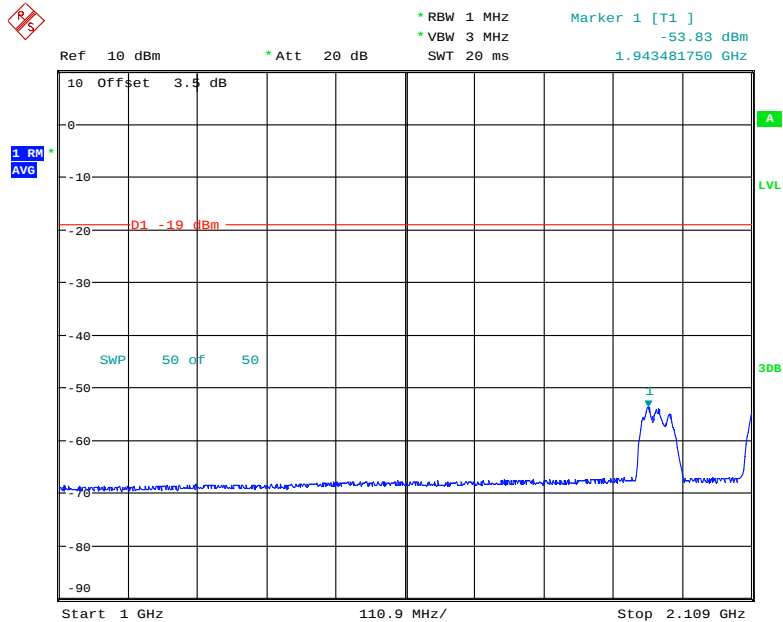


Date: 15.AUG.2019 07:06:40

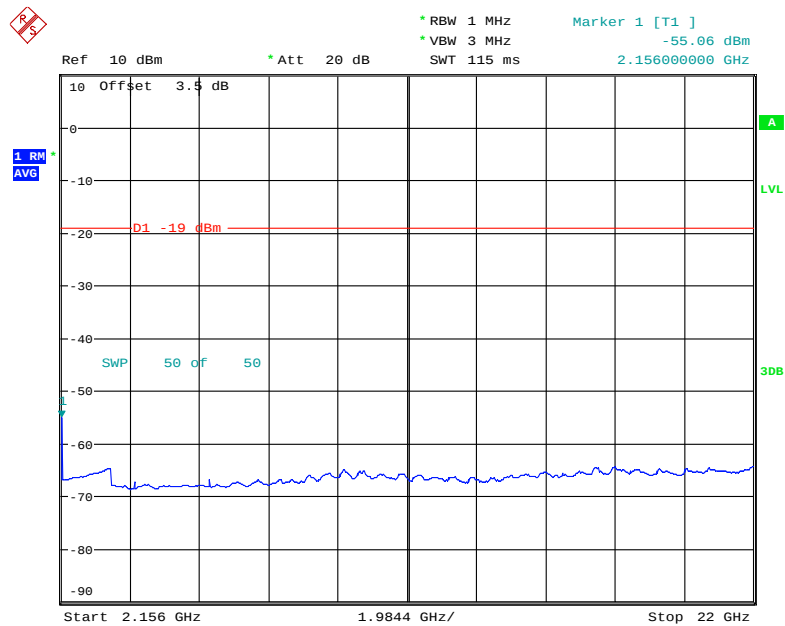


Date: 15.AUG.2019 07:07:34


### Lower 700MHz

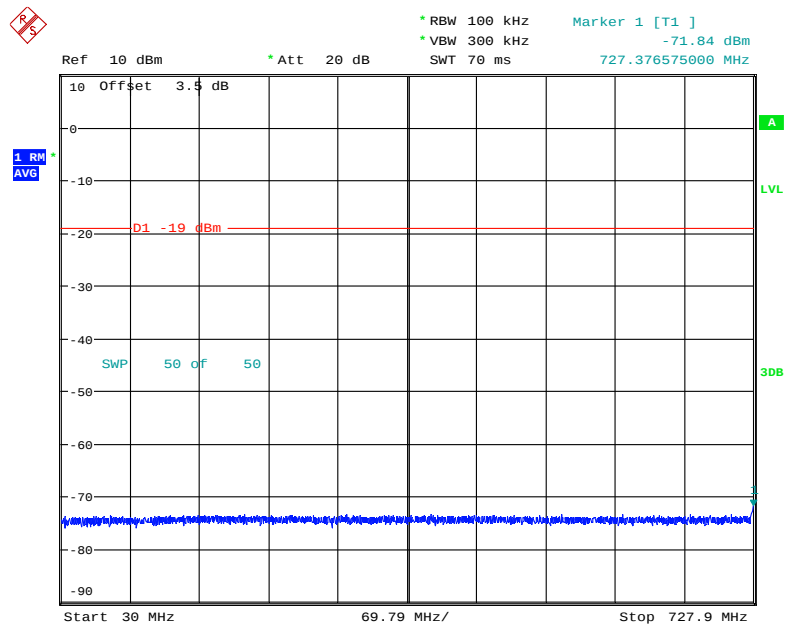

Date: 15.AUG.2019 07:09:43

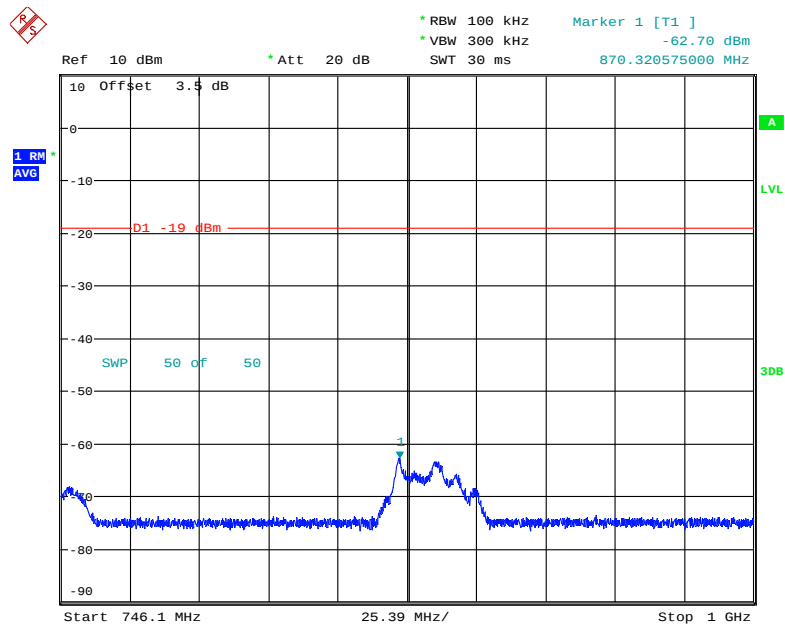


Date: 15.AUG.2019 07:10:24

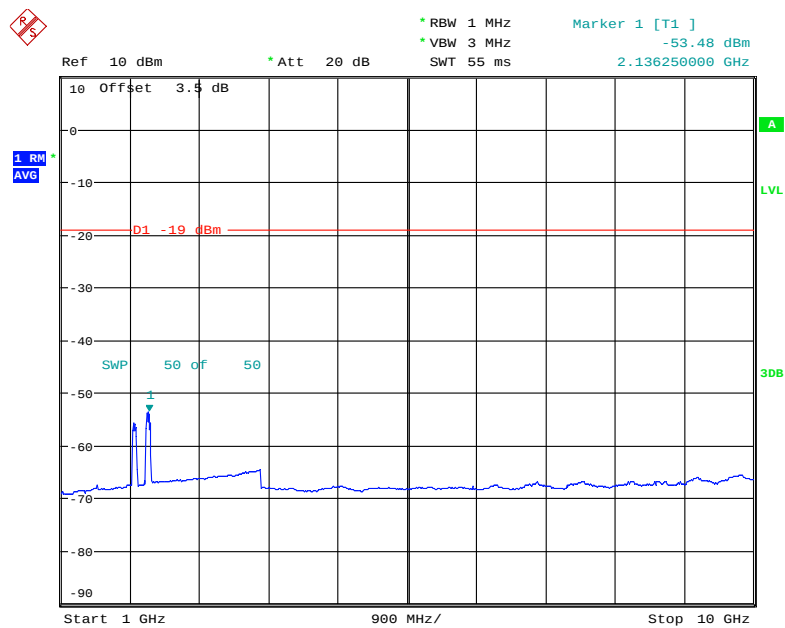


Date: 15.AUG.2019 07:08:48


# Upper 700MHz

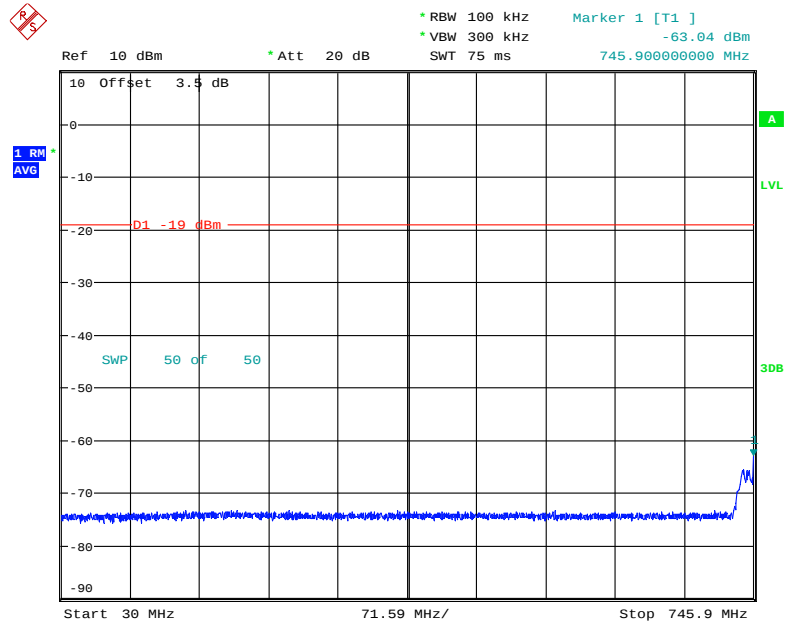

Date: 15.AUG.2019 07:11:37

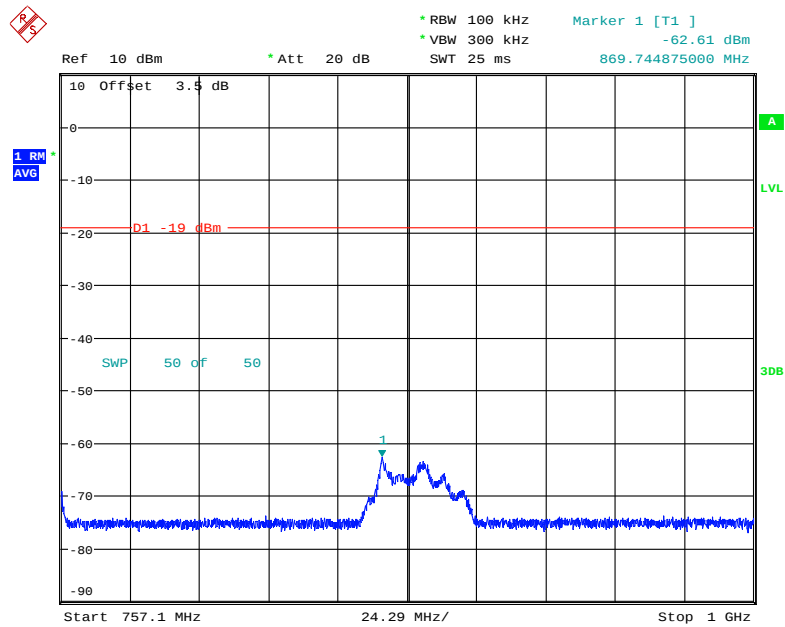


Date: 15.AUG.2019 07:12:40

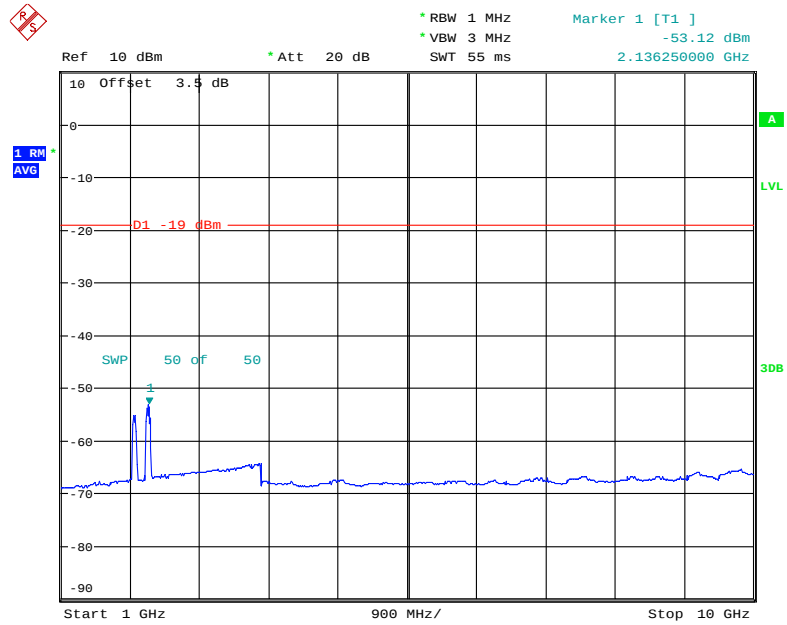


Date: 15.AUG.2019 07:13:20

Uplink:


### Cellular Band

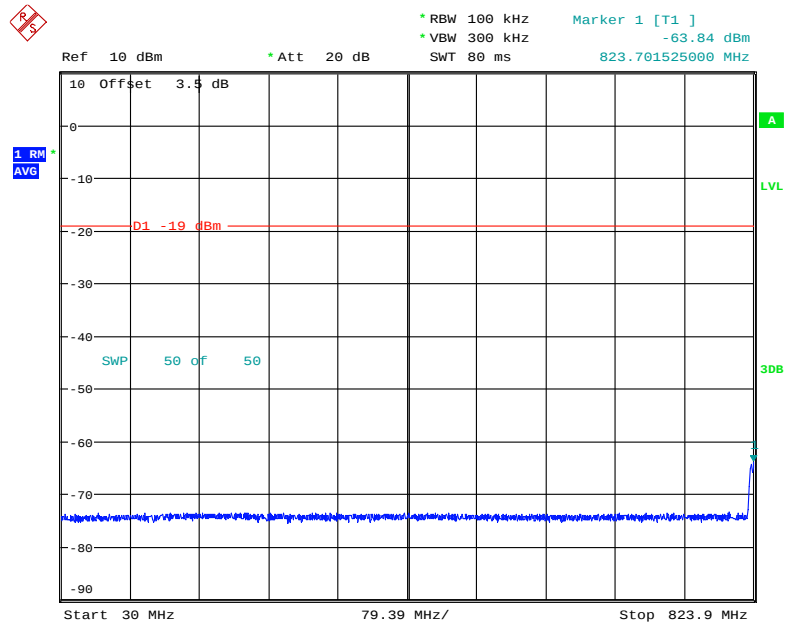

Date: 15.AUG.2019 06:37:56

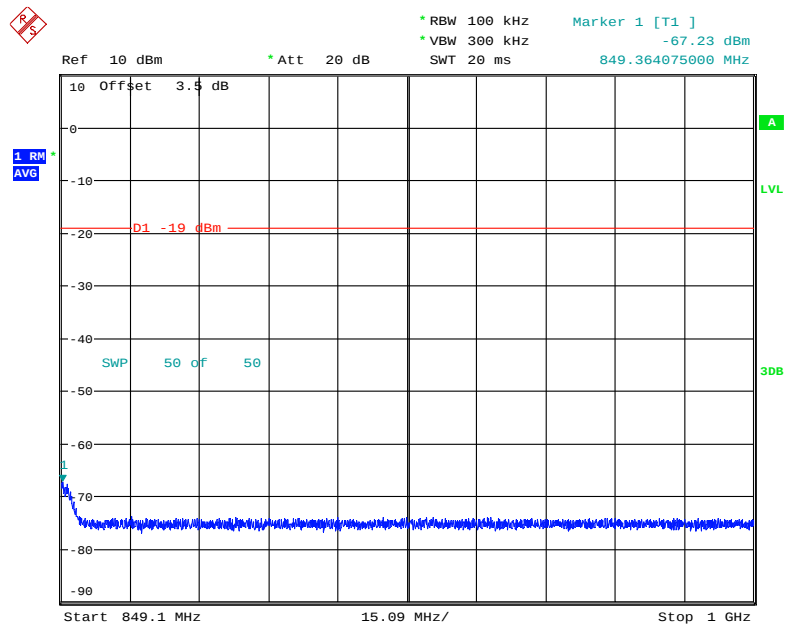


Date: 15.AUG.2019 06:39:16

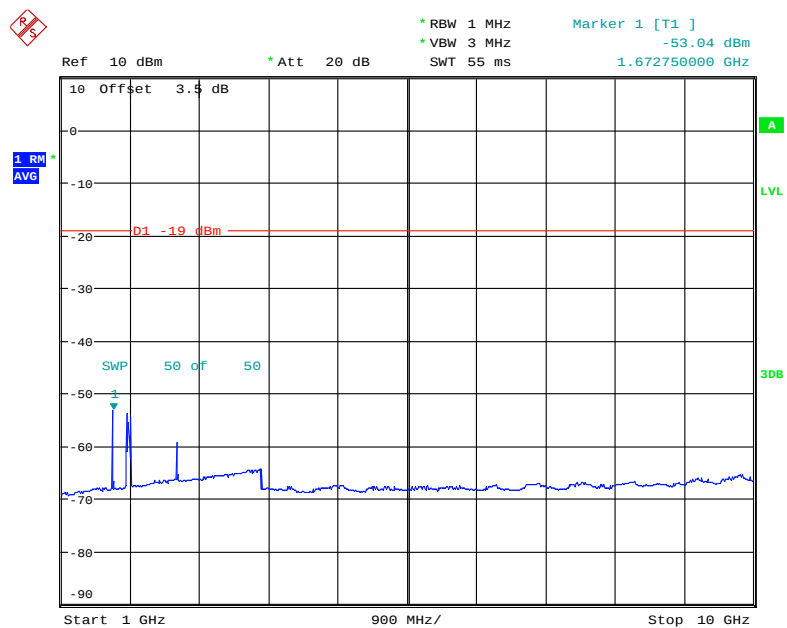


Date: 15.AUG.2019 06:41:03


# PCS Band

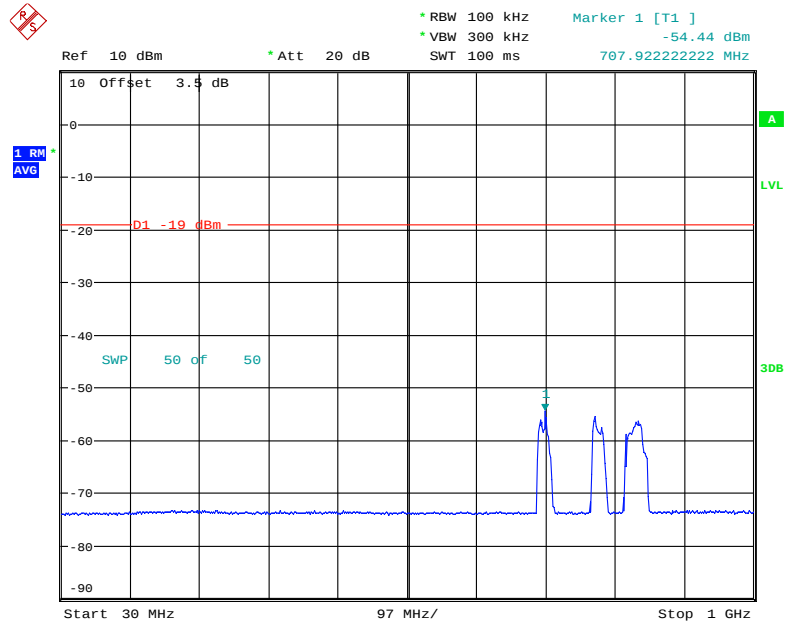

Date: 15.AUG.2019 06:27:11

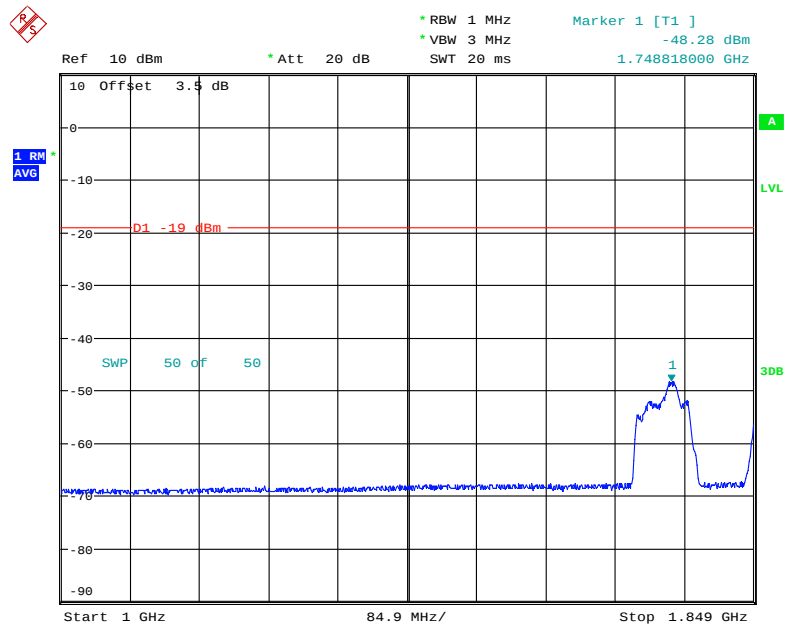


Date: 15.AUG.2019 06:33:10

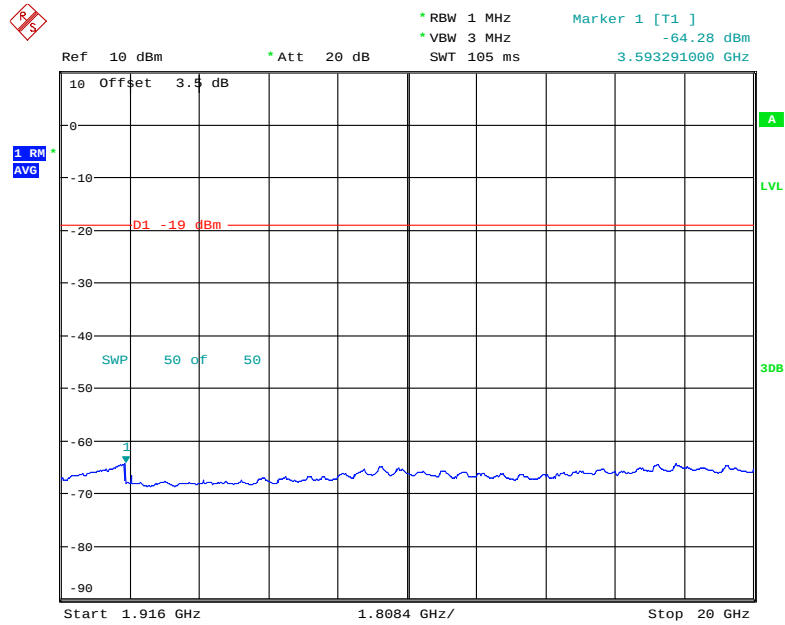


Date: 15.AUG.2019 06:33:53


### AWS Band

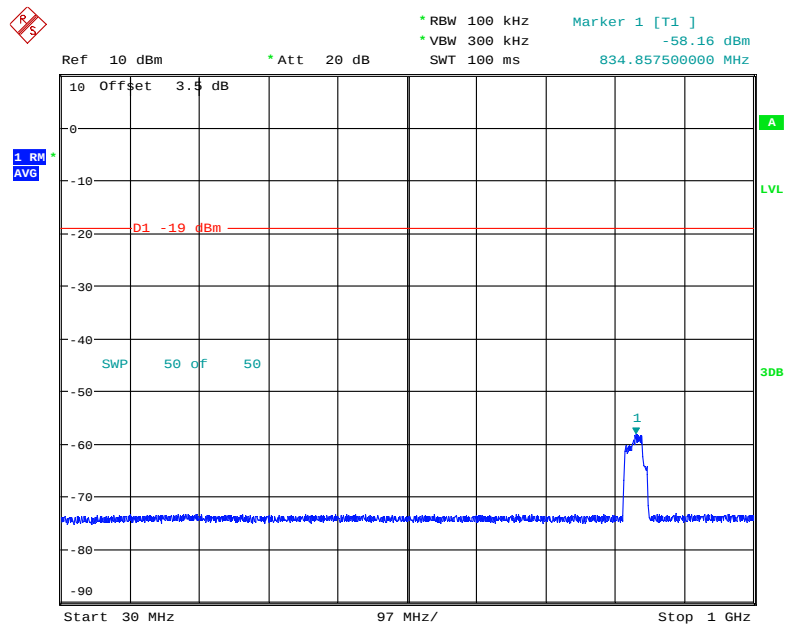

Date: 15.AUG.2019 06:45:12

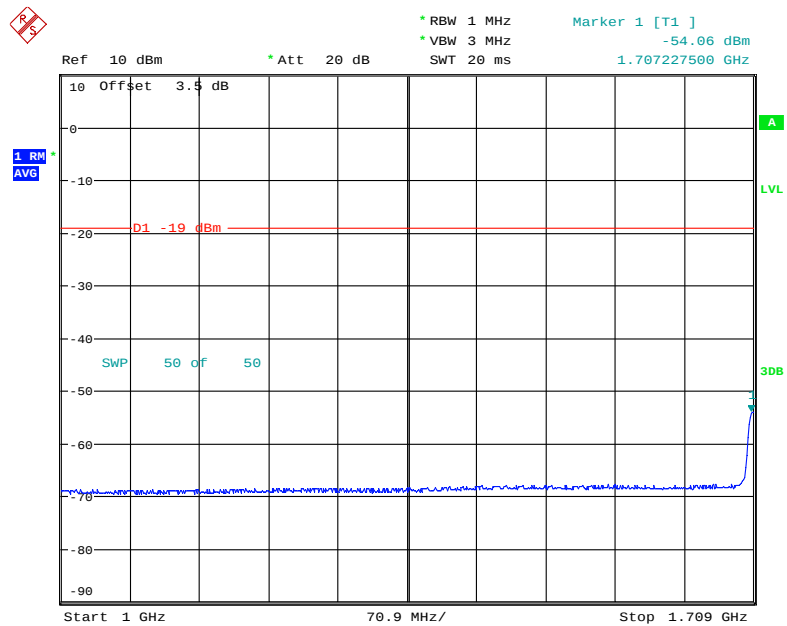


Date: 15.AUG.2019 06:42:33

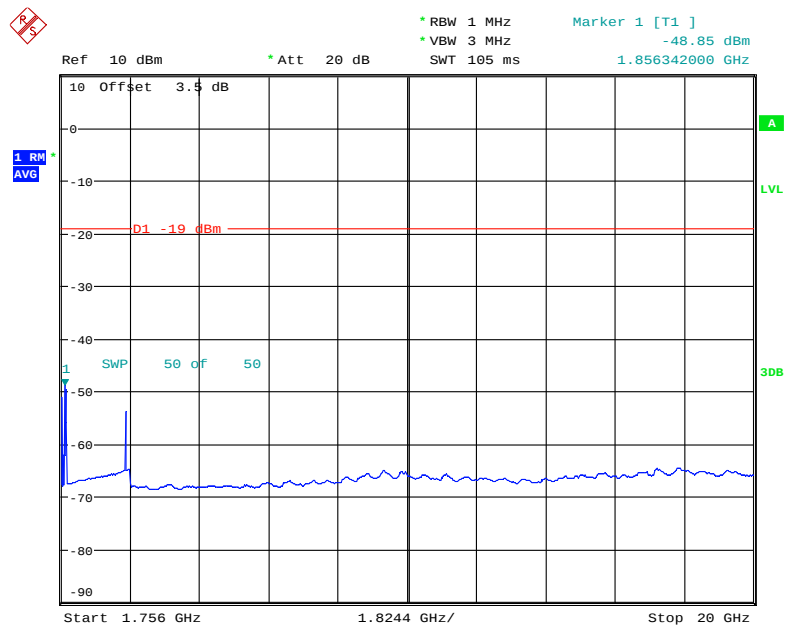


Date: 15.AUG.2019 06:44:29


### Lower 700MHz

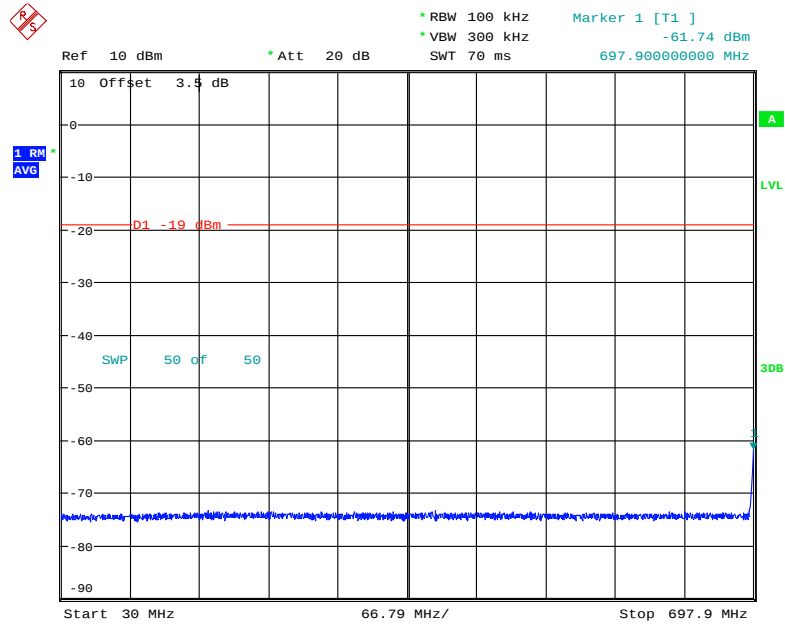

Date: 15.AUG.2019 06:47:14

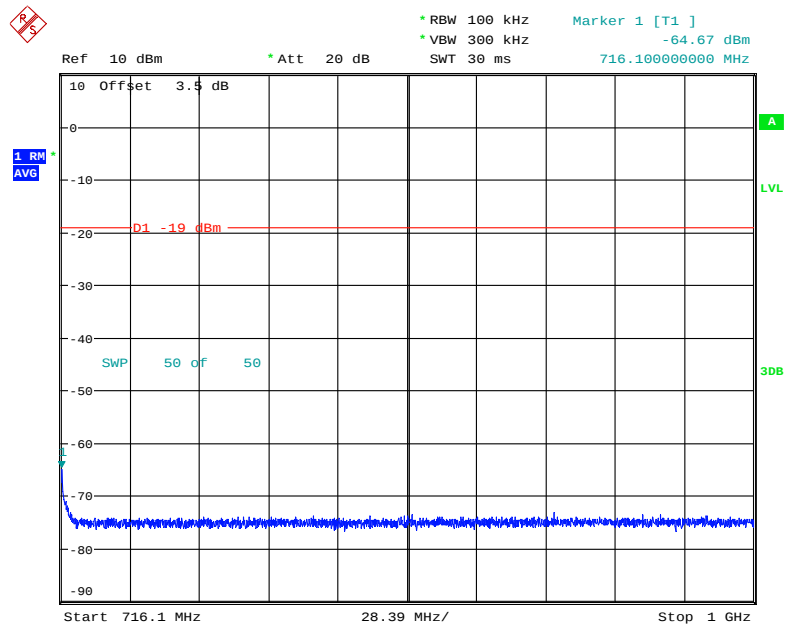


Date: 15.AUG.2019 06:48:39

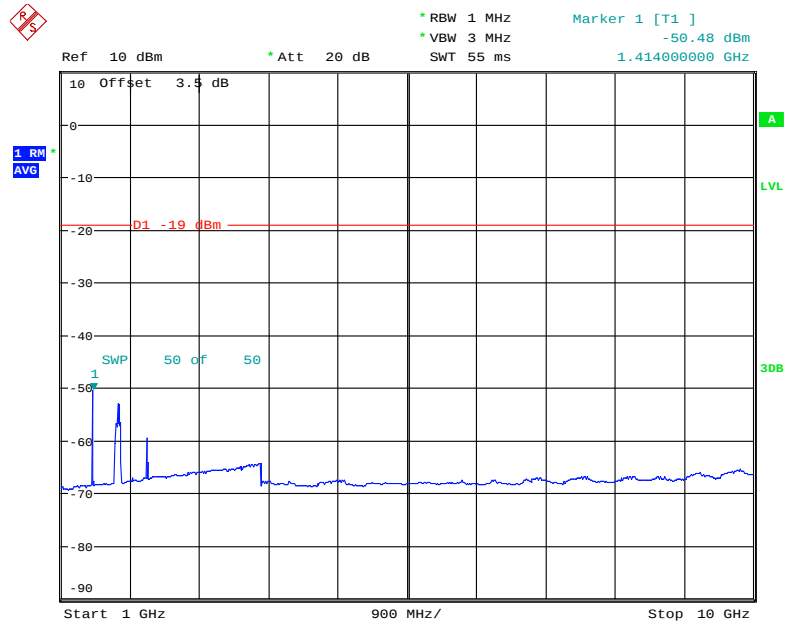


Date: 15.AUG.2019 06:49:27


### Upper 700MHz

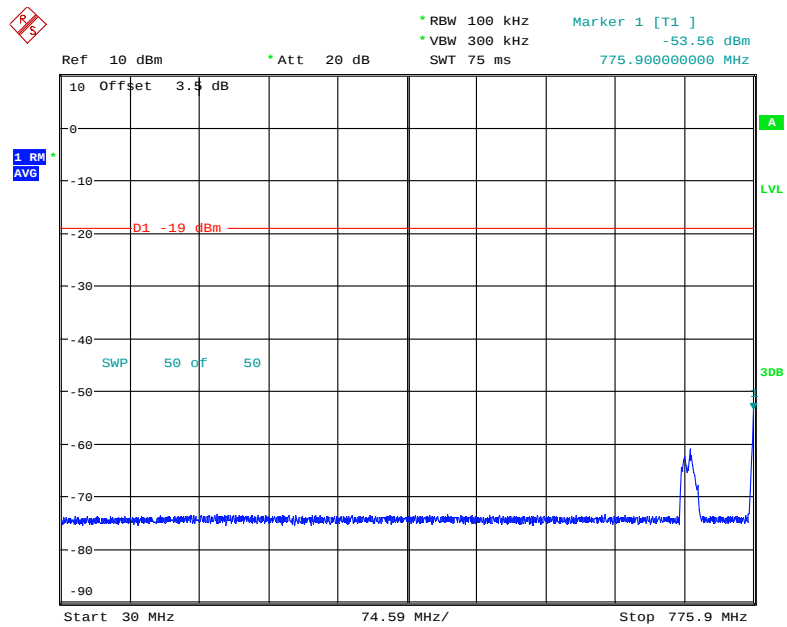

Date: 15.AUG.2019 06:51:53

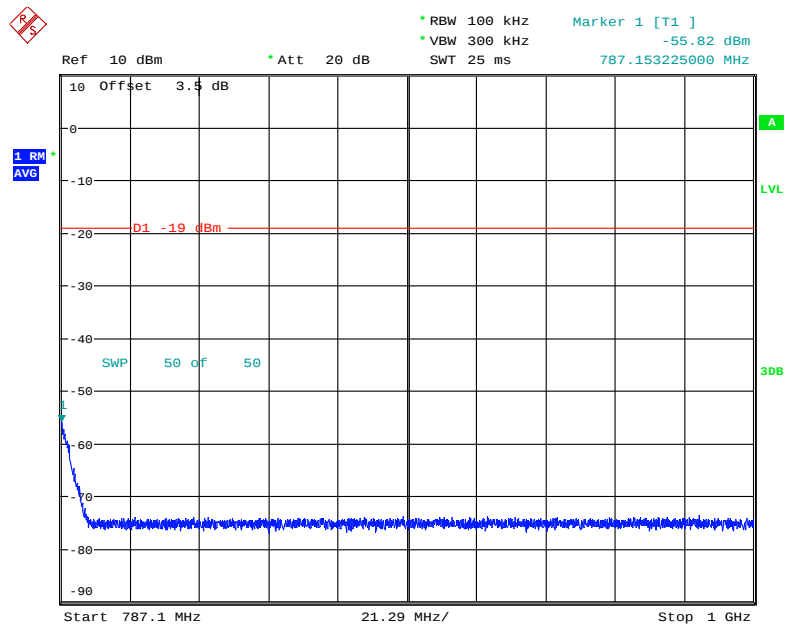

Date: 15.AUG.2019 06:52:42

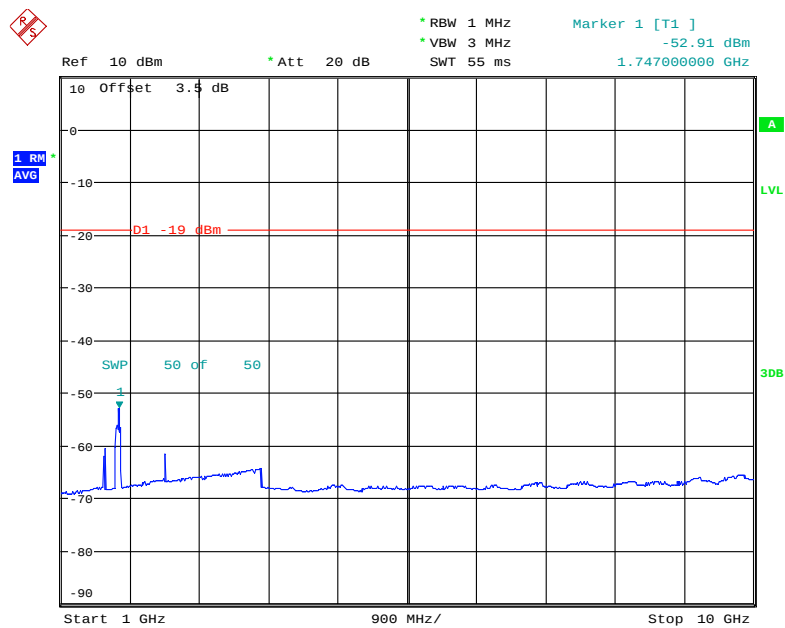


Date: 15.AUG.2019 06:50:47

## Additional requirement for upper 700MHz band


Uplink:

763 MHz~775 MHz

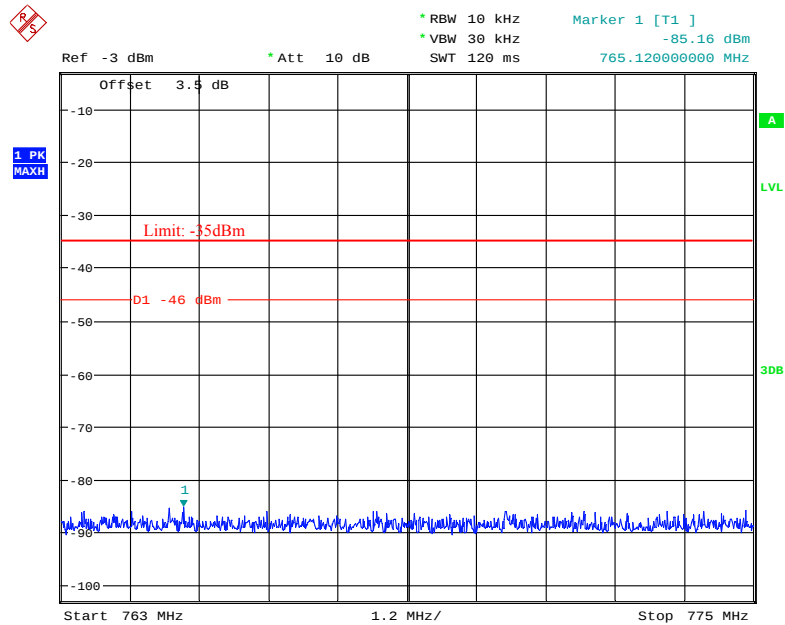


Date: 15.AUG.2019 11:41:08

793 MHz~805 MHz

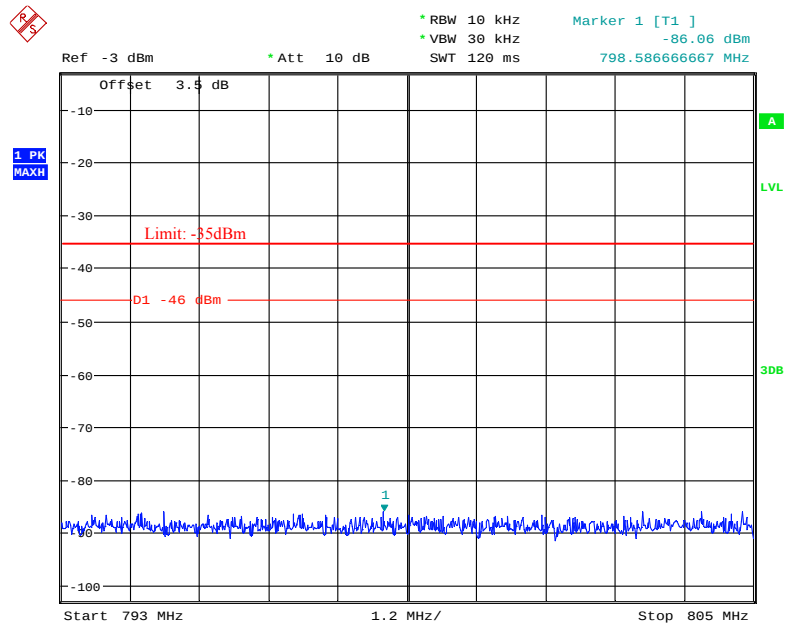


Date: 15.AUG.2019 11:40:34

### 1559 MHz~1610 MHz (wide band)

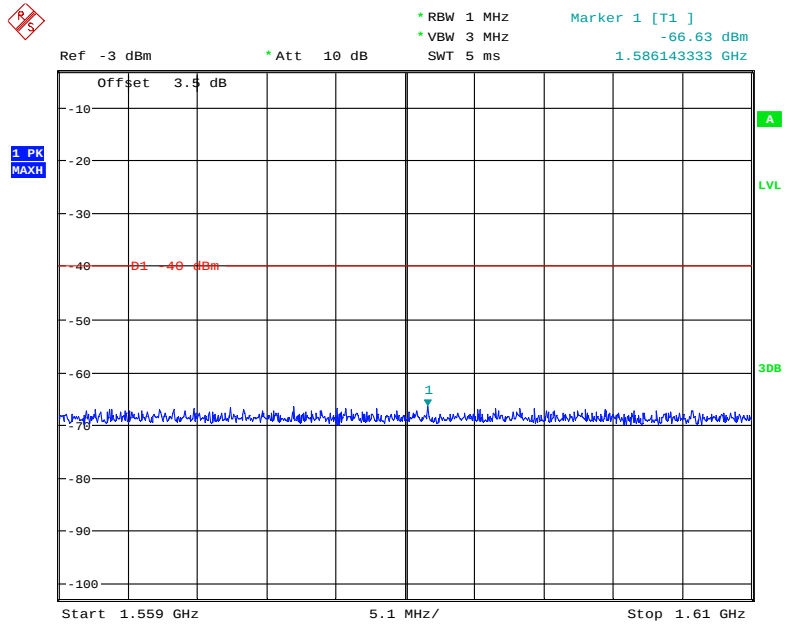

Date: 15.AUG.2019 11:42:16


### 1559 MHz~1610 MHz (narrow band)

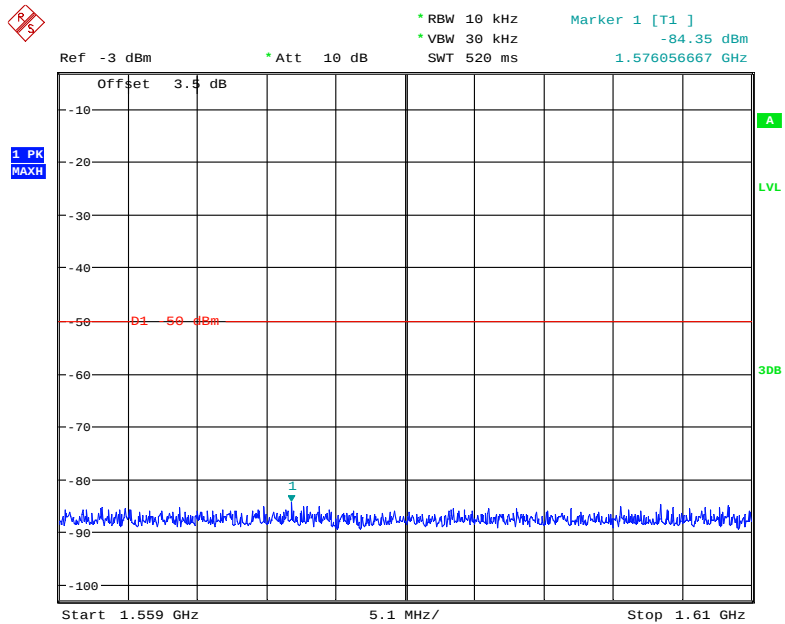

Date: 15.AUG.2019 11:41:44


**Downlink:**

**763 MHz~775 MHz**

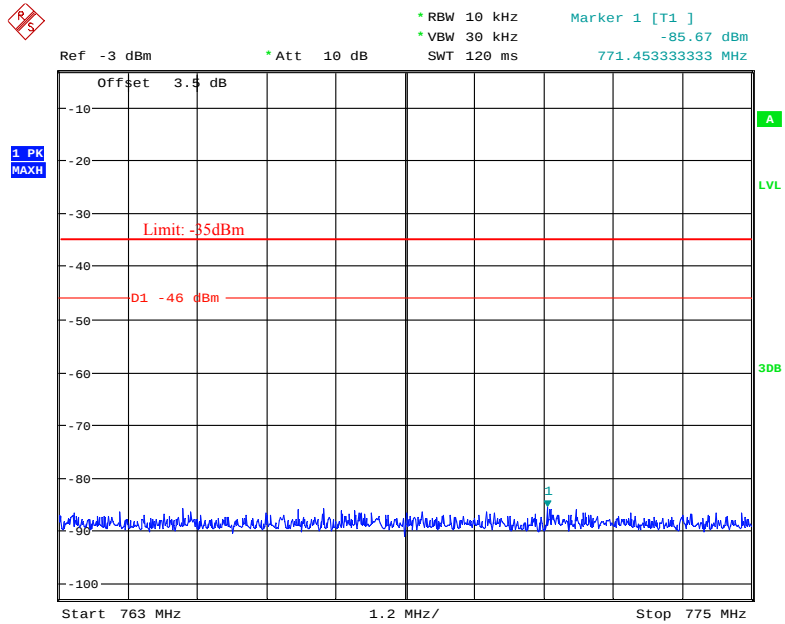


Date: 15.AUG.2019 11:37:38

**793 MHz~805 MHz**

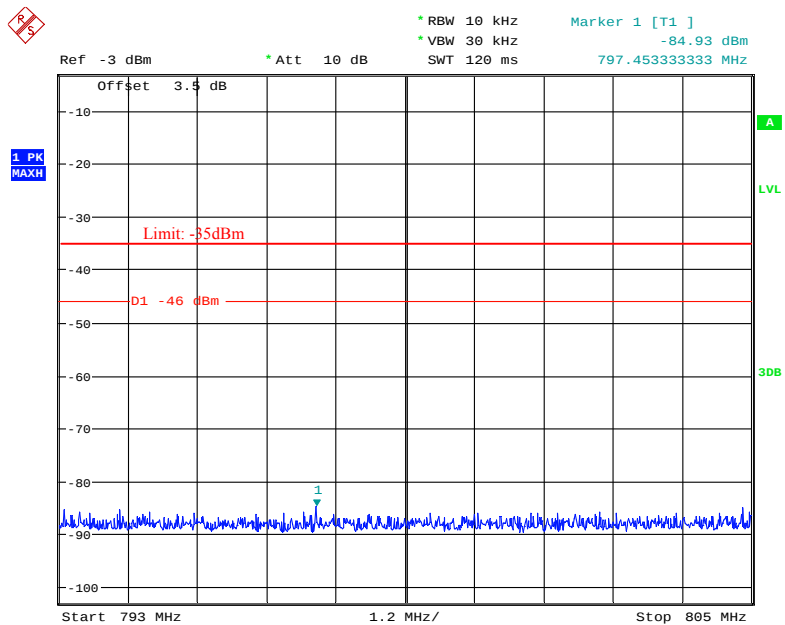


Date: 15.AUG.2019 11:38:40

## 1559 MHz~1610 MHz (wide band)

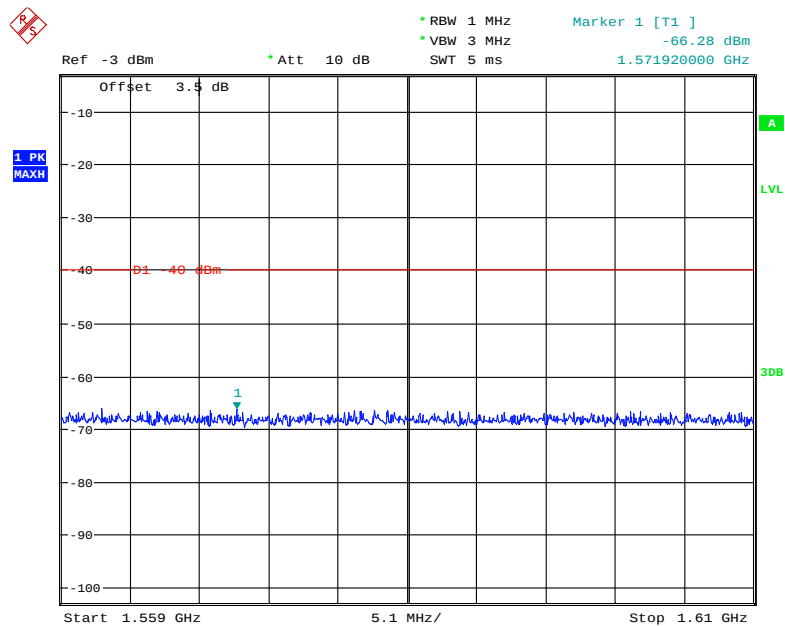

Date: 15.AUG.2019 11:34:52

## 1559 MHz~1610 MHz (narrow band)

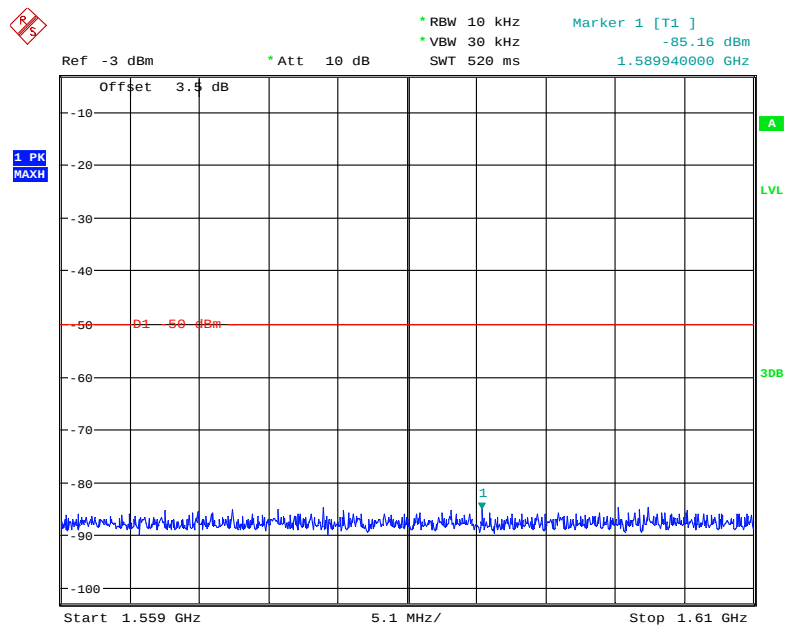

Date: 15.AUG.2019 11:35:25

## § 2.1053 - RADIATED SPURIOUS EMISSIONS


### Applicable Standards

§ 2.1053 *Measurements required: Field strength of spurious radiation.*

### Test Procedure

This procedure is intended to satisfy the requirements specified in § 2.1053. The applicable limits are those specified for mobile emissions in the rule part appropriate to the band of operation (see Annex A).

- Place the EUT on an OATS or semi-anechoic chamber turntable 3 m from the receiving antenna.
- Connect the EUT to the test equipment as shown in **Figure 10** beginning with the uplink output.
- Set the signal generator to produce a CW signal with the frequency set to the center of the operational band under test and the power level set at  $P_{IN}$  as determined from 7.2.
- Measure the radiated spurious emissions from the EUT from lowest to the highest frequencies as specified in § 2.1057. Maximize the radiated emissions by utilizing the procedures described in Clause 8 of ANSI C63.4-2014.
- Capture the peak emissions plots using a peak detector with Max-Hold for inclusion in the test report. Tabular data is acceptable in lieu of spectrum analyzer plots.
- Repeat 7.12c) through 7.12e) for all operational bands.

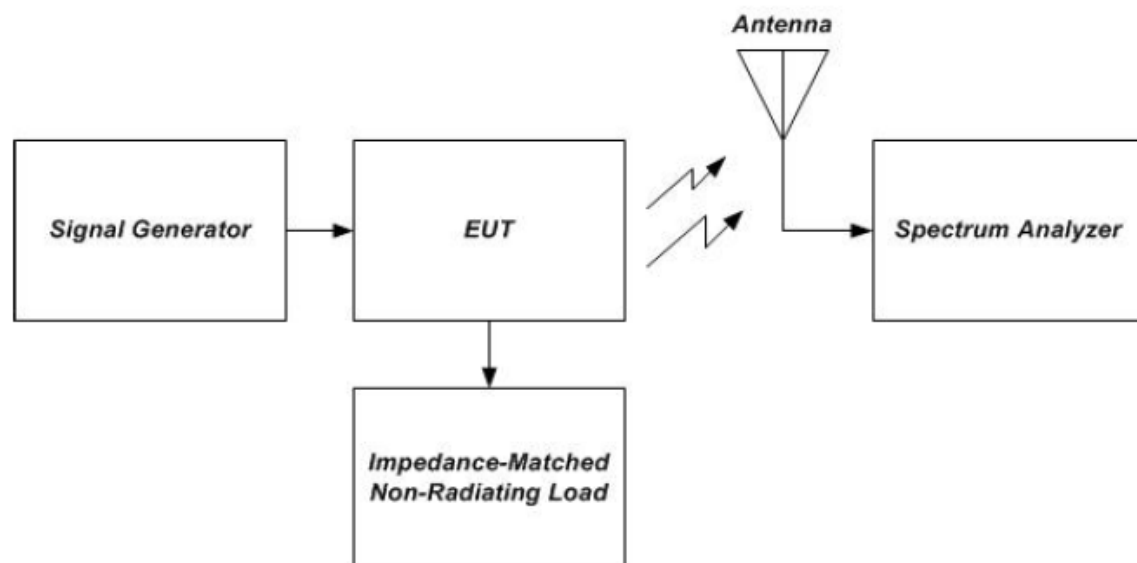

**Figure 10 – Radiated spurious emissions test instrumentation setup**

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 24 °C     |
| <b>Relative Humidity:</b> | 52 %      |
| <b>ATM Pressure:</b>      | 101.2 kPa |

The testing was performed by Andy Yu and Alan He on 2019-08-08.

**Test Result:** Compliance. Please refer to following table.

Test Mode: Transmitting

**Downlink:**

| Frequency<br>(MHz)                     | Receiver<br>Reading<br>(dBμV) | Polar<br>(H / V) | Substituted Method |                   |                      | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|----------------------------------------|-------------------------------|------------------|--------------------|-------------------|----------------------|----------------------------|----------------|----------------|
|                                        |                               |                  | Level<br>(dBm)     | Cable<br>loss(dB) | Antenna<br>Gain(dBi) |                            |                |                |
| Cellular Band, Test Frequency 881.5MHz |                               |                  |                    |                   |                      |                            |                |                |
| 960.15                                 | 36.85                         | H                | -63.7              | 1.37              | 0.0                  | -65.07                     | -19            | 46.07          |
| 960.15                                 | 35.98                         | V                | -63.4              | 1.37              | 0.0                  | -64.77                     | -19            | 45.77          |
| 1763.00                                | 43.54                         | H                | -61.5              | 1.30              | 9.30                 | -53.50                     | -19            | 34.50          |
| 1763.00                                | 44.48                         | V                | -60.2              | 1.30              | 9.30                 | -52.20                     | -19            | 33.20          |
| PCS Band, Test Frequency 1962.5MHz     |                               |                  |                    |                   |                      |                            |                |                |
| 836.15                                 | 36.71                         | H                | -66.0              | 1.35              | 0.0                  | -67.35                     | -19            | 48.35          |
| 836.15                                 | 35.80                         | V                | -66.5              | 1.35              | 0.0                  | -67.85                     | -19            | 48.85          |
| 3925.00                                | 51.27                         | H                | -49.8              | 1.60              | 11.90                | -39.50                     | -19            | 20.50          |
| 3925.00                                | 51.30                         | V                | -49.6              | 1.60              | 11.90                | -39.30                     | -19            | 20.30          |
| AWS Band, Test Frequency 2132.5MHz     |                               |                  |                    |                   |                      |                            |                |                |
| 960.60                                 | 36.28                         | H                | -64.3              | 1.37              | 0.0                  | -65.67                     | -19            | 46.67          |
| 960.60                                 | 36.37                         | V                | -63.0              | 1.37              | 0.0                  | -64.37                     | -19            | 45.37          |
| 4265.00                                | 44.74                         | H                | -56.4              | 1.50              | 11.70                | -46.20                     | -19            | 27.20          |
| 4265.00                                | 43.50                         | V                | -57.0              | 1.50              | 11.70                | -46.80                     | -19            | 27.80          |
| Lower 700MHz, Test Frequency 737MHz    |                               |                  |                    |                   |                      |                            |                |                |
| 841.55                                 | 35.47                         | H                | -67.2              | 1.35              | 0.0                  | -68.55                     | -19            | 49.55          |
| 841.55                                 | 35.18                         | V                | -67.1              | 1.35              | 0.0                  | -68.45                     | -19            | 49.45          |
| 1474.00                                | 43.02                         | H                | -65.6              | 1.60              | 8.50                 | -58.70                     | -19            | 39.70          |
| 1474.00                                | 42.15                         | V                | -66.8              | 1.60              | 8.50                 | -59.90                     | -19            | 40.90          |
| Upper 700MHz, Test Frequency 751.5MHz  |                               |                  |                    |                   |                      |                            |                |                |
| 841.40                                 | 35.75                         | H                | -67.0              | 1.35              | 0.0                  | -68.35                     | -19            | 49.35          |
| 841.40                                 | 35.09                         | V                | -67.2              | 1.35              | 0.0                  | -68.55                     | -19            | 49.55          |
| 1503.00                                | 45.70                         | H                | -62.9              | 1.60              | 8.50                 | -56.00                     | -19            | 37.00          |
| 1503.00                                | 45.96                         | V                | -62.9              | 1.60              | 8.50                 | -56.00                     | -19            | 37.00          |

Uplink:

| Frequency<br>(MHz)                     | Receiver<br>Reading<br>(dBμV) | Polar<br>(H / V) | Substituted Method |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|----------------------------------------|-------------------------------|------------------|--------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                                        |                               |                  | Level<br>(dBm)     | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| Cellular Band, Test Frequency 836.5MHz |                               |                  |                    |                              |                    |                            |                |                |
| 958.36                                 | 36.74                         | H                | -63.9              | 1.37                         | 0.0                | -65.27                     | -19            | 46.27          |
| 958.36                                 | 36.09                         | V                | -63.3              | 1.37                         | 0.0                | -64.67                     | -19            | 45.67          |
| 1673.00                                | 44.30                         | H                | -62.0              | 1.30                         | 8.90               | -54.40                     | -19            | 35.40          |
| 1673.00                                | 46.91                         | V                | -58.8              | 1.30                         | 8.90               | -51.20                     | -19            | 32.20          |
| PCS Band, Test Frequency 1882.5MHz     |                               |                  |                    |                              |                    |                            |                |                |
| 835.65                                 | 36.42                         | H                | -66.3              | 1.35                         | 0.0                | -67.65                     | -19            | 48.65          |
| 835.65                                 | 36.01                         | V                | -66.3              | 1.35                         | 0.0                | -67.65                     | -19            | 48.65          |
| 3765.00                                | 44.52                         | H                | -57.9              | 1.50                         | 11.80              | -47.60                     | -19            | 28.60          |
| 3765.00                                | 45.06                         | V                | -56.9              | 1.50                         | 11.80              | -46.60                     | -19            | 27.60          |
| AWS Band, Test Frequency 1732.5MHz     |                               |                  |                    |                              |                    |                            |                |                |
| 959.50                                 | 36.85                         | H                | -63.7              | 1.37                         | 0.0                | -65.07                     | -19            | 46.07          |
| 959.50                                 | 35.48                         | V                | -63.9              | 1.37                         | 0.0                | -65.27                     | -19            | 46.27          |
| 3465.00                                | 44.13                         | H                | -56.7              | 1.50                         | 12.00              | -46.20                     | -19            | 27.20          |
| 3465.00                                | 44.58                         | V                | -57.1              | 1.50                         | 12.00              | -46.60                     | -19            | 27.60          |
| Lower 700MHz, Test Frequency 707MHz    |                               |                  |                    |                              |                    |                            |                |                |
| 841.52                                 | 36.10                         | H                | -66.6              | 1.35                         | 0.0                | -67.95                     | -19            | 48.95          |
| 841.52                                 | 35.24                         | V                | -67.0              | 1.35                         | 0.0                | -68.35                     | -19            | 49.35          |
| 1414.00                                | 44.69                         | H                | -63.5              | 1.60                         | 7.90               | -57.20                     | -19            | 38.20          |
| 1414.00                                | 45.38                         | V                | -63.1              | 1.60                         | 7.90               | -56.80                     | -19            | 37.80          |
| Upper 700MHz, Test Frequency 781.5MHz  |                               |                  |                    |                              |                    |                            |                |                |
| 841.59                                 | 36.24                         | H                | -66.5              | 1.35                         | 0.0                | -67.85                     | -19            | 48.85          |
| 841.59                                 | 35.27                         | V                | -67.0              | 1.35                         | 0.0                | -68.35                     | -19            | 49.35          |
| 1563.00                                | 44.64                         | H                | -63.4              | 1.40                         | 8.70               | -56.10                     | -46            | 10.10          |
| 1563.00                                | 51.04                         | V                | -56.8              | 1.40                         | 8.70               | -49.50                     | -46            | 3.50           |

**Note:**

- 1) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 2) Margin = Limit- Absolute Level

\*\*\*\*\* END OF REPORT \*\*\*\*\*