

Letter of acceptance

SPECIFICATION FOR APPROVAL

USTOMER NAME: Huapte Technology Shenzhen Co., LTD

CUSTOMER P/N:

PRODUCT P/N: H2S54B3D38A

PRODUCT NAME: External black glue stick antenna

H2S54B3D38A/2.4G/5.8G-2dBi/External

Description: black glue stick antenna+SMA fe-male head male
needle

Address: 12th Floor, West Building 8, Huaqiang
Creative Industrial Park, Guangguang Road,
Guangming District, Shenzhen

Factory signature

SIGN	quality (DQE)	construction (ME)	radio frequency (RF)


SIGN	project (PM)	construction (ME)	quality (DQE)

Specification Table:

Product main technical parameters

Main technical specifications	
Frequency Range (MHZ)	2400–2500/ 5150–5850
Impedance(Ω)	50
Gain(dBi)	2.0
VSWR	≤ 2
Polarization	Linear
Radiation	Omni-directional
Connector Type	SMA
Physical Properties	
Antenna cover	TPEE
Operating Temp	-20℃~+70℃
Storage Temp	-20℃~+60℃

Product drawing:

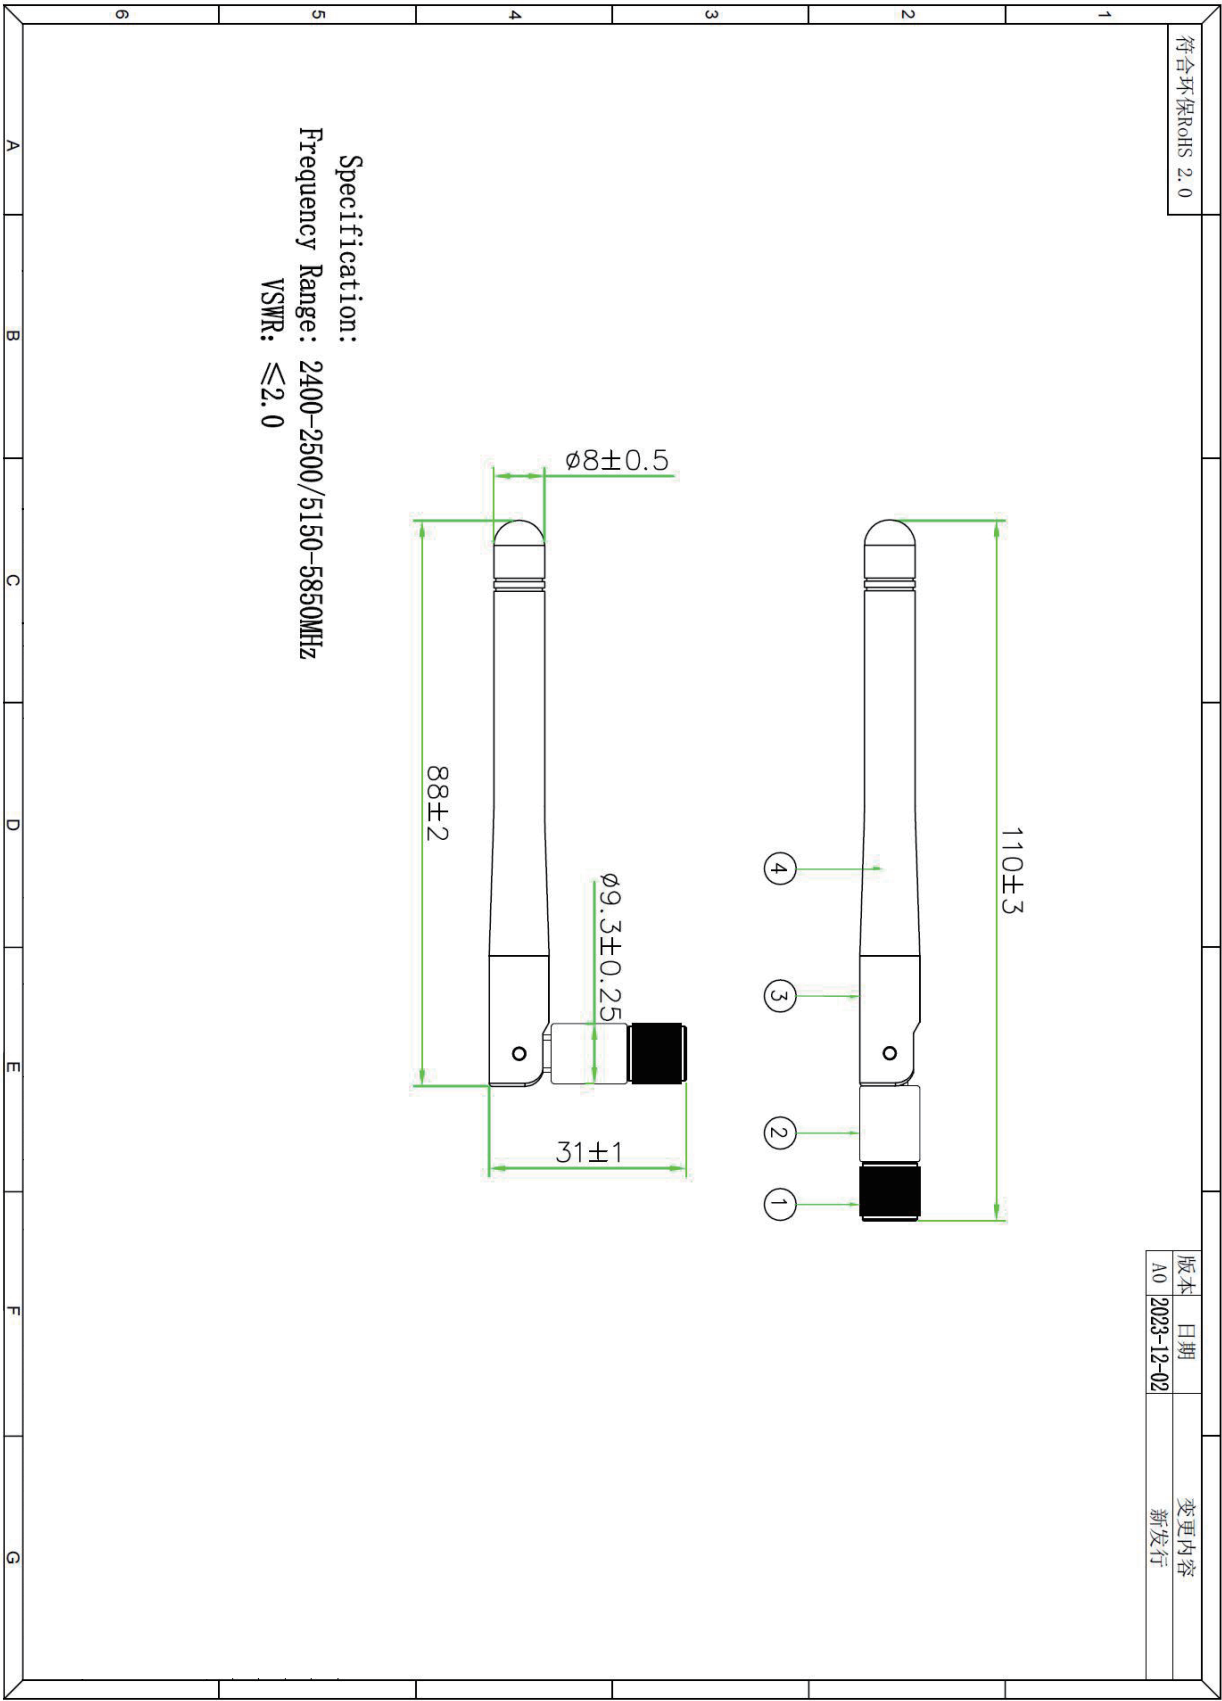




Test report:

Network analyzer test report





HONANT


Darkroom 2D, 3D Raditation Pattern

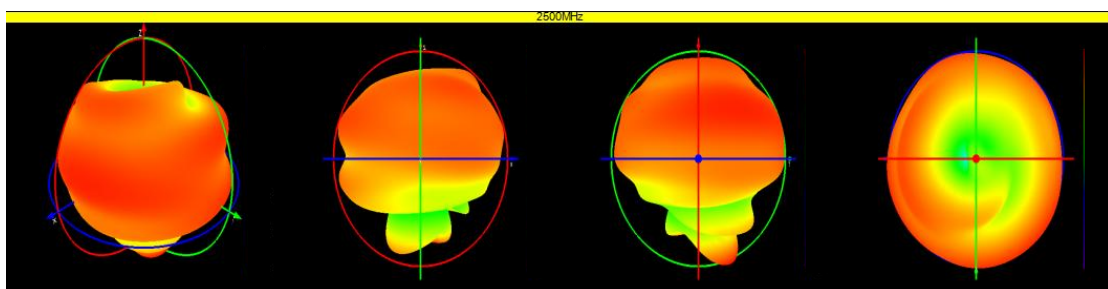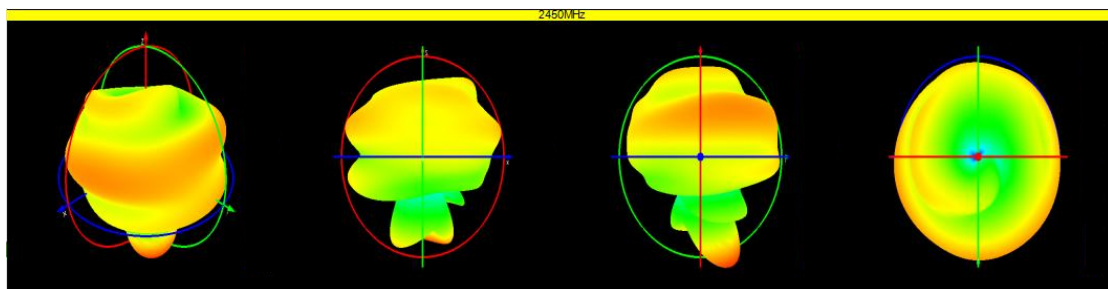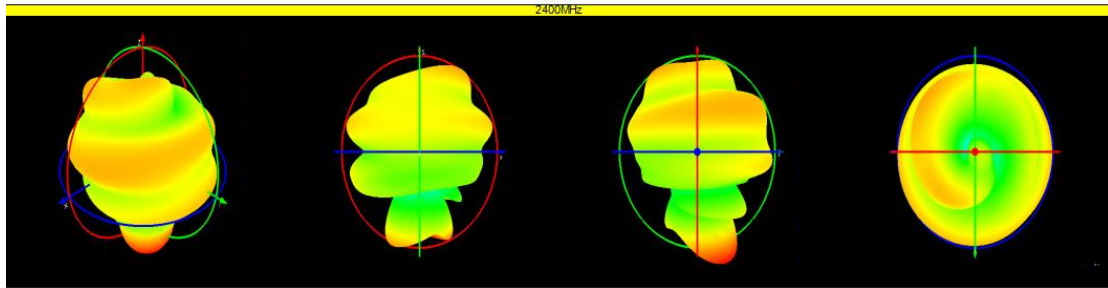

HONANT

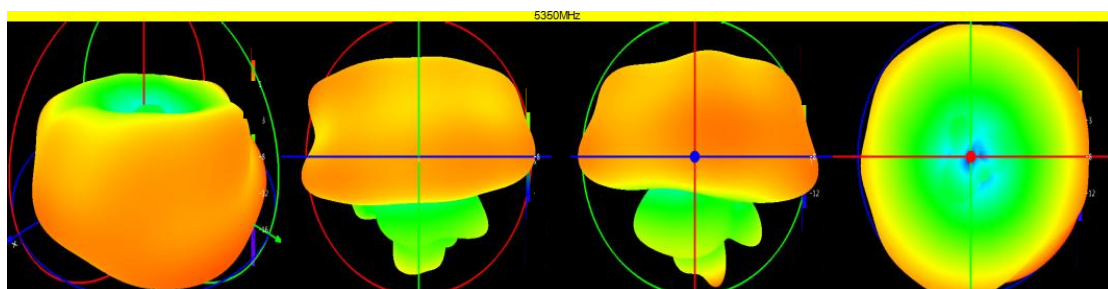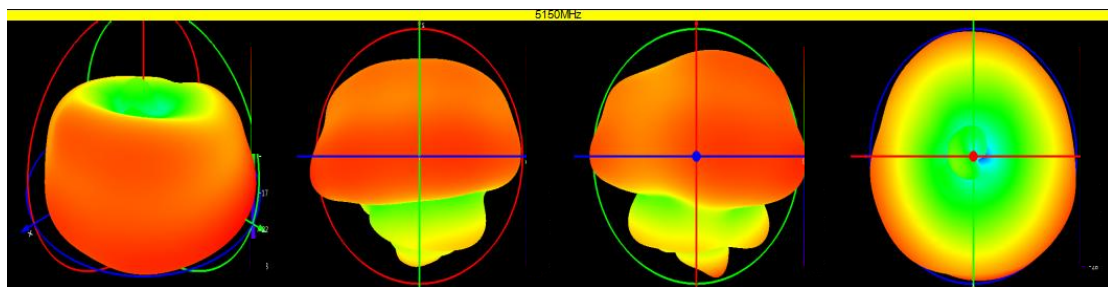

HONANT

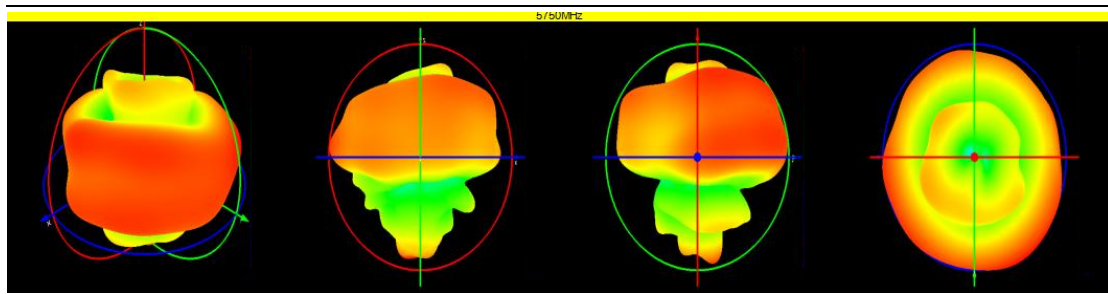

Antenna gain and efficiency

Frequency (MHZ)	Gain (dBi)	Efficiency (%)
2400	2.0	83.71
2450	1.7	82.63
2500	1.0	80.25
5150	1.8	71.36
5350	1.7	70.69
5750	1.0	80.09
5850	0.8	72.18

Product drawing

