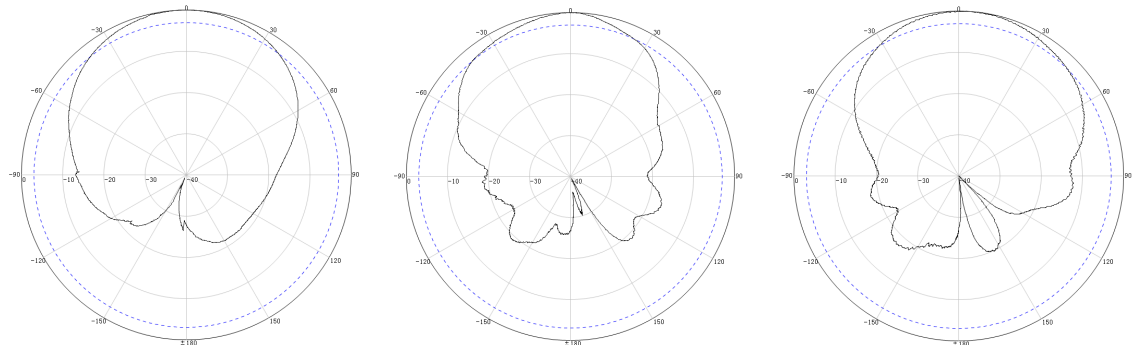
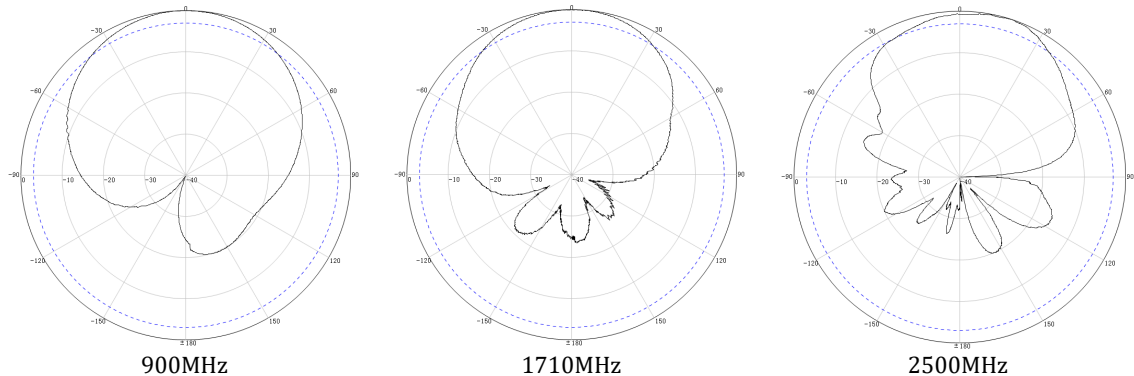


**Electrical Specifications**

Item No.		AI698-2700V09iB		
Frequency Range		MHz	698-960	1710-2700
Gain		dBi	6.5	8.5
Polarization			Vertical	
Beam width	Horizontal	deg	78	70
	Vertical		70	65
Front-To-Back Ratio		dB	> 12	
VSWR			≤1.8:1	
Maximum Power		W	100	
Impedance		Ω	50	

Mechanical Specifications

Dimensions, HxWxD	mm (in)	165x155x50(6.5x6.1x1.96)
Weight, without Mounting Kit	kg (lb)	0.25(0.55)
Radome Material and Color		ABS, White
Mounting Kit		On-wall
Connector Type and Location		N-Female
Operational Temperature	oC	-55 to +60
Operational Humidity	%	< 95

Radiation Patterns**Horizontal pattern****Vertical pattern****Features and Product Description**

- New generation wideband Directional Antenna, coverage 700MHz - 2700MHz.
- Smaller size, light-weight and easy to install.
- Typically used in indoor distribution of LTE services.
- Low return loss, High gain, Stable performance.





MODEL NO.HPTIDP-0727-07NF1

Indoor Wide Band Panel Antenna

Item NO.E32046996001