

Letter of acceptance

SPECIFICATION FOR APPROVAL

CUSTOMER NAME: Huapte Technology Shenzhen Co., LTD

CUSTOMER P/N:

PRODUCT P/N: H2S54B3D38A

PRODUCT NAME: External black glue stick antenna

H2S54B3D38A/2.4G/5.8G-2dBi/External

Description: black glue stick antenna+SMA male head male
needle

REV: A edition

Factory signature

SIGN	quality (DQE)	construction (ME)	radio frequency (RF)


SIGN	project (PM)	construction (ME)	quality (DQE)

Specification Table:

Product main technical parameters

Main technical specifications	
Frequency Range (MHZ)	2400–2500/ 5150–5850
Impedance(Ω)	50
Gain(dBi)	2.06
VSWR	≤ 2
Polarization	Linear
Radiation	Omni-directional
Connector Type	SMA
Physical Properties	
Antenna cover	TPEE
Operating Temp	-20°C~+70°C
Storage Temp	-20°C~+60°C

Product drawing:

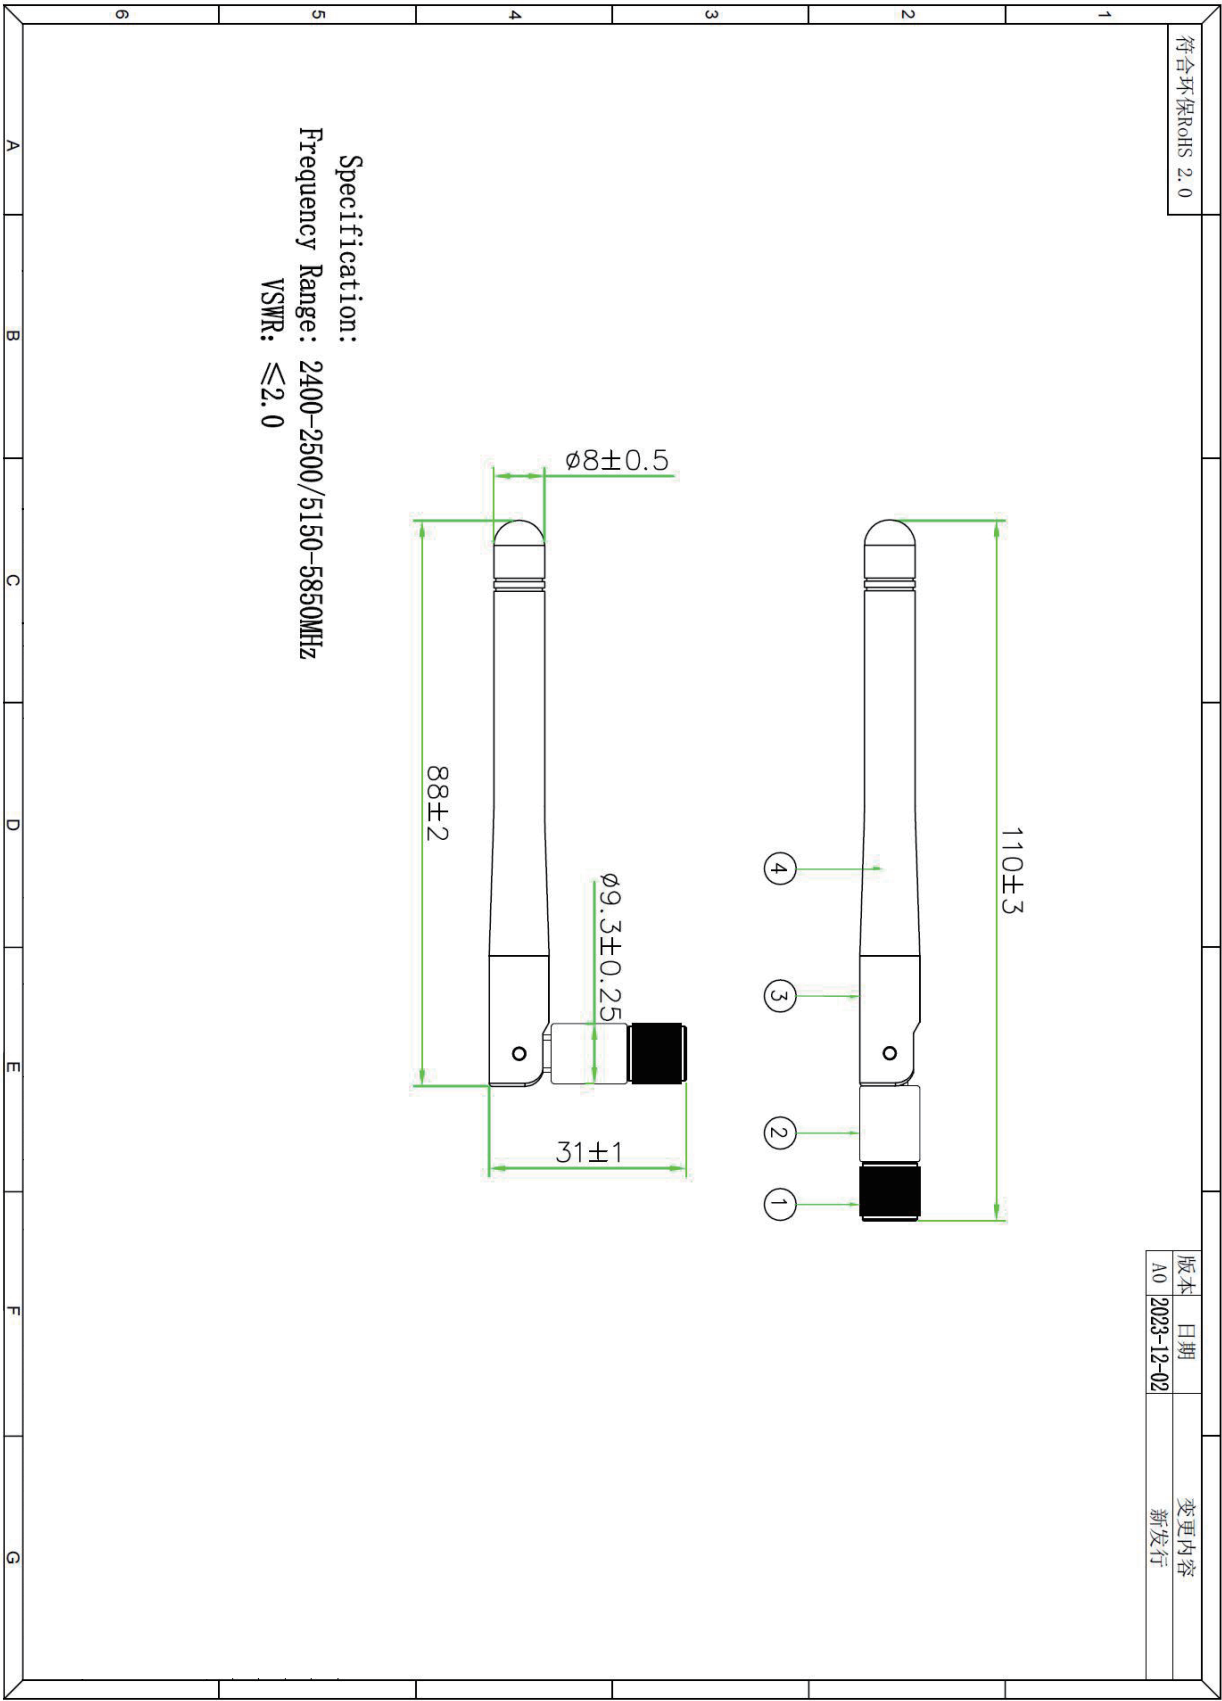


Test report:

Network analyzer test report




HONANT

Darkroom 2D, 3DRaditation Pattern

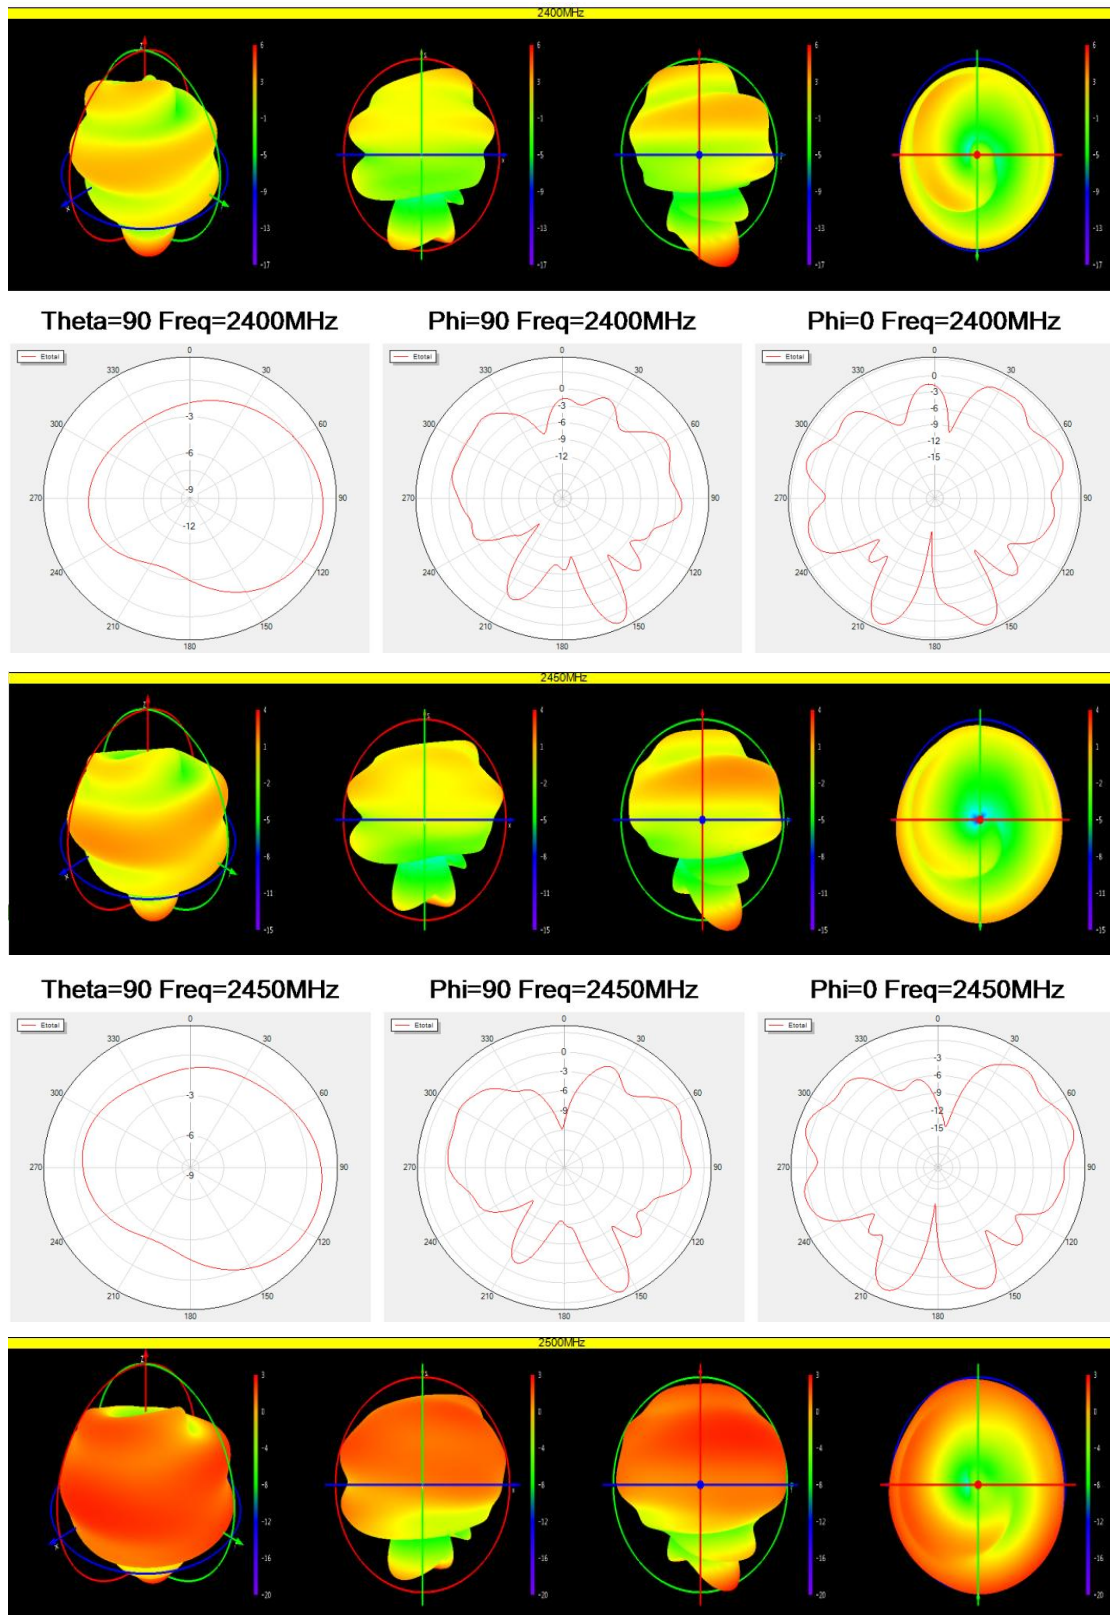


HONANT



Theta=90 Freq=2500MHz

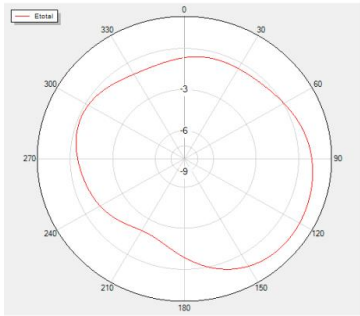


Phi=90 Freq=2500MHz

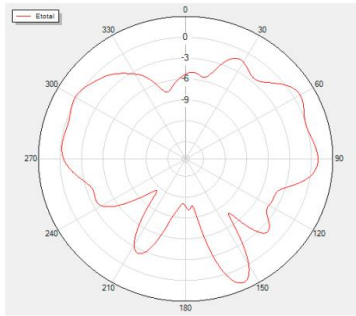


Phi=0 Freq=2500MHz

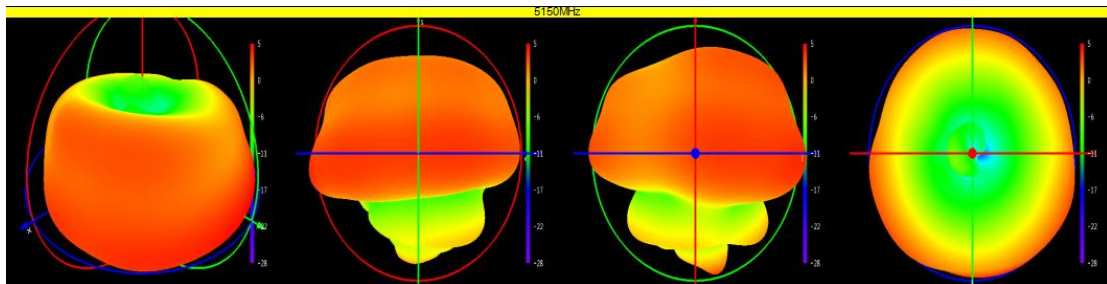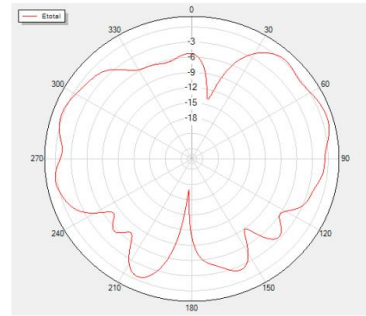



Theta=90 Freq=5150MHz

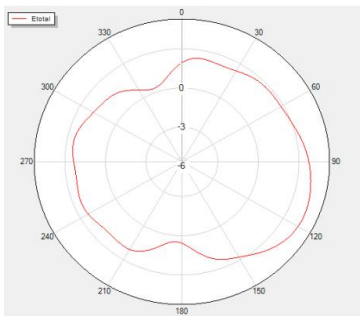


Phi=90 Freq=5150MHz

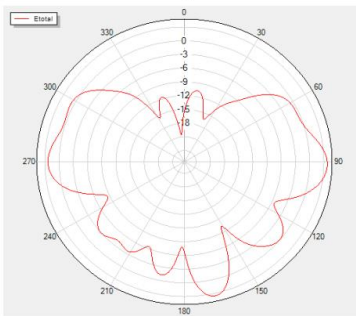


Phi=0 Freq=5150MHz

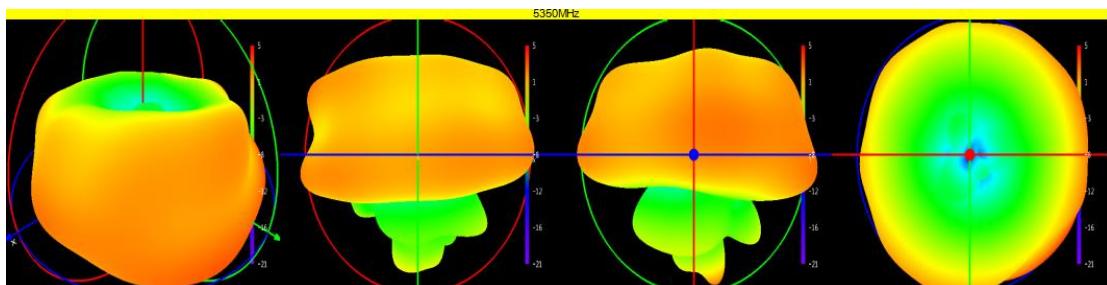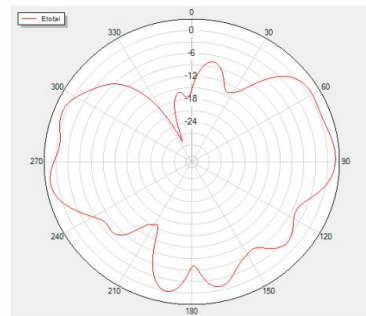


Theta=90 Freq=5350MHz

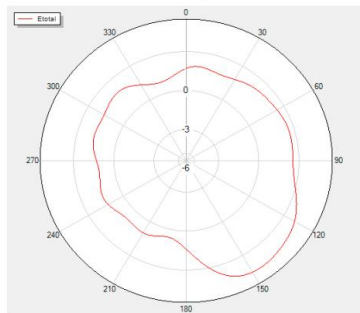


Phi=90 Freq=5350MHz

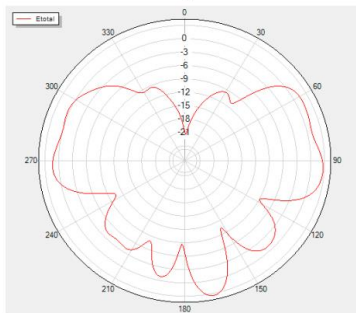


Phi=0 Freq=5350MHz

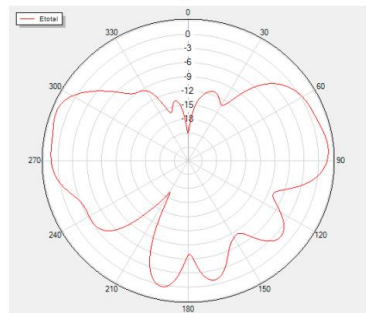


HONANT

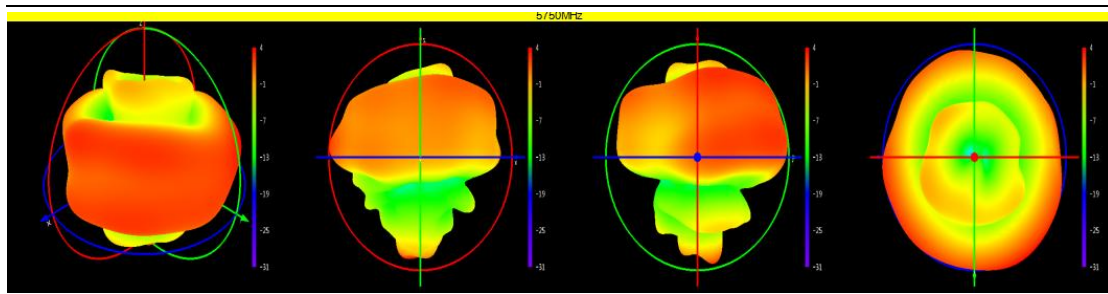


Theta=90 Freq=5750MHz

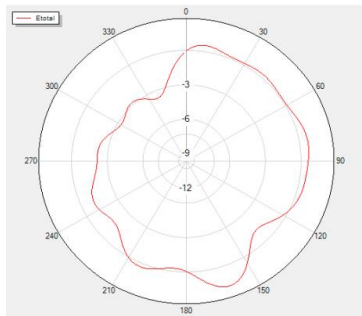


Phi=90 Freq=5750MHz

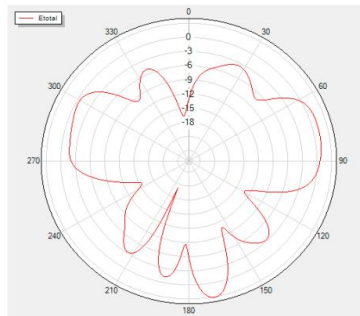


Phi=0 Freq=5750MHz

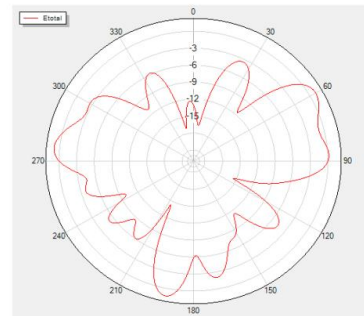


Theta=90 Freq=5850MHz

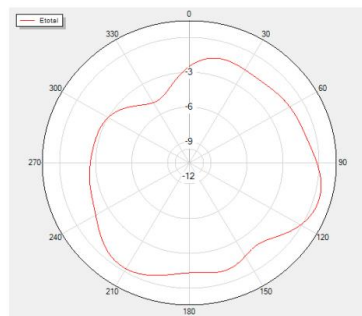

Phi=90 Freq=5850MHz

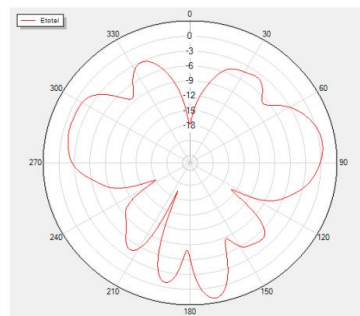

Phi=0 Freq=5850MHz

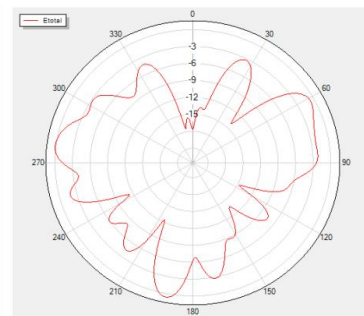

Antenna gain and efficiency

Frequency (MHZ)	Gain (dBi)	Efficiency (%)
2400	4.06	83.71
2450	3.71	82.63
2500	3.02	80.25
5150	3.85	71.36
5350	3.77	70.69
5750	3.06	80.09
5850	2.84	72.18

Product drawing

