

FCC/ISED - TEST REPORT

Report Number : **68.950.22.0262.01** Date of Issue: May 09, 2022

Model : AEM105

Product Type : Bluetooth Mobile Speakerphone

Applicant : Targus International LLC

Address : 1211 North Miller Street Anaheim, CA 92806 USA

Factory : SHENZHEN AONI ELECTRONIC CO., LTD.

Address : No.5, Bldg., Honghui Industrial Park, 2nd Liuxian Road, Bao'an District,
518101 Shenzhen, Guangdong PEOPLE'S REPUBLIC OF CHINA

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including
Appendices : 65

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.

1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks.....	7
7	Test Setups.....	8
8	Systems test configuration	9
9	Technical Requirement	10
9.1	Conducted Emission.....	10
9.2	Conducted peak output power and e.i.r.p.	13
9.3	20 dB bandwidth and 99% Occupied Bandwidth.....	20
9.4	Carrier Frequency Separation.....	30
9.5	Number of hopping frequencies	33
9.6	Dwell Time	35
9.7	Spurious RF conducted emissions.....	38
9.8	Band edge testing.....	49
9.9	Spurious radiated emissions for transmitter	54
10	Test Equipment List.....	64
11	System Measurement Uncertainty	65



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park, Nantou Checkpoint
Road 2, Nanshan District
Shenzhen 518052
P.R. China

Telephone: 86 755 8828 6998
Fax: 86 755 8288 5299

FCC Registration No.: 514049
ISED#: 10320A

3 Description of the Equipment Under Test

Product:	Bluetooth Mobile Speakerphone
Model no/HVIN/PMN:	AEM105
FVIN:	V0.1.2
FCC ID	OXM000141
IC:	27357-00010
Options and accessories:	Type-C Cable
Rating:	5VDC, 2A (Supplied by USB Port) 3.7VDC, 2600mAh (Supplied by 18650 battery)
RF Transmission Frequency:	2402MHz-2480MHz
No. of Operated Channel:	79
Modulation:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	FPC Integral antenna
Antenna Gain:	1.58dBi
Description of the EUT:	The Equipment Under Test (EUT) is a Bluetooth Mobile Speakerphone support Bluetooth function.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2020 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5, Amendment 1, March 2019	General Requirements for the Certification of Radio Apparatus
RSS-247 Issue 2 February 2017	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices

All the test methods were according to Public Notice DA 00-705 -Frequency Hopper Spread Spectrum Test Procedure, KDB558074 D01 v05r02 and ANSI C63.10-2013.

5 Summary of Test Results

Technical Requirements				
FCC Part 15 Subpart C/ RSS-247 Issue 2/RSS-Gen Issue 5				
Test Condition			Test Site	Test Result
§15.207	RSS-GEN 8.8	Conducted emission AC power port	Site 1	N/A
§15.247(b)(1)	RSS-247 Clause 5.4(b)	Conducted peak output power and e.i.r.p.	Site 1	PASS
§15.247(e)	RSS-247 Clause 5.2(b)	Power spectral density	--	N/A
§15.247(a)(2)	RSS-247 Clause 5.2(a)	6dB bandwidth	--	N/A
§15.247(a)(1)	RSS-247 Clause 5.1(a) & RSS-Gen 6.7	20dB bandwidth and 99% Occupied Bandwidth	Site 1	PASS
§15.247(a)(1)	RSS-247 Clause 5.1(b)	Carrier frequency separation	Site 1	PASS
§15.247(a)(1)(iii)	RSS-247 Clause 5.1(d)	Number of hopping frequencies	Site 1	PASS
§15.247(a)(1)(iii)	RSS-247 Clause 5.1(d)	Dwell Time	Site 1	PASS
§15.247(d)	RSS-247 Clause 5.5	Spurious RF conducted emissions	Site 1	PASS
§15.247(d)	RSS-247 Clause 5.5	Out of Band Emission Measurement	Site 1	PASS
§15.247(d) & §15.209 & §15.205	RSS-247 Clause 5.5 & RSS-GEN 6.13 RSS-GEN 8.9 RSS-GEN 8.10	Spurious radiated emissions for transmitter and receiver	Site 1	PASS
§15.203	RSS-GEN 6.8	Antenna requirement	See note 2	PASS

Note 1: N/A=Not Applicable.

Note 2: The EUT uses FPC Integral antenna, which gain is 1.58dBi. In accordance to §15.203 and RSS-GEN 6.8, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: OXM000141, IC: 27357-00010 complies with Section 15.205, 15.209, 15.247 of the FCC Part 15, Subpart and RSS-247 issue 2 and RSS-Gen issue 5 rules.

Note: The report is for BDR+EDR only.

SUMMARY:

All tests according to the regulations cited on page 6 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: March 16, 2022

Testing Start Date: March 16, 2022

Testing End Date: May 9, 2022

Reviewed by:

Prepared by:

Tested by:



John Zhi
EMC Project Manager




Mark Chen
EMC Project Engineer



Carry Cai
EMC Test Engineer


7 Test Setups

7.1 AC Power Line Conducted Emission test setups

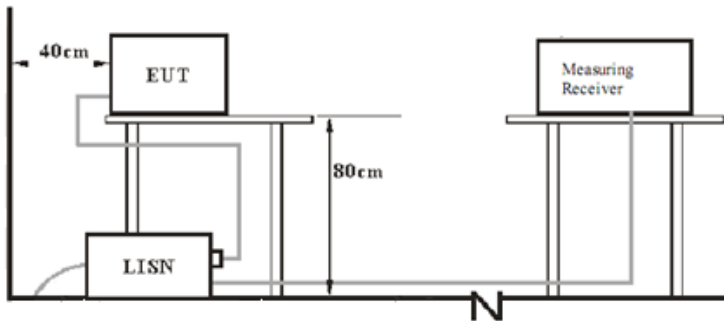


7.2 Radiated test setups


Below 1GHz

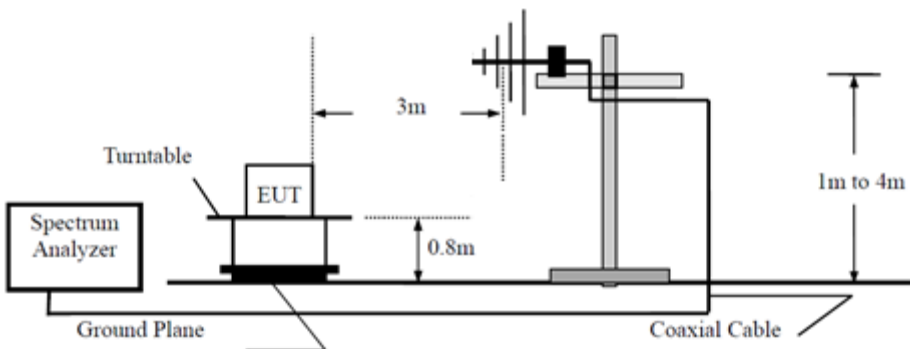

Above 1GHz

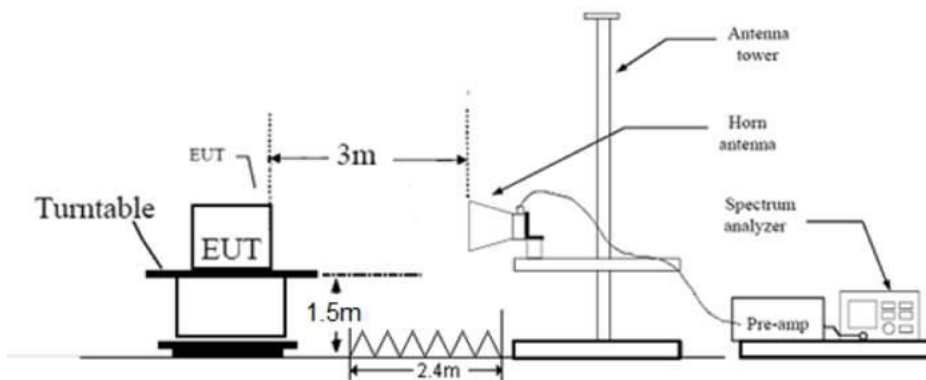

7.3 Conducted RF test setups



8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.	S/N
Notebook	Lenovo	X220	---

Test software: FCC.exe Test Tool, which used to control the EUT in continues transmitting mode

The system was configured to hopping mode and non-hopping mode.

Hopping mode: typical working mode (normal hopping status)

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line


Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

*Decreasing linearly with logarithm of the frequency.

Conducted Emission

Product Type : Bluetooth Mobile Speakerphone
 M/N : AEM105
 Operating Condition : Charging with transmitting
 Test specification : Live
 Comment : AC 120V/60Hz

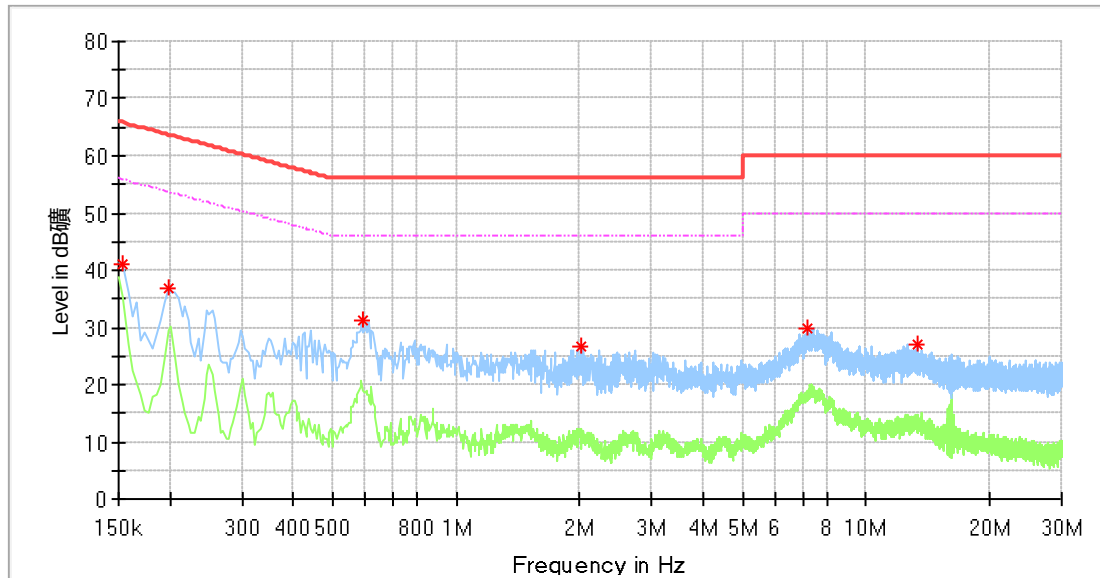

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB/m)
0.154000	40.98	---	65.78	24.80	L1	9.74
0.198000	36.76	---	63.69	26.94	L1	9.70
0.590000	31.28	---	56.00	24.72	L1	9.65
2.006000	26.77	---	56.00	29.23	L1	9.68
7.206000	29.92	---	60.00	30.08	L1	9.94
13.318000	27.00	---	60.00	33.00	L1	10.17

Remark:


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : Bluetooth Mobile Speakerphone
 M/N : AEM105
 Operating Condition : Charging with transmitting
 Test specification : Neutral
 Comment : AC 120V/60Hz

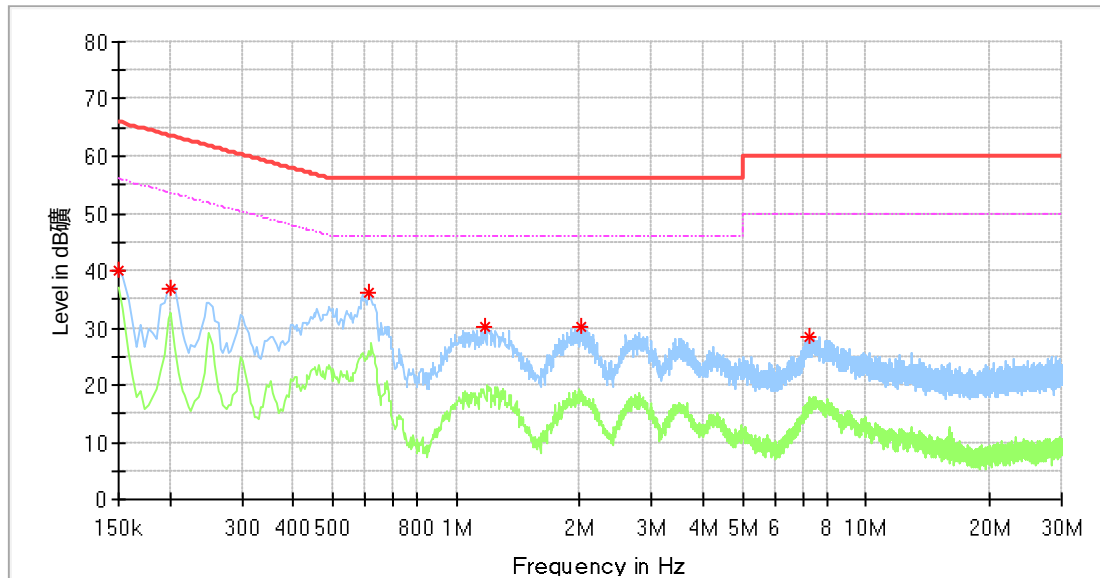

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB/m)
0.150000	40.16	---	66.00	25.84	N	9.78
0.202000	36.90	---	63.53	26.63	N	9.73
0.614000	36.14	---	56.00	19.86	N	9.68
1.174000	30.28	---	56.00	25.72	N	9.70
2.006000	30.10	---	56.00	25.90	N	9.73
7.246000	28.33	---	60.00	31.67	N	10.00

Remark:

Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

9.2 Conducted peak output power and e.i.r.p.

Test Method

1. Use the following spectrum analyzer settings:
Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel
RBW > the 20dB bandwidth of the emission being measured, VBW ≥ RBW,
Sweep = auto, Detector function = peak, Trace = max hold
2. Add a correction factor to the display.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power

Limits

Conducted Peak Output Power:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

For e.i.r.p.:


Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤4	≤36

Conducted peak output power

Bluetooth Mode GFSK modulation Test Result


Frequency MHz	Conducted Peak Output Power dBm	e.i.r.p. dBm	Result
Low channel 2402MHz	4.36	5.94	Pass
Middle channel 2441MHz	4.4	4.98	Pass
High channel 2480MHz	4.08	5.66	Pass

Low channel 2402MHz

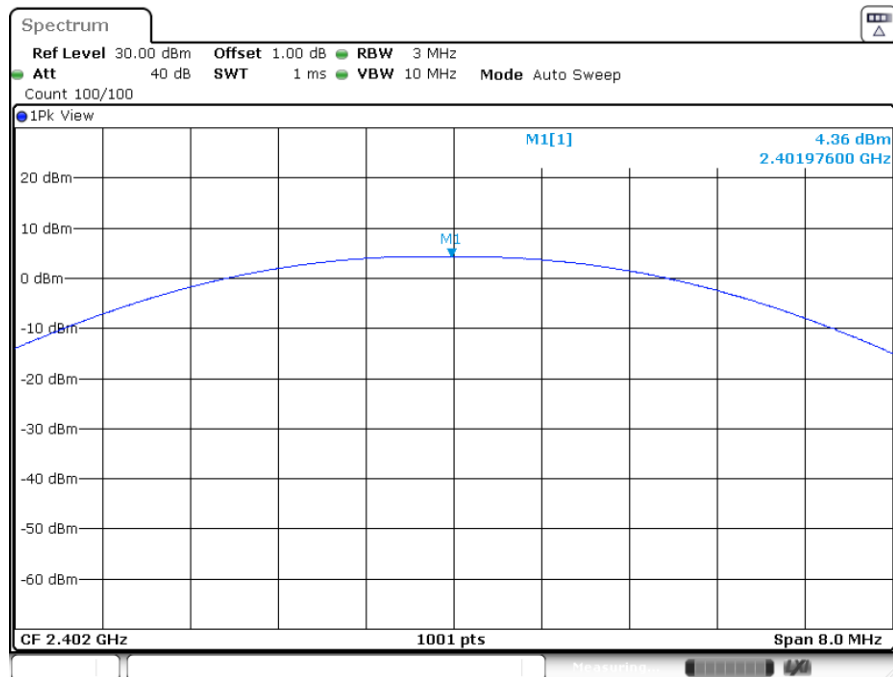


Date: 29.MAR.2022 16:12:10

Middle channel 2441MHz

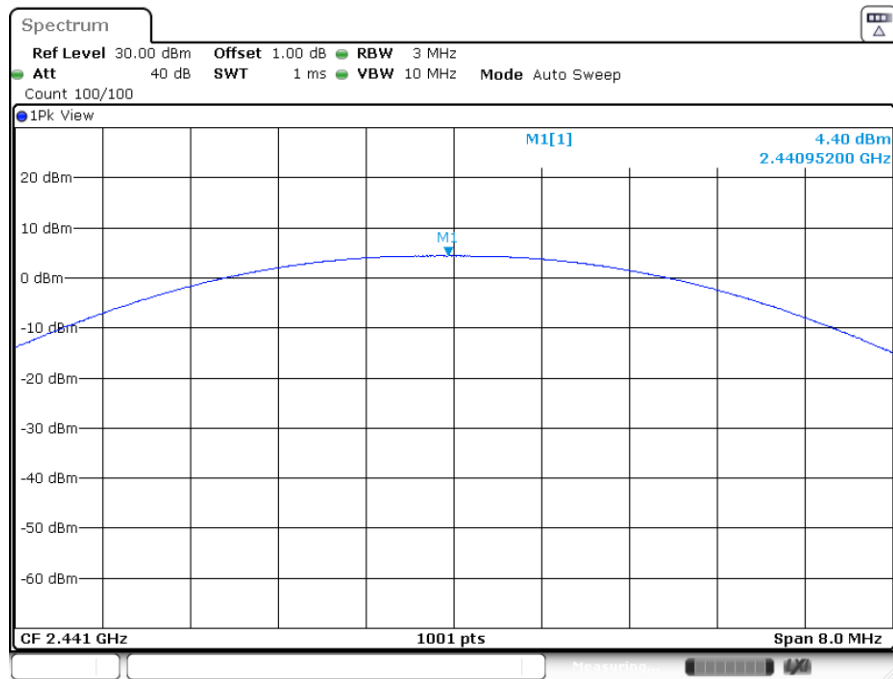

Date: 29.MAR.2022 16:12:41

High channel 2480MHz

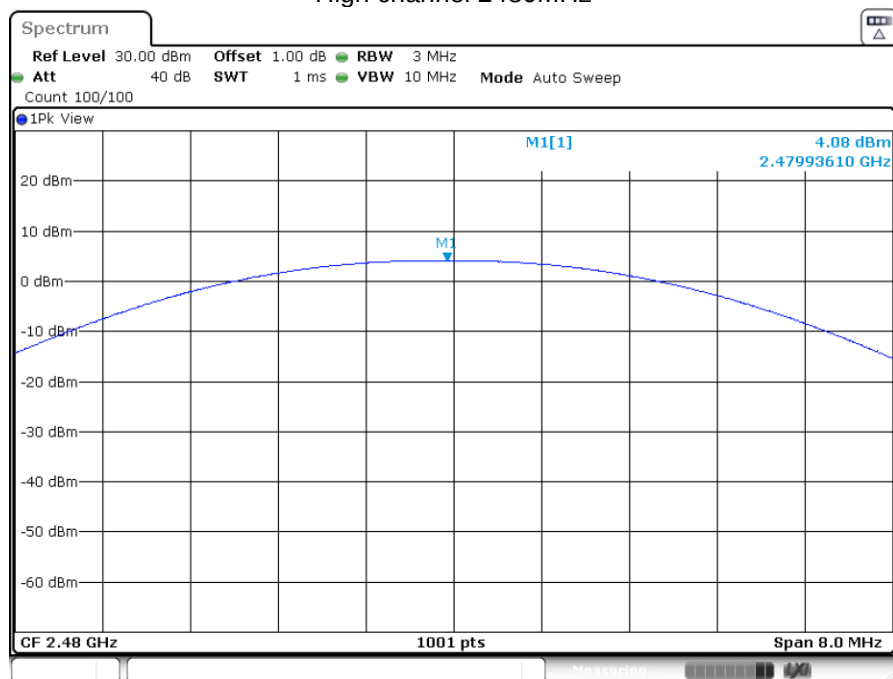


Date: 29.MAR.2022 16:13:04

Bluetooth Mode $\pi/4$ -DQPSK modulation Test Result


Frequency MHz	Conducted Peak Output		Result
	Power dBm	e.i.r.p. dBm	
Low channel 2402MHz	4.32	5.90	Pass
Middle channel 2441MHz	4.34	4.92	Pass
High channel 2480MHz	4.05	5.63	Pass

Low channel 2402MHz

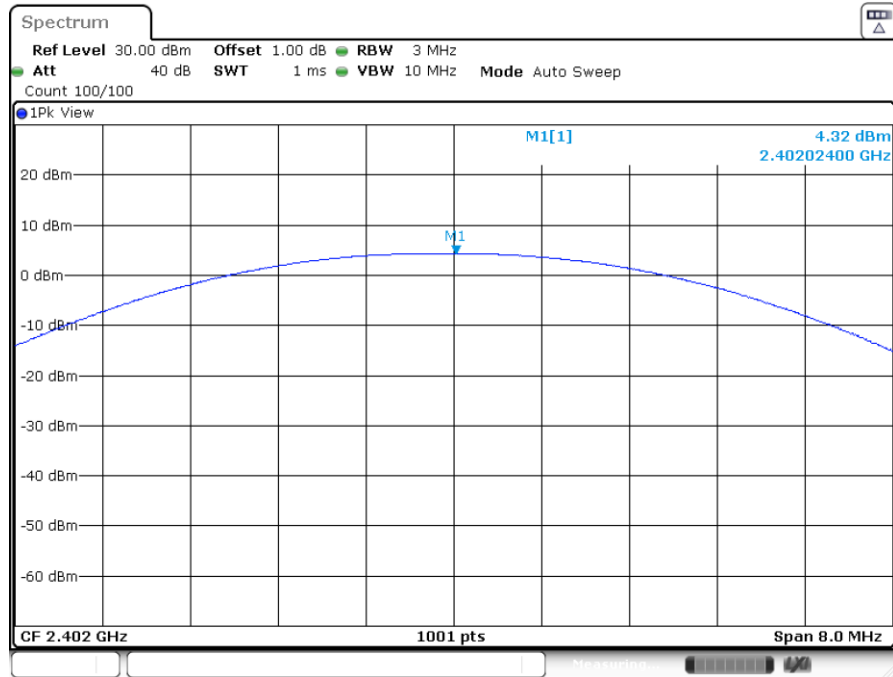


Date: 29.MAR.2022 16:13:23

Middle channel 2441MHz

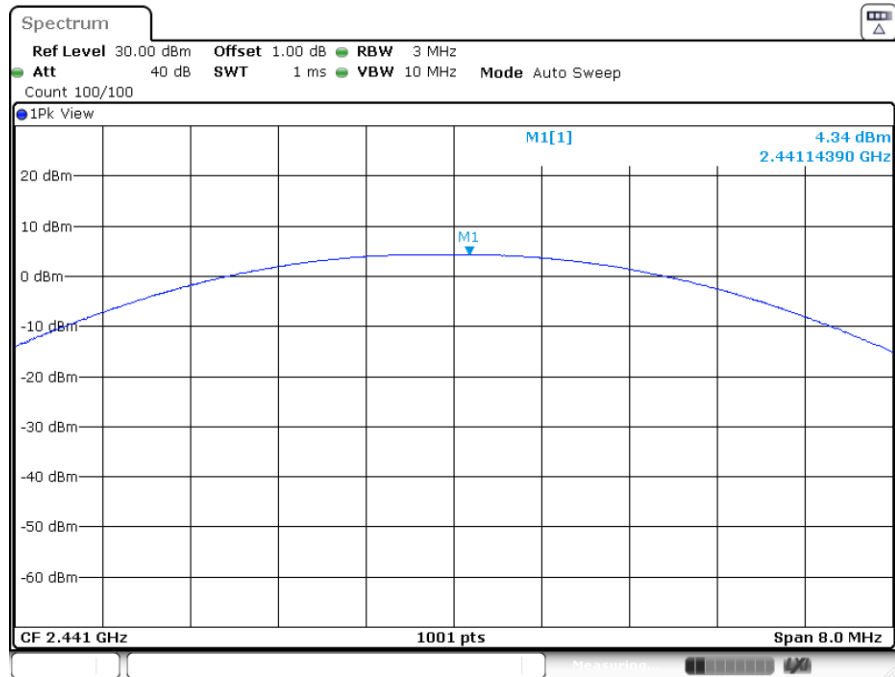

Date: 29.MAR.2022 16:13:48

High channel 2480MHz

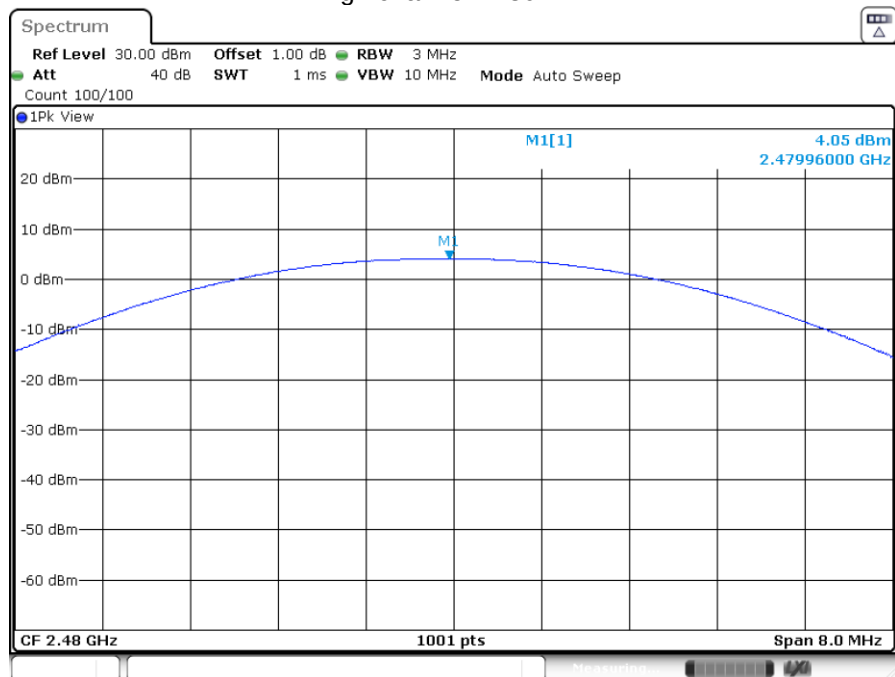


Date: 29.MAR.2022 16:14:08

Bluetooth Mode 8DPSK modulation Test Result


Frequency MHz	Conducted Peak Output		Result
	Power dBm	e.i.r.p. dBm	
Low channel 2402MHz	4.10	5.68	Pass
Middle channel 2441MHz	4.26	5.84	Pass
High channel 2480MHz	4.38	5.96	Pass

Low channel 2402MHz

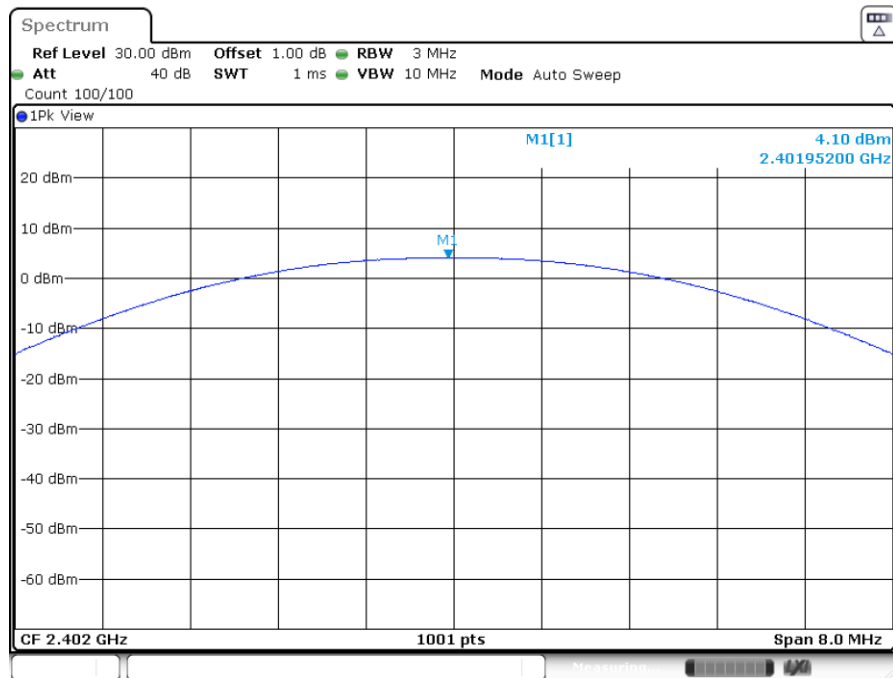


Date: 9.MAY.2022 18:22:18

Middle channel 2441MHz

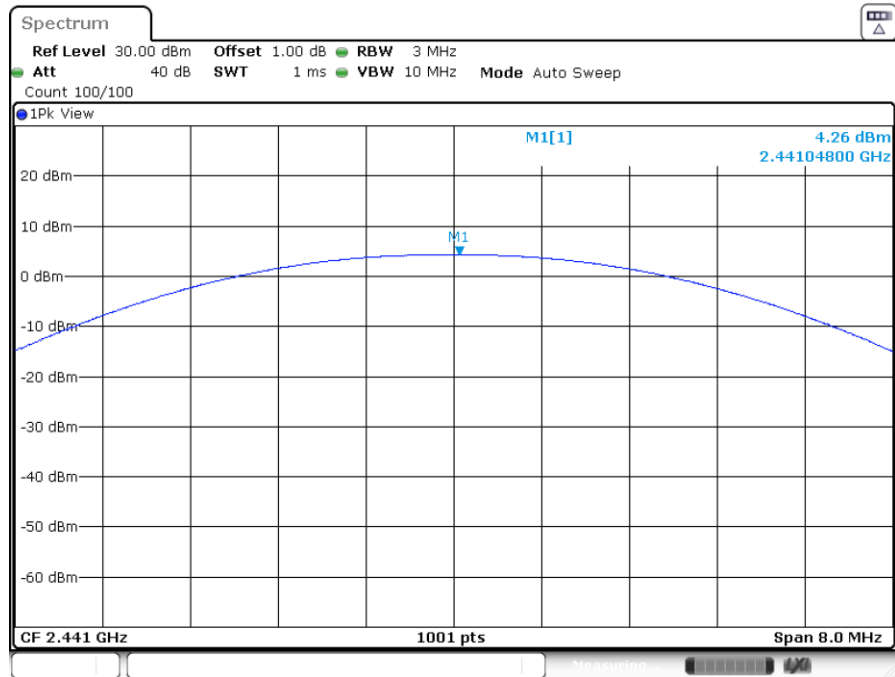

Date: 9.MAY.2022 17:51:46

High channel 2480MHz

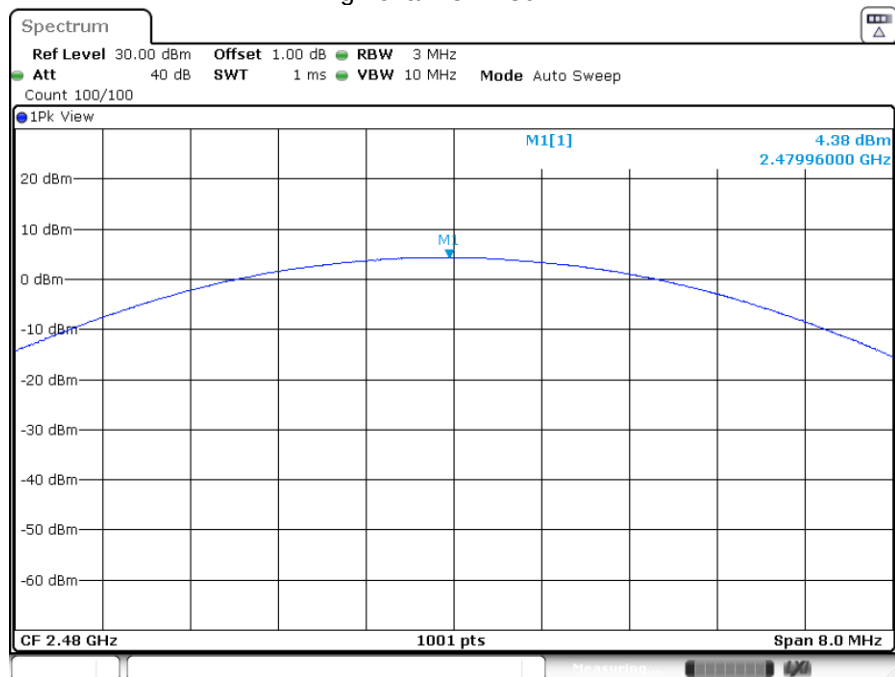

Date: 29.MAR.2022 16:15:24

9.3 20 dB bandwidth and 99% Occupied Bandwidth

Test Method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Limit

Limit [kHz]


N/A

20 dB bandwidth and 99% Occupied Bandwidth


Bluetooth Mode GFSK Modulation test result

Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	1110	875	--	Pass
2441	1113	881	--	Pass
2480	1107	863	--	Pass

Low channel 2402MHz

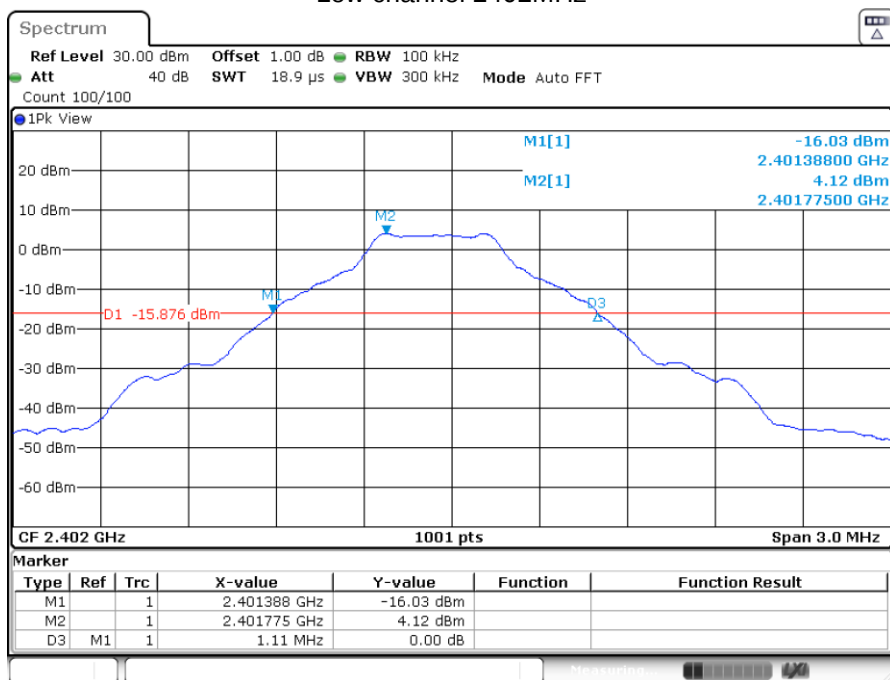


Date: 29.MAR.2022 15:43:15

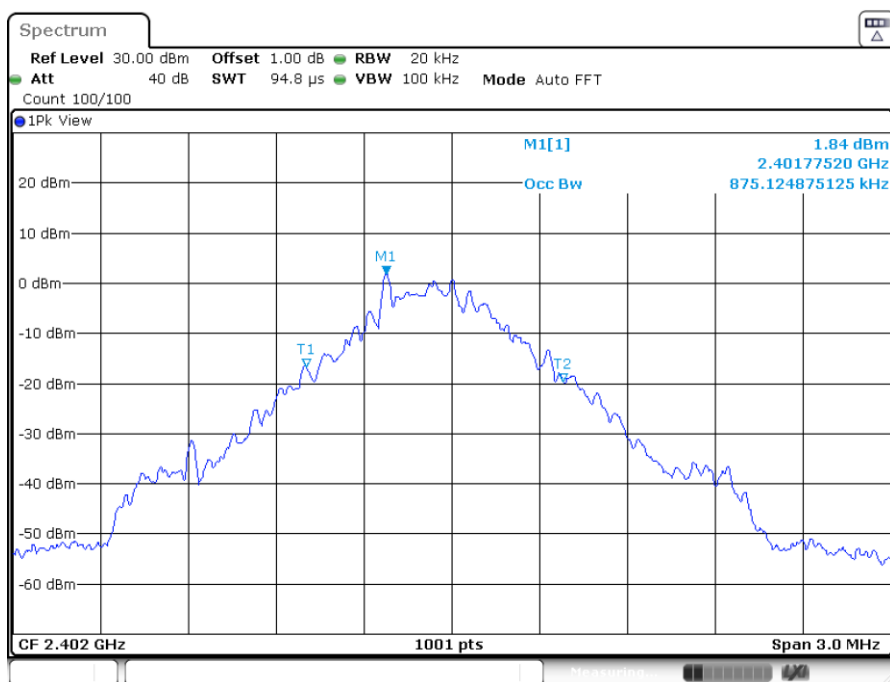


Date: 29.MAR.2022 15:43:26



Middle channel 2441MHz

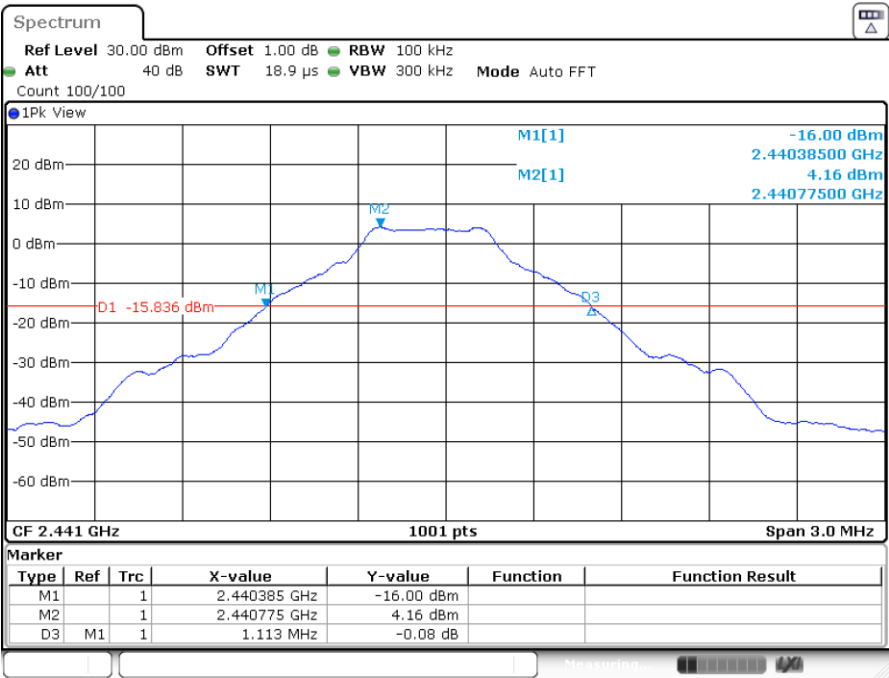


Date: 29.MAR.2022 15:45:05

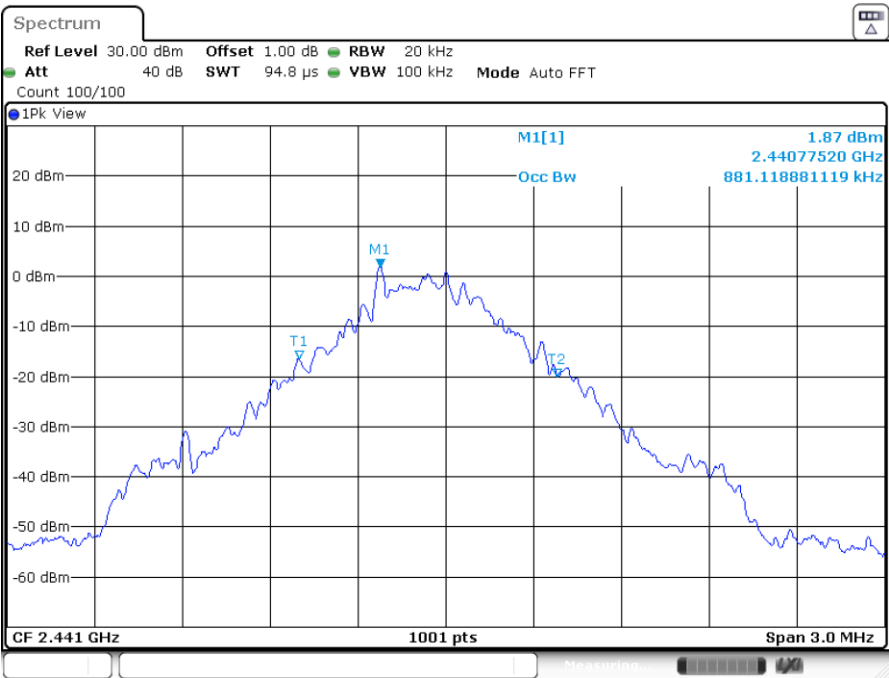


Date: 29.MAR.2022 15:45:16



High channel 2480MHz

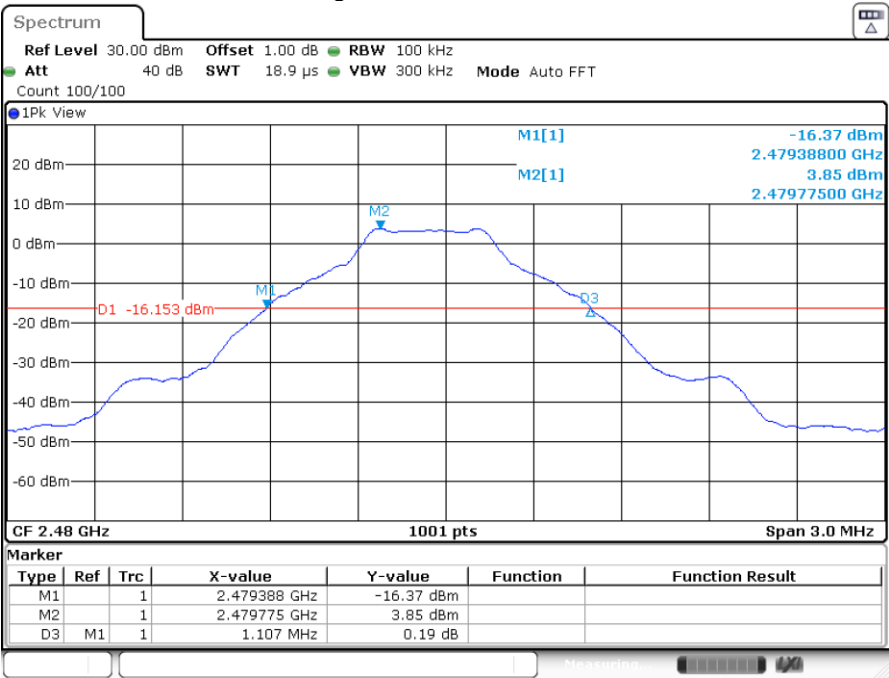

Date: 29.MAR.2022 15:46:29

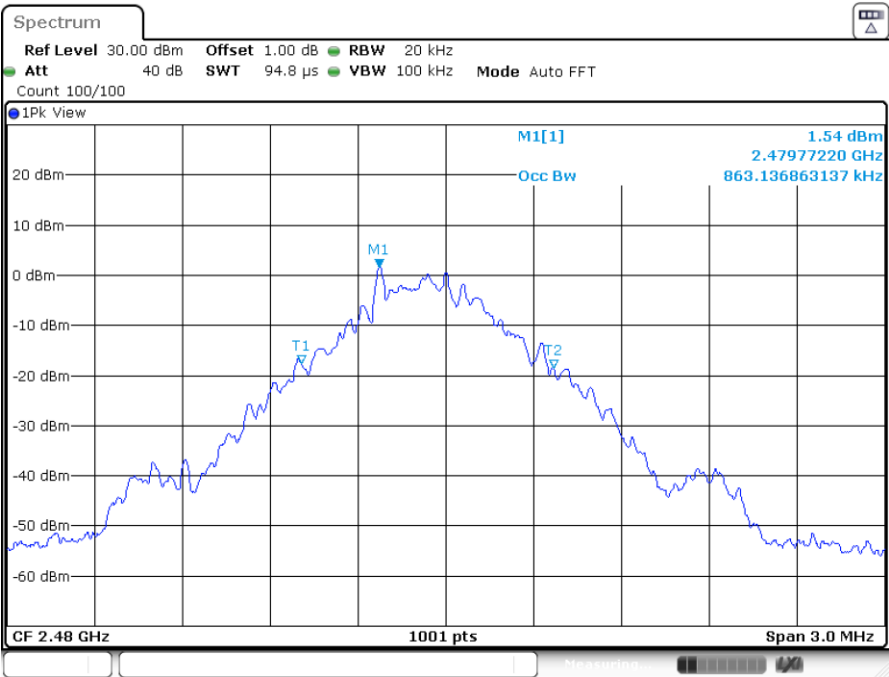


Date: 29.MAR.2022 15:46:40

20 dB bandwidth and 99% Occupied Bandwidth


Bluetooth Mode $\pi/4$ -DQPSK Modulation test result

Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	1347	1172	--	Pass
2441	1350	1175	--	Pass
2480	1347	1169	--	Pass

Low channel 2402MHz

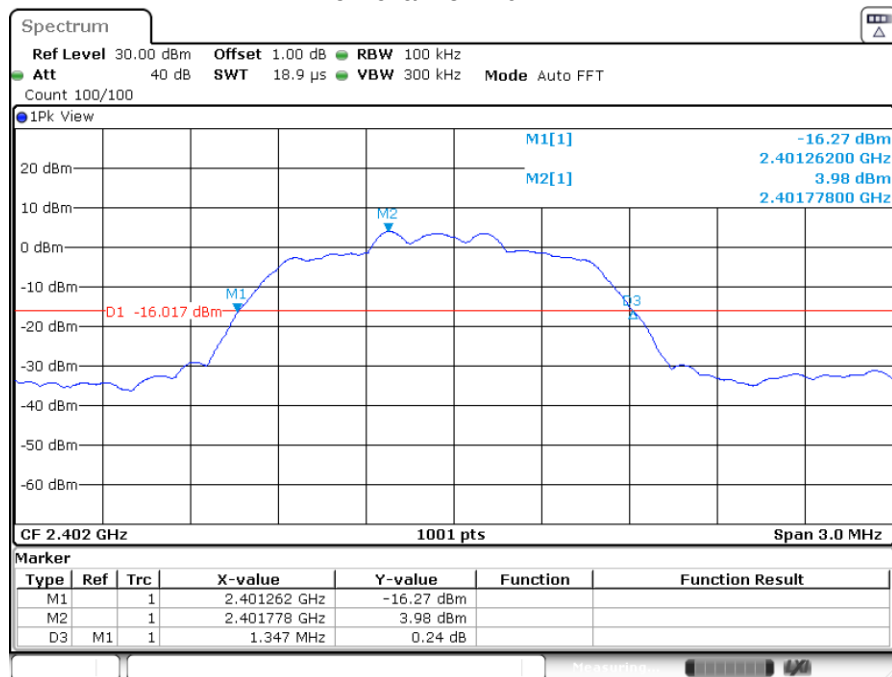


Date: 29.MAR.2022 15:48:08

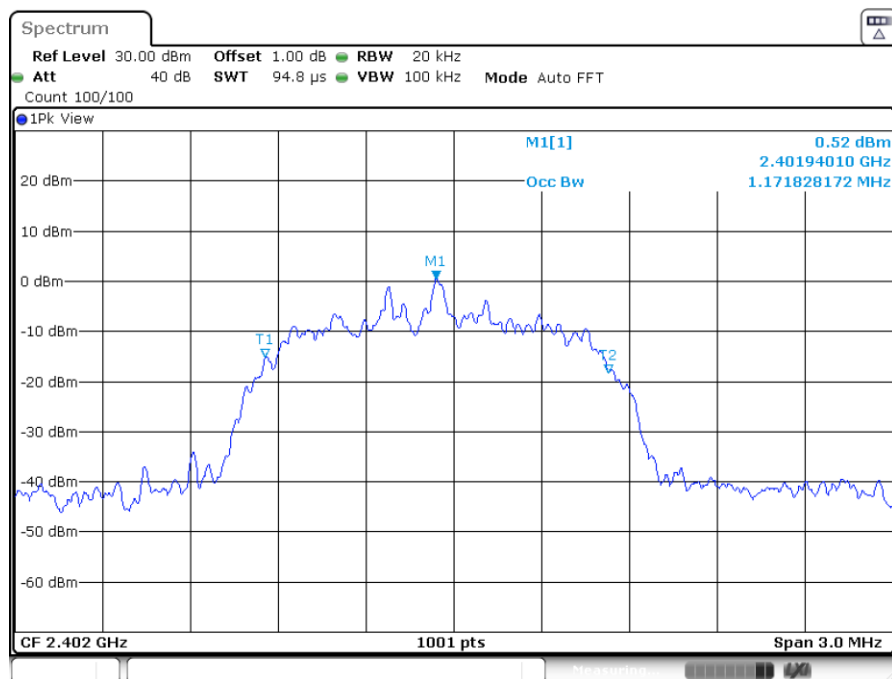


Date: 29.MAR.2022 15:48:19

Middle channel 2441MHz

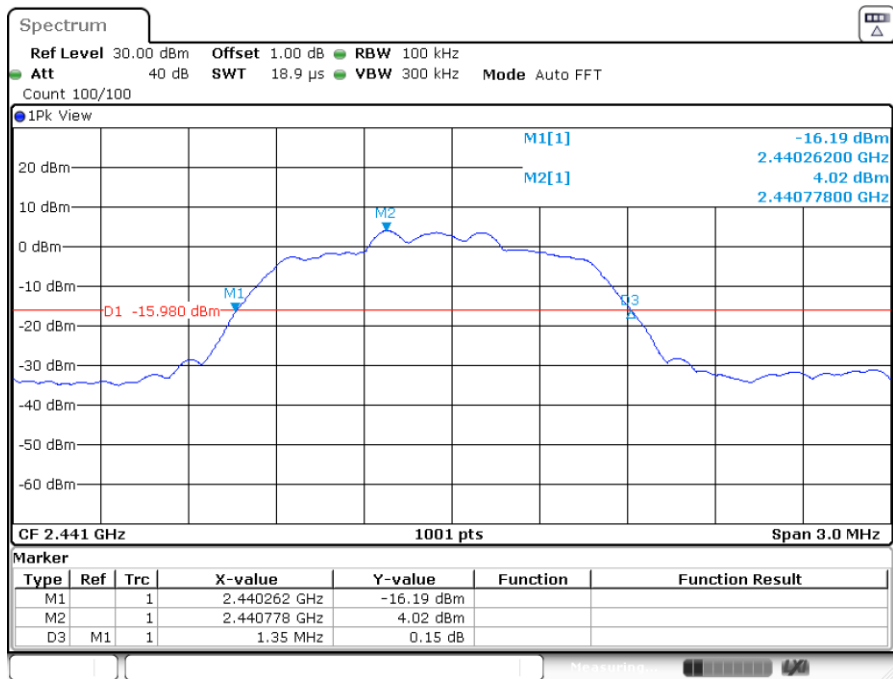


Date: 29.MAR.2022 15:49:43

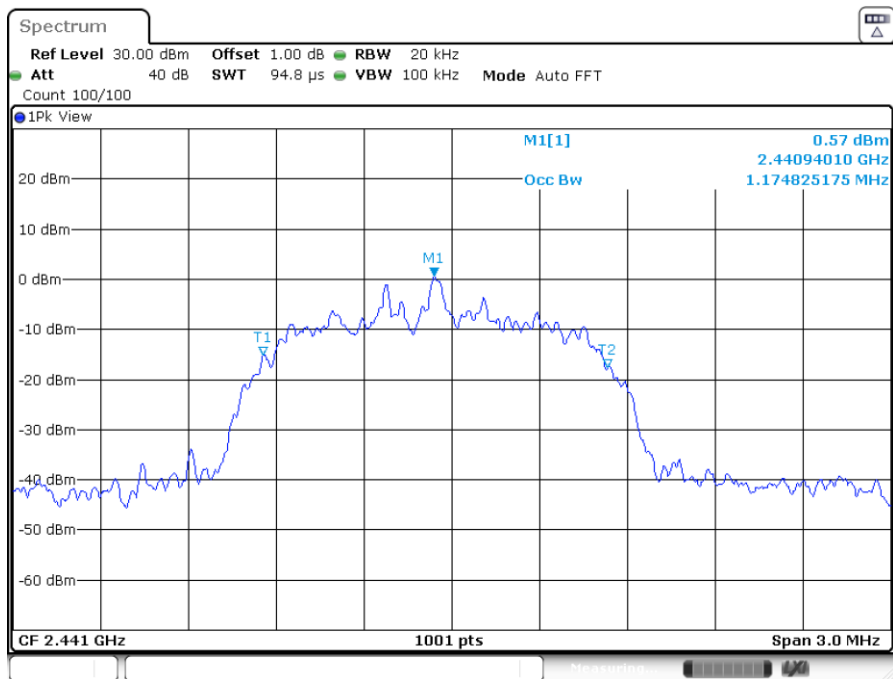


Date: 29.MAR.2022 15:49:54



High channel 2480MHz

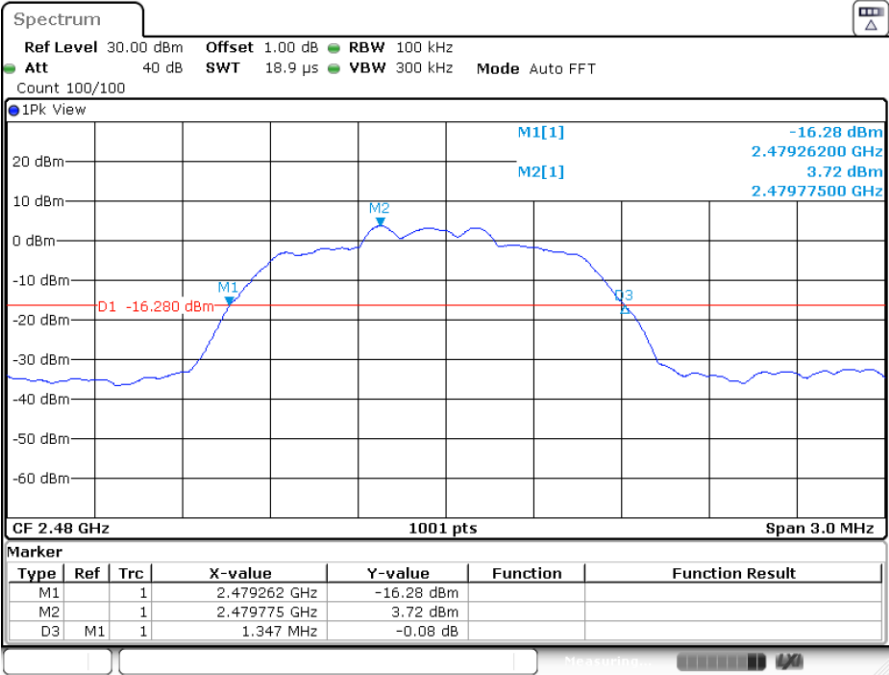

Date: 29.MAR.2022 15:51:08

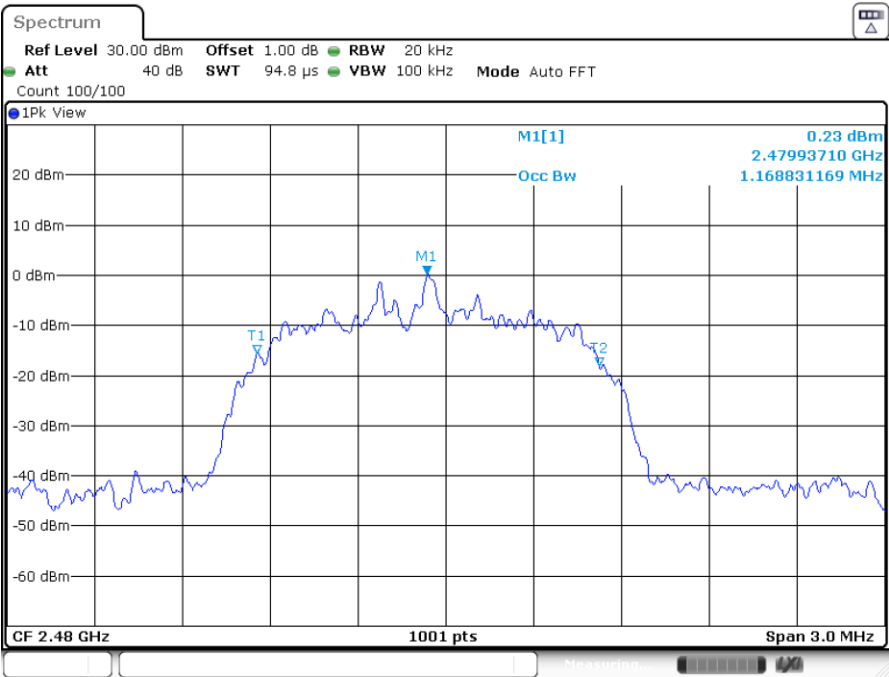


Date: 29.MAR.2022 15:51:18

20 dB bandwidth and 99% Occupied Bandwidth


Bluetooth Mode 8DPSK Modulation test result

Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	1359	1160	--	Pass
2441	1359	1157	--	Pass
2480	1359	1157	--	Pass

Low channel 2402MHz

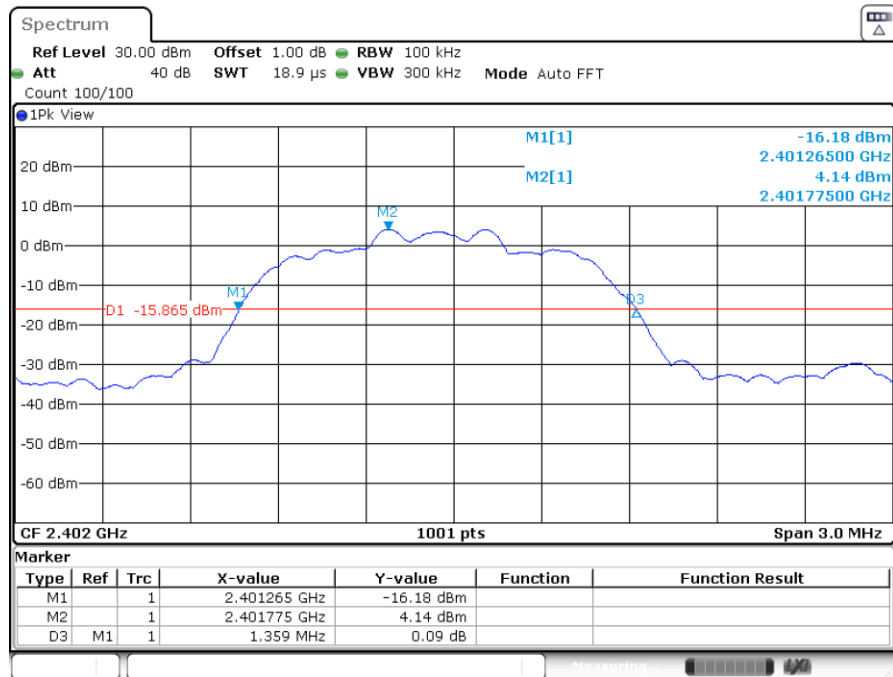


Date: 29.MAR.2022 15:52:49

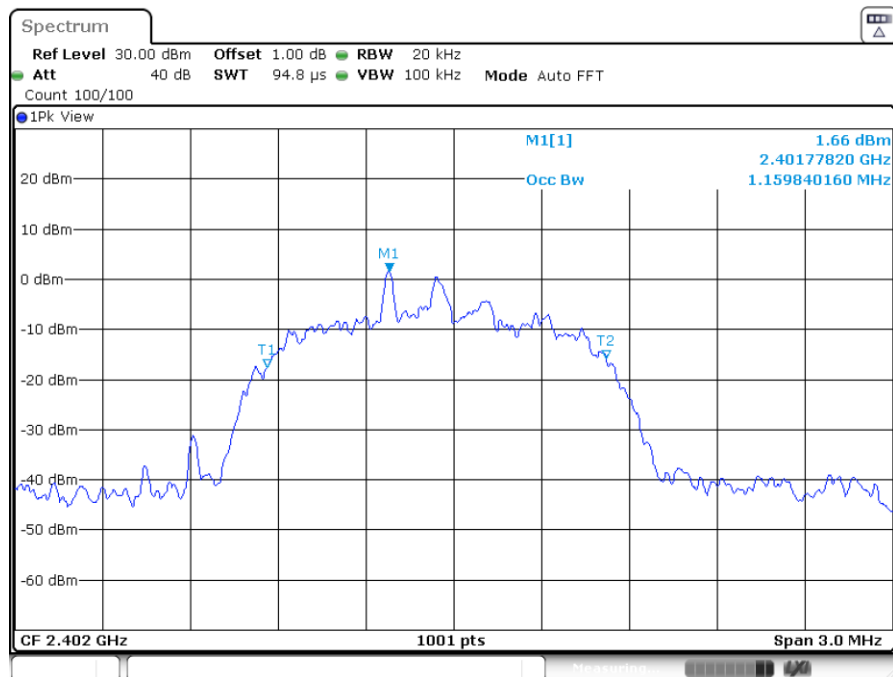


Date: 29.MAR.2022 15:53:00

Middle channel 2441MHz

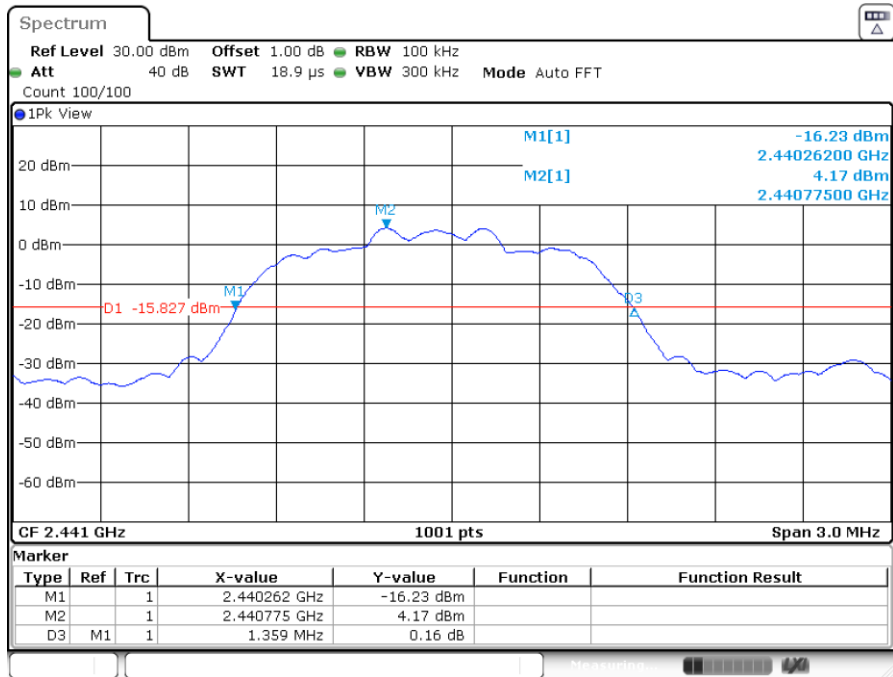


Date: 29.MAR.2022 15:54:24

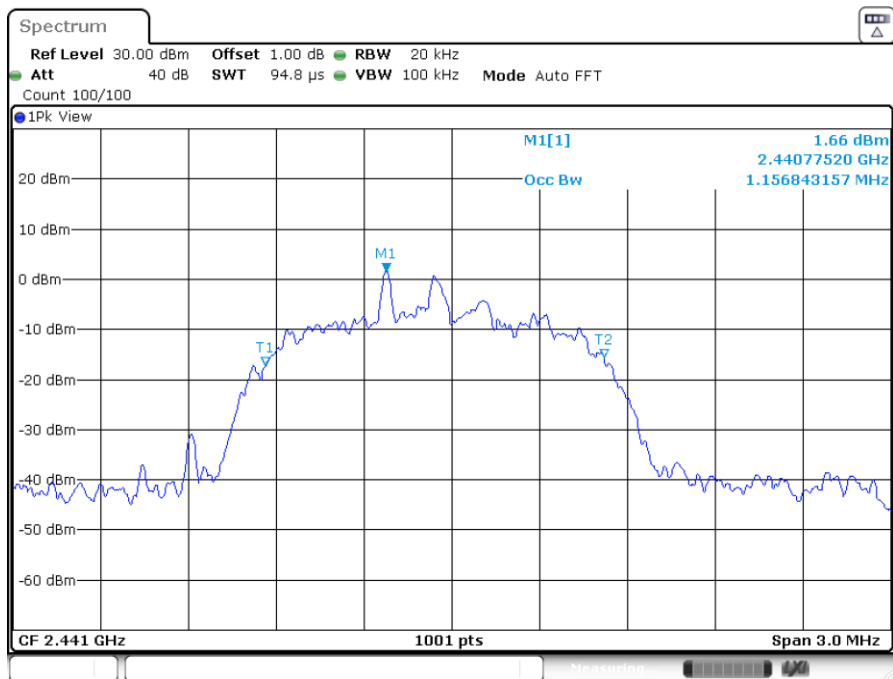


Date: 29.MAR.2022 15:54:35

High channel 2480MHz

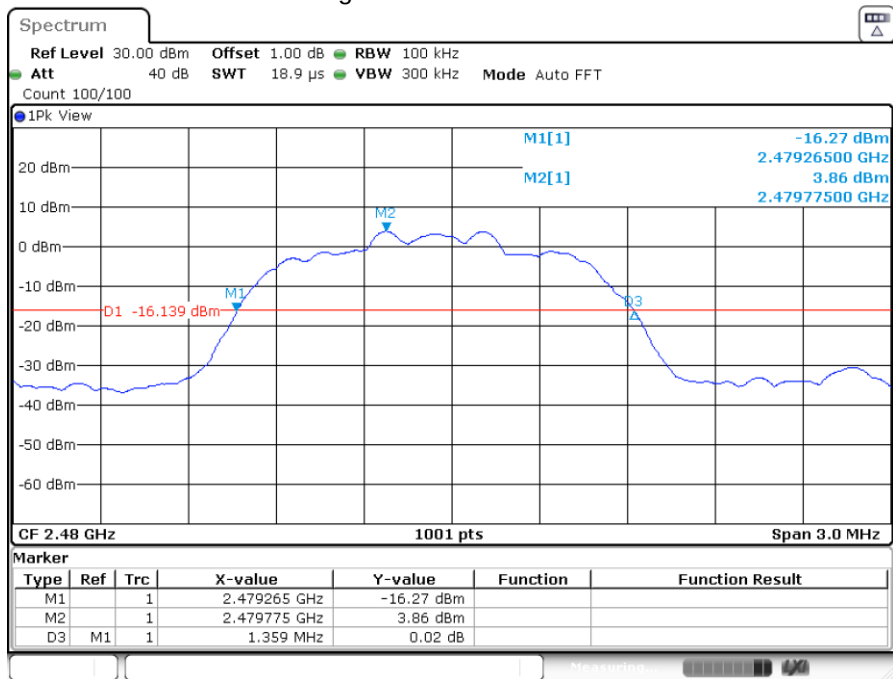

Date: 29.MAR.2022 15:55:55

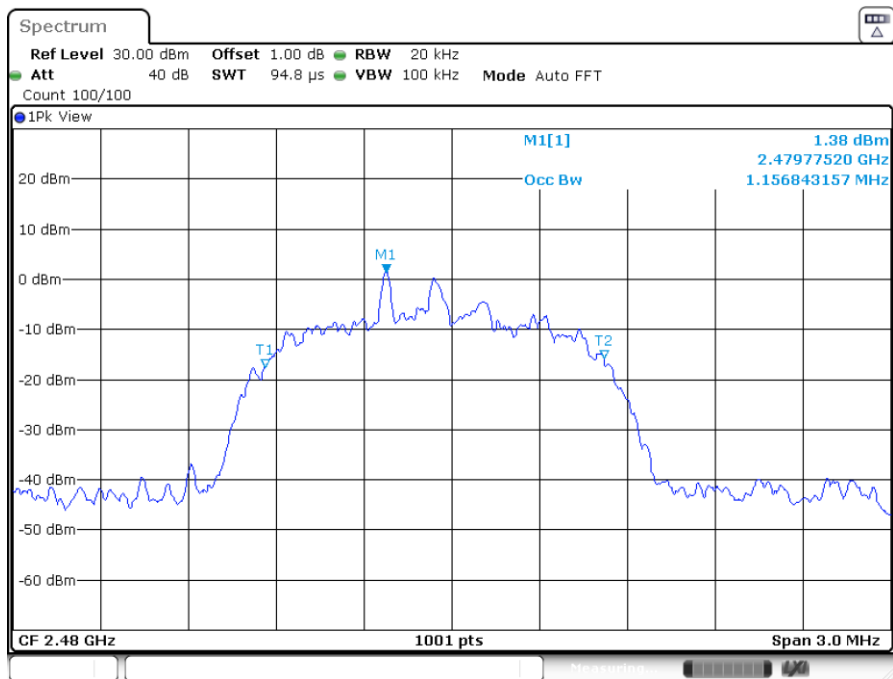

Date: 29.MAR.2022 15:56:06

9.4 Carrier Frequency Separation

Test Method

1. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector function = peak
2. By using the Max-Hold function record the separation of two adjacent channels.
3. Measure the frequency difference of these two adjacent channels by spectrum analyzer marker function.
4. Repeat above procedures until all frequencies measured were complete.

Limit

Limit

kHz

$\geq 25\text{kHz}$ or $2/3$ of the 20 dB bandwidth which is greater

GFSK Modulation Limit

Test Mode	2/3 of 20 dB Bandwidth kHz
DH5	742
2DH5	900
3DH5	906




Carrier Frequency Separation

Test result: The measurement was performed with the typical configuration (normal hopping status), here GFSK modulation mode was used to show compliance.

GFSK Modulation test result


Test Mode	Carrier Frequency Separation kHz	Result
DH5	1003	Pass
2DH5	1168	Pass
3DH5	1006	Pass

DH5

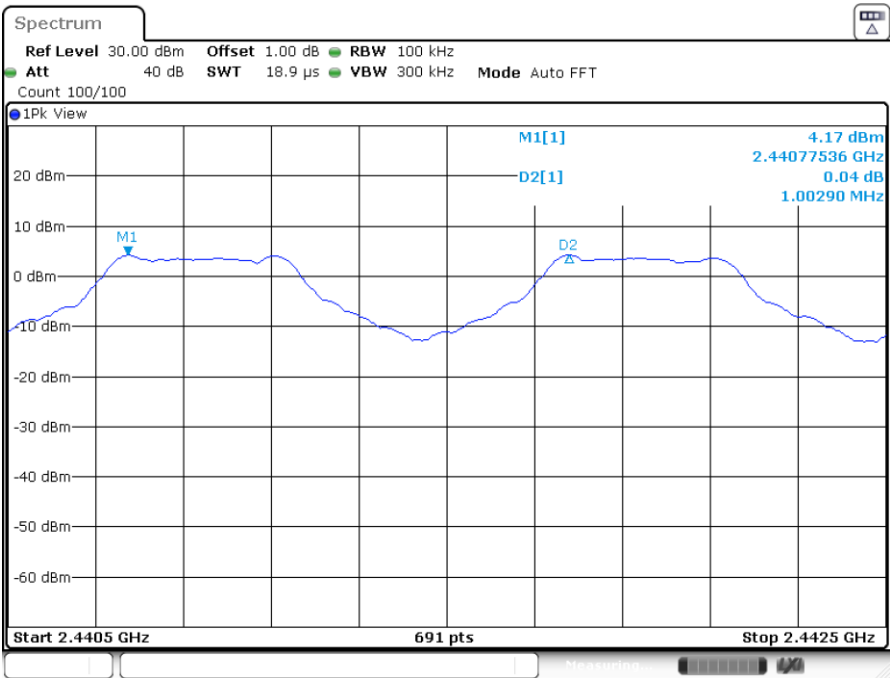


Date: 29.MAR.2022 15:57:31

2DH5

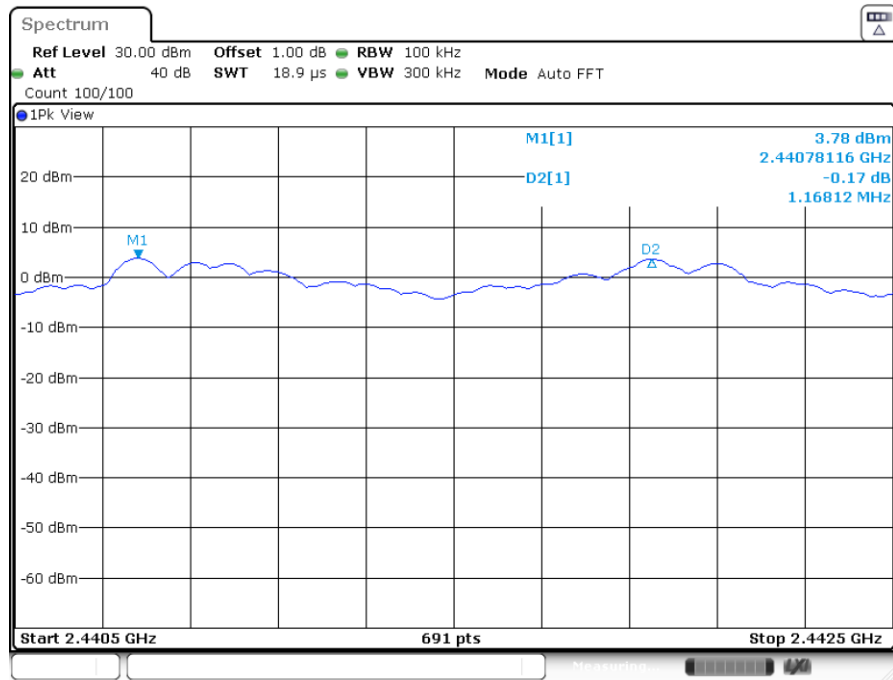

Date: 29.MAR.2022 16:01:47

3DH5

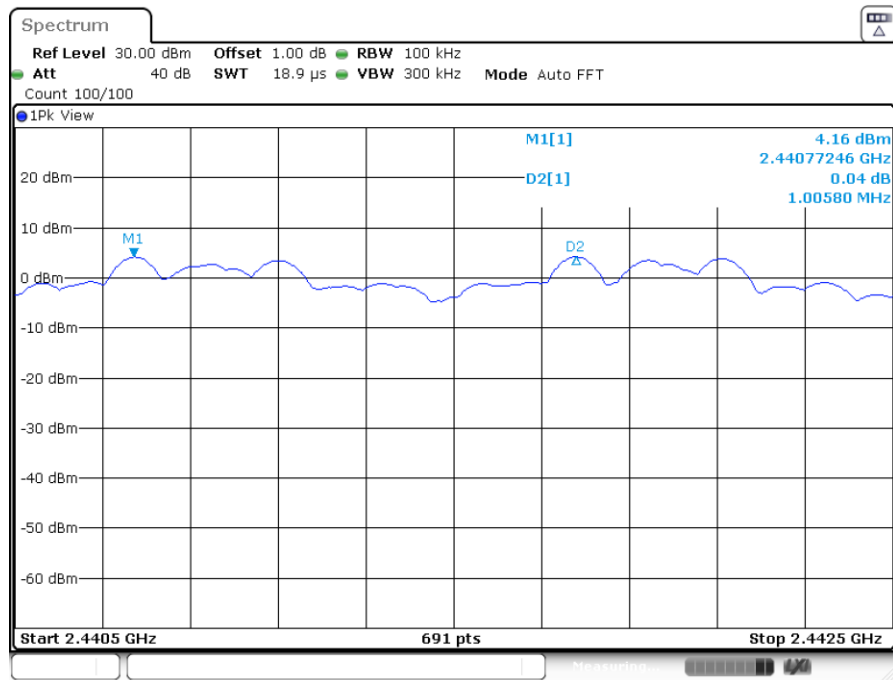

Date: 29.MAR.2022 16:04:46

9.5 Number of hopping frequencies

Test Method

1. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector function = peak
2. Set the spectrum analyzer on Max-Hold Mode, and then keep the EUT in hopping mode.
3. Record all the signals from each channel until each one has been recorded.
4. Repeat above procedures until all frequencies measured were complete.

Limit

Limit
number


≥ 15



Number of hopping frequencies

Test result: The measurement was performed with the typical configuration (normal hopping status), and the total hopping channels is constant for the all modulation mode according with the Bluetooth Core Specification. Here GFSK modulation mode was used to show compliance.

Number of hopping frequencies	Result
79	Pass

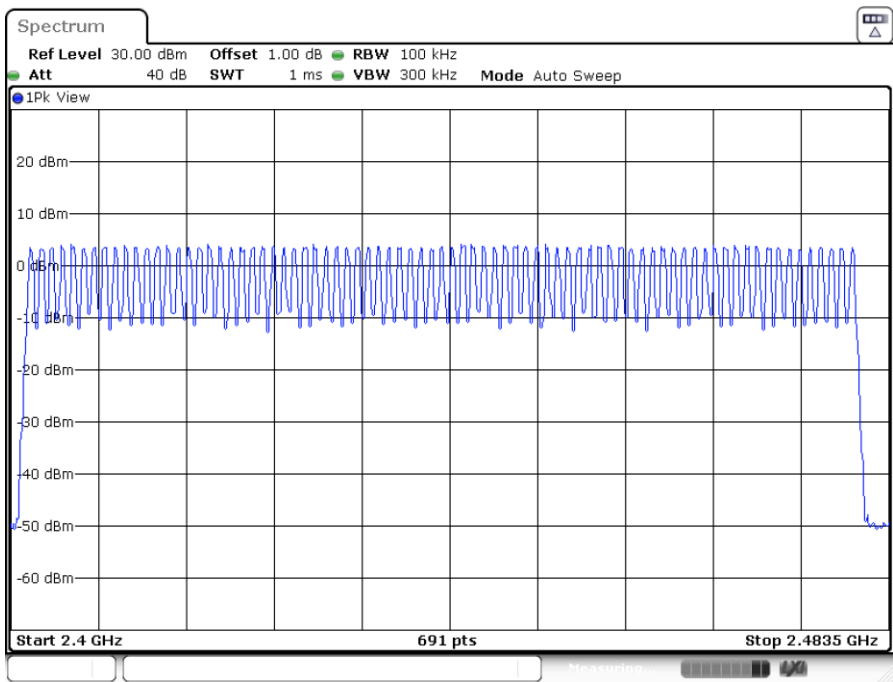

Date: 29.MAR.2022 15:57:46

9.6 Dwell Time

Test Method

1. Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.
Equipment mode: Spectrum analyzer
2. RBW: 1MHz; VBW: 1MHz; SPAN: Zero Span
3. Adjust the center frequency of spectrum analyzer on any frequency be measured.
4. Measure the Dwell Time by spectrum analyzer Marker function.
5. Repeat above procedures until all frequencies measured were complete.

Limit

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Dwell Time

Dwell time

The maximum dwell time shall be 0.4 s.


According to the Bluetooth Core Specification, the worse result (DH5 mode) was reported to show compliance.

The Dwell Time = Burst Width * Total Hops. The detailed calculations are showed as follows:
The duration for dwell time calculation: 0.4 [s] * hopping number = 0.4 [s] * 79 [ch] = 31.6 [s];

Test Result

TestMode	Channel	BurstWidth(s)	TotalHops	Result(s)	Limit(s)	Verdict
DH5	Hop	2.85	80	0.228	<=0.4	PASS
2DH5	Hop	2.86	80	0.229	<=0.4	PASS
3DH5	Hop	2.86	80	0.229	<=0.4	PASS

GFSK Modulation

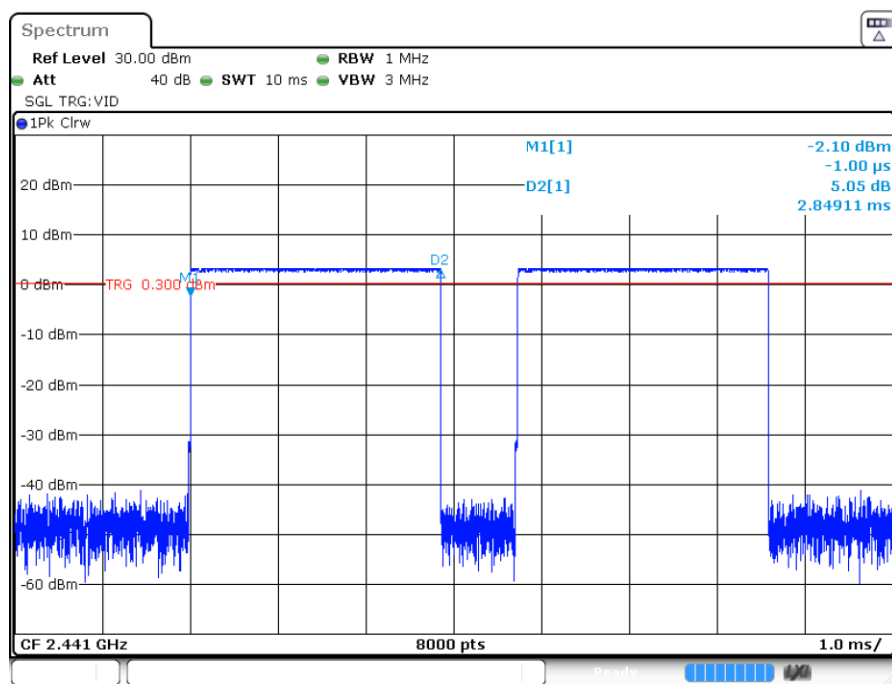


Date: 29.MAR.2022 15:57:57

DH5




$\pi/4$ -DQPSK Modulation

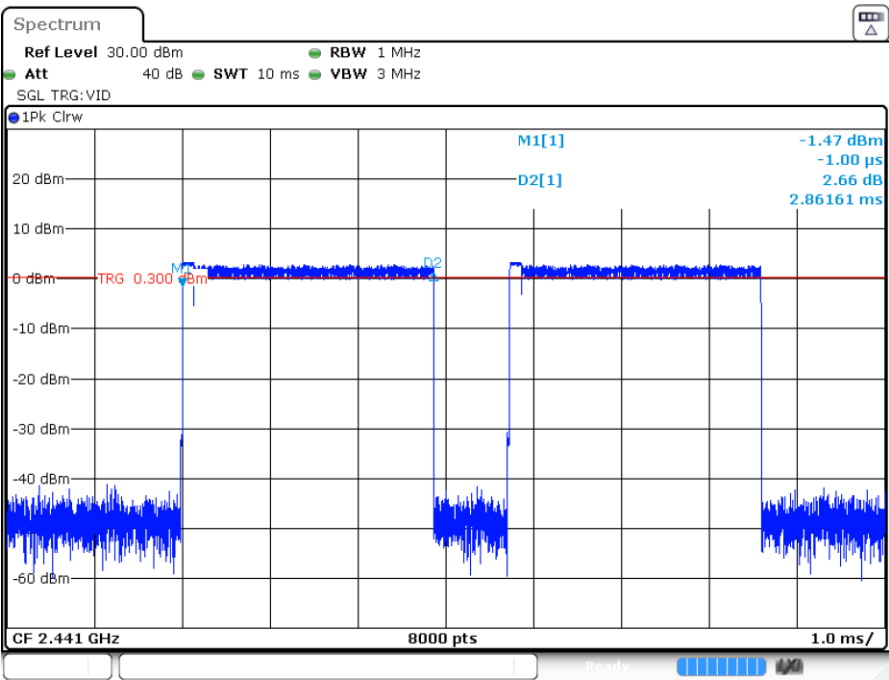

Date: 29.MAR.2022 16:02:24

2DH5

8-DPSK Modulation

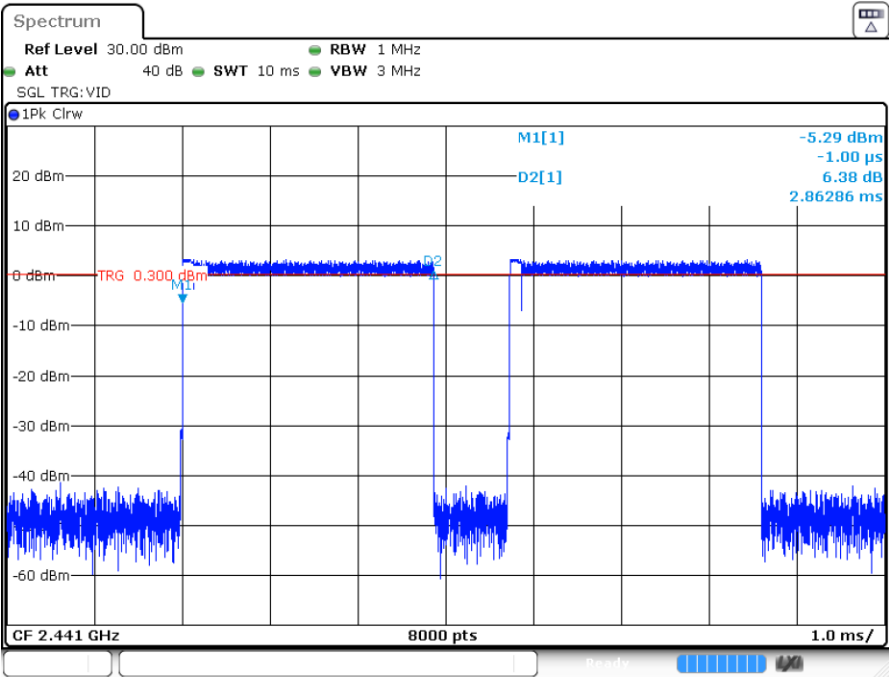

Date: 29.MAR.2022 16:05:23

3DH5

9.7 Spurious RF conducted emissions

Test Method

1. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
3. The level displayed must comply with the limit specified in this Section. Submit these plots.
4. Repeat above procedures until all frequencies measured were complete.


Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20

Spurious RF conducted emissions


TestMode	Antenna	Channel(MHz)	Freq Range(MHz)	Ref Level	Result(dBm)	Limit(dBm)	Verdict
DH5	Ant1	2402	Reference	4.11 (dBm)	4.11	---	PASS
			30~1000	30~1000(MHz)	-67.49	<=-15.89	PASS
			1000~26500	1000~26500(MHz)	-47.24	<=-15.89	PASS
		2441	Reference	4.20(dBm)	4.20	---	PASS
			30~1000	30~1000(MHz)	-65.39	<=-15.8	PASS
			1000~26500	1000~26500(MHz)	-45.85	<=-15.8	PASS
		2480	Reference	3.86(dBm)	3.86	---	PASS
			30~1000	30~1000(MHz)	-64.37	<=-16.14	PASS
			1000~26500	1000~26500(MHz)	-46.31	<=-16.14	PASS
2DH5	Ant1	2402	Reference	3.96(dBm)	3.96	---	PASS
			30~1000	30~1000(MHz)	-66.53	<=-16.04	PASS
			1000~26500	1000~26500(MHz)	-35.01	<=-16.04	PASS
		2441	Reference	4.06(dBm)	4.06	---	PASS
			30~1000	30~1000(MHz)	-67.72	<=-15.94	PASS
			1000~26500	1000~26500(MHz)	-47.27	<=-15.94	PASS
		2480	Reference	3.71(dBm)	3.71	---	PASS
			30~1000	30~1000(MHz)	-66.81	<=-16.29	PASS
			1000~26500	1000~26500(MHz)	-50.68	<=-16.29	PASS
3DH5	Ant1	2402	Reference	4.11(dBm)	4.11	---	PASS
			30~1000	30~1000(MHz)	-67.74	<=-15.89	PASS
			1000~26500	1000~26500(MHz)	-35.14	<=-15.89	PASS
		2441	Reference	4.21(dBm)	4.21	---	PASS
			30~1000	30~1000(MHz)	-67.56	<=-15.79	PASS
			1000~26500	1000~26500(MHz)	-46.51	<=-15.79	PASS
		2480	Reference	3.85(dBm)	3.85	---	PASS
			30~1000	30~1000(MHz)	-66.41	<=-16.15	PASS
			1000~26500	1000~26500(MHz)	-51.11	<=-16.15	PASS

DH5_Ant1_2402_0~Reference

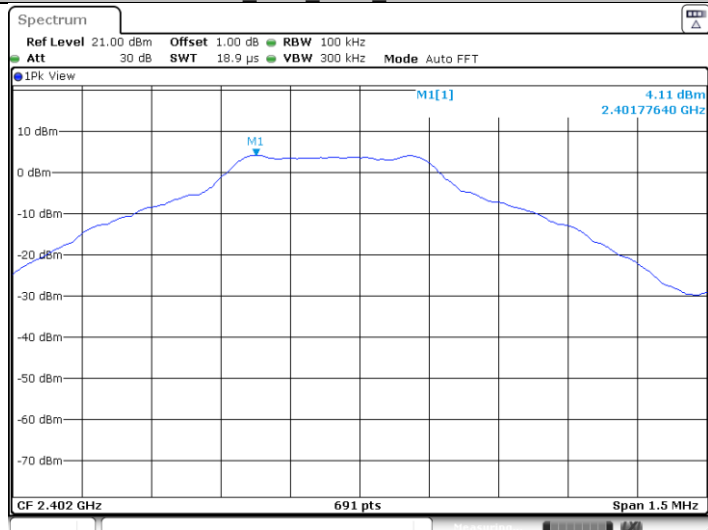


Date: 29 MAR 2022 15:43:42

DH5_Ant1_2402_30~1000

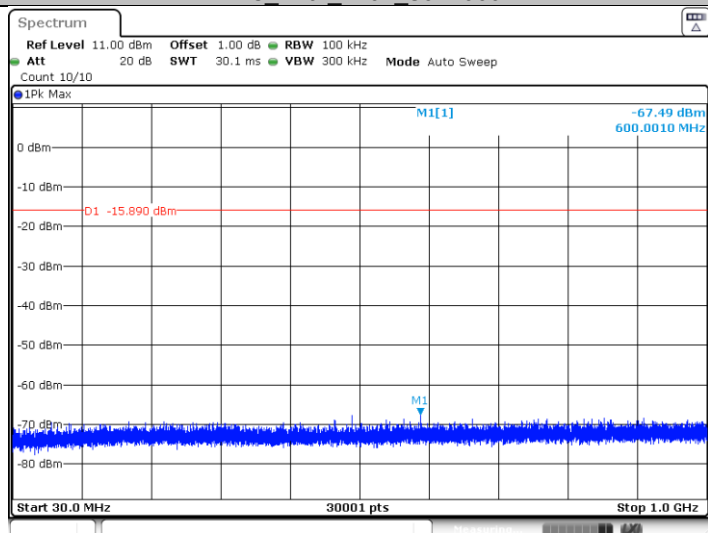


Date: 29 MAR 2022 15:43:48

DH5_Ant1_2402_1000~26500

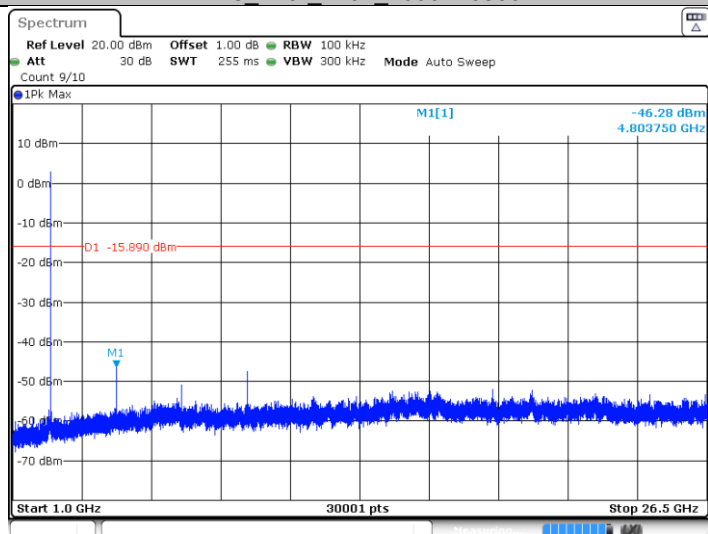


Date: 29 MAR 2022 15:43:56

DH5_Ant1_2441_0~Reference

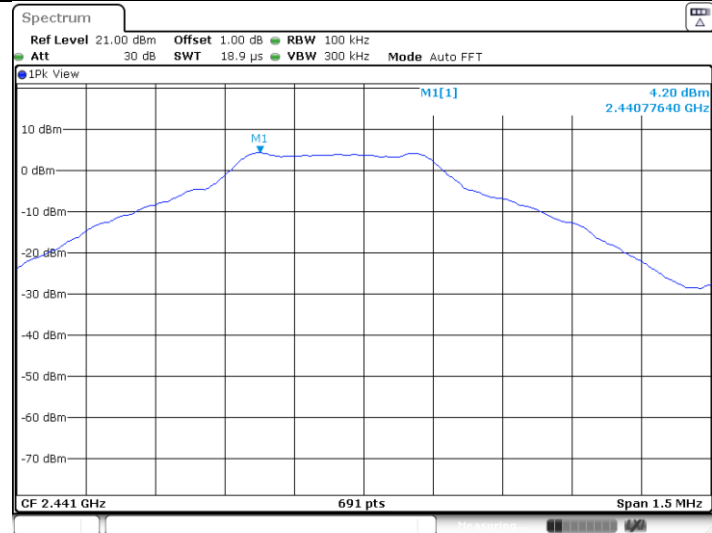


Date: 29 MAR 2022 15:45:21

DH5_Ant1_2441_30~1000

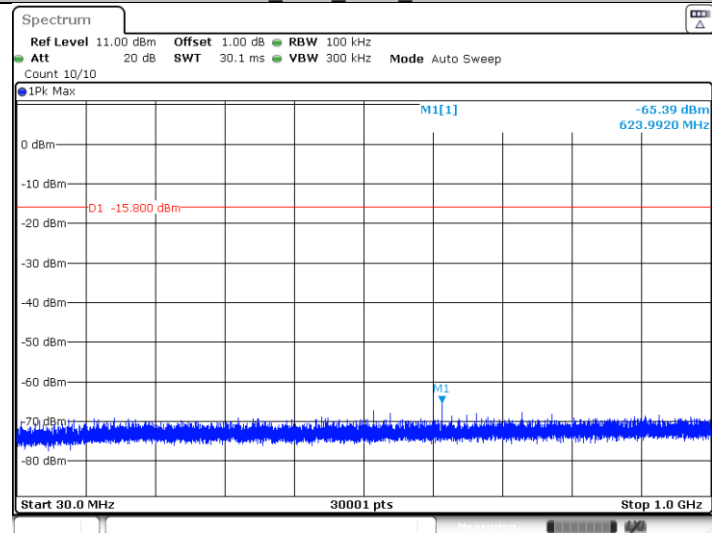


Date: 29 MAR 2022 15:45:27

DH5_Ant1_2441_1000~26500

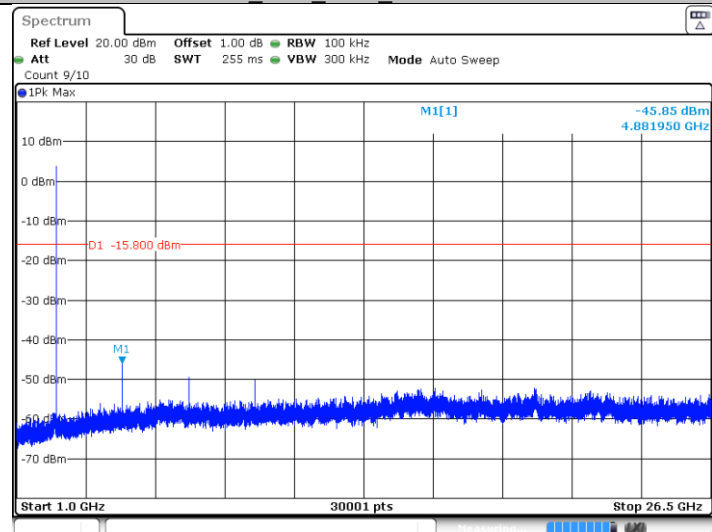


Date: 29 MAR 2022 15:45:35

DH5_Ant1_2480_0~Reference

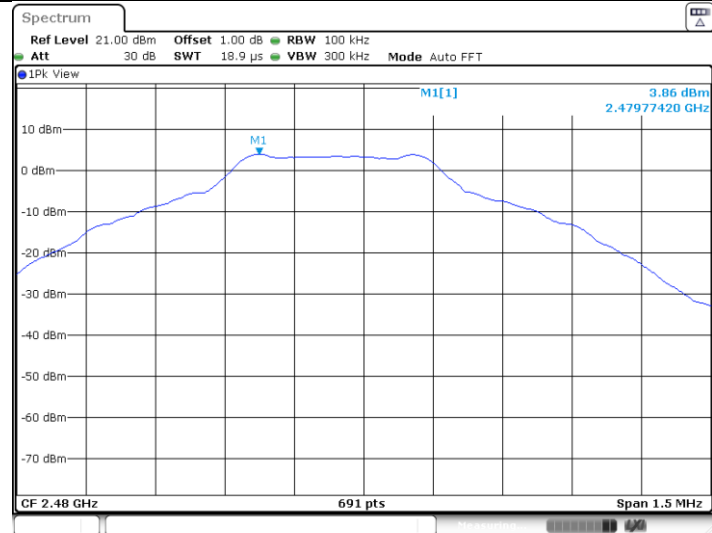


Date: 29 MAR 2022 15:46:54

DH5_Ant1_2480_30~1000

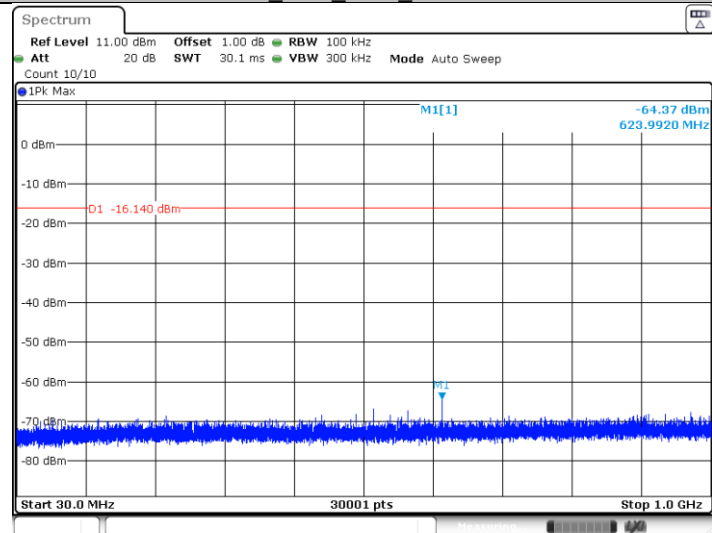


Date: 29 MAR 2022 15:47:00

DH5_Ant1_2480_1000~26500

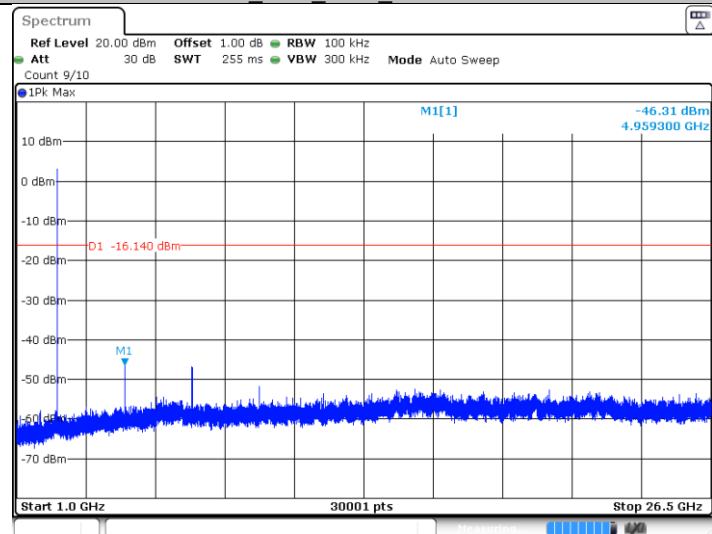


Date: 29 MAR 2022 15:47:08

2DH5_Ant1_2402_0-Reference

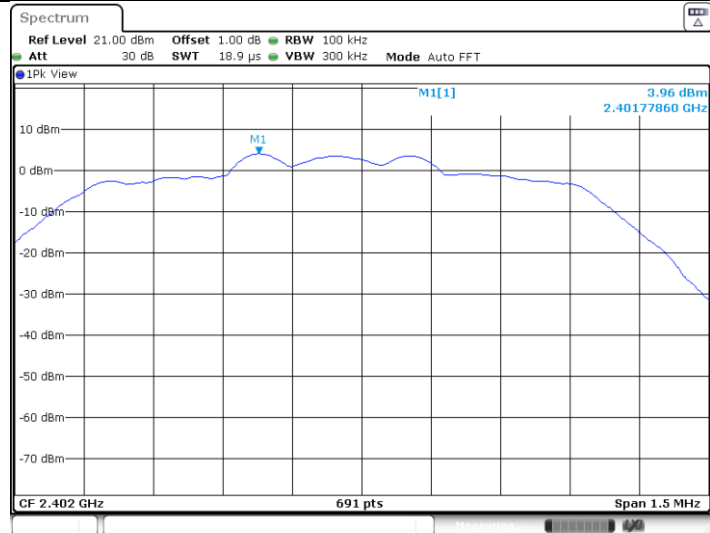


Date: 29 MAR 2022 15:48:34

2DH5_Ant1_2402_30-1000

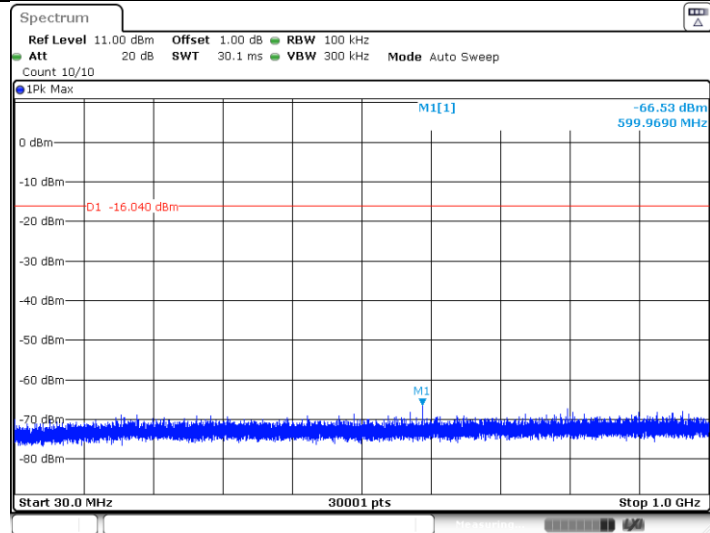


Date: 29 MAR 2022 15:48:40

2DH5_Ant1_2402_1000-26500

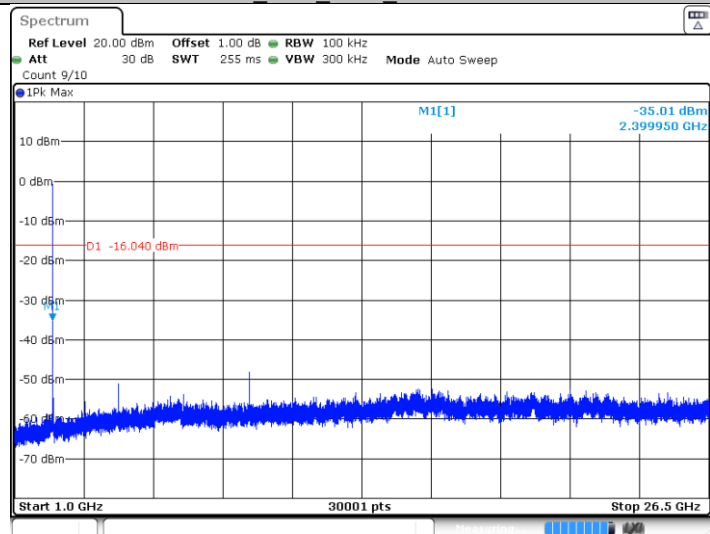


Date: 29 MAR 2022 15:48:48

2DH5_Ant1_2441_0-Reference

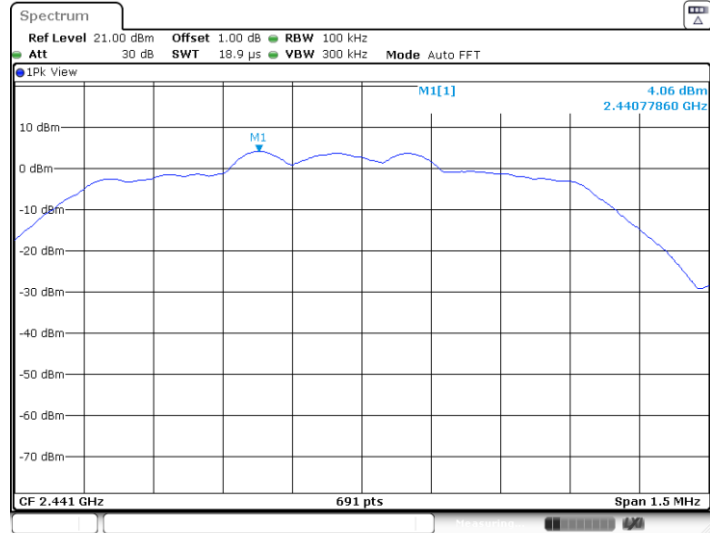


Date: 29 MAR 2022 15:49:59

2DH5_Ant1_2441_30-1000

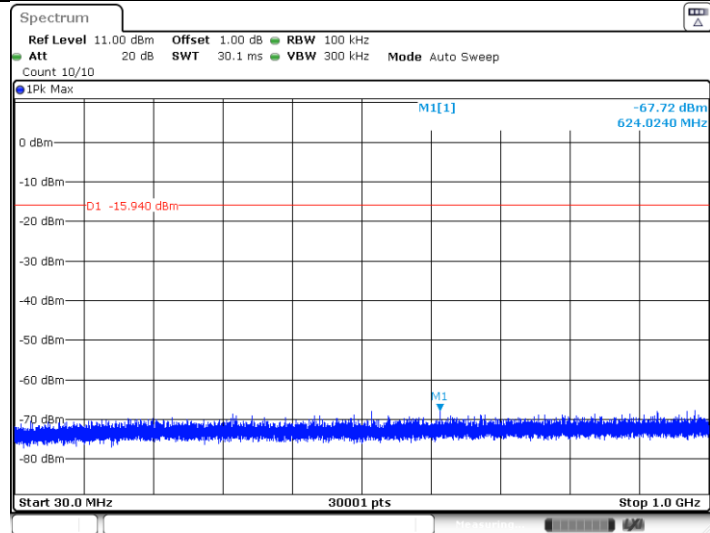


Date: 29 MAR 2022 15:50:05

2DH5_Ant1_2441_1000-26500

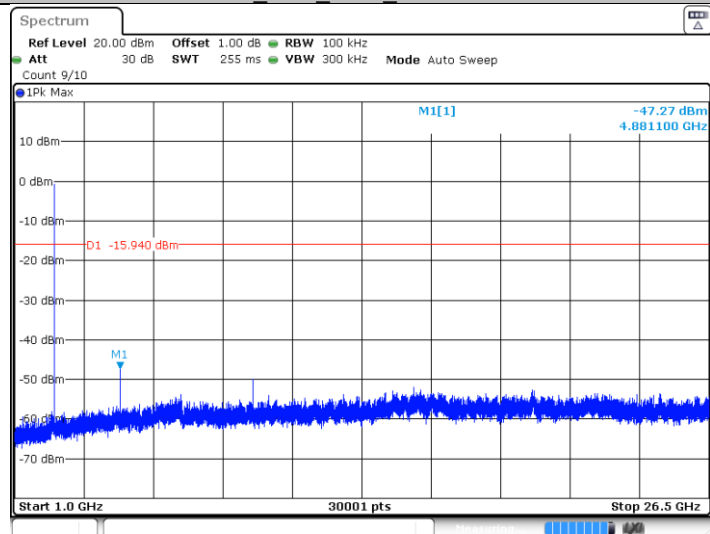


Date: 29 MAR 2022 15:50:13


2DH5_Ant1_2480_0-Reference

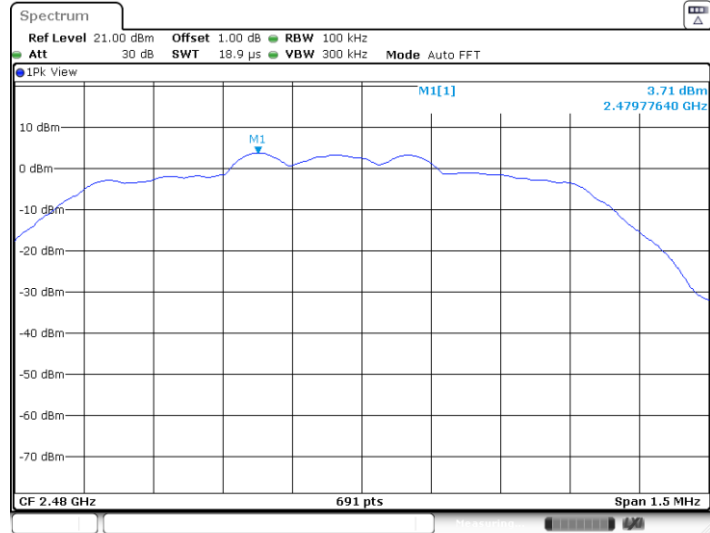


2DH5_Ant1_2480_30-1000

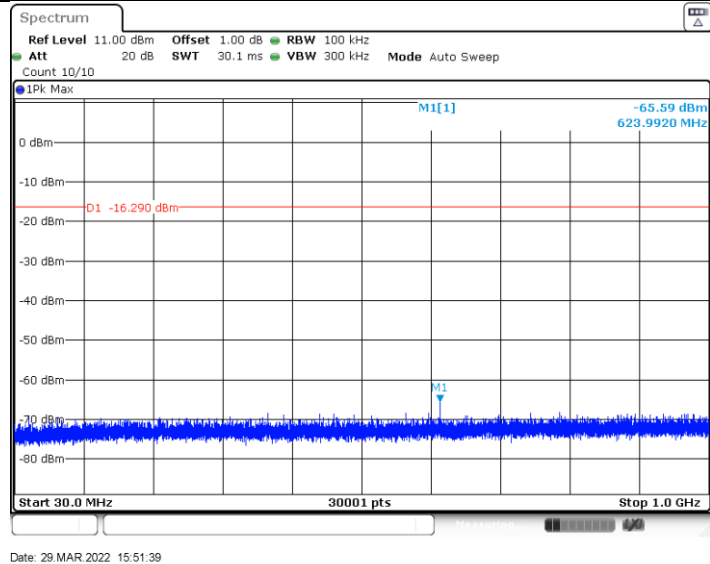

2DH5_Ant1_2480_1000-26500

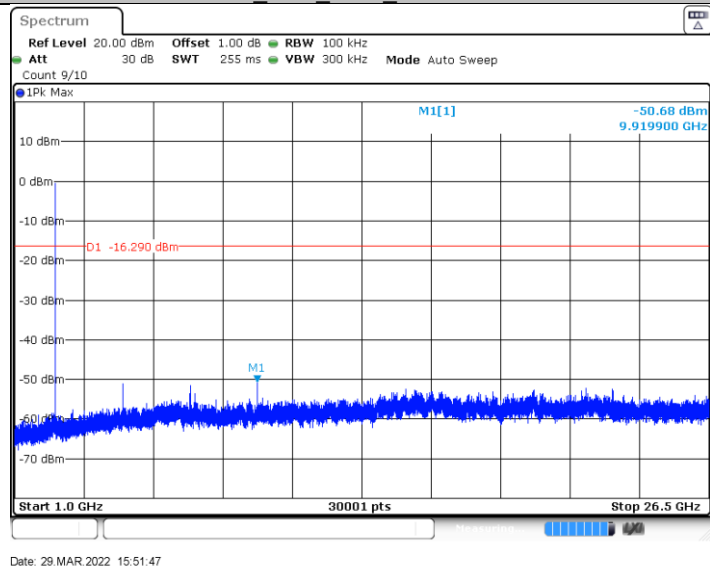


3DH5_Ant1_2402_0-Reference

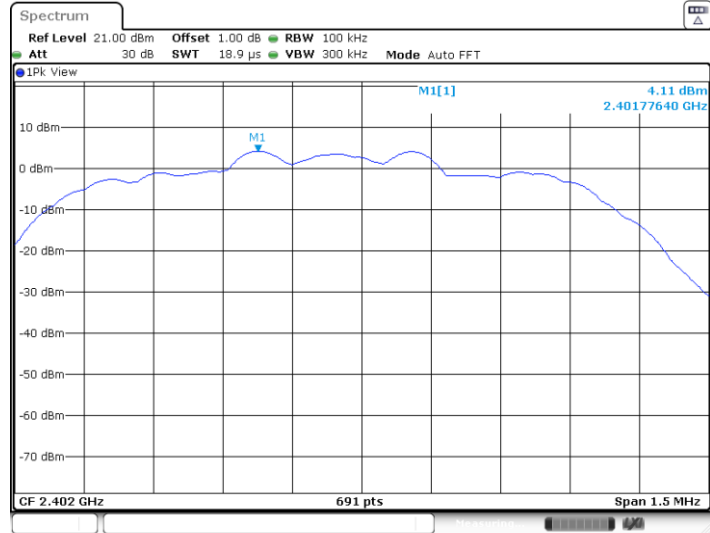


Date: 29 MAR 2022 15:53:15

3DH5_Ant1_2402_30-1000

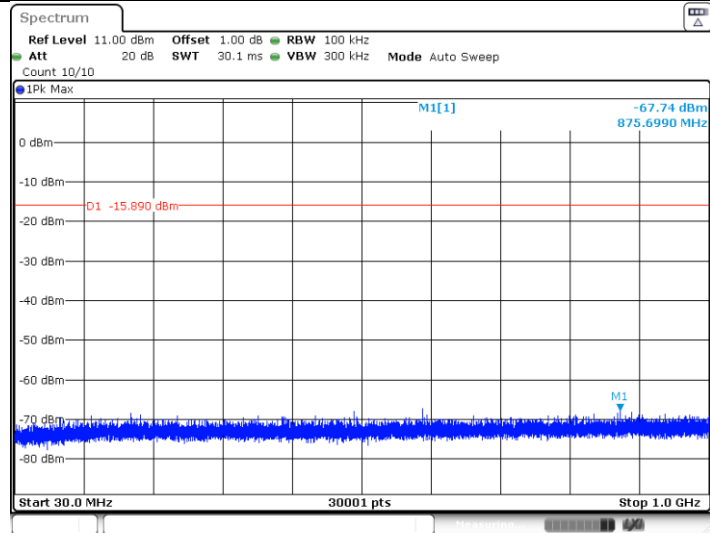


Date: 29 MAR 2022 15:53:21

3DH5_Ant1_2402_1000-26500

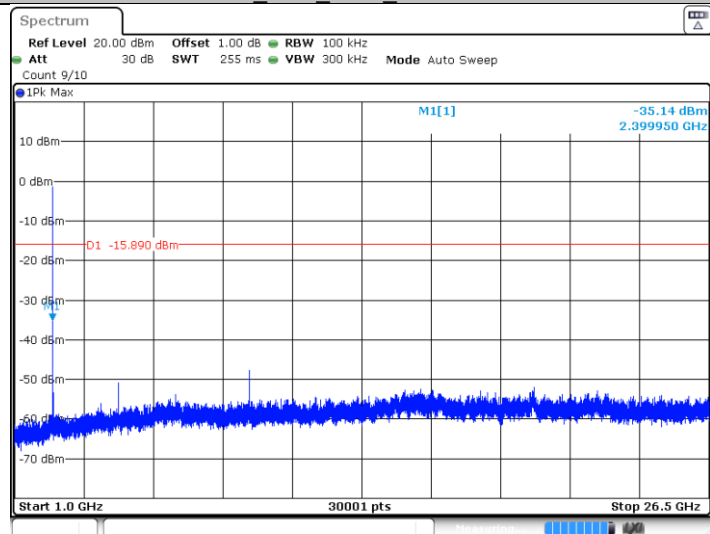


Date: 29 MAR 2022 15:53:29

3DH5_Ant1_2441_0-Reference

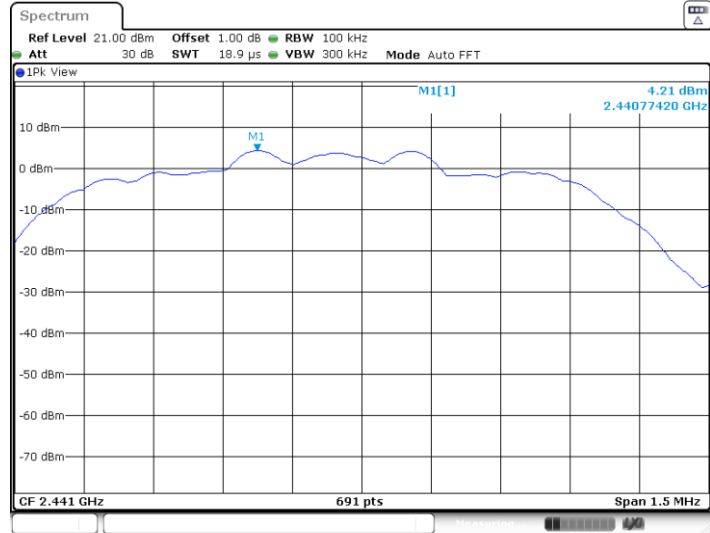


Date: 29 MAR 2022 15:54:40

3DH5_Ant1_2441_30-1000

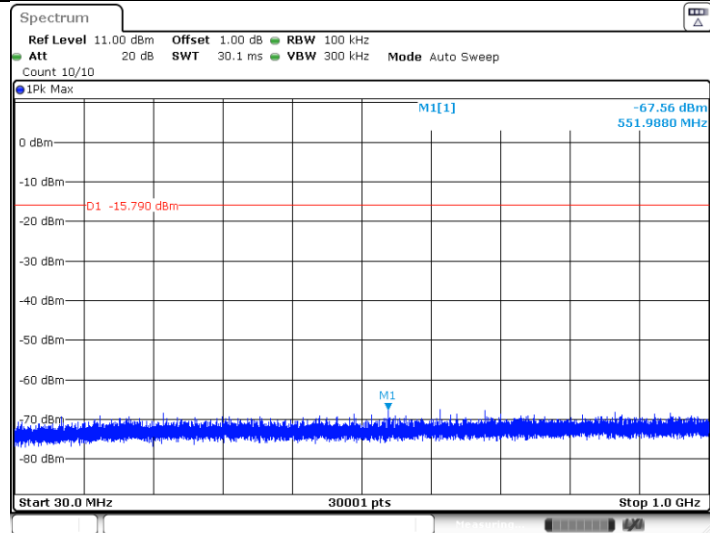


Date: 29 MAR 2022 15:54:47

3DH5_Ant1_2441_1000-26500

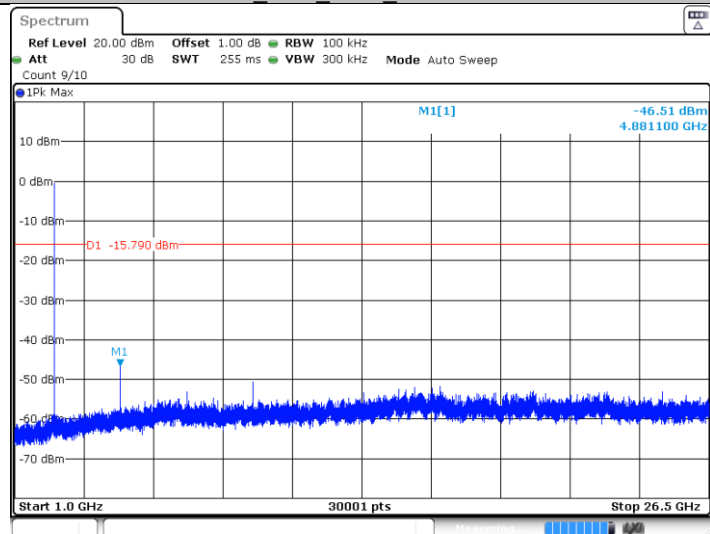


Date: 29 MAR 2022 15:54:54

3DH5_Ant1_2480_0-Reference

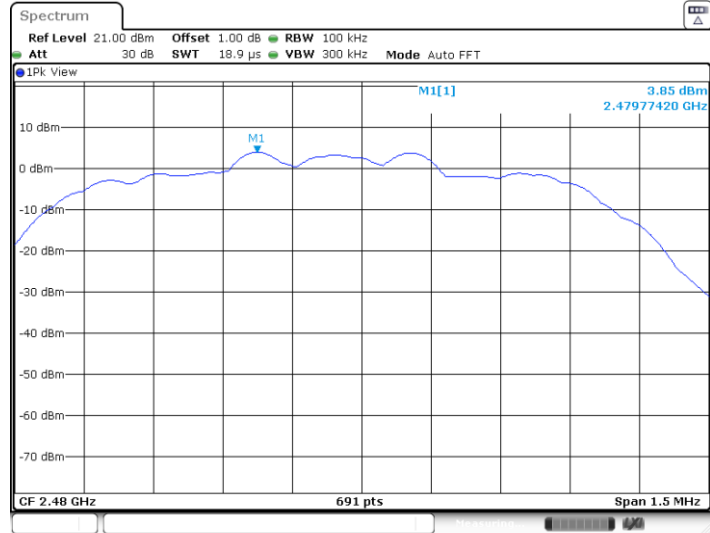


Date: 29 MAR 2022 15:56:21

3DH5_Ant1_2480_30-1000

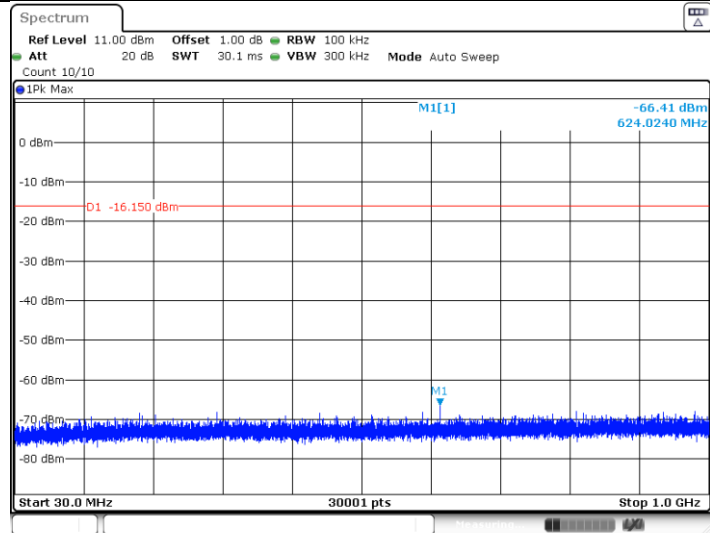

Date: 29 MAR 2022 15:56:27

3DH5_Ant1_2480_1000-26500

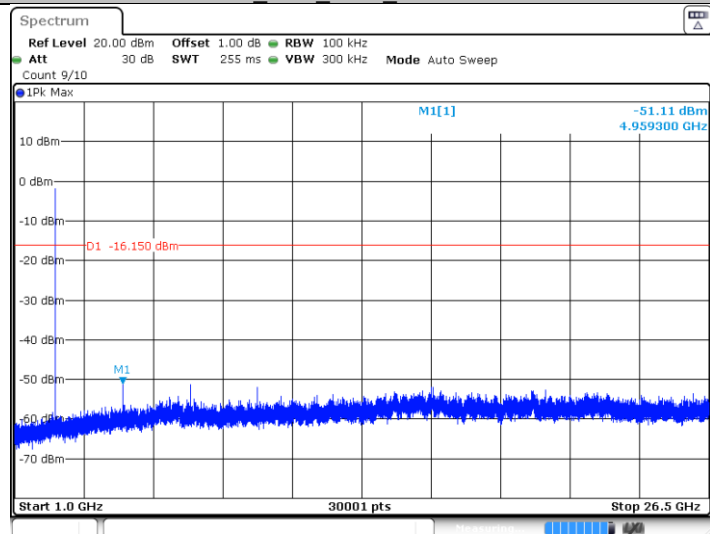

Date: 29 MAR 2022 15:56:35

9.8 Band edge testing


Test Method

- 1 Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW $\geq$ RBW, Sweep = auto, Detector function = peak, Trace = max hold
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section. .
- 4 Repeat the test at the hopping off and hopping on mode, submit all the plots.


Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

GFSK mode: Hopping off

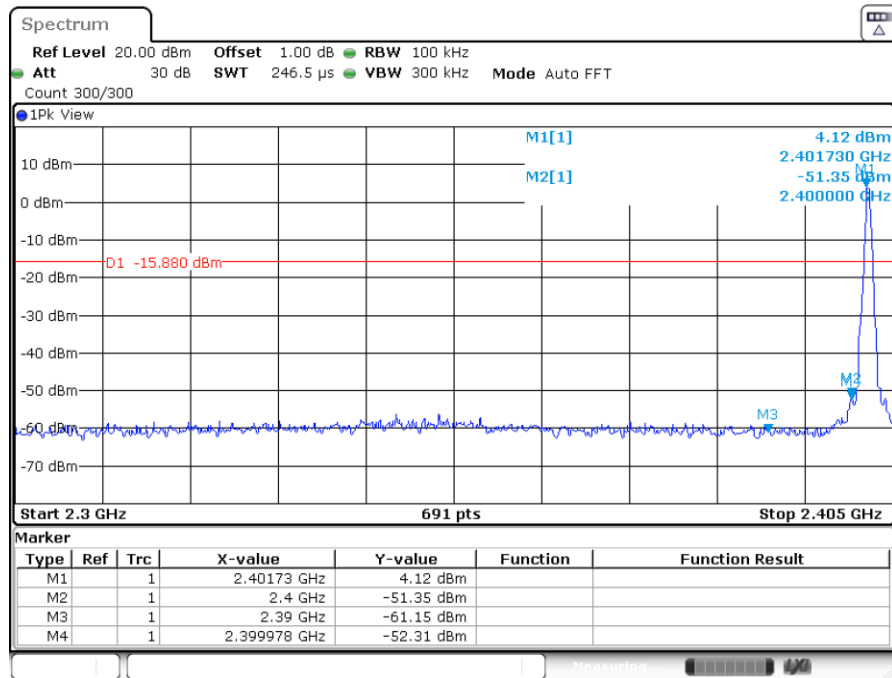


Date: 29.MAR.2022 15:43:35

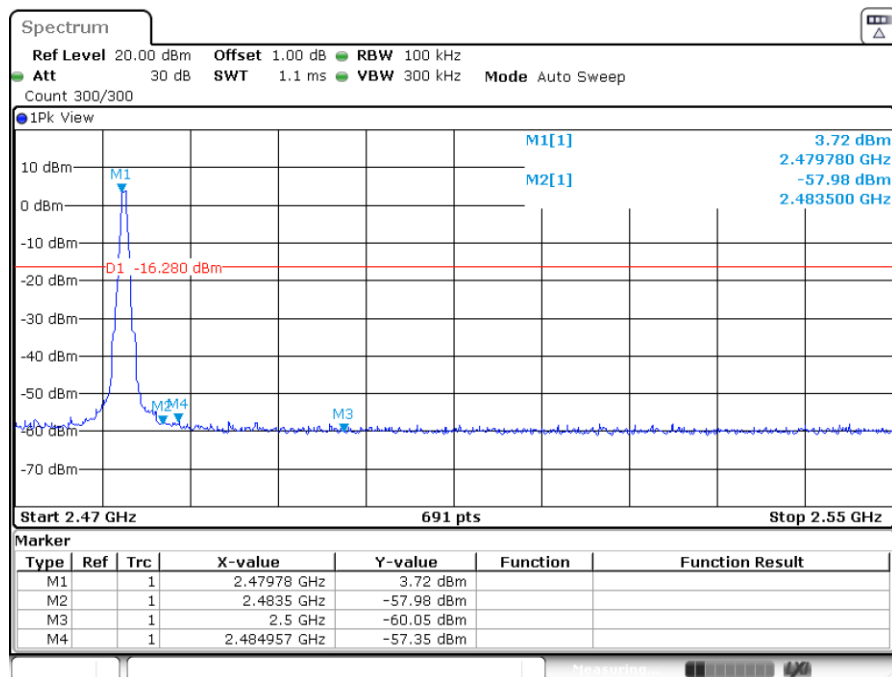


Date: 29.MAR.2022 15:46:49



GFSK mode: Hopping on

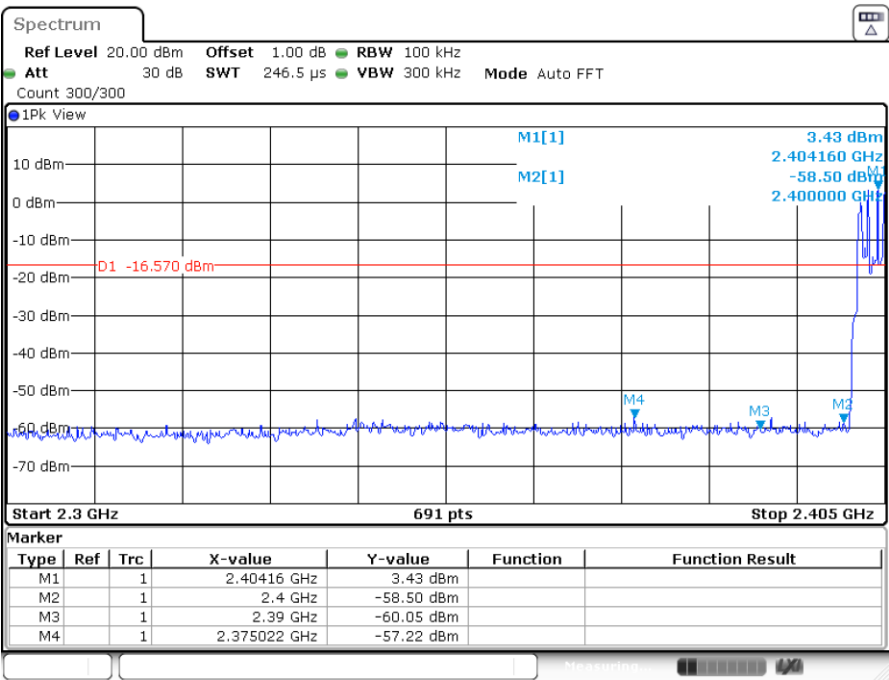


Date: 29.MAR.2022 15:57:05

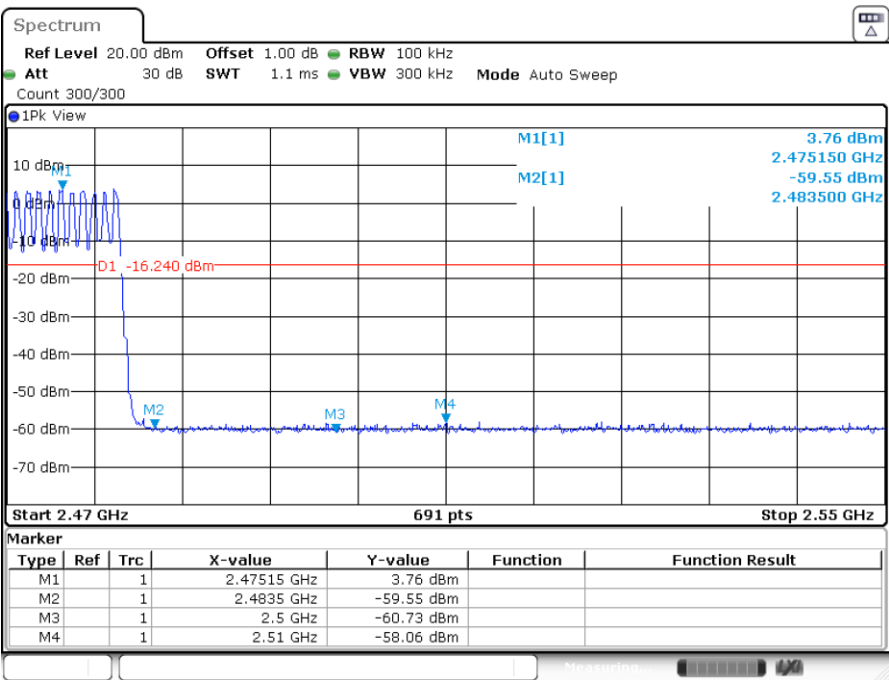


Date: 29.MAR.2022 15:59:54

8DPSK mode: Hopping off

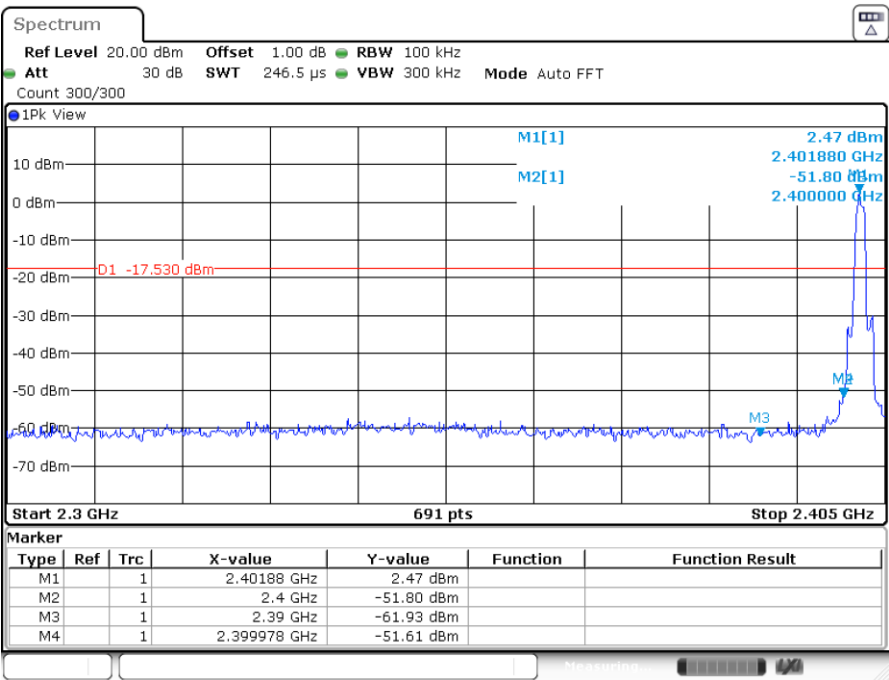


Date: 29.MAR.2022 15:53:09

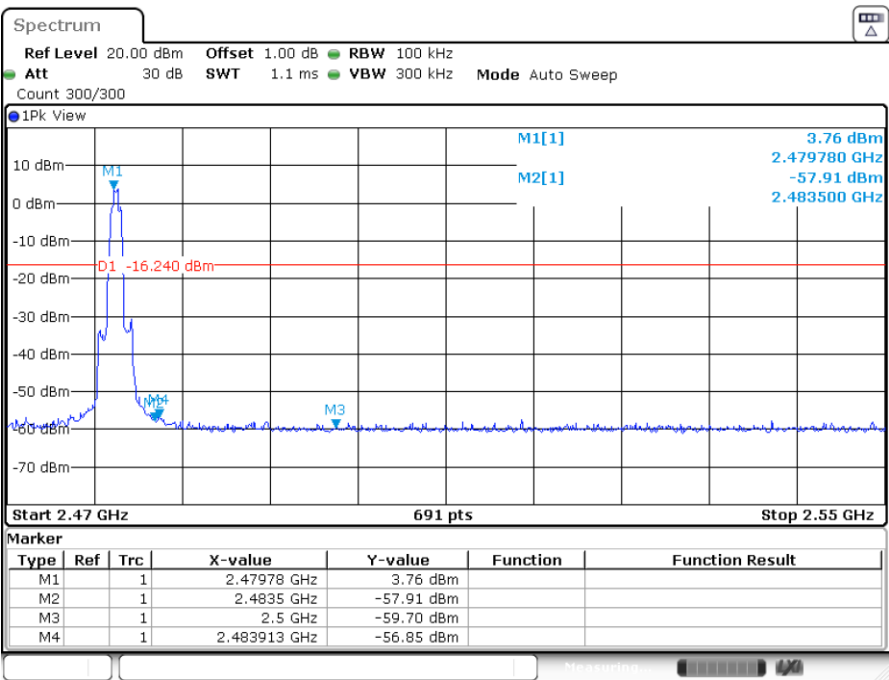


Date: 29.MAR.2022 15:56:15

8DPSK mode: Hopping on

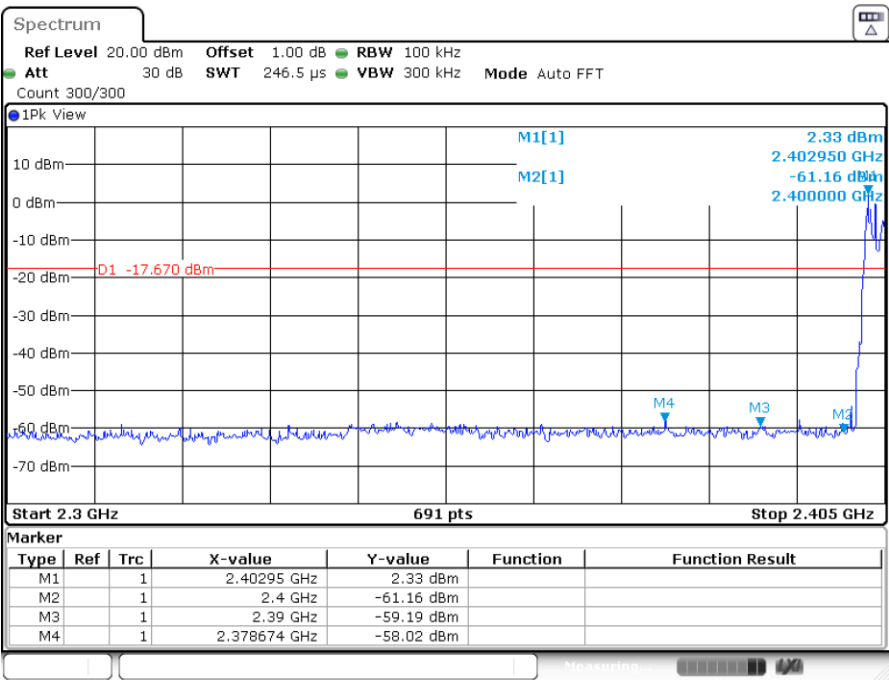

Date: 29.MAR.2022 16:04:16

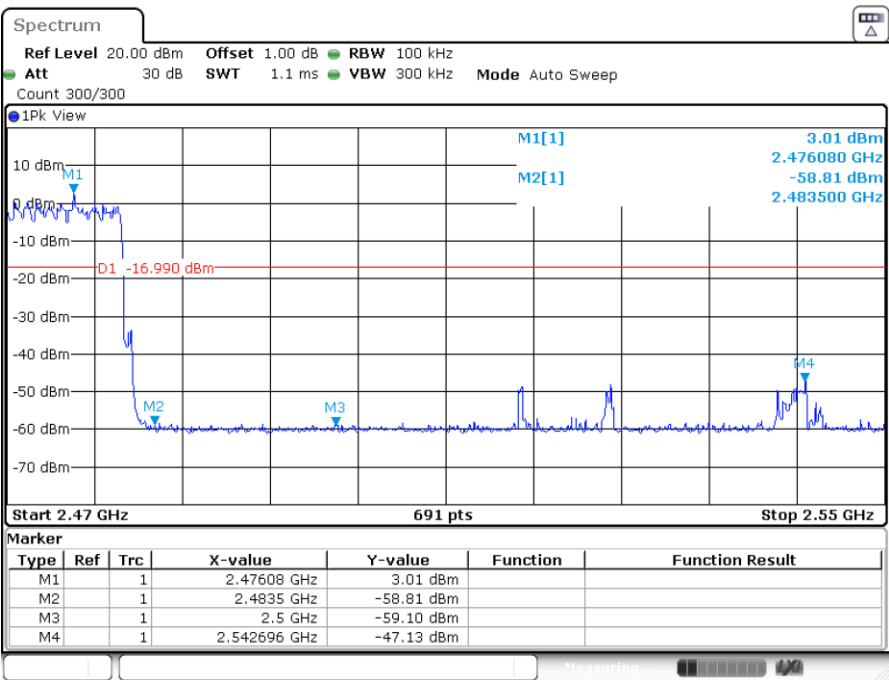

Date: 29.MAR.2022 16:10:47

9.9 Spurious radiated emissions for transmitter

Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz to 120KHz, VBW $\geq$ RBW for peak measurement, Sweep = auto,
Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW $\geq$ RBW for peak measurement, Sweep = auto,
Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW=10Hz, Sweep = auto, Detector function = peak, Trace = max hold.
If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.

If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.

The setting method can refer to DA00-705.

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Frequency MHz	Field Strength uV/m	Field Strength dBµV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK


Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

The only worse case (which is subject to the maximum EIRP, GFSK mode) test result is listed in the report.


Transmitting spurious emission test result as below:

EUT: Bluetooth Mobile Speakerphone
M/N: AEM105
Operating Condition: Tx 2402MHz, lowest Channel

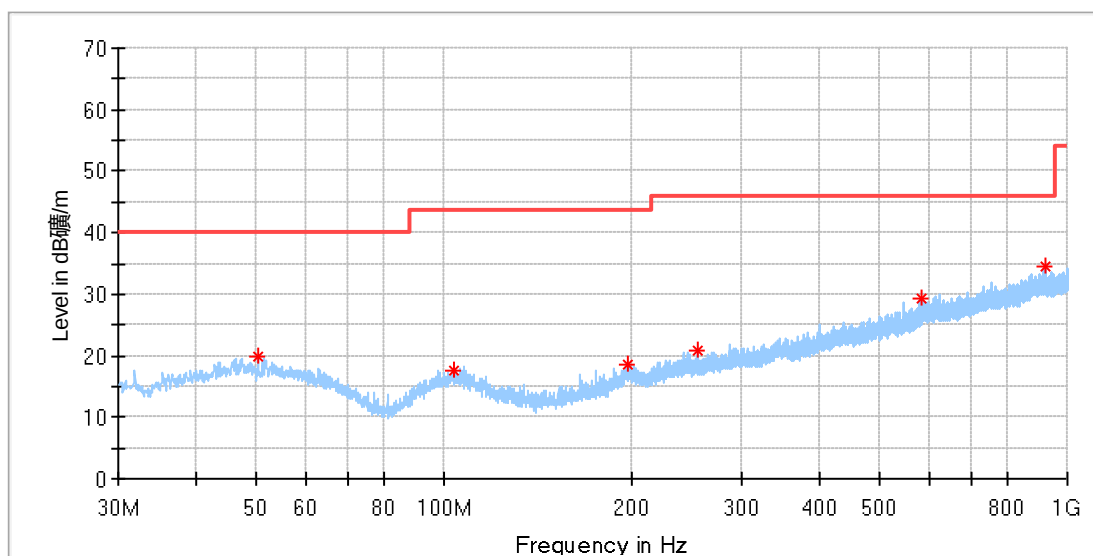


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.370000	19.80	40.00	20.20	200.0	H	0.0	20.98
103.416875	17.73	43.50	25.77	200.0	H	0.0	19.40
196.658125	18.70	43.50	24.80	100.0	H	118.0	19.41
256.010000	20.75	46.00	25.25	100.0	H	230.0	20.61
584.476250	29.26	46.00	16.74	200.0	H	312.0	28.11
921.915000	34.38	46.00	11.62	200.0	H	29.0	32.76

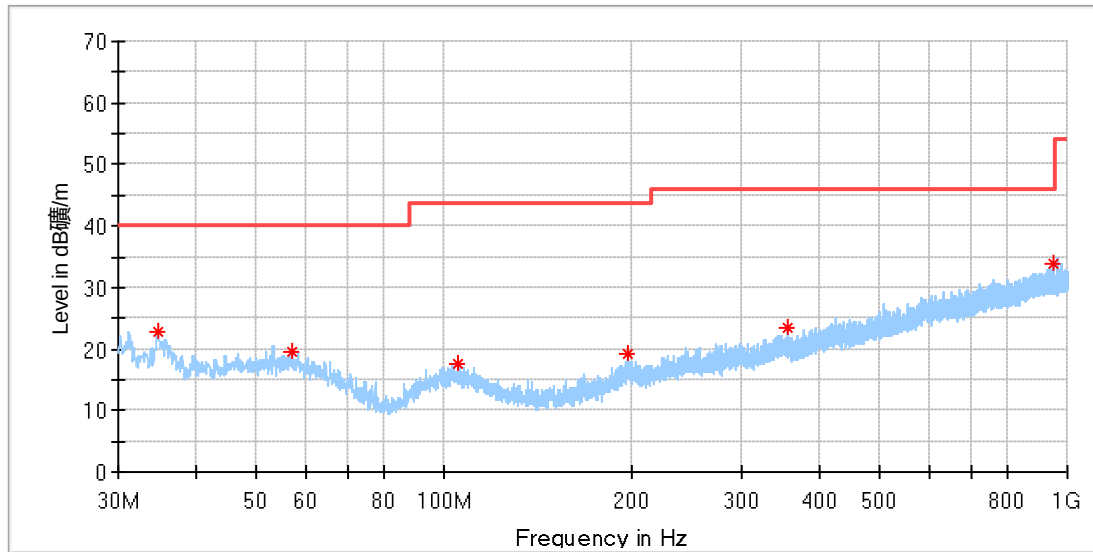


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.668125	22.77	40.00	17.23	100.0	V	331.0	17.58
57.038750	19.66	40.00	20.34	100.0	V	249.0	20.38
105.175000	17.53	43.50	25.97	100.0	V	257.0	19.22
196.597500	19.30	43.50	24.20	100.0	V	184.0	19.40
354.889375	23.34	46.00	22.66	100.0	V	313.0	23.63
951.803125	33.71	46.00	12.29	100.0	V	0.0	32.66

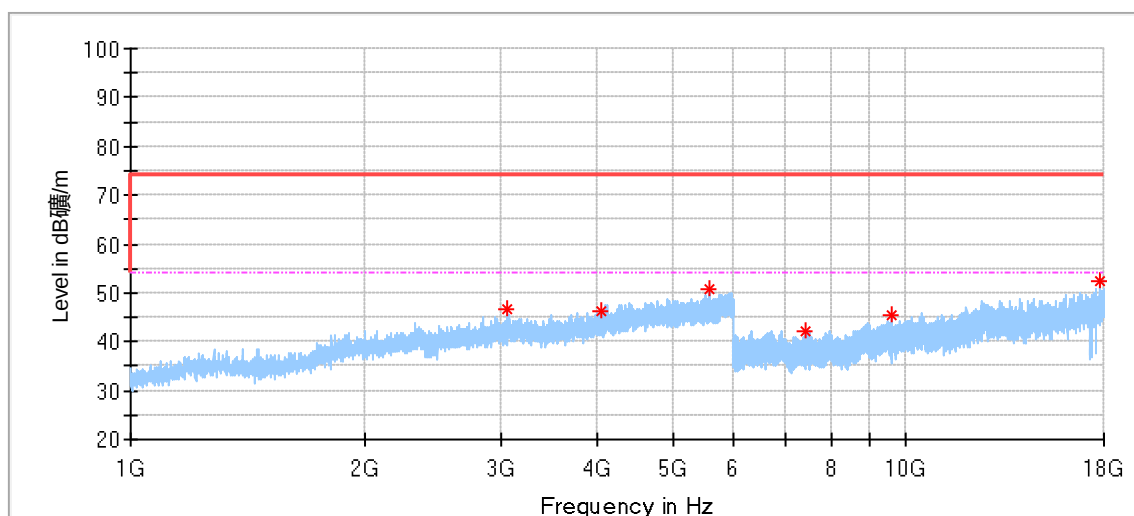

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3059.000000	46.64	74.00	27.36	150.0	H	130.0	0.15
4041.500000	46.16	74.00	27.84	150.0	H	337.0	1.97
5579.500000	50.67	74.00	23.33	150.0	H	75.0	5.79
7421.500000	42.04	74.00	31.96	150.0	H	269.0	8.90
9607.500000	45.53	74.00	28.47	150.0	H	143.0	12.20
17835.500000	50.56	74.00	23.44	150.0	H	84.0	22.27

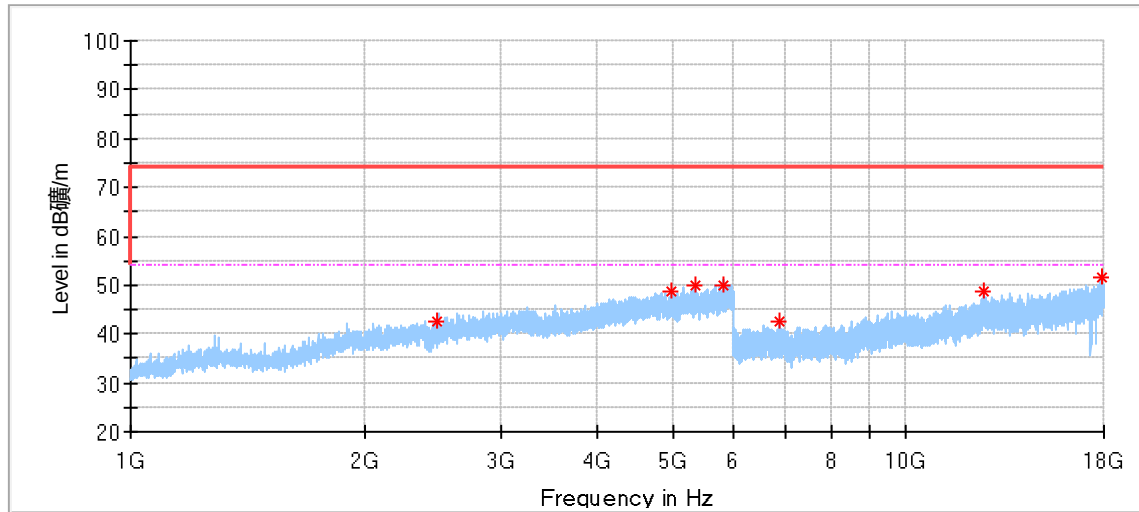


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2491.500000	42.69	74.00	31.31	150.0	V	35.0	-1.82
4985.500000	48.89	74.00	25.11	150.0	V	129.0	4.63
5365.000000	50.00	74.00	24.00	150.0	V	260.0	5.77
5804.500000	50.06	74.00	23.94	150.0	V	135.0	6.54
6886.000000	42.43	74.00	31.57	150.0	V	106.0	9.05
12609.500000	48.53	74.00	25.47	150.0	V	311.0	16.36
17940.000000	50.48	74.00	23.52	150.0	V	356.0	22.27




EUT: Bluetooth Mobile Speakerphone
M/N: AEM105
Operating Condition: Tx 2441MHz, Middle Channel

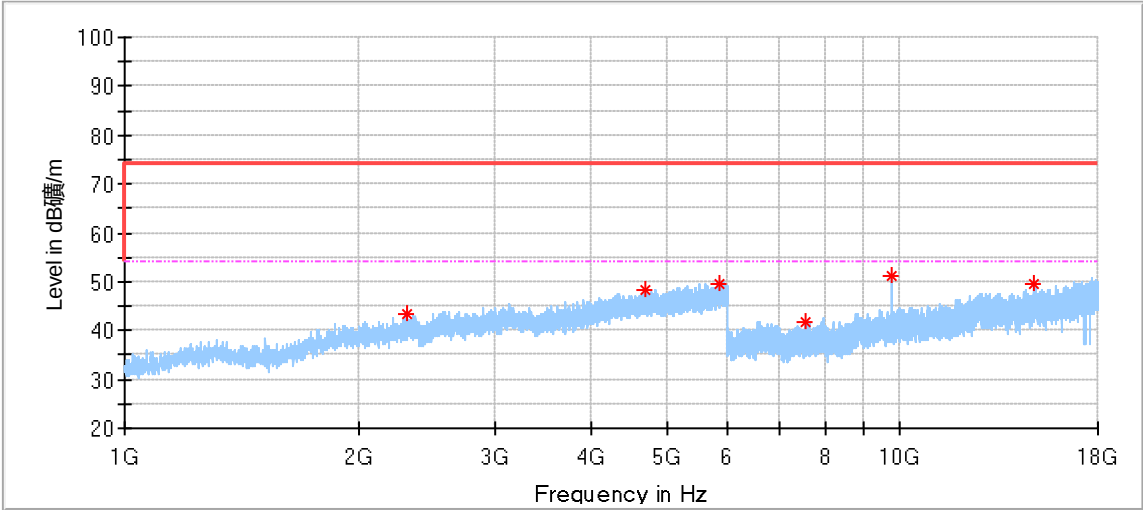

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2314.500000	43.38	74.00	30.62	150.0	H	28.0	-2.39
4695.500000	48.27	74.00	25.73	150.0	H	0.0	4.30
5834.000000	49.44	74.00	24.56	150.0	H	190.0	6.65
7568.000000	41.63	74.00	32.37	150.0	H	356.0	9.57
9763.500000	51.11	74.00	22.89	150.0	H	145.0	12.55
14904.500000	49.57	74.00	24.43	150.0	H	6.0	17.31

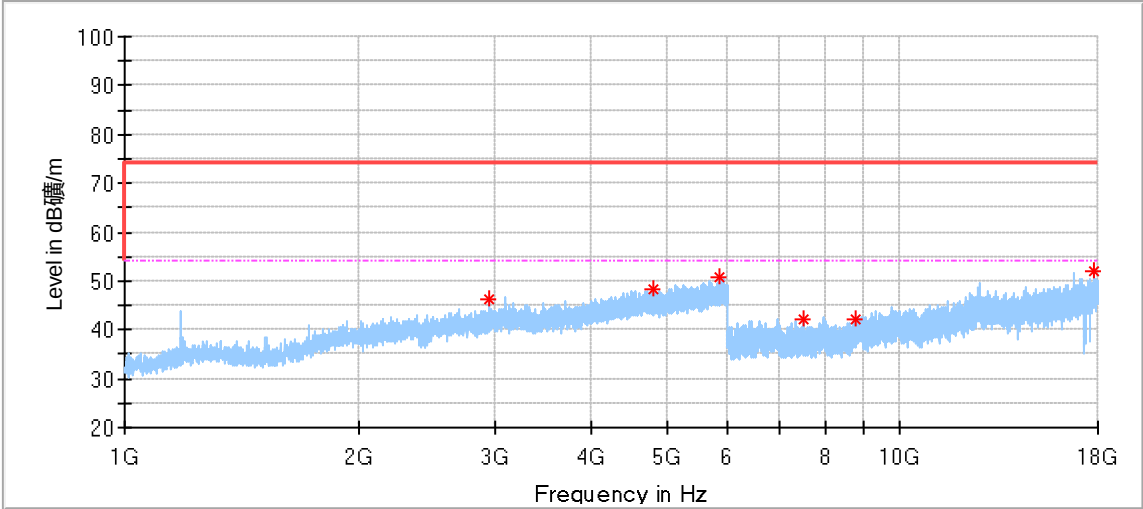


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2945.000000	46.20	74.00	27.80	150.0	V	129.0	-0.54
4800.000000	48.45	74.00	25.55	150.0	V	155.0	4.36
5834.000000	50.81	74.00	23.19	150.0	V	242.0	6.65
7514.000000	42.09	74.00	31.91	150.0	V	333.0	9.27
8760.000000	42.22	74.00	31.78	150.0	V	65.0	11.41
17787.000000	51.91	74.00	22.09	150.0	V	248.0	22.23




EUT: Bluetooth Mobile Speakerphone
M/N: AEM105
Operating Condition: Tx 2480MHz, High Channel)

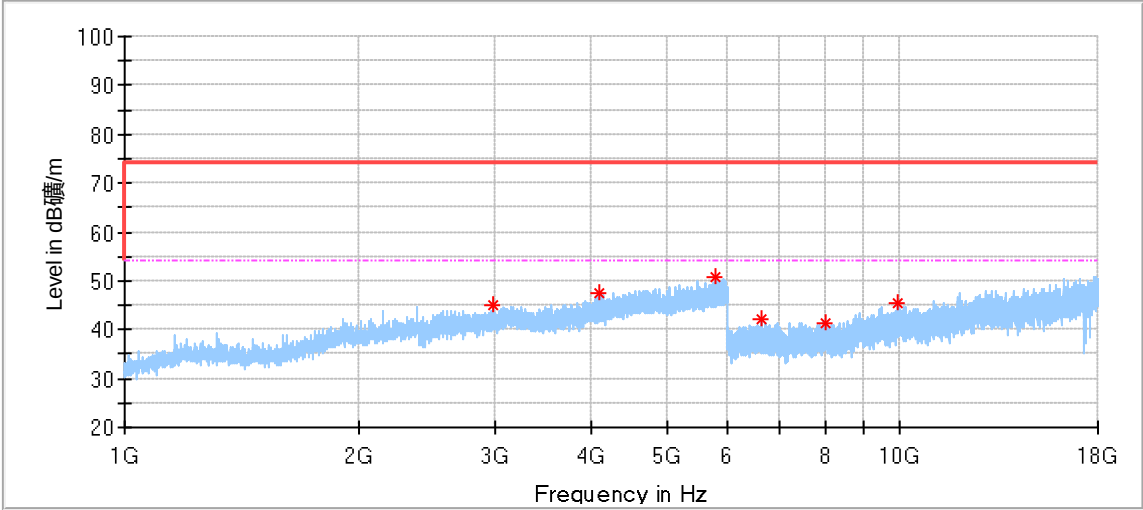

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2985.000000	45.22	74.00	28.78	150.0	H	245.0	-0.41
4093.500000	47.31	74.00	26.69	150.0	H	338.0	2.31
5776.000000	50.94	74.00	23.06	150.0	H	265.0	6.48
6623.500000	42.27	74.00	31.73	150.0	H	154.0	9.44
7998.000000	41.40	74.00	32.60	150.0	H	133.0	10.23
9920.000000	45.44	74.00	28.56	150.0	H	154.0	12.22

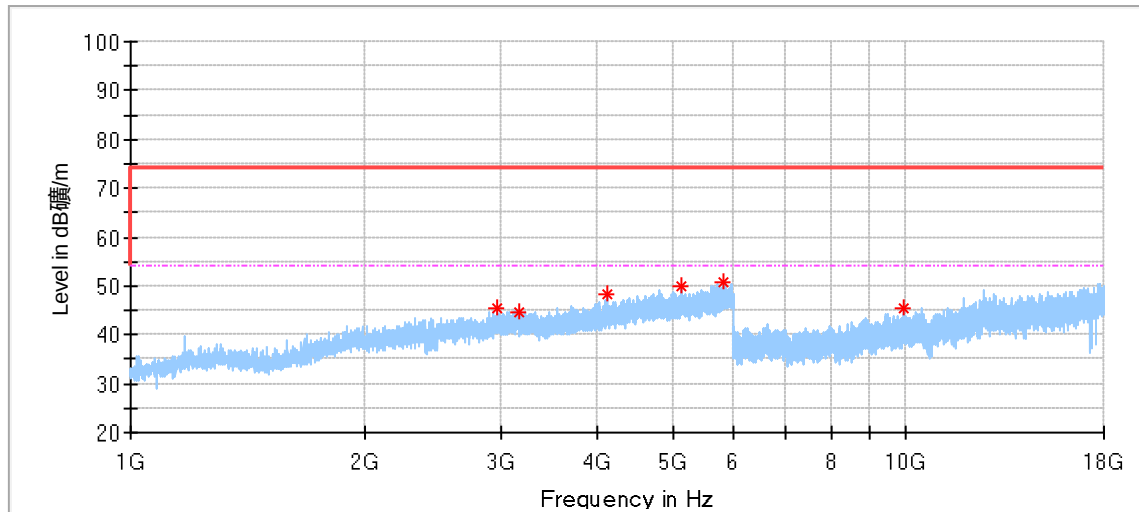

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2962.500000	45.29	74.00	28.71	150.0	V	251.0	-0.41
3179.000000	44.74	74.00	29.26	150.0	V	238.0	0.31
4117.500000	48.14	74.00	25.86	150.0	V	211.0	2.40
5132.500000	49.76	74.00	24.24	150.0	V	16.0	5.38
5818.000000	50.82	74.00	23.18	150.0	V	231.0	6.57
9956.000000	45.31	74.00	28.69	150.0	V	4.0	12.27

Remark:

- (1) Data of measurement within frequency range 18-26GHz are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report.
- (2) Level=Reading Level + Correction Factor
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
 (The Reading Level is recorded by software which is not shown in the sheet)

10 Test Equipment List

List of Test Instruments

Radiated Emission Test

Description	Manufacturer	Model no.	Equipment ID	Serial no.	cal interval (year)	cal. due date
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2022-6-4
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2022-2-2
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2022-5-24
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2022-10-10
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-002	100746	1	2022-10-10
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2022-7-21
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2022-7-27
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2022-8-23
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	2	2023-5-28
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

RF Conducted Test

Description	Manufacturer	Model no.	Equipment ID	Serial no.	Calibration interval (year)	cal. due date
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2022-6-3

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Radiated Spurious Emission 30MHz-1000MHz	Horizontal: 4.70dB; Vertical: 4.67dB;
Radiated Spurious Emission 1000MHz-18000MHz	Horizontal: 4.65dB; Vertical: 4.63dB;
Conducted RF test with TS 8997	RF Power Conducted: 1.31dB Frequency test involved: 0.6×10 ⁻⁷ or 1%