

Date: 2000-04-15

## **TEST REPORT**

Page 1 of 7

No.: HM102364

**APPLICANT:** (CODE:SUF007)

SUPERIOR FOCUS INTERNATIONAL (ASIA) LTD.

ROOM 906 CFC-CATIC BUILDING, 44 TSUN YIP STREET, KWUN TONG, KOWLOON,  
HONG KONG

**DATE OF SAMPLES RECEIVED:** 2000.03.24

**DATE OF TESTING:** 2000.04.11.

**DESCRIPTION OF SAMPLE(S):**

A sample of product said to be:

|               |                                          |
|---------------|------------------------------------------|
| Product:      | FM WIRELESS MICROPHONE                   |
| Manufacturer: | SUPERIOR FOCUS INTERNATIONAL (ASIA) LTD. |
| Model Number: | 68136                                    |
| Brand Name:   | N/A                                      |
| Rating:       | 3V d.c. ("AA" size battery × 2)          |
| Origin:       | CHINA                                    |

**INVESTIGATIONS REQUESTED:**

Measurement to the relevant clauses of F.C.C. Rules and Regulations Part 15 Subpart C -  
Intentional Radiator.

**RESULT/ REMARK:** Please see attached sheet(s).

**CONCLUSION:**

From the measurement data obtained, the tested sample was considered to have COMPLIED  
after modification with the clause 15.239 of Federal Communications Commission Rules and  
Regulations Part 15.

**TEST EQUIPMENT AUDIT:** Please see Appendix A

**MODIFICATION:** Change the valve R8 from 22k to 51k

---

Law Man Kit  
Testing Engineer

---

Kitty Choy  
Verify by

---

Patrick Wong  
Patrick Wong  
for Managing Director

Date: 2000-04-15

## TEST REPORT

Page 2 of 7

No.: HM102364

### TEST SUMMARY

\*\*\* INTENTIONAL RADIATOR \*\*\*

- (1) Measurement of Emission of RF energy on the carrier frequency .....Satisfactory  
Measurement of the out-of band emissions including harmonics .....Satisfactory
- (2) Measurement of Emission Within Band Edges .....Satisfactory
- (3) Measurement of Line-Conducted Voltage onto AC Power Line.....Not applicable

### TEST DATA

Please refer to the attached result sheets.

Date: 2000-04-15

## TEST REPORT

Page 3 of 7

No.: HM102364

\*\*\* INTENTIONAL RADIATOR \*\*\*

### (1) Measurement of Radiated Interference

TEST REFERENCE : FCC Rules Part 15 Subpart Section 15.239(88.00-108.00MHz)

TEST CONDITION : Normal

TEST DATE : 2000.04.11.

### **Emission of RF energy on the carrier frequency -- 99.022 MHz (PEAK VALUE)**

| Emission<br>Frequency | Meter<br>Reading | Polarization | Antenna<br>Factor | Field Strength<br>(at 3m) | FCC Limit |
|-----------------------|------------------|--------------|-------------------|---------------------------|-----------|
| MHz                   | dB(μV)           | H-V          | dB                | dB(μV/m)      μV/m        | μV/m      |
| 99.0                  | 28.9             | H            | + 15.2            | 44.1      160.3           | 2500.0    |

### **Emission of RF energy on the carrier frequency -- 99.022 MHz (AVERAGE VALUE)**

| Emission<br>Frequency | Meter<br>Reading | Polarization | Antenna<br>Factor | Field Strength<br>(at 3m) | FCC Limit |
|-----------------------|------------------|--------------|-------------------|---------------------------|-----------|
| MHz                   | dB(μV)           | H-V          | dB                | dB(μV/m)      μV/m        | μV/m      |
| 99.0                  | 26.7             | H            | + 15.2            | 41.9      124.5           | 250.0     |

... to be continued

Date: 2000-04-15

## TEST REPORT

Page 4 of 7

No.: HM102364

\*\*\* INTENTIONAL RADIATOR \*\*\*

### (1) Measurement of Radiated Interference ... Continued ..

TEST REFERENCE : FCC Rules Part 15 Section 15.239 (88.00-108.00MHz)

TEST CONDITION : Normal

TEST DATE : 2000.04.11.

**The out-of-band emissions, including harmonics (25-1000 MHz)**  
**(CISPR VALUE)**

| Emission<br>Frequency | Meter<br>Reading | Polarization | Antenna<br>Factor | Field Strength<br>(at 3m) |        |      | FCC Limit |
|-----------------------|------------------|--------------|-------------------|---------------------------|--------|------|-----------|
| MHz                   | dB(μV)           | H-V          | dB                | dB(μV/m)                  | μV/m   | μV/m |           |
| 198.0                 | < 1.0            |              | + 10.8            | < 11.8                    | < 3.9  |      | 150.0     |
| 297.1                 | < 1.0            |              | + 16.0            | < 17.0                    | < 7.1  |      | 200.0     |
| 396.1                 | < 1.0            |              | + 20.5            | < 21.5                    | < 11.9 |      | 200.0     |
| 495.1                 | 16.3             |              | + 24.2            | 40.5                      | 105.9  |      | 200.0     |
| 594.1                 | < 1.0            |              | + 24.3            | < 25.3                    | < 18.4 |      | 200.0     |
| 693.2                 | < 1.0            |              | + 26.9            | < 27.9                    | < 24.8 |      | 200.0     |
| 792.2                 | < 1.0            |              | + 27.3            | < 28.3                    | < 26.0 |      | 200.0     |
| 891.2                 | < 1.0            |              | + 27.5            | < 28.5                    | < 26.6 |      | 200.0     |
| 990.2                 | < 1.0            |              | + 27.8            | < 28.8                    | < 27.5 |      | 200.0     |

### =====SUMMARY=====

All data is within limits

Broad-band Antennas were used both polarizations of emissions were measured.  
polarizations at highest reading indicated as:  
H -- Horizontal      V -- Vertical

Date: 2000-04-15

## TEST REPORT

Page 5 of 7

No.: HM102364


\*\*\* INTENTIONAL RADIATOR \*\*\*

### (2) Measurement of Emissions Within Band Edges.

TEST REFERENCE: FCC Rules Part 15 section 15.239(88.00-108.00 MHz)

TEST CONDITION: Normal

TEST DATE : 2000.04.11.

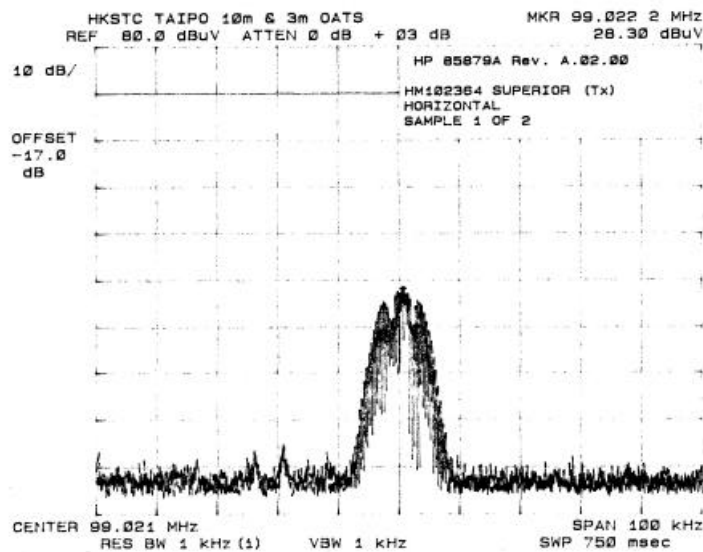

### RESULTS AND NOTES

The bandwidth of the emission shall be no wider than 200kHz of the center frequency for devices operating within 88.00MHz to 108.00MHz. The bandwidth is determined at the points 26dB down from the modulated carrier.

L: FCC Lower Band Edge .....-> 88.000MHz

H: FCC Higher Band Edge .....-> 108.000MHz

C: Unmodulated carrier at frequency .....-> 99.022MHz

D: No. of dB from unmodulated carrier .....-> 28.30dB

### SPECTRUM ANALYZER SETTINGS

Resolution bandwidth : 11.9KHz

Frequency span : 10.0KHz/div

No. of dB/div : 10.0dB/div

### FCC Limit

Minimum No. of dB from unmodulated carrier required : 26.0dB

=====SUMMARY=====

All data is within limits

=====

**NOTES FOR THE RADIATION MEASUREMENT**

(1) Test site facility:

Open field test site located at Taipo (Hong Kong) with a metal ground plane on filed with the FCC pursuant to section 2.948 of the FCC Rules.

(2) Distance between the EUT and measuring antenna:

3 meters.

(3) Measuring instrumentations:

CISPR Quasi-peak type field strength meter (25 MHz - 1000 MHz). 6 dB bandwidth set at 120KHz. Also, peak level of the fundamental emissions was measured in order to determine compliance with the 20dB peak to average limit specified in Section 15.35(b) of the FCC new Rules.

(4) Measuring antenna:

Broad band antenna for the frequency range 25-1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable. included in the Antenna Factor for measurement data. The antenna are capable of measuring both horizontal and vertical polarizations.

(5) Frequency range scanned:

The frequency range from 25 MHz to 1000 MHz had been searched. Readings of the highest emssions relating to the limit were reported as above.

(6) Arrangement of EUT:

During the test, the sample was operated at rated supply voltage and arranged for maximum emissions.

(7) Measuring Procedure:

In accordance with the relevant clauses of the FCC Rules Part 15 section 15.239.

(8) Measuring Uncertainty:

The calculated uncertainty for measurement performed at 3M test distance are:-  
30MHz to 300MHz =  $\pm 3.7\text{dB}$ , 300MHz to 1000MHz =  $+ 3.0\text{dB}/-2.7\text{dB}$ .

Remark: Purpose of this test is to provide the Applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under FCC's Equipment Authorization Program. This test itself is not an Approval Test.

\*\*\* End of Document \*\*\*

Date: 2000-04-15

## TEST REPORT

Page 7 of 7

No.: HM102364

### APPENDIX A

#### TEST EQUIPMENT AUDIT

##### Radiated Emission

| EQP NO. | DESCRIPTION                                                         | MANUFACTURER                                          | MODEL NO.                      | SERIAL NO.                             | LAST CAL. |
|---------|---------------------------------------------------------------------|-------------------------------------------------------|--------------------------------|----------------------------------------|-----------|
| EM007   | SPECTRUM ANALYZER                                                   | HEWLETT PACKARD                                       | HP85660B                       | 3144A21192                             | 11/06/99  |
| EM008   | SPECTRUM ANALYZER DISPLAY                                           | HEWLETT PACKARD                                       | HP85662A                       | 3144A20514                             | 11/06/99  |
| EM009   | QUASI PEAK ADAPTOR                                                  | HEWLETT PACKARD                                       | HP85650A                       | 3303A01702                             | 11/06/99  |
| EM010   | RF PRESELECTOR                                                      | HEWLETT PACKARD                                       | HP85685A                       | 3221A01410                             | 11/06/99  |
| EM011   | ATTENUATOR/SWITCH                                                   | HEWLETT PACKARD                                       | HP11713A                       | 2508A10595                             | 11/06/99  |
| EM012   | PRE-AMPLIFIER                                                       | HEWLETT PACKARD                                       | HP8449B                        | 3008A00262                             | 11/06/99  |
| EM013   | CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE FLOPPY DRIVE | HEWLETT PACKARD<br>HEWLETT PACKARD<br>HEWLETT PACKARD | HP9000<br>HP A1097C<br>HP9133L | 6226A60314<br>3151J39517<br>2623A02468 | CM        |
| EM017   | ANTENNA                                                             | ARA INC.                                              | LPB-2513/A                     | 1069                                   | 17/02/00  |
| EM020   | HORN ANTENNA                                                        | EMCO                                                  | 3115                           | 4032                                   | 30/06/97  |
| EM072   | SIGNAL GENERATOR                                                    | HEWLETT PACKARD                                       | 8640B                          | 1948A11892                             | 30/03/98  |
| EM083   | HKSTC OPEN AREA TEST SITE                                           | HKSTC                                                 | N/A                            | N/A                                    | 15/01/00  |
| EM145   | EMI TEST RECEIVER                                                   | R & S                                                 | ESCS 30                        | 830245/021                             | 10/05/99  |

**Remarks:-**

CM Corrective Maintenance

N/A Not Applicable or Not Available

TBD To Be Determined