
FCC Test Report

Report No.: AGC00931150416FE03

FCC ID : OYCTT-SK05
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Bluetooth speaker
BRAND NAME : N/A
MODEL NAME : TT-SK05,BT074
CLIENT : Dongguan Taide Industrial Co., Ltd
DATE OF ISSUE : May 12,2015
STANDARD(S)
TEST PROCEDURE(S) : FCC Part 15 Rules
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 12,2015	Valid	Original Report

TABLE OF CONTENTS


1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3. MEASUREMENT UNCERTAINTY	7
4. DESCRIPTION OF TEST MODES.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM.....	8
5.2. EQUIPMENT USED IN EUT SYSTEM.....	8
5.3. SUMMARY OF TEST RESULTS.....	8
6. TEST FACILITY	9
7 ALL TEST EQUIPMENT LIST	9
8. RADIATED EMISSION	10
8.1TEST LIMIT.....	10
8.2. MEASUREMENT PROCEDURE.....	11
8.3. TEST SETUP	13
8.4. TEST RESULT(Worst modulation:GFSK).....	15
9. BAND EDGE EMISSION	41
9.1. MEASUREMENT PROCEDURE.....	41
9.2 TEST SETUP	41
9.3 RADIATED TEST RESULT(Worst modulation:GFSK)	42
10. 20DB BANDWIDTH.....	50
10.1. MEASUREMENT PROCEDURE.....	50
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	50
10.3. LIMITS AND MEASUREMENT RESULTS.....	50
11. FCC LINE CONDUCTED EMISSION TEST	59
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	59
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	59
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	60
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	60
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	61
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	65
APPENDIX B: PHOTOGRAPHS OF EUT	67

1. VERIFICATION OF CONFORMITY

Applicant	Dongguan Taide Industrial Co., Ltd.
Address	Taide Technology Park, Jinfenghuang Industrial Distrial, Fenggang Town, Dongguan City,China
Manufacturer	Dongguan Taide Industrial Co., Ltd.
Address	Taide Technology Park, Jinfenghuang Industrial Distrial, Fenggang Town, Dongguan City,China
Product Designation	Bluetooth speaker
Brand Name	N/A
Test Model	TT-SK05
Series Model	BT074
Difference description	All the same except for the model name
Date of test	May 08,2015&May 11,2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Compliance Certification Service(Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Prepared By		
	Jerry Xiao	May 12,2015
Checked By		
	Forrest Lei	May 12,2015
Authorized By		
	Solger Zhang	May 12,2015

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	5.02dBm(Max)
Bluetooth Version	V4.0
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of channels	79 for traditional BT 40 for BLE
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	PCB Antenna (Met 15.203 Antenna requirement)
Antenna Gain	0dBi
Power Supply	DC 3.7V
Note: The USB port only used for charging and can't be used to transfer data with PC.	

2.2. TABLE OF CARRIER FREQUENCIES

Traditional Bluetooth channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2404MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Normal operation (BT)


Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

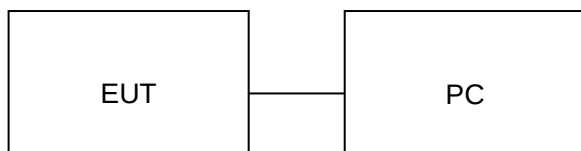

Configure 2: (Control continuous TX)

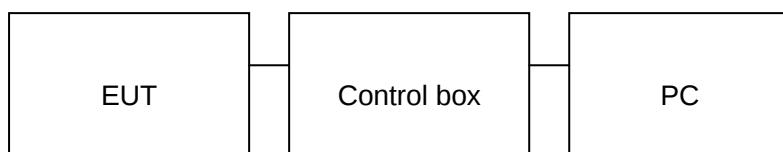

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth speaker	N/A	TT-SK05	EUT
2	PC	Dell	INSPIRON	A.E
3	Control box	N/A	N/A	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
N/A	BANDWIDTH	Compliant

6. TEST FACILITY

Site	Compliance Certification Service(Shenzhen) Inc.
Location	No.10-1 Mingkeda Logistics Park, No.18 Huanguan South RD. Guan lan Town,Baoan Distr
FCC Registration No.	441872
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

7 ALL TEST EQUIPMENT LIST

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2015	03/01/2016
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/17/2016
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2015	03/17/2016
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2014	07/09/2015
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2015	03/01/2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2015	03/01/2016
Loop Antenna	COM-POWER	AL-130	121044	09/27/2014	09/26/2015
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	03/09/2015	03/08/2016
LISN	EMCO	3825/2	8901-1459	03/09/2015	03/08/2016
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2015	03/03/2016
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

8. RADIATED EMISSION

8.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

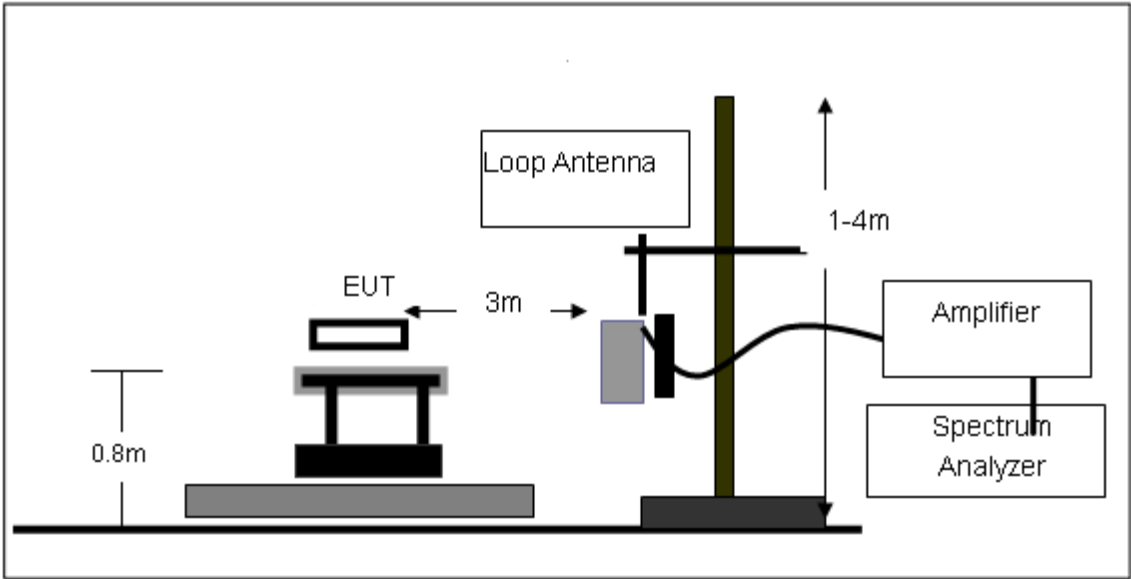

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

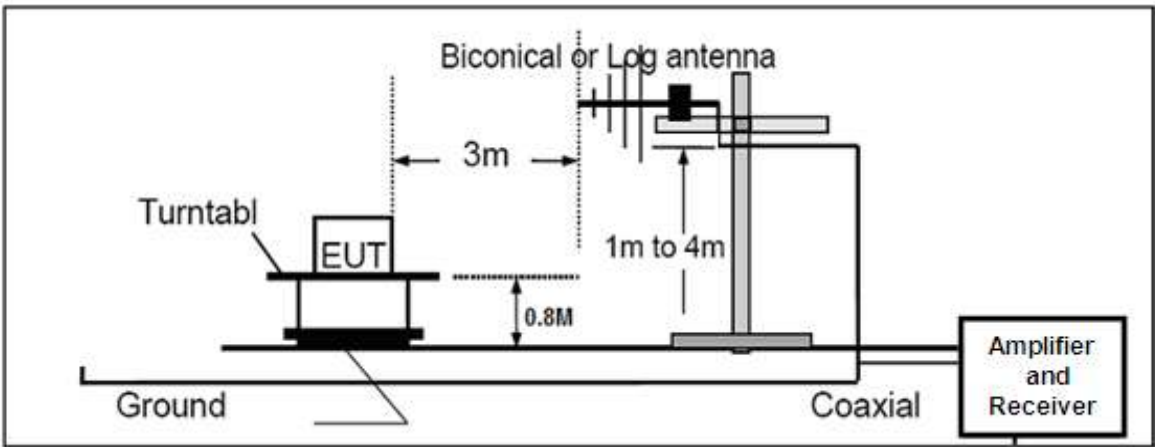

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

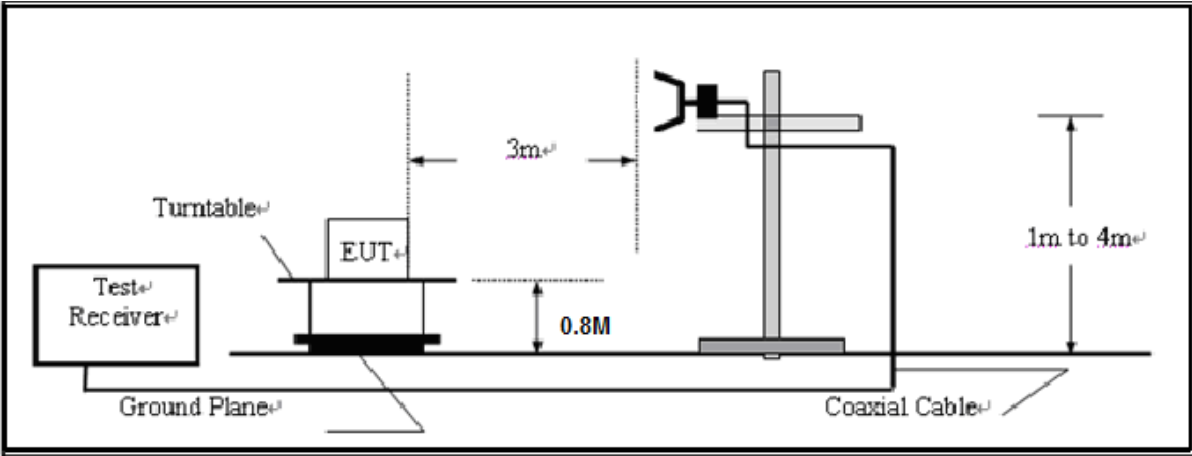

8.4. TEST RESULT(Worst modulation:GFSK)


FOR TRADITIONAL BLUETOOTH

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

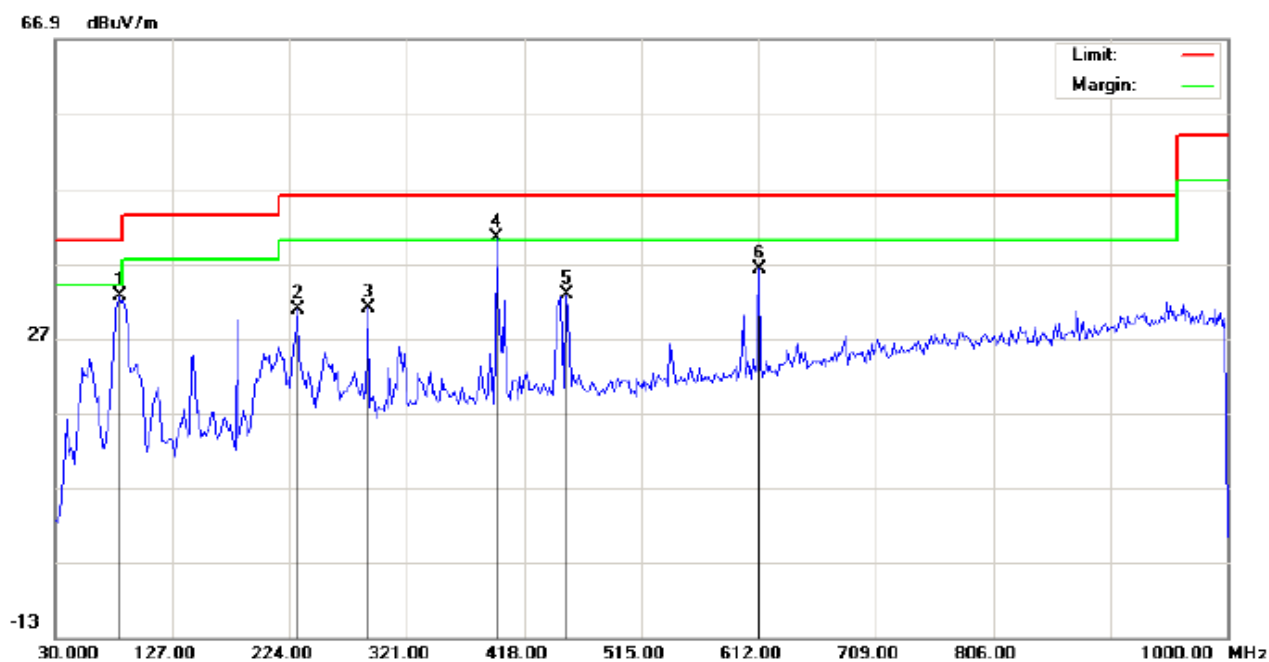

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: TT-SK05

Mode: Low Channel TX

Note:

Polarization: **Horizontal**

Power:

Distance: 3m


Temperature: 26

Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		83.3500	23.01	9.66	32.67	40.00	-7.33	peak			
2		230.4667	17.57	13.16	30.73	46.00	-15.27	peak			
3		288.6667	15.99	15.07	31.06	46.00	-14.94	peak			
4	*	395.3667	21.42	19.04	40.46	46.00	-5.54	peak			
5		453.5667	12.20	20.63	32.83	46.00	-13.17	peak			
6		612.0000	12.53	23.76	36.29	46.00	-9.71	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

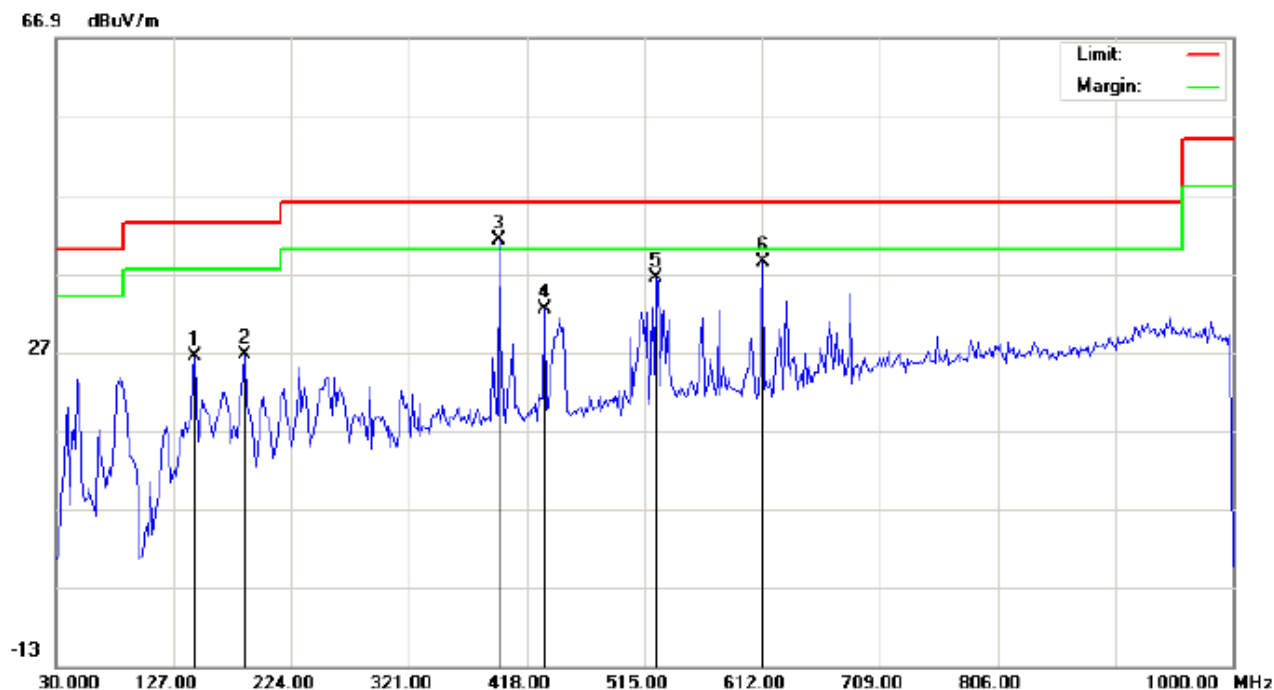

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Bluetooth Speaker
M/N: TT-SK05
Mode: Low Channel TX
Note:

Polarization: **Vertical**
Power:
Distance: 3m

Temperature: 26
Humidity: 60 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		144.7833	11.13	15.23	26.36	43.50	-17.14	peak			
2		185.2000	13.81	12.75	26.56	43.50	-16.94	peak			
3	*	395.3667	22.22	19.04	41.26	46.00	-4.74	peak			
4		432.5500	12.27	20.06	32.33	46.00	-13.67	peak			
5		524.7000	14.66	21.80	36.46	46.00	-9.54	peak			
6		612.0000	15.44	23.00	38.44	46.00	-7.56	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

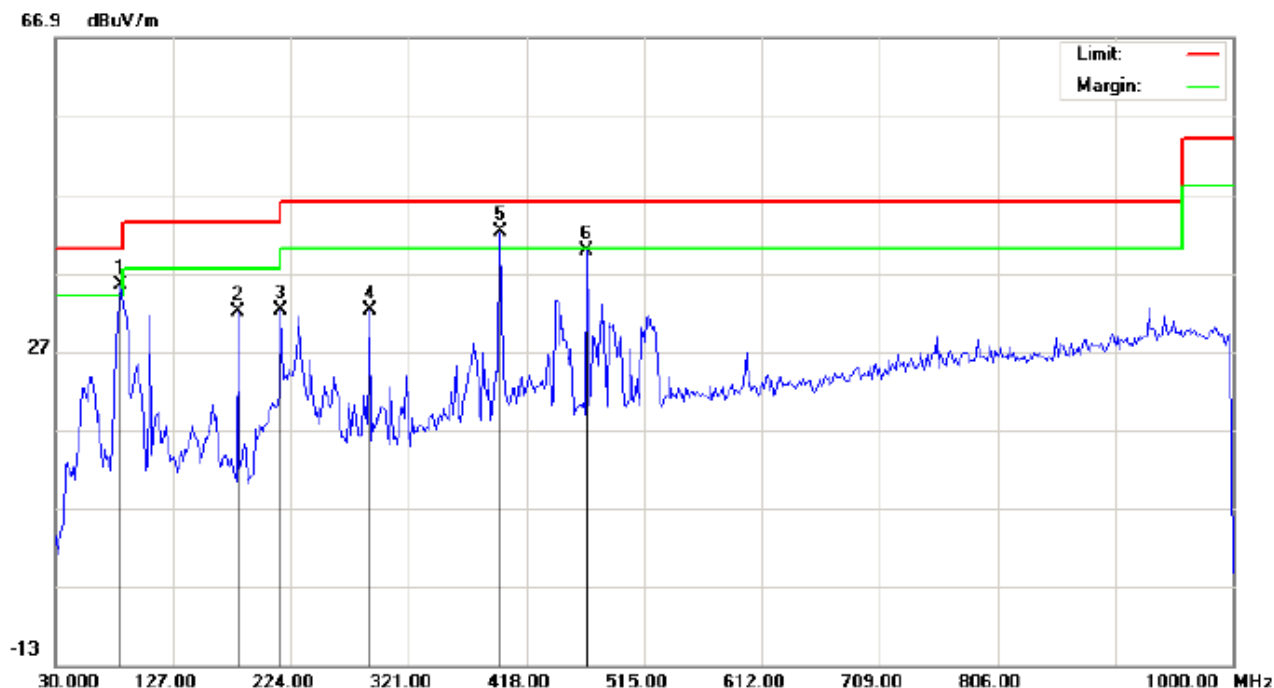


Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation	Power:	Humidity: 60 %
EUT: Bluetooth Speaker	Distance: 3m	
M/N: TT-SK05		
Mode: Middle Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	!	83.3500	25.65	9.66	35.31	40.00	-4.69	peak			
2		180.3500	20.88	11.09	31.97	43.50	-11.53	peak			
3		215.9167	19.65	12.60	32.25	43.50	-11.25	peak			
4		288.6667	17.23	15.07	32.30	46.00	-13.70	peak			
5	*	396.9833	23.12	19.05	42.17	46.00	-3.83	peak			
6		468.1167	18.92	20.79	39.71	46.00	-6.29	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

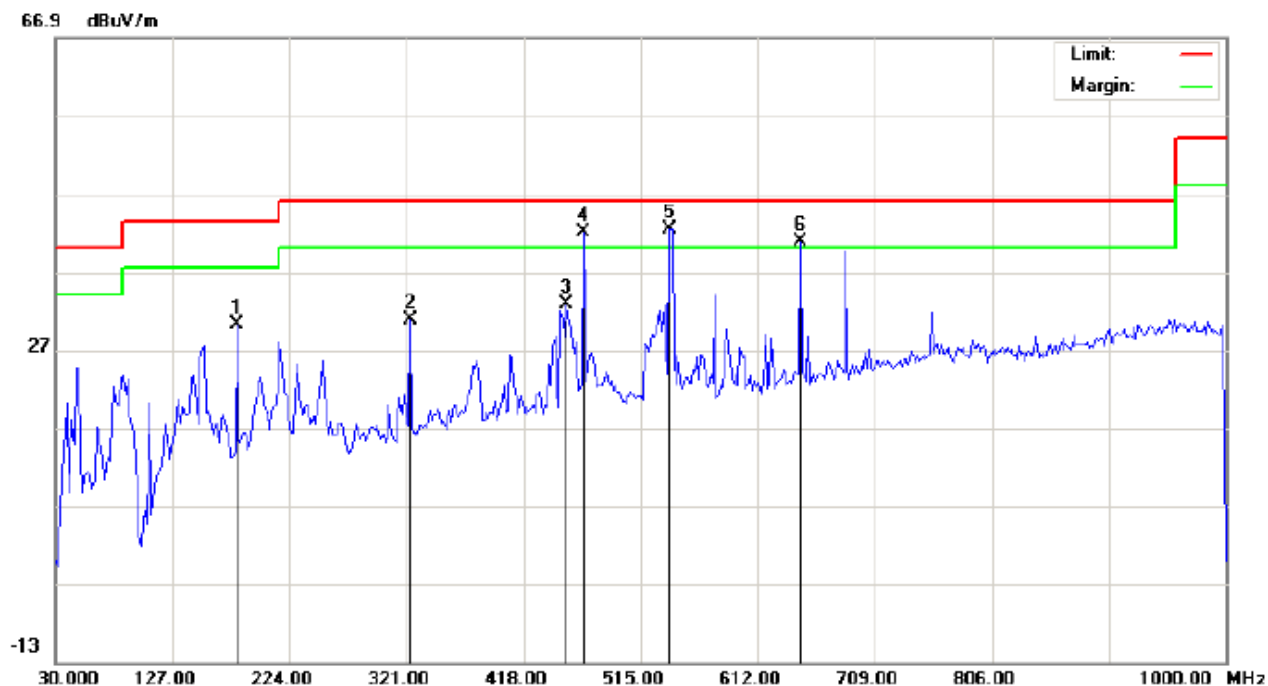

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Bluetooth Speaker
M/N: TT-SK05
Mode: Middle Channel TX
Note:

Polarization: **Vertical**
Power:
Distance: 3m

Temperature: 26
Humidity: 60 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		180.3500	16.29	13.98	30.27	43.50	-13.23	peak			
2		324.2333	13.82	17.02	30.84	46.00	-15.16	peak			
3		453.5667	12.08	20.63	32.71	46.00	-13.29	peak			
4	!	468.1167	21.26	20.79	42.05	46.00	-3.95	peak			
5	*	539.2500	20.16	22.19	42.35	46.00	-3.65	peak			
6	!	647.5667	16.91	23.80	40.71	46.00	-5.29	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

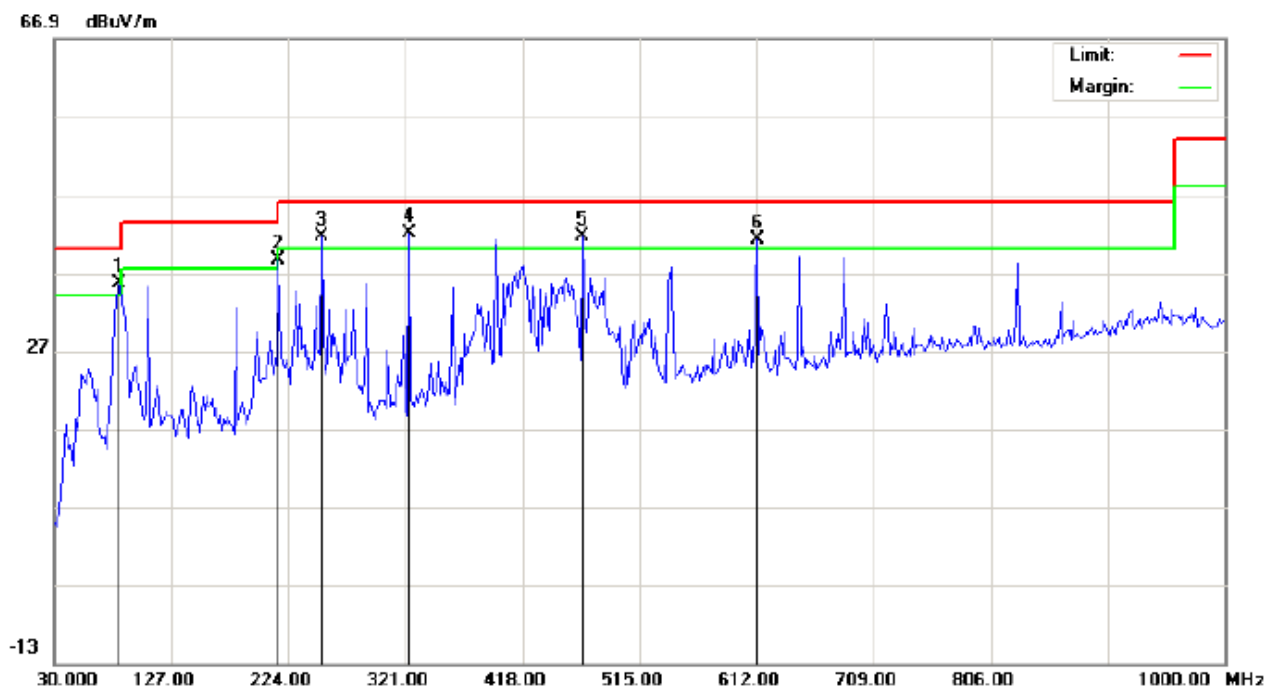

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Bluetooth Speaker
M/N: TT-SK05
Mode: High Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance: 3m

Temperature: 26
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	!	83.3500	26.00	9.66	35.66	40.00	-4.34	peak			
2	!	215.9167	26.06	12.60	38.66	43.50	-4.84	peak			
3	!	251.4833	27.72	13.94	41.66	46.00	-4.34	peak			
4	*	324.2333	24.97	17.02	41.99	46.00	-4.01	peak			
5	!	468.1167	20.81	20.79	41.60	46.00	-4.40	peak			
6	!	612.0000	17.42	23.76	41.18	46.00	-4.82	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

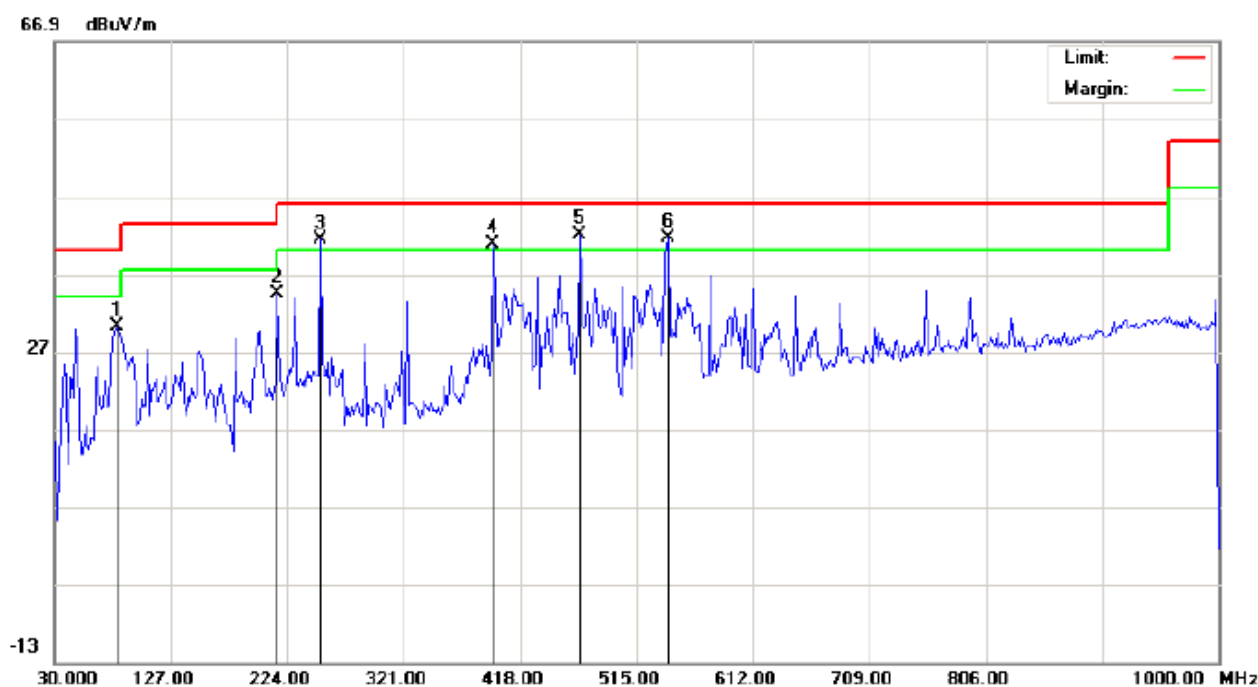

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Bluetooth Speaker
M/N: TT-SK05
Mode: High Channel TX
Note:

Polarization: **Vertical**
Power:
Distance: 3m

Temperature: 26
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		81.7333	20.54	9.73	30.27	40.00	-9.73	peak			
2		215.9167	21.87	12.60	34.47	43.50	-9.03	peak			
3	!	251.4833	27.53	13.94	41.47	46.00	-4.53	peak			
4	!	395.3667	21.68	19.04	40.72	46.00	-5.28	peak			
5	*	468.1167	21.20	20.79	41.99	46.00	-4.01	peak			
6	!	540.8667	19.47	22.23	41.70	46.00	-4.30	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


FOR BLE

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

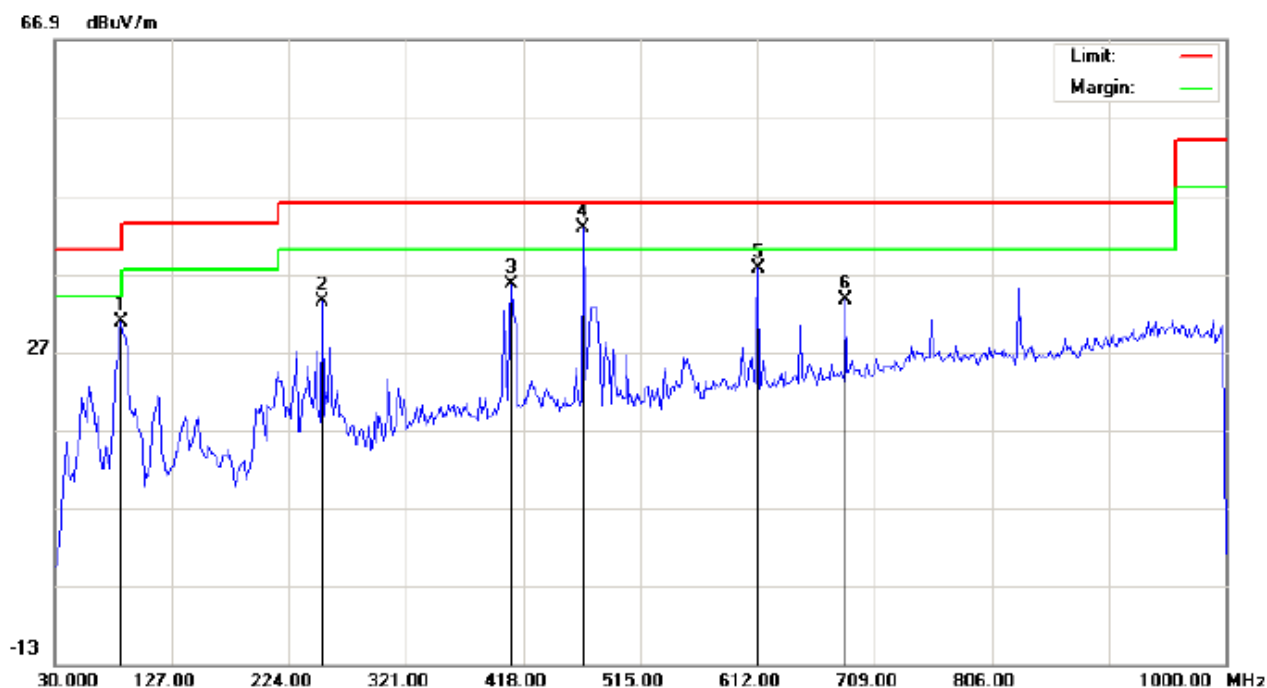

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: TT-SK05

Mode: Low Channel TX

Note:

Polarization: *Horizontal*

Power:

Distance: 3m


Temperature: 26

Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		84.9667	21.20	9.59	30.79	40.00	-9.21	peak			
2		251.4833	19.39	13.94	33.33	46.00	-12.67	peak			
3		408.3000	16.33	19.32	35.65	46.00	-10.35	peak			
4	*	468.1167	22.01	20.79	42.80	46.00	-3.20	peak			
5		612.0000	13.75	23.76	37.51	46.00	-8.49	peak			
6		684.7500	8.84	24.78	33.62	46.00	-12.38	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

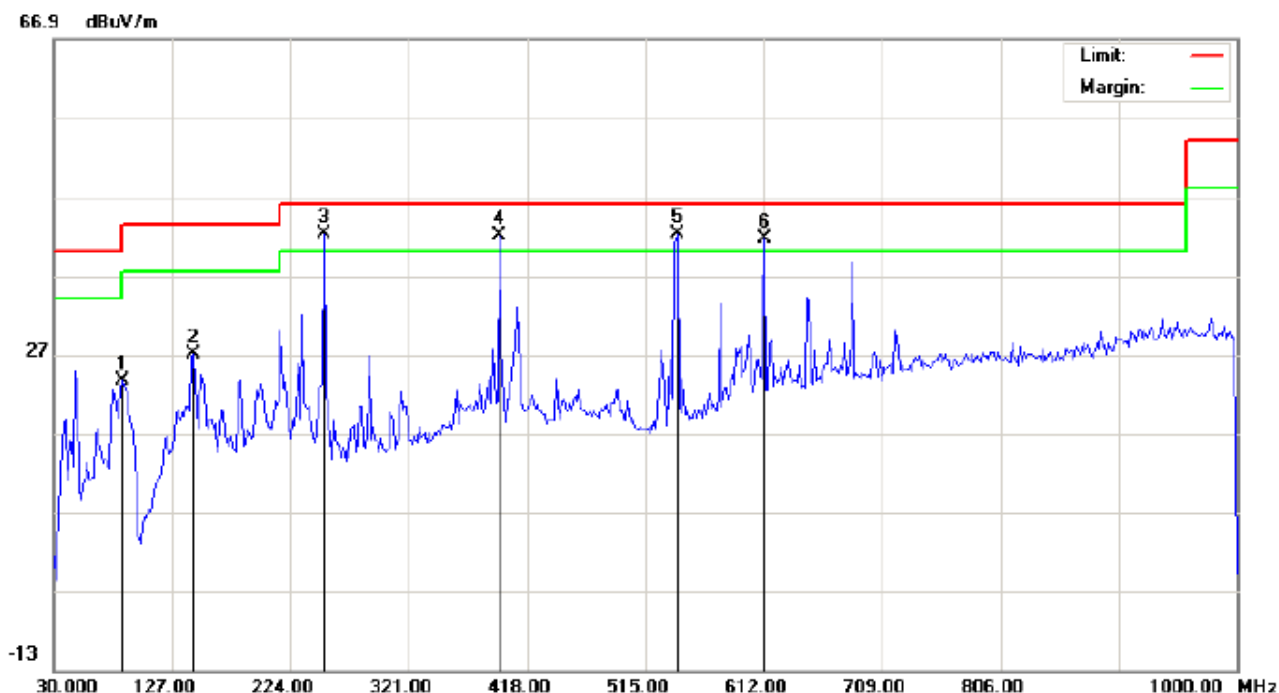

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Bluetooth Speaker
M/N: TT-SK05
Mode: Low Channel TX
Note:

Polarization: **Vertical**
Power:
Distance: 3m

Temperature: 26
Humidity: 60 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		86.5833	19.41	4.16	23.57	40.00	-16.43	peak			
2		144.7833	11.79	15.23	27.02	43.50	-16.48	peak			
3	!	251.4833	28.20	13.94	42.14	46.00	-3.86	peak			
4	!	395.3667	23.03	19.04	42.07	46.00	-3.93	peak			
5	*	540.8667	19.93	22.23	42.16	46.00	-3.84	peak			
6	!	612.0000	18.70	23.00	41.70	46.00	-4.30	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

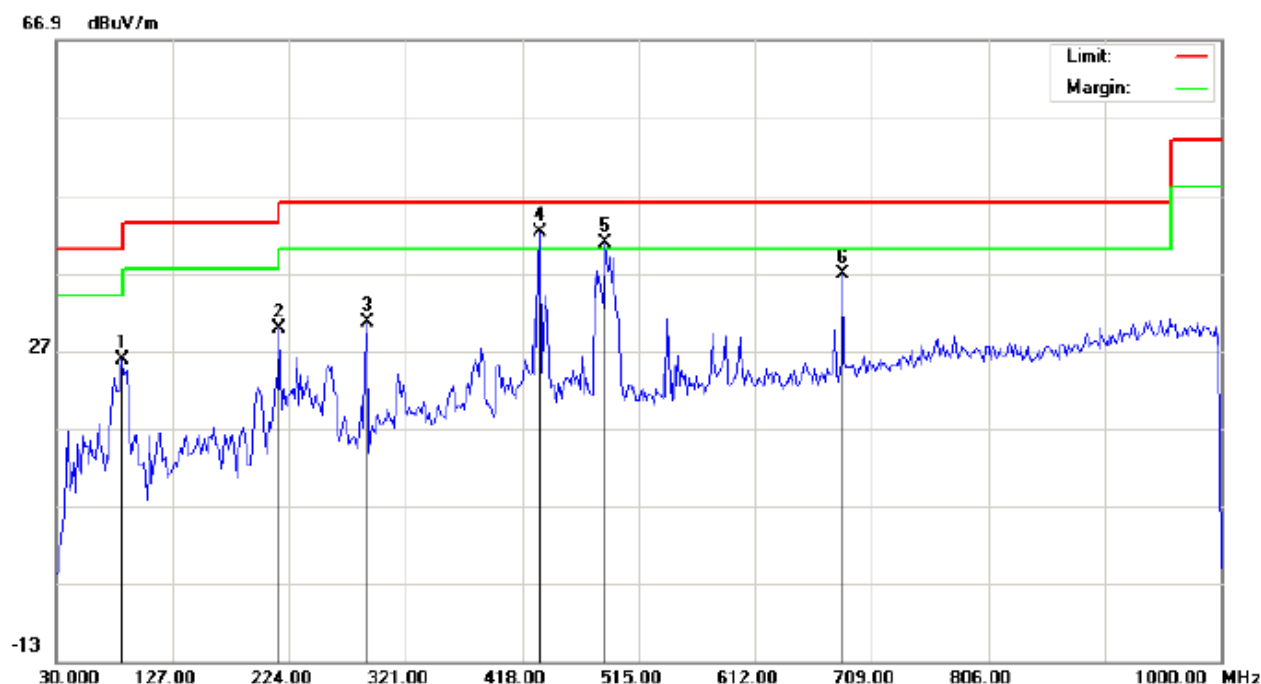

Site: site #1

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT: Bluetooth Speaker

Distance: 3m

M/N: TT-SK05


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		84.9667	16.14	9.59	25.73	40.00	-14.27	peak			
2		215.9167	17.21	12.60	29.81	43.50	-13.69	peak			
3		288.6667	15.52	15.07	30.59	46.00	-15.41	peak			
4	*	432.5500	22.12	20.06	42.18	46.00	-3.82	peak			
5	!	487.5167	19.71	21.00	40.71	46.00	-5.29	peak			
6		684.7500	12.10	24.78	36.88	46.00	-9.12	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

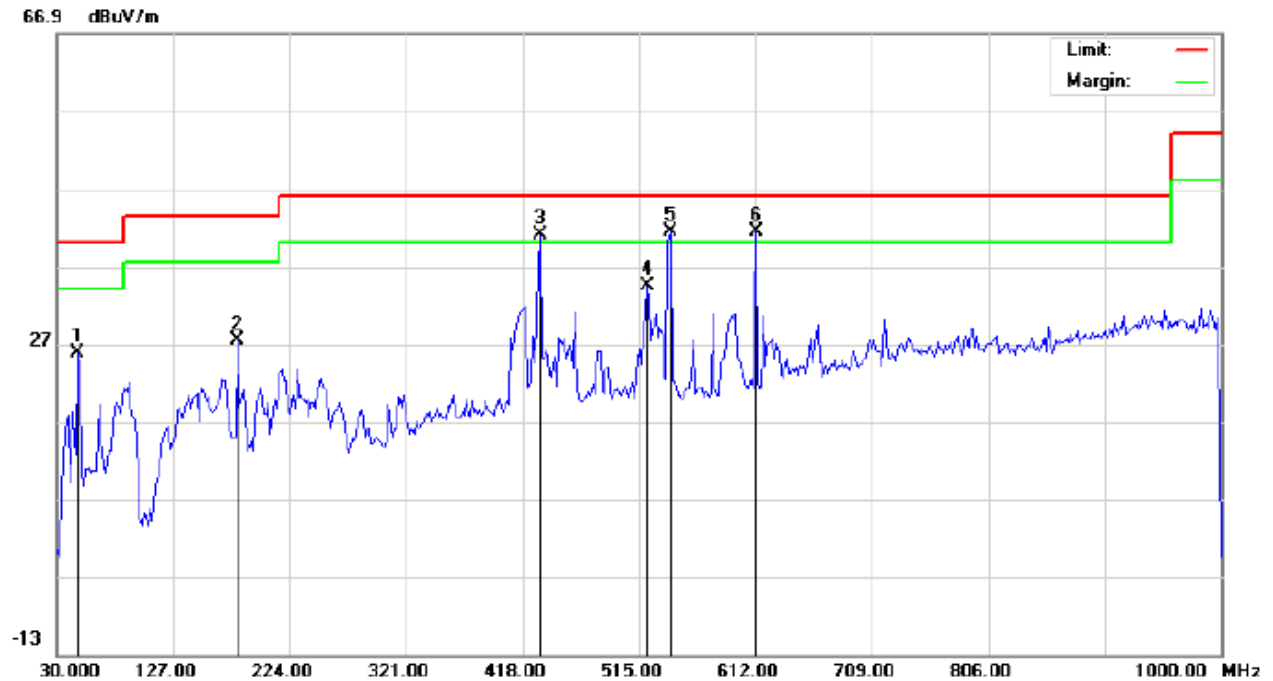

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation

Power:

Humidity: 60 %

EUT: Bluetooth Speaker

Distance: 3m

M/N: TT-SK05

Mode: Middle Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		47.7833	17.46	8.39	25.85	40.00	-14.15	peak			
2		180.3500	13.44	13.98	27.42	43.50	-16.08	peak			
3	!	432.5500	20.97	20.06	41.03	46.00	-4.97	peak			
4		521.4667	12.78	21.71	34.49	46.00	-11.51	peak			
5	*	540.8667	19.23	22.23	41.46	46.00	-4.54	peak			
6	!	612.0000	18.44	23.00	41.44	46.00	-4.56	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

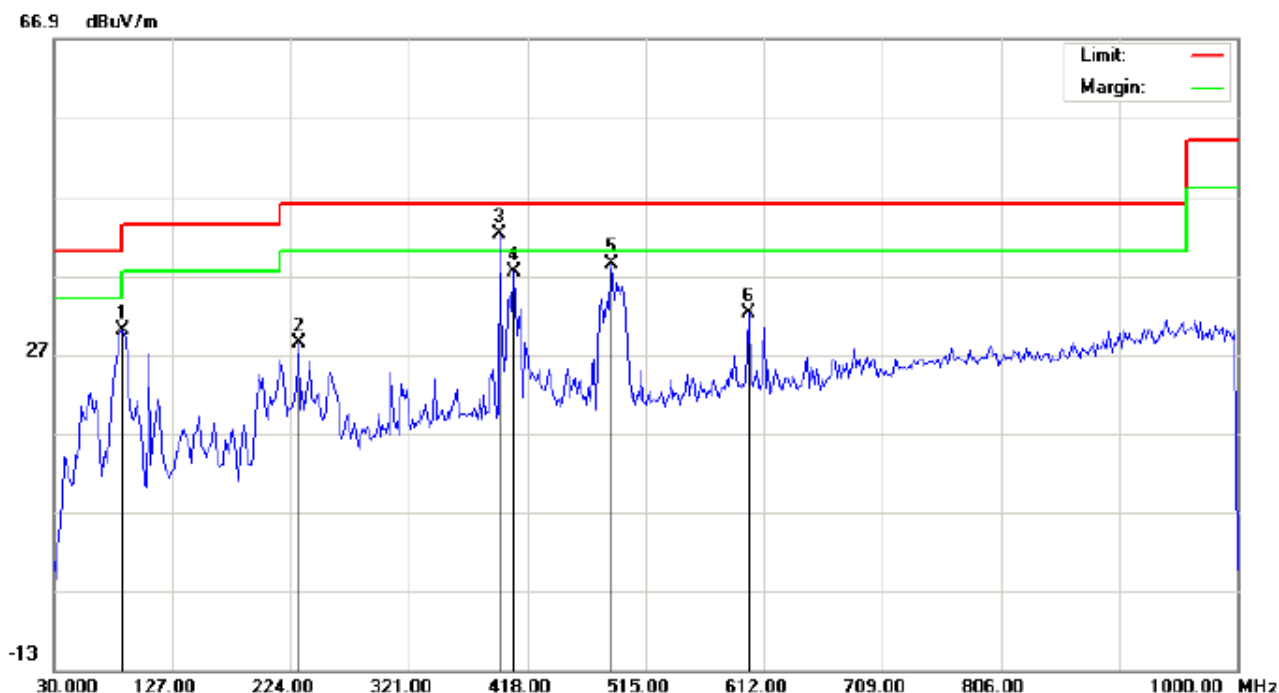

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Bluetooth Speaker
M/N: TT-SK05
Mode: High Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance: 3m

Temperature: 26
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		86.5833	20.57	9.52	30.09	40.00	-9.91	peak			
2		230.4667	15.18	13.16	28.34	46.00	-17.66	peak			
3	*	395.3667	23.18	19.04	42.22	46.00	-3.78	peak			
4		406.6833	18.19	19.27	37.46	46.00	-8.54	peak			
5		487.5167	17.44	21.00	38.44	46.00	-7.56	peak			
6		599.0667	8.49	23.71	32.20	46.00	-13.80	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

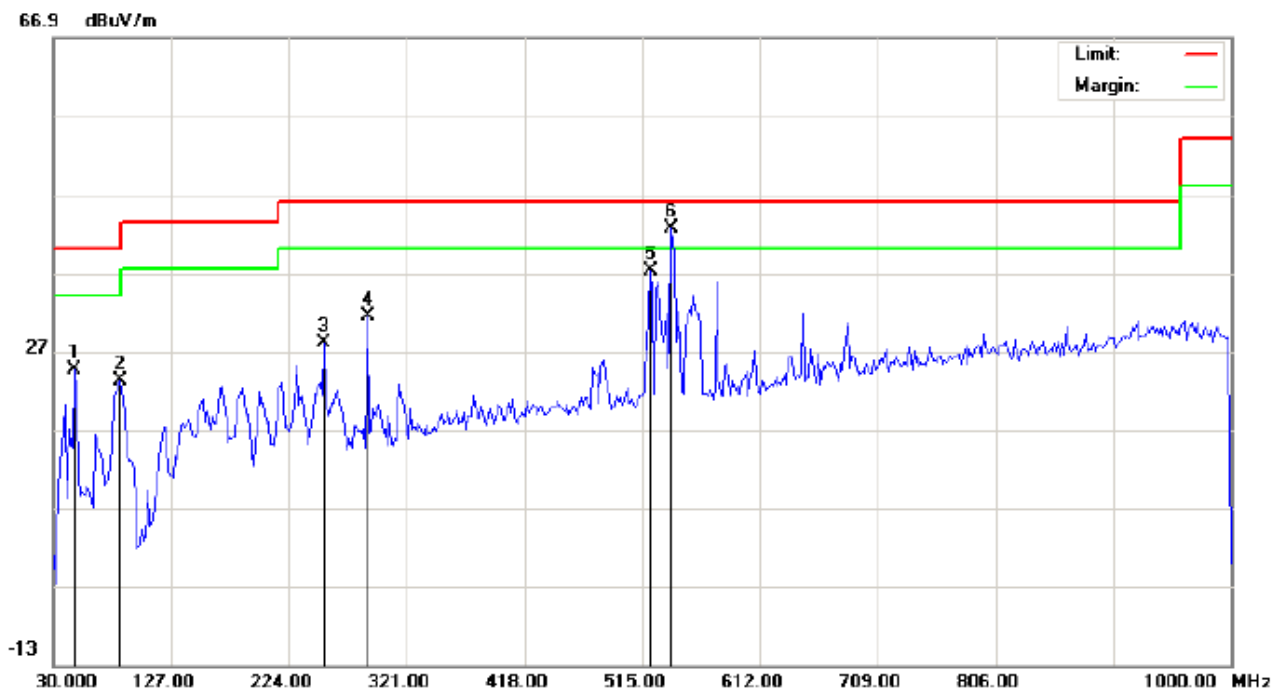

Site: site #1	Polarization: Vertical	Temperature: 26
Limit: FCC Class B 3M Radiation	Power:	Humidity: 60 %
EUT: Bluetooth Speaker	Distance: 3m	
M/N: TT-SK05		
Mode: High Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		47.7833	16.14	8.39	24.53	40.00	-15.47	peak			
2		84.9667	19.62	3.58	23.20	40.00	-16.80	peak			
3		253.1000	14.06	13.99	28.05	46.00	-17.95	peak			
4		288.6667	16.26	15.07	31.33	46.00	-14.67	peak			
5		521.4667	15.46	21.71	37.17	46.00	-8.83	peak			
6	*	539.2500	20.33	22.19	42.52	46.00	-3.48	peak			

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.

RADIATED EMISSION ABOVE 1GHZ

FOR TRADITIONAL BLUETOOTH

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

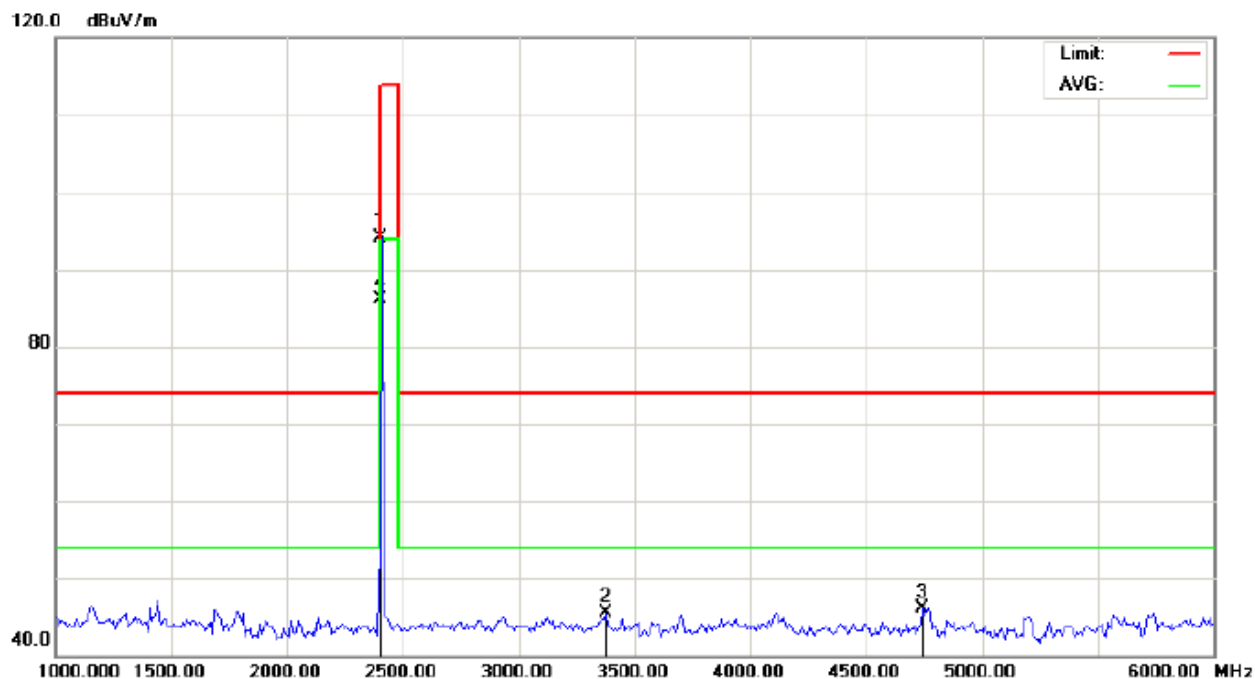


Site: site #1 Polarization: **Horizontal** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance: 3m
M/N:TT-SK05
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	103.76	-9.68	94.08	114.00	-19.92	peak			
2		3375.000	53.43	-8.01	45.42	74.00	-28.58	peak			
3		4741.667	48.68	-2.48	46.20	74.00	-27.80	peak			
4	*	2402.000	95.87	-9.68	86.19	94.00	-7.81	AVG	100	244	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

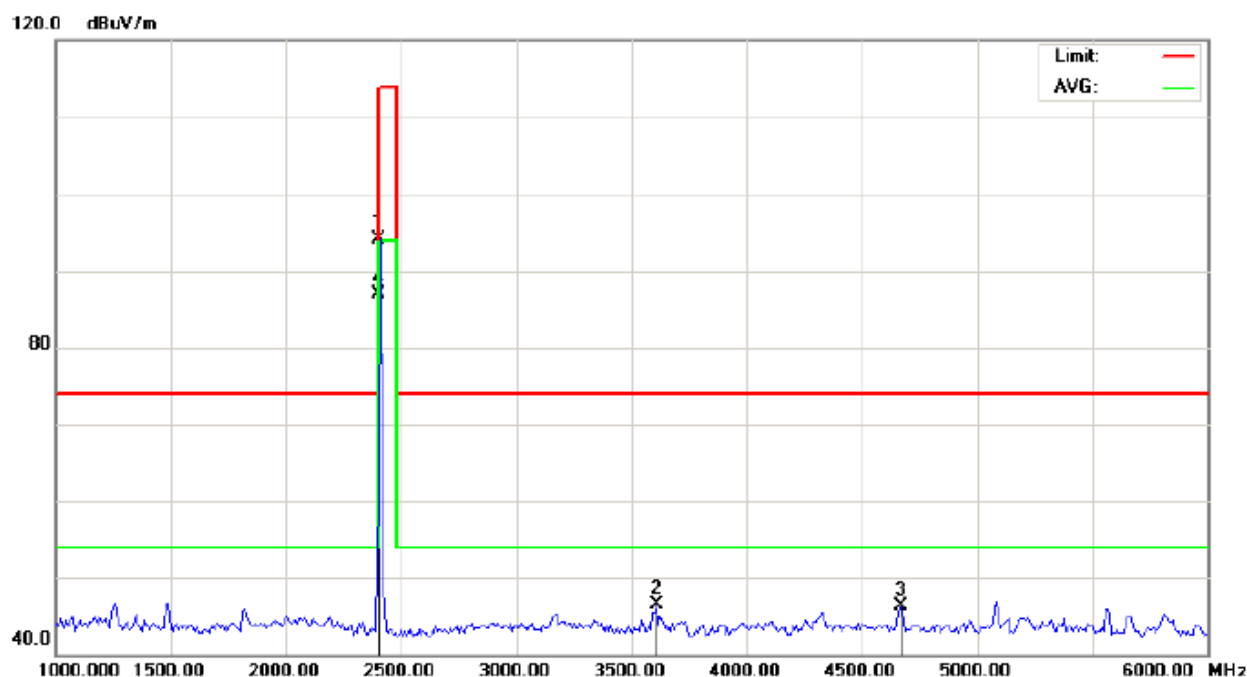


Site: site #1 Polarization: *Vertical* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance: 3m
M/N:TT-SK05
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	103.75	-9.68	94.07	114.00	-19.93	peak			
2		3608.333	53.66	-7.22	46.44	74.00	-27.56	peak			
3		4666.667	48.98	-2.67	46.31	74.00	-27.69	peak			
4	*	2402.000	96.58	-9.68	86.90	94.00	-7.10	AVG	100	302	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

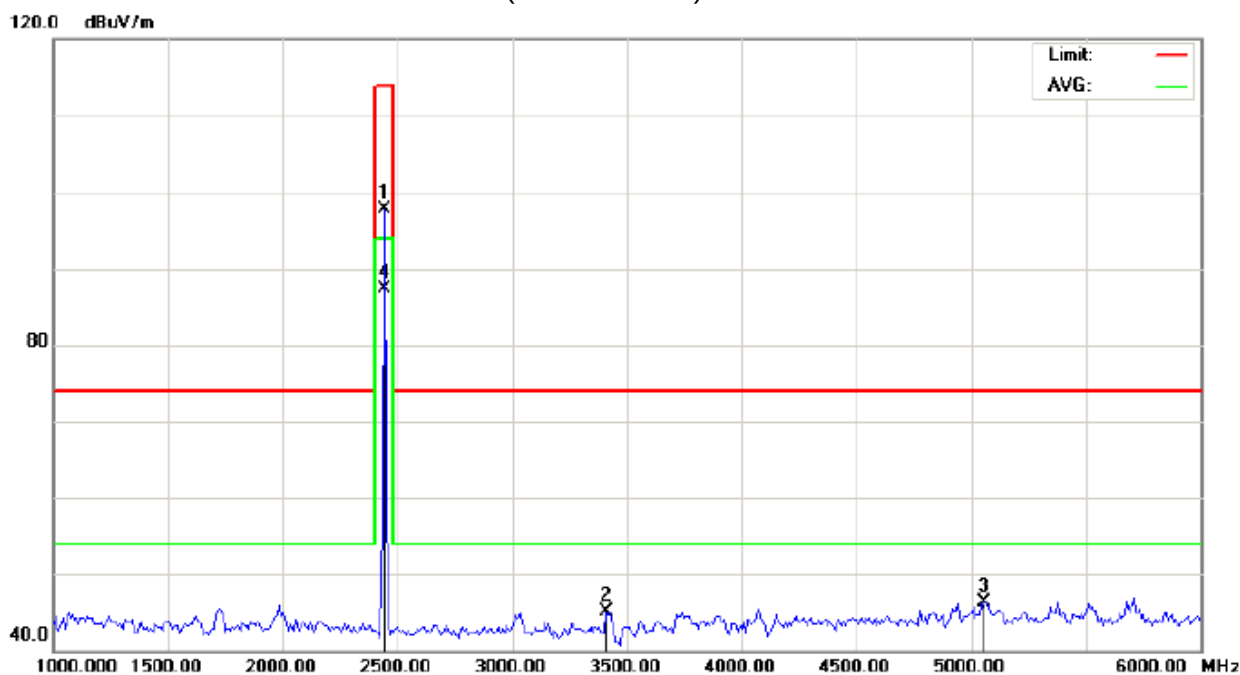


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance: 3m
M/N:TT-SK05
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	107.29	-9.63	97.66	114.00	-16.34	peak			
2		3408.333	53.06	-7.98	45.08	74.00	-28.92	peak			
3		5058.333	48.04	-1.80	46.24	74.00	-27.76	peak			
4	*	2441.000	96.98	-9.63	87.35	94.00	-6.65	AVG	150	254	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

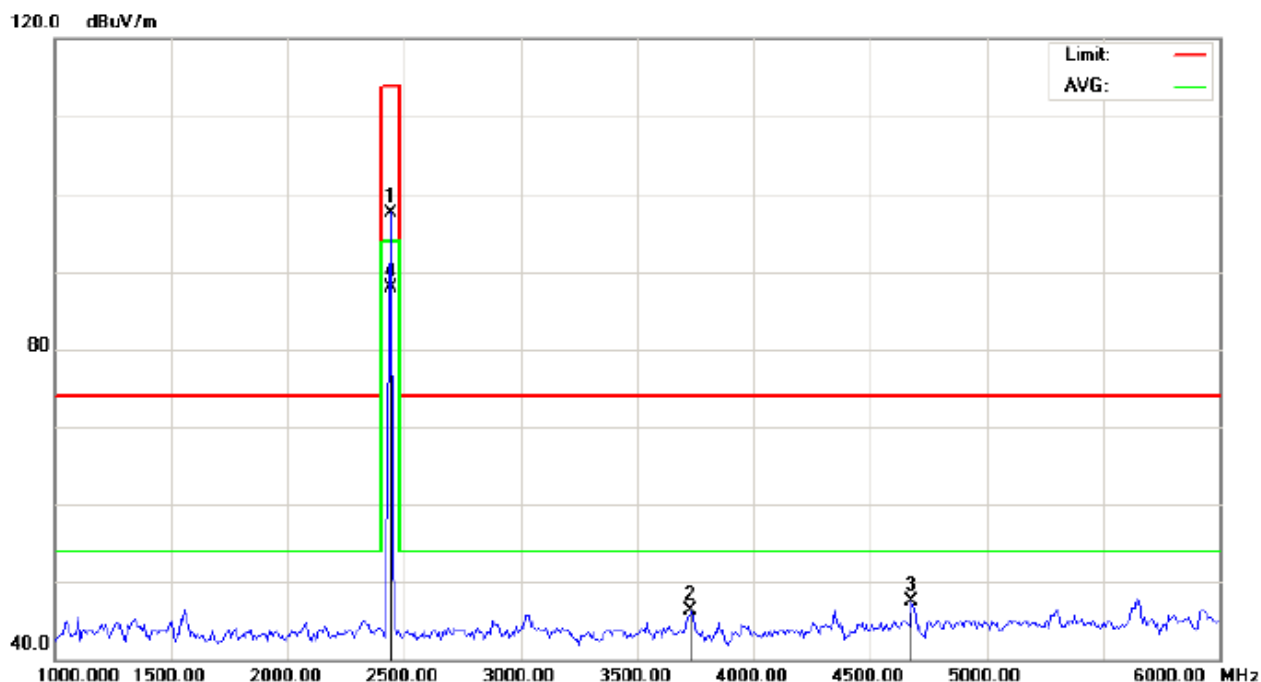


Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance: 3m
M/N:TT-SK05
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	107.23	-9.63	97.60	114.00	-16.40	peak			
2		3733.333	52.73	-6.45	46.28	74.00	-27.72	peak			
3		4675.000	50.12	-2.65	47.47	74.00	-26.53	peak			
4	*	2441.000	97.52	-9.63	87.89	94.00	-6.11	AVG	150	359	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

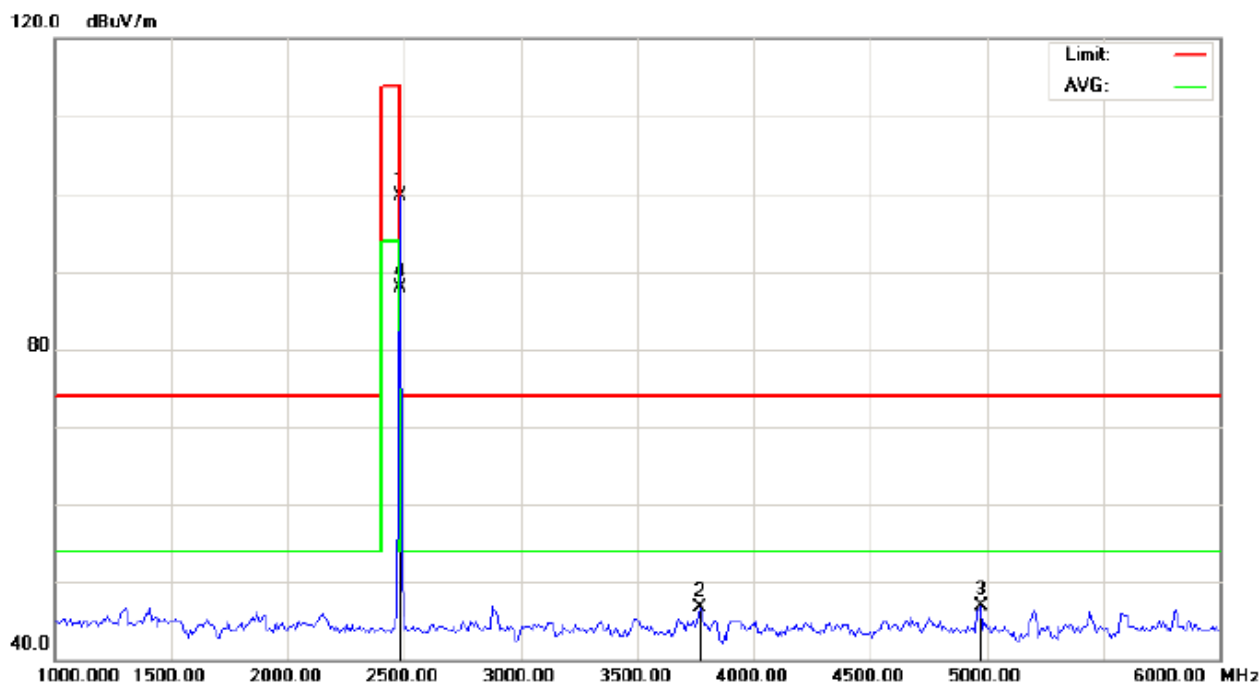


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance: 3m
M/N:TT-SK05
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	109.36	-9.59	99.77	114.00	-14.23	peak			
2		3766.667	52.91	-6.25	46.66	74.00	-27.34	peak			
3		4975.000	48.86	-1.87	46.99	74.00	-27.01	peak			
4	*	2480.000	97.57	-9.59	87.98	94.00	-6.02	AVG	100	90	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

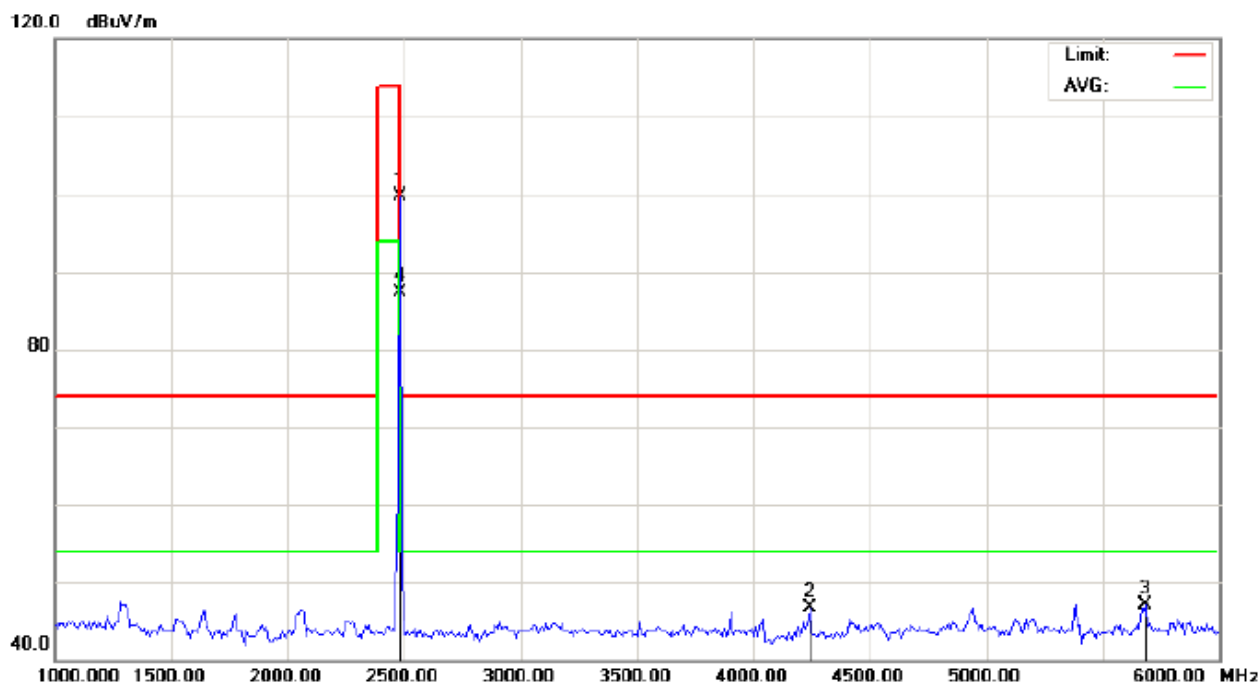

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance: 3m
M/N:TT-SK05
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	109.34	-9.59	99.75	114.00	-14.25	peak			
2		4241.667	50.69	-3.99	46.70	74.00	-27.30	peak			
3		5683.333	48.89	-1.73	47.16	74.00	-26.84	peak			
4	*	2480.000	96.87	-9.59	87.28	94.00	-6.72	AVG	100	0	

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value


Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	103.76	-9.68	94.08	114	-19.92	Horizontal
2402	103.75	-9.68	94.07	114	-19.93	Vertical
2440	107.29	-9.63	97.66	114	-16.34	Horizontal
2440	107.23	-9.63	97.60	114	-16.40	Vertical
2480	109.36	-9.59	99.77	114	-14.23	Horizontal
2480	109.34	-9.59	99.75	114	-14.25	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	95.87	-9.68	86.19	94	-7.81	Horizontal
2402	96.58	-9.68	86.90	94	-7.10	Vertical
2440	96.98	-9.63	87.35	94	-6.65	Horizontal
2440	97.52	-9.63	87.89	94	-6.11	Vertical
2480	97.57	-9.59	87.98	94	-6.02	Horizontal
2480	96.87	-9.59	87.28	94	-6.72	Vertical

FOR BLE

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

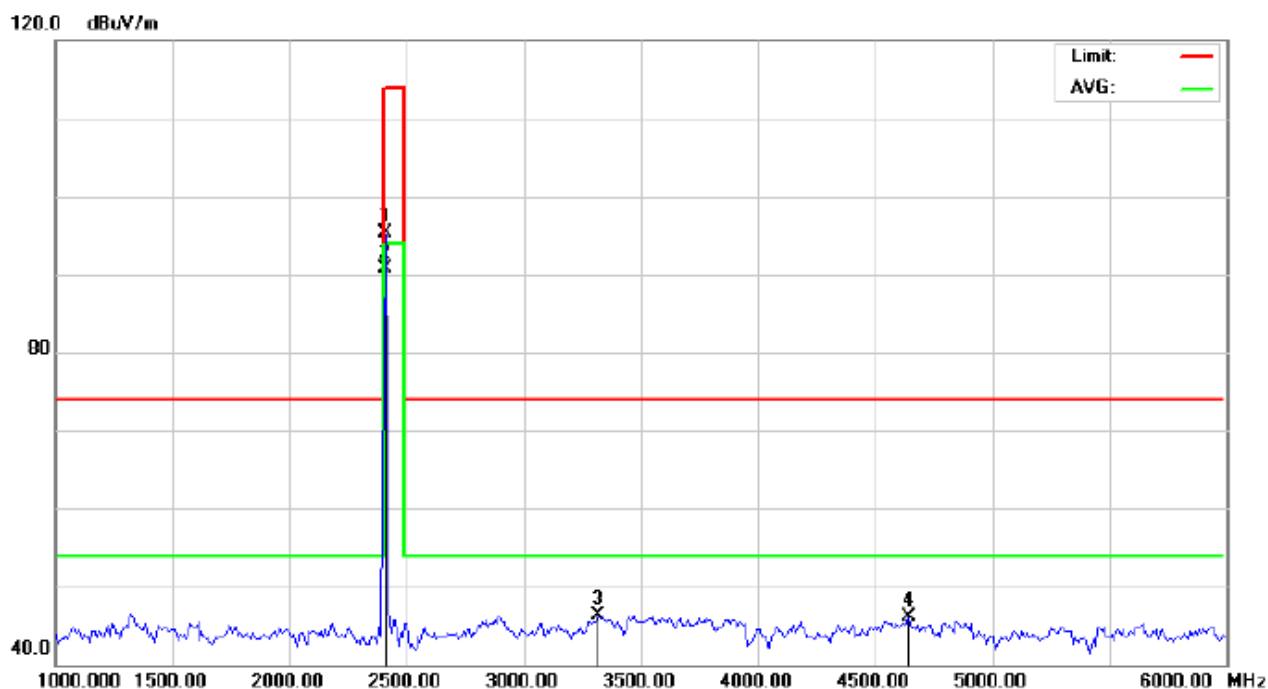

Site: site #1
Limit: FCC Class B 3M Radiation above 1GHz(PK)-
EUT: Bluetooth Speaker
M/N: TT-SK05
Mode: Low Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance: 3m

Temperature: 26
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	105.05	-9.68	95.37	114.00	-18.63	peak			
2	*	2402.000	100.41	-9.68	90.73	94.00	-3.27	AVG	150	319	
3		3316.667	54.33	-8.06	46.27	74.00	-27.73	peak			
4		4641.667	48.83	-2.74	46.09	74.00	-27.91	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

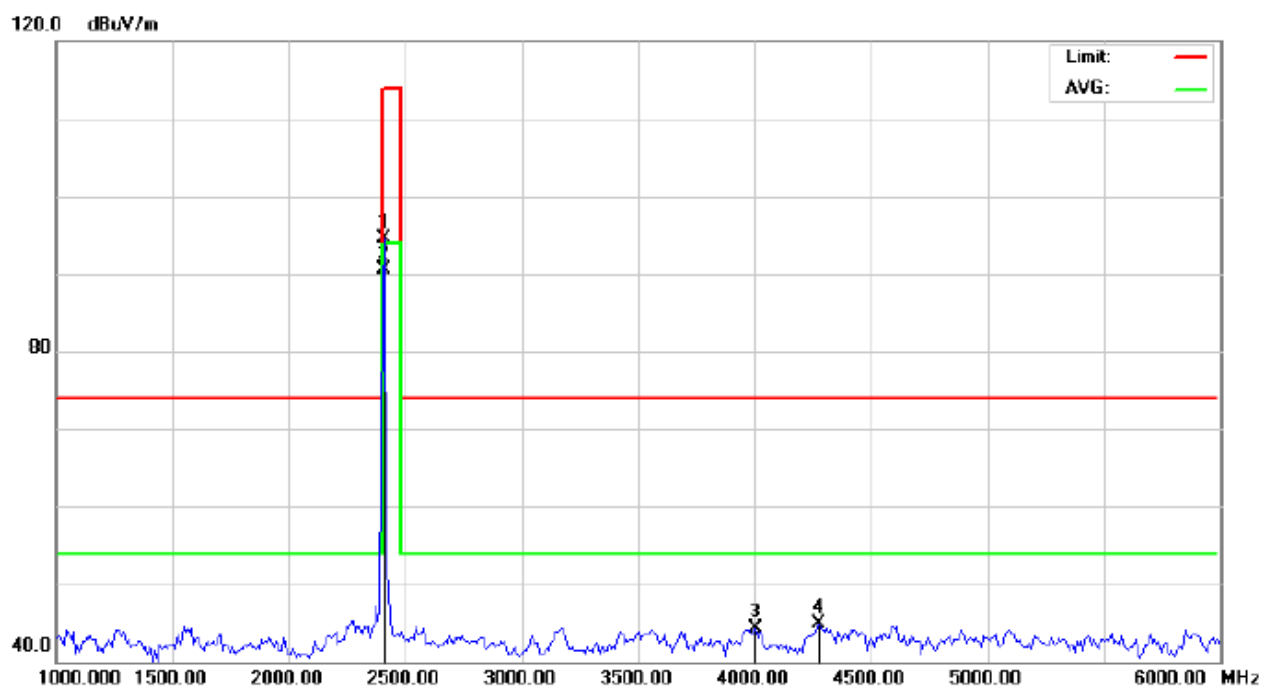


Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance: 3m
M/N: TT-SK05
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	104.23	-9.68	94.55	114.00	-19.45	peak			
2	*	2402.000	100.18	-9.68	90.50	94.00	-3.50	AVG	150	255	
3		4000.000	49.08	-4.81	44.27	74.00	-29.73	peak			
4		4275.000	48.83	-3.87	44.96	74.00	-29.04	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

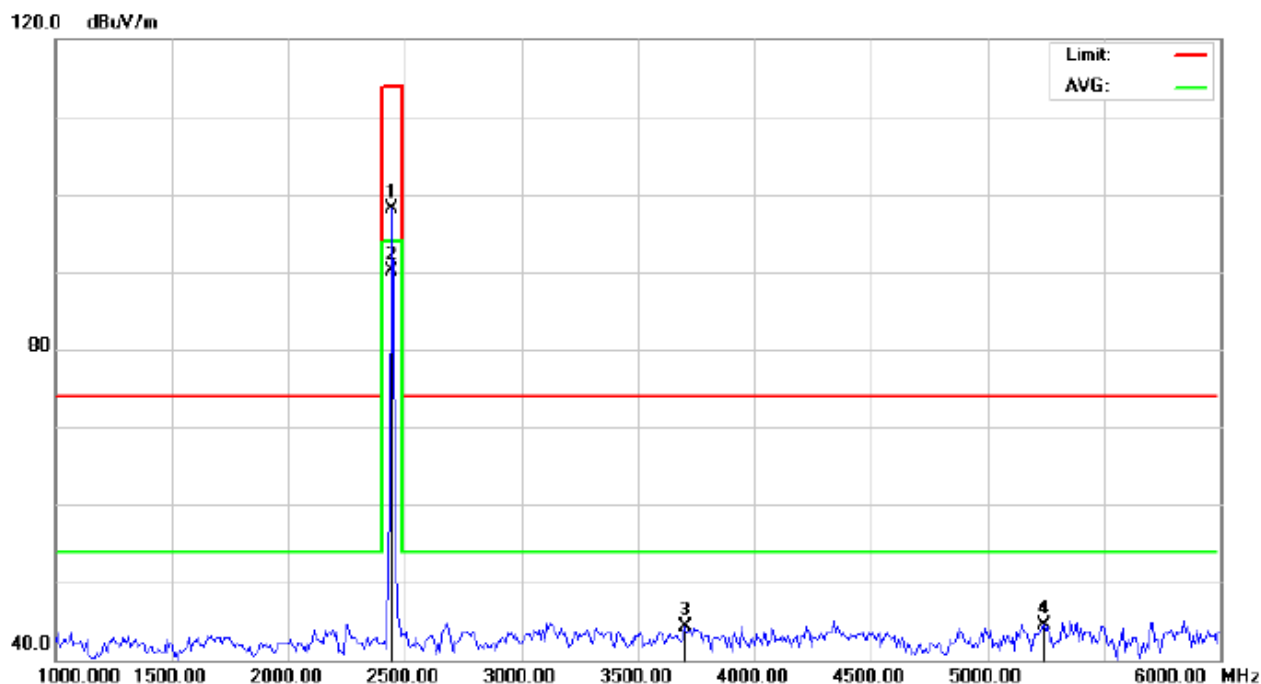


Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance: 3m
M/N: TT-SK05
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	107.80	-9.64	98.16	114.00	-15.84	peak			
2	*	2440.000	99.81	-9.64	90.17	94.00	-3.83	AVG	108	68	
3		3700.000	50.97	-6.66	44.31	74.00	-29.69	peak			
4		5241.667	46.34	-1.80	44.54	74.00	-29.46	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

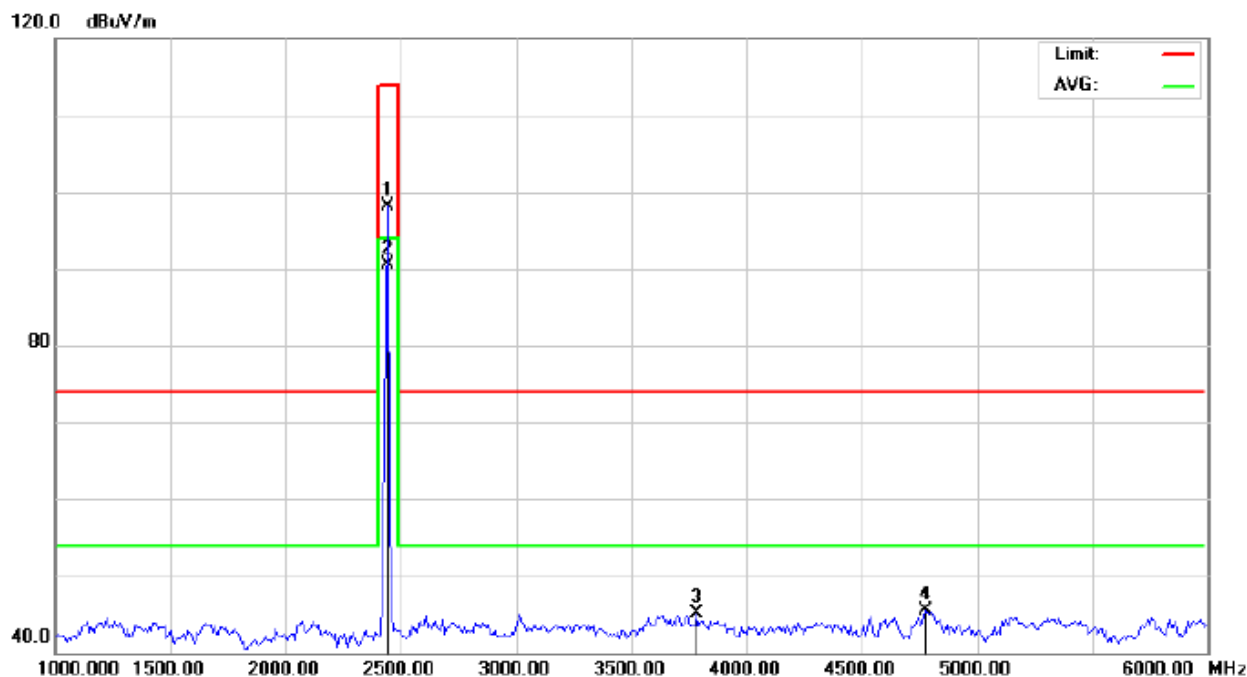

Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT: Bluetooth Speaker

Distance: 3m

M/N: TT-SK05


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	107.74	-9.64	98.10	114.00	-15.90	peak			
2	*	2440.000	100.22	-9.64	90.58	94.00	-3.42	AVG	150	291	
3		3783.333	51.33	-6.14	45.19	74.00	-28.81	peak			
4		4775.000	47.92	-2.39	45.53	74.00	-28.47	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

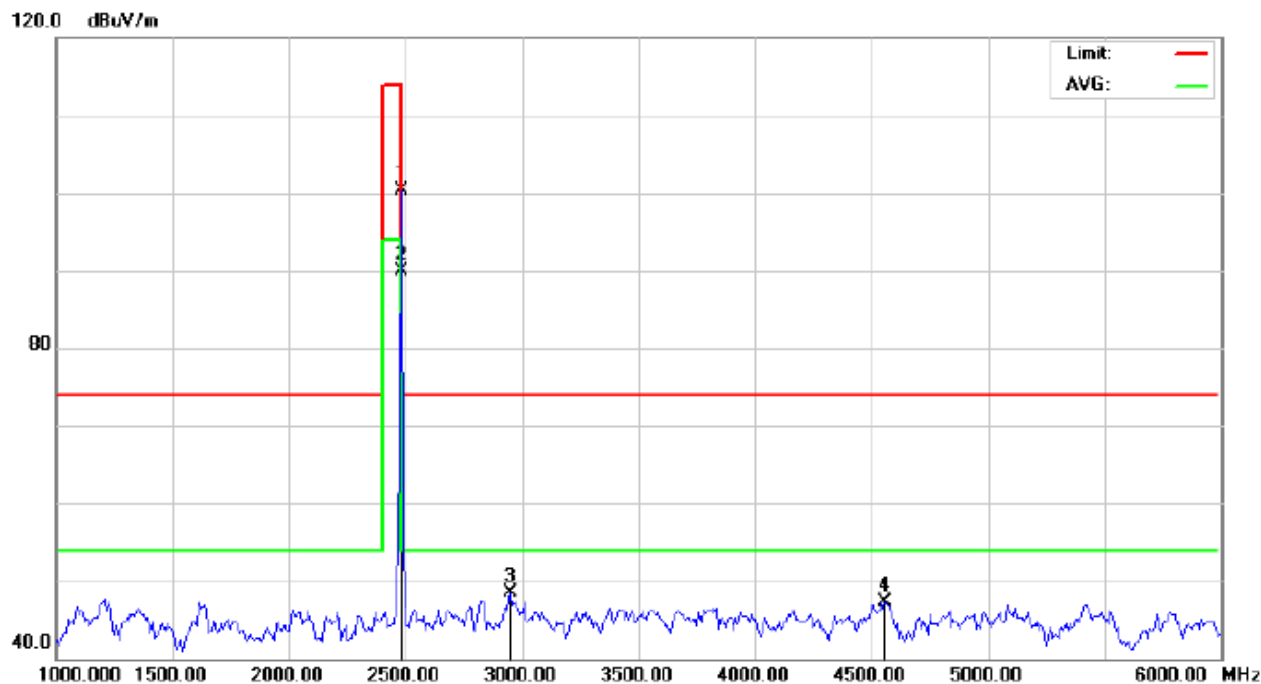

Site: site #1
Limit: FCC Class B 3M Radiation above 1GHZ(PK)-
EUT: Bluetooth Speaker
M/N: TT-SK05
Mode: High Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance: 3m

Temperature: 26
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	109.87	-9.59	100.28	114.00	-13.72	peak			
2	*	2480.000	99.57	-9.59	89.98	94.00	-4.02	AVG	150	173	
3		2950.000	56.97	-8.48	48.49	74.00	-25.51	peak			
4		4558.333	50.27	-2.96	47.31	74.00	-26.69	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

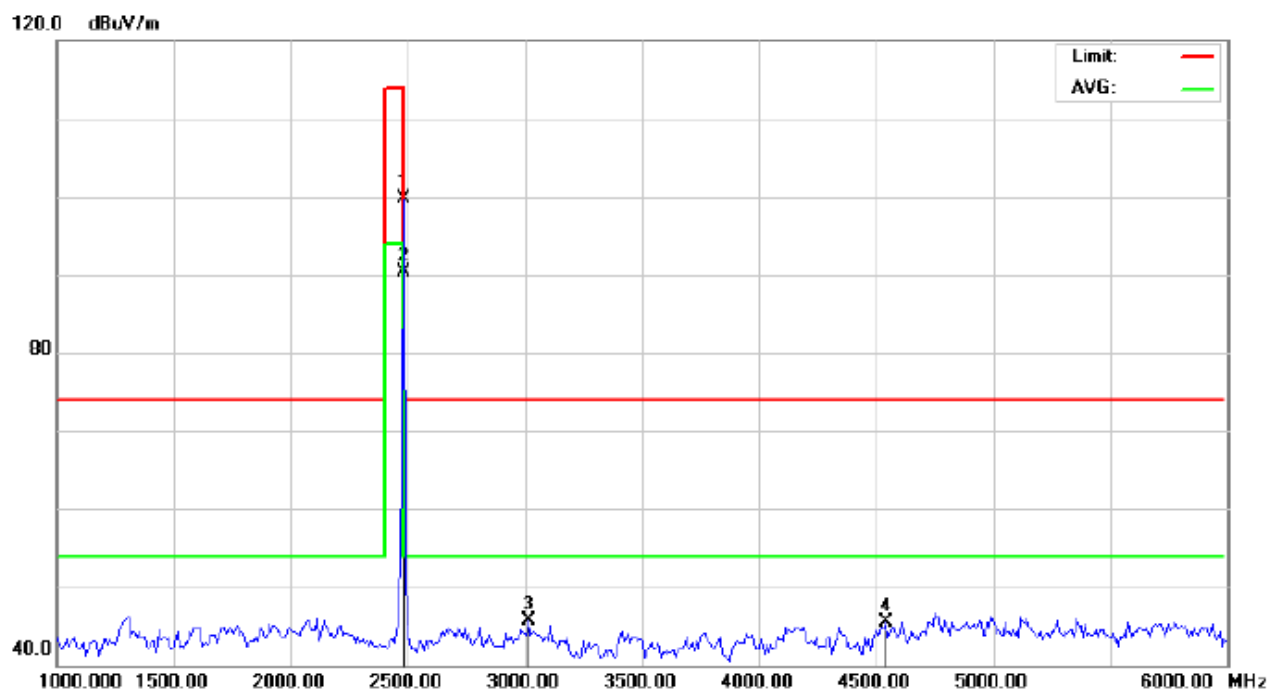

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)-

Power:

Humidity: 60 %

EUT: Bluetooth Speaker

Distance: 3m

M/N: TT-SK05

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	109.37	-9.59	99.78	114.00	-14.22	peak			
2	*	2480.000	99.85	-9.59	90.26	94.00	-3.74	AVG	150	188	
3		3016.667	53.95	-8.34	45.61	74.00	-28.39	peak			
4		4541.667	48.56	-3.00	45.56	74.00	-28.44	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	105.05	-9.68	95.37	114	-18.63	Horizontal
2402	104.23	-9.68	94.55	114	-19.45	Vertical
2440	107.80	-9.64	98.16	114	-15.84	Horizontal
2440	107.74	-9.64	98.10	114	-15.90	Vertical
2480	109.87	-9.59	100.28	114	-13.72	Horizontal
2480	109.37	-9.59	99.78	114	-14.22	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	100.41	-9.68	90.73	94	-3.27	Horizontal
2402	100.18	-9.68	90.50	94	-3.50	Vertical
2440	99.81	-9.64	90.17	94	-3.83	Horizontal
2440	100.22	-9.64	90.58	94	-3.42	Vertical
2480	99.57	-9.59	89.98	94	-4.02	Horizontal
2480	99.85	-9.59	90.26	94	-3.74	Vertical

9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE

1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.


2Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO


(b) AVERAGE: RBW=1MHz ; VBW=1/on time(1KHz) / Sweep=AUTO

9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

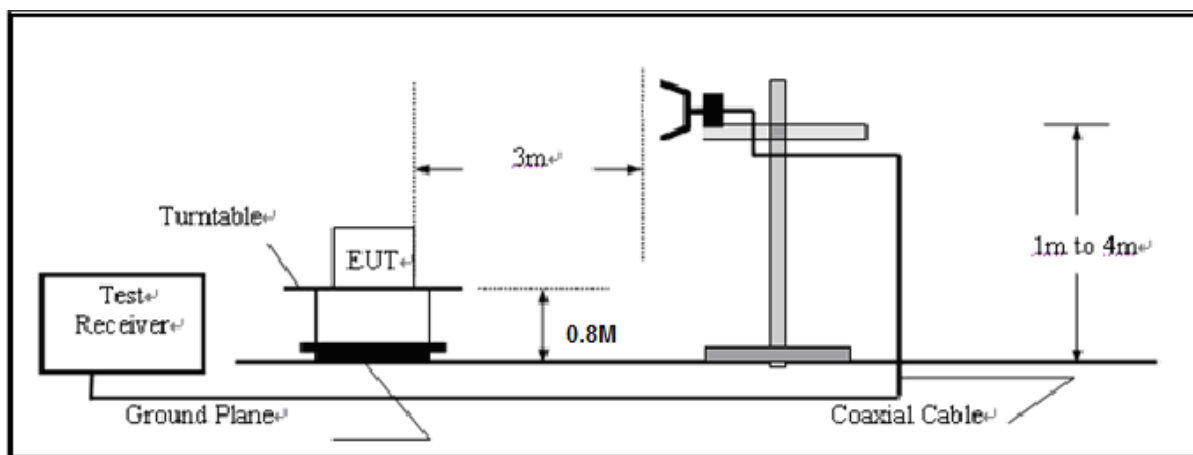


CONDUCTED TEST SETUP

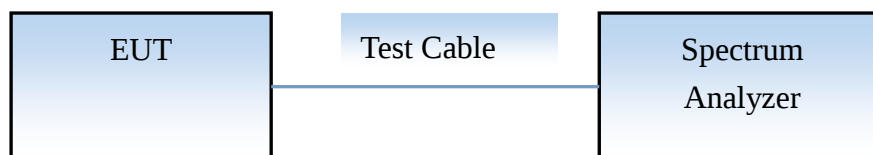

9.3 RADIATED TEST RESULT(Worst modulation:GFSK) FOR TRADITIONAL BLEUTOOTH


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

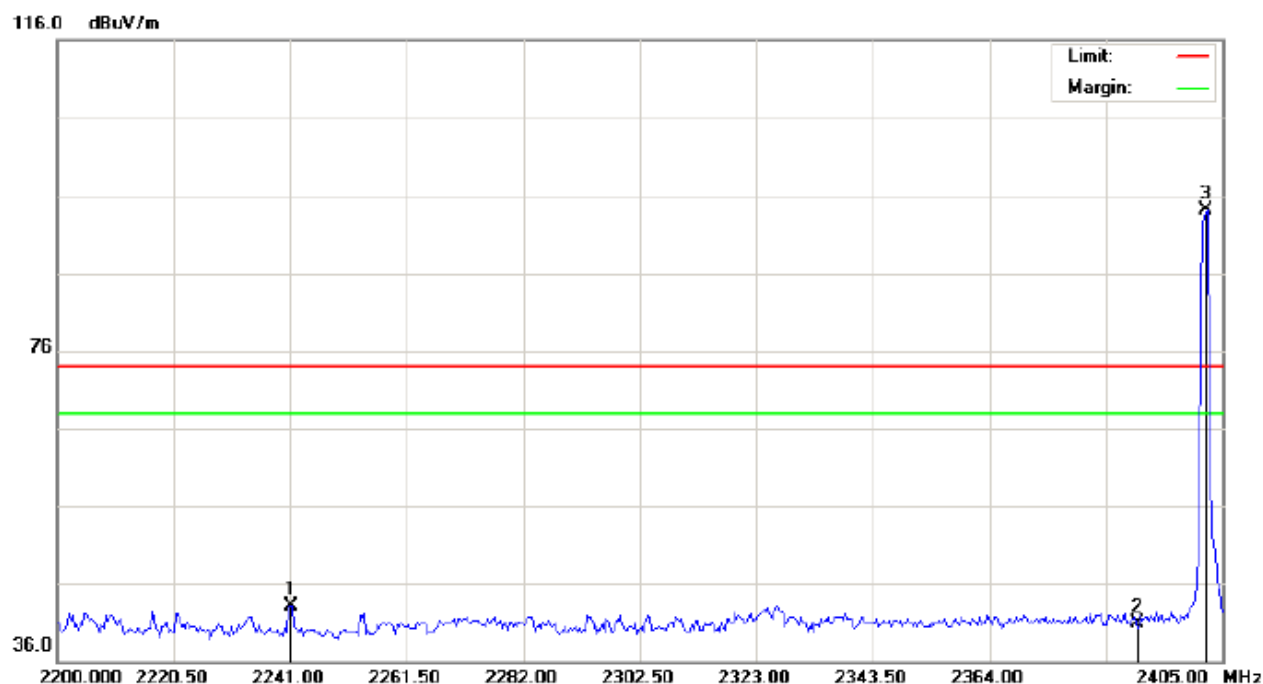

Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance:
M/N:TT-SK05
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2241.000	32.96	10.15	43.11	74.00	-30.89	peak			
2		2390.000	30.50	10.31	40.81	74.00	-33.19	peak			
3	*	2402.000	83.75	10.32	94.07	74.00	20.07	peak			

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

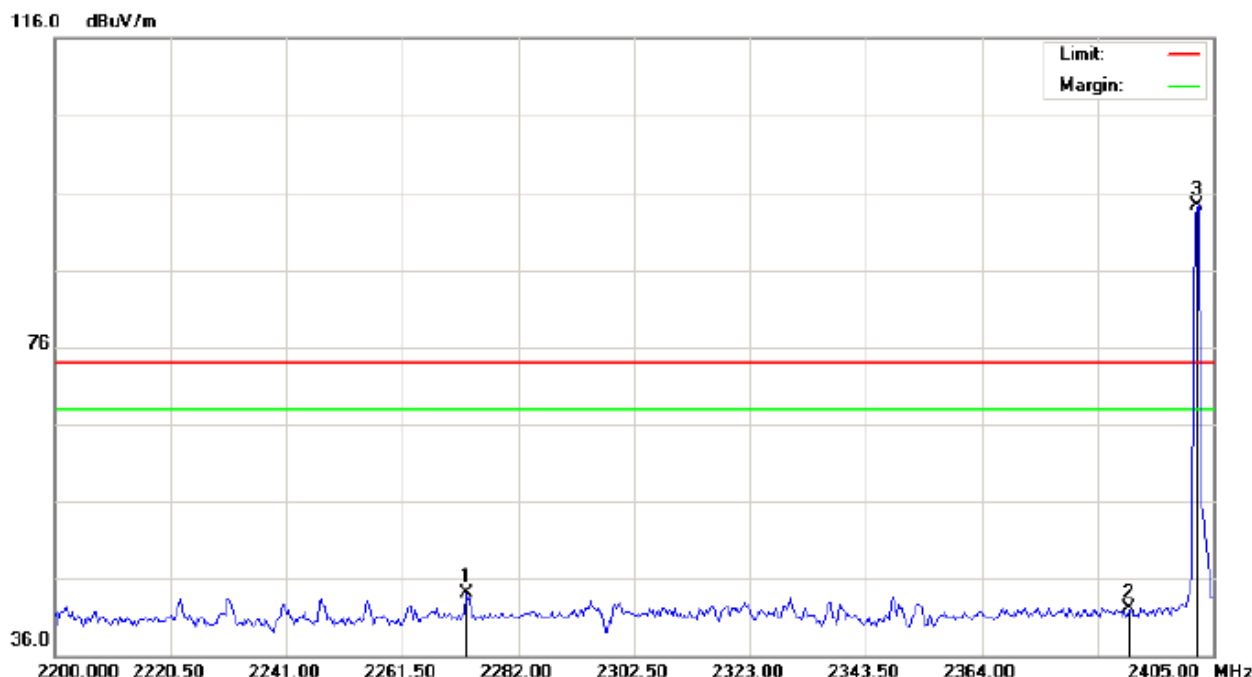

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth Speaker

Distance:


M/N:TT-SK05

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2272.775	33.85	10.18	44.03	74.00	-29.97	peak			
2		2390.000	31.71	10.31	42.02	74.00	-31.98	peak			
3	*	2402.000	84.06	10.32	94.38	74.00	20.38	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

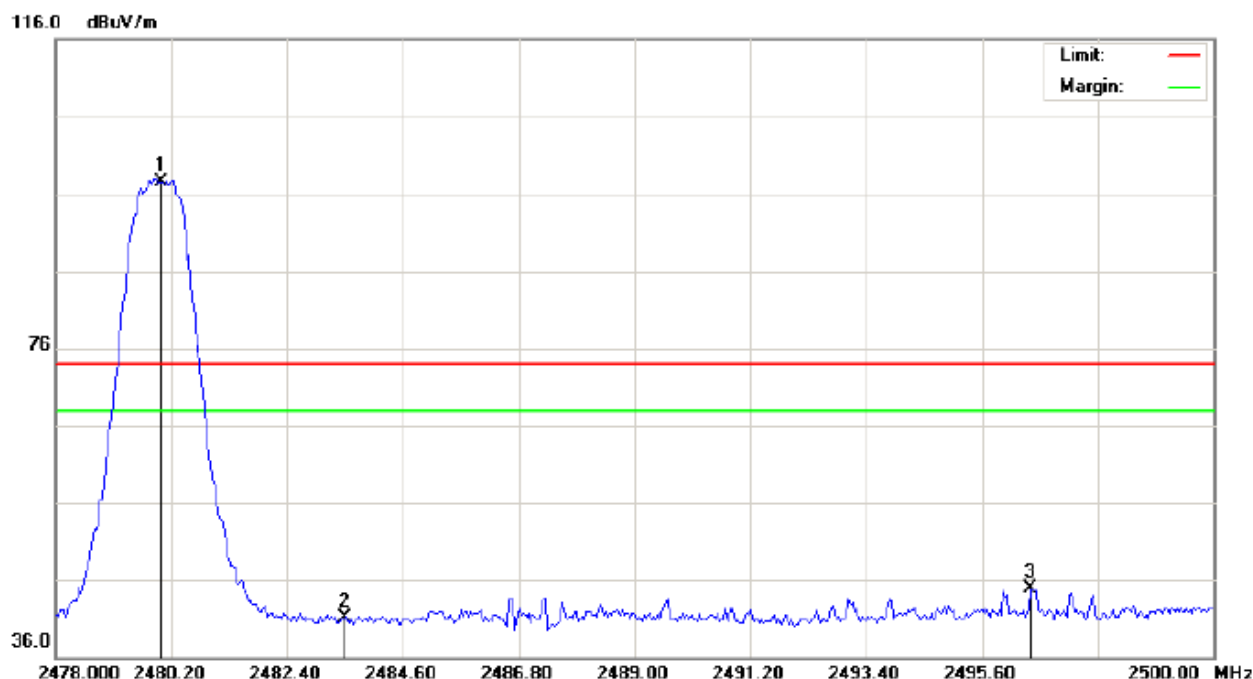

Site: site #1

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

EUT: Bluetooth Speaker

M/N:TT-SK05

Mode: High Channel TX

Note:

Polarization: *Horizontal*

Power:


Distance:

Temperature: 26

Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	87.08	10.41	97.49	74.00	23.49	peak			
2		2483.500	30.69	10.41	41.10	74.00	-32.90	peak			
3		2496.517	34.44	10.43	44.87	74.00	-29.13	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

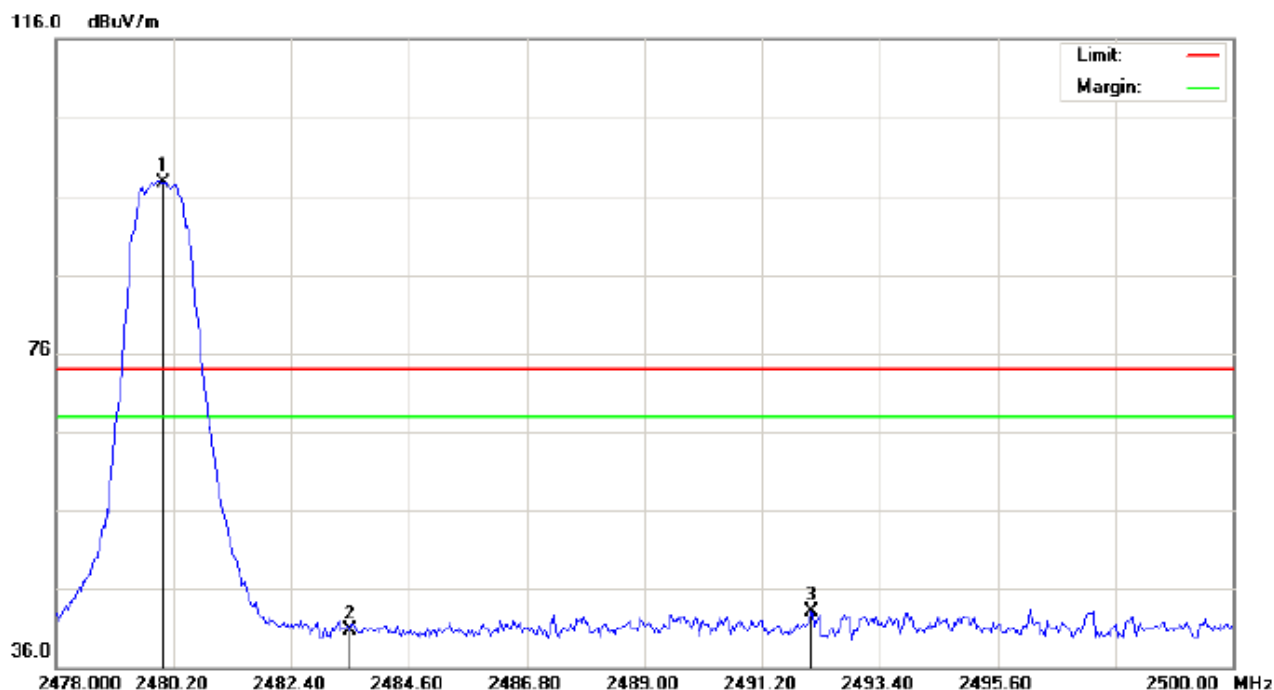

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance:
M/N:TT-SK05
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	87.32	10.41	97.73	74.00	23.73	peak			
2		2483.500	30.26	10.41	40.67	74.00	-33.33	peak			
3		2492.117	32.74	10.42	43.16	74.00	-30.84	peak			

RESULT: PASS


Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

FOR BLE


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

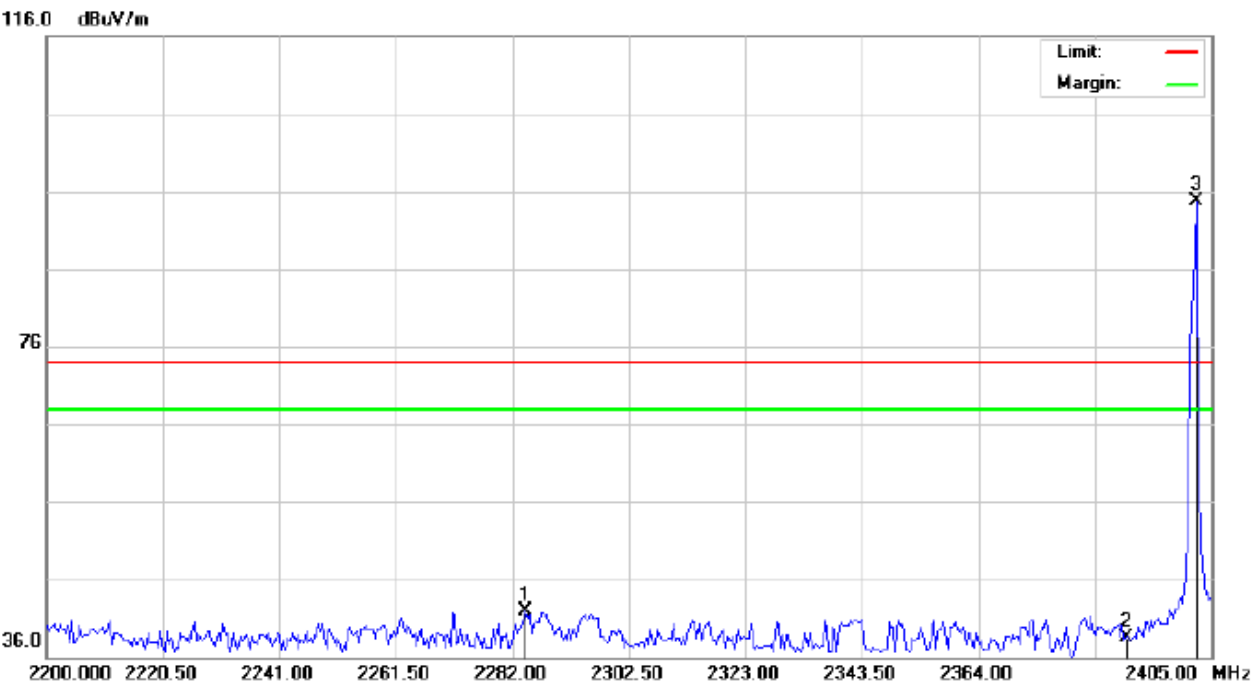

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)	Power:	Humidity: 60 %
EUT: Bluetooth Speaker	Distance:	
M/N: TT-SK05		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2284.392	31.63	10.19	41.82	74.00	-32.18	peak			
2		2390.000	28.12	10.31	38.43	74.00	-35.57	peak			
3	*	2402.000	84.41	10.32	94.73	74.00	20.73	peak			

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

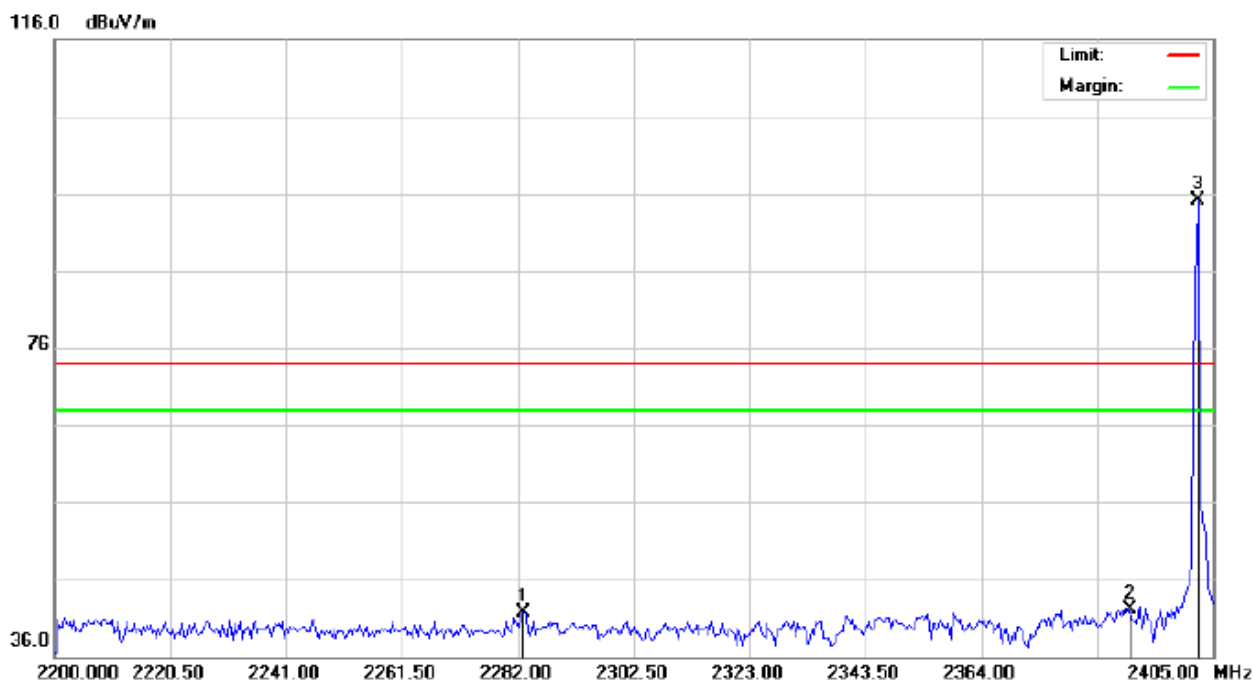

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Humidity: 60 %

EUT: Bluetooth Speaker

Distance:


M/N: TT-SK05

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2283.025	31.44	10.19	41.63	74.00	-32.37	peak			
2		2390.000	31.85	10.31	42.16	74.00	-31.84	peak			
3	*	2402.000	84.76	10.32	95.08	74.00	21.08	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

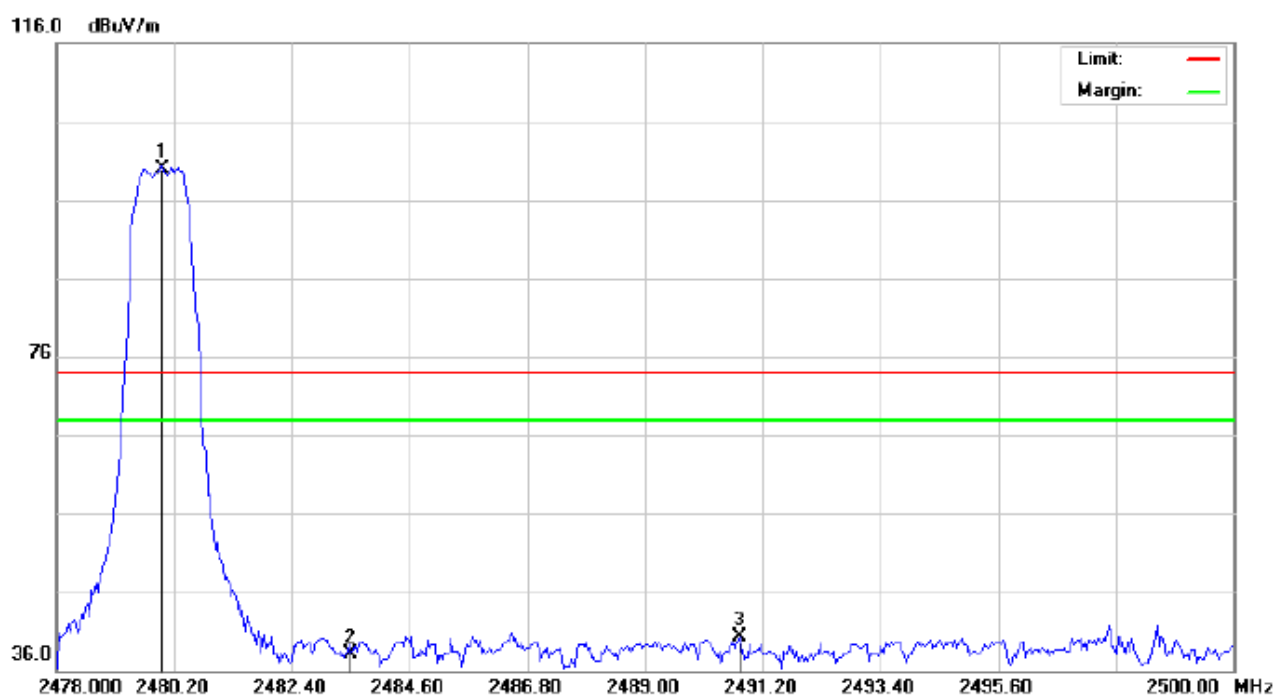

Site: site #1 Polarization: *Horizontal* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance:
M/N: TT-SK05
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	89.46	10.41	99.87	74.00	25.87	peak			
2		2483.500	27.75	10.41	38.16	74.00	-35.84	peak			
3		2490.760	29.85	10.42	40.27	74.00	-33.73	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

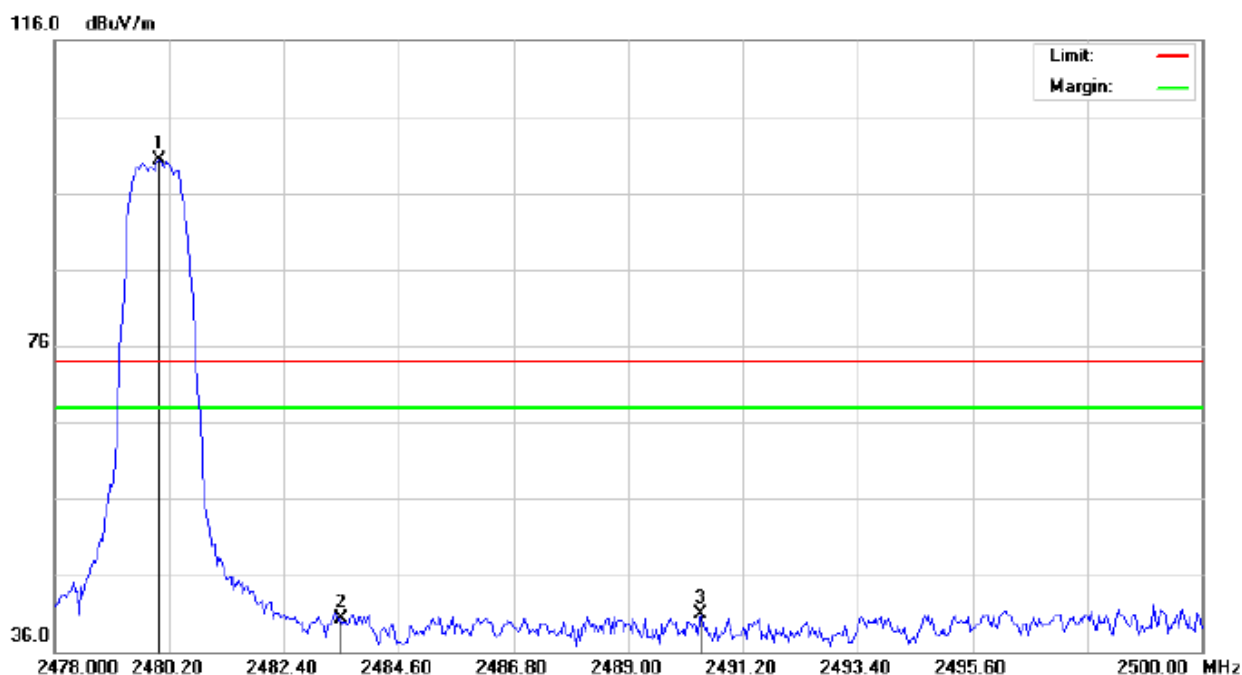

Site: site #1 Polarization: *Vertical* Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: Bluetooth Speaker Distance:
M/N: TT-SK05
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	89.85	10.41	100.26	74.00	26.26	peak			
2		2483.500	29.87	10.41	40.28	74.00	-33.72	peak			
3		2490.393	30.40	10.42	40.82	74.00	-33.18	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.


The "Factor" value can be calculated automatically by software of measurement system.

10. 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW $\geq$ 1% of the 20 dB bandwidth, VBW $\geq$ RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

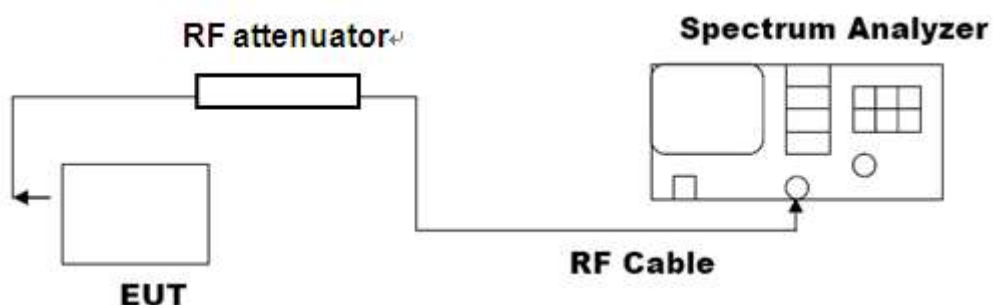

10.3. LIMITS AND MEASUREMENT RESULTS


FOR TRADITIONAL BLUETOOTH

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.036	PASS
	Middle Channel	1.036	PASS
	High Channel	1.036	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

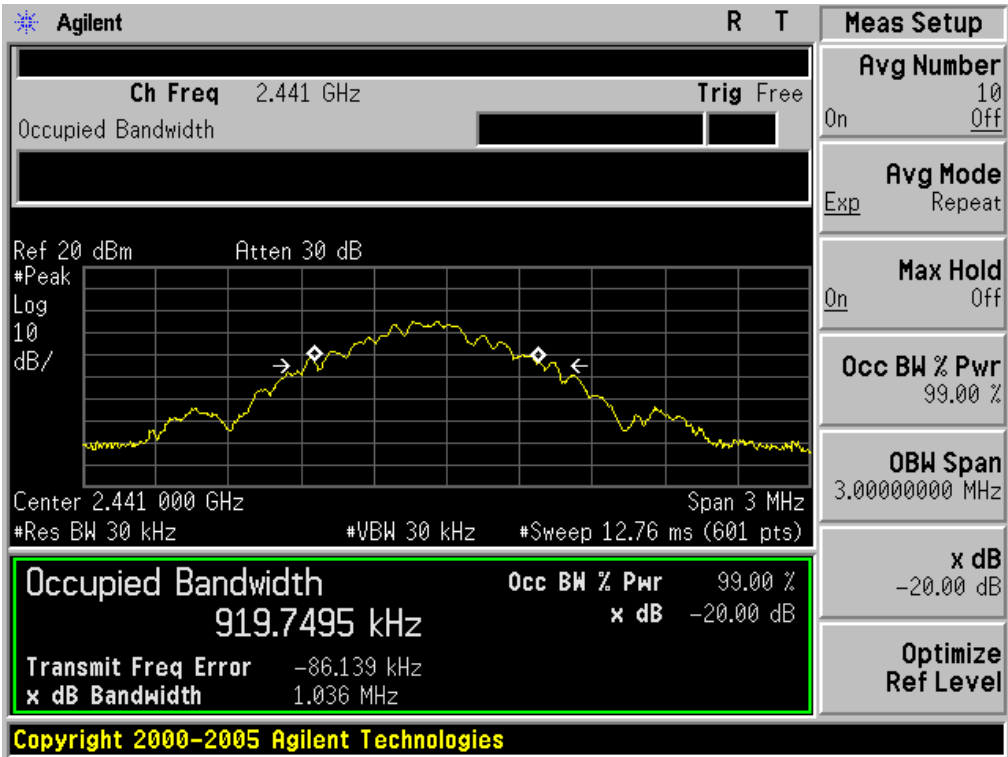


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

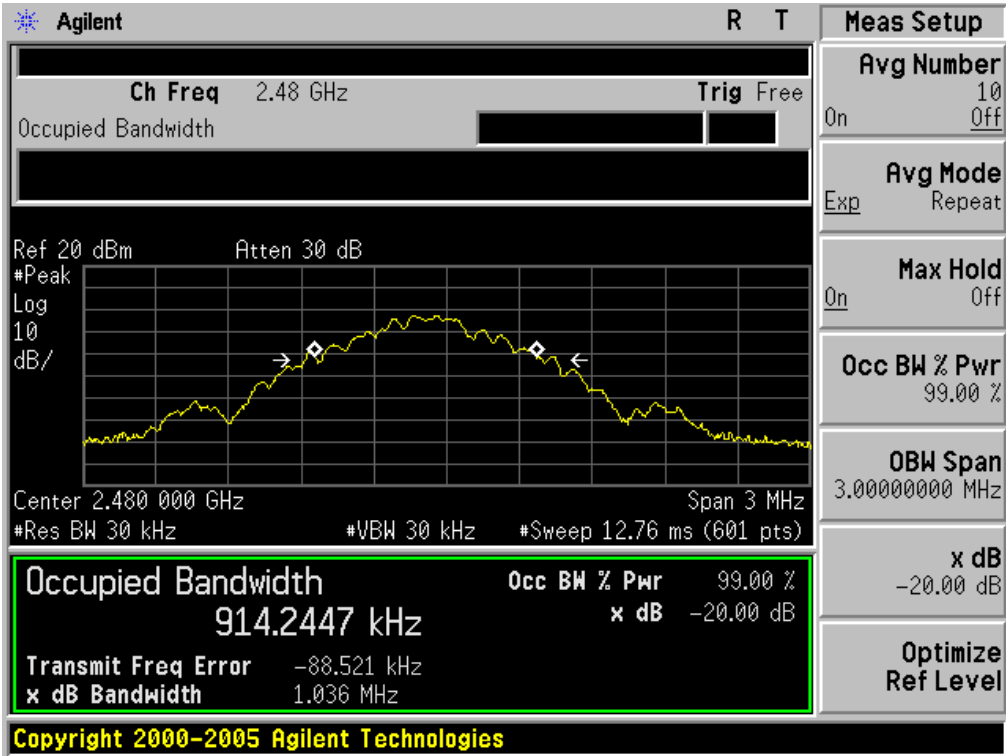


BLUETOOTH 2Mbps LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.347	PASS
	Middle Channel	1.348	PASS
	High Channel	1.347	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

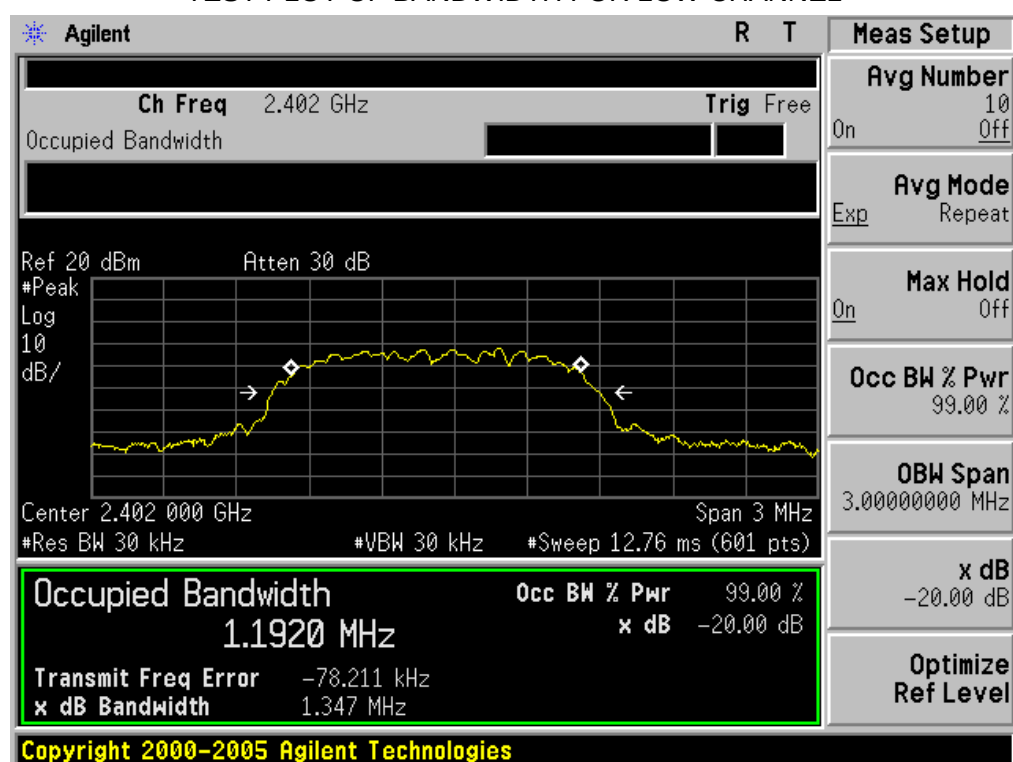

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

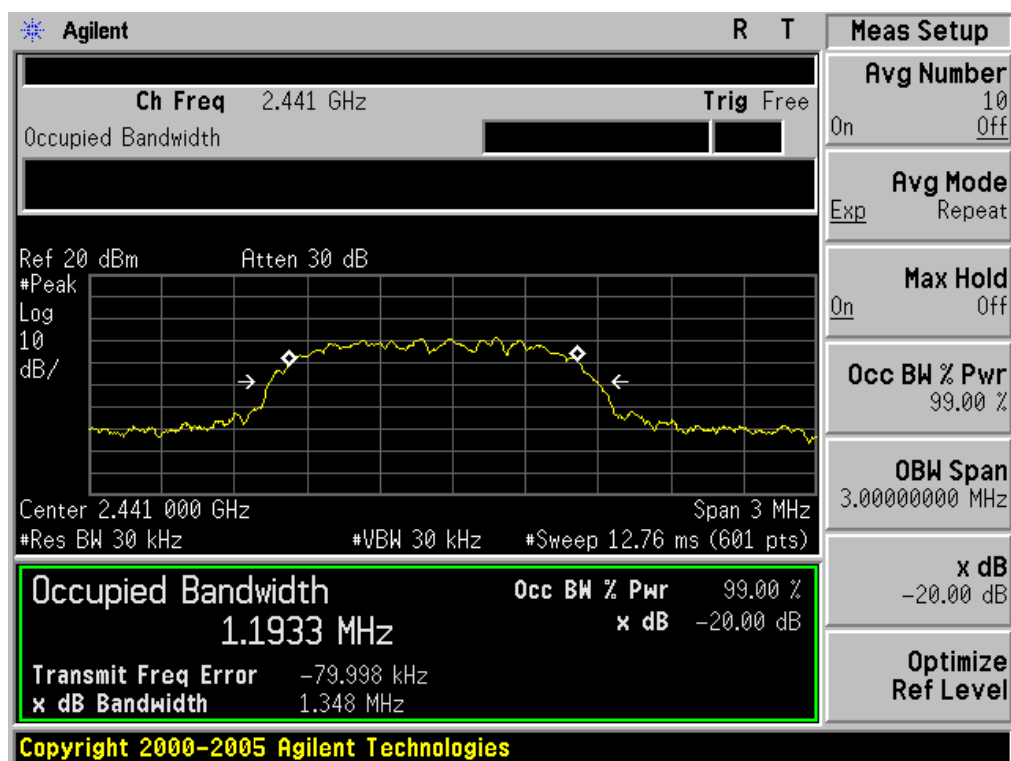

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

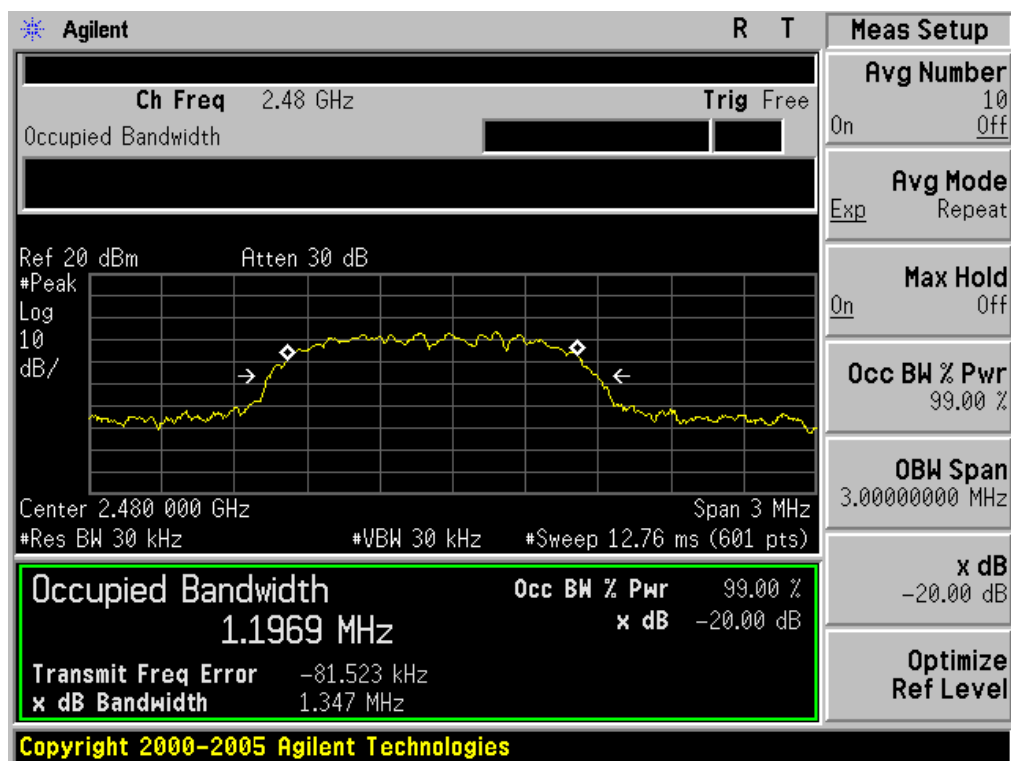


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.305	PASS
	Middle Channel	1.308	PASS
	High Channel	1.321	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

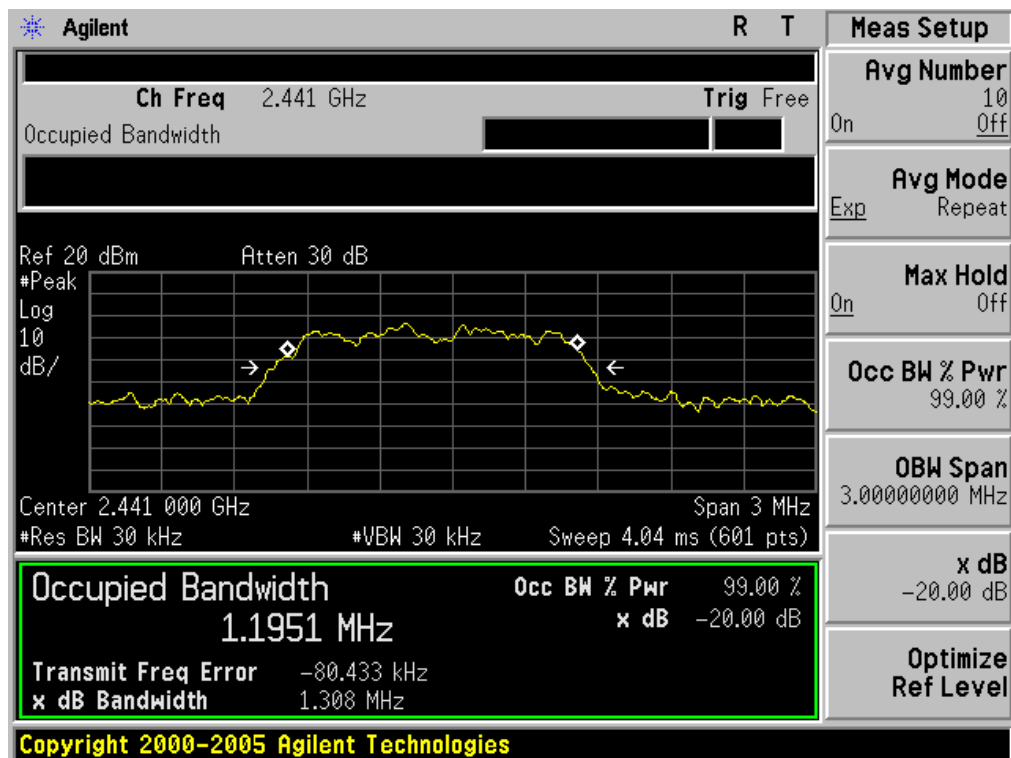


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

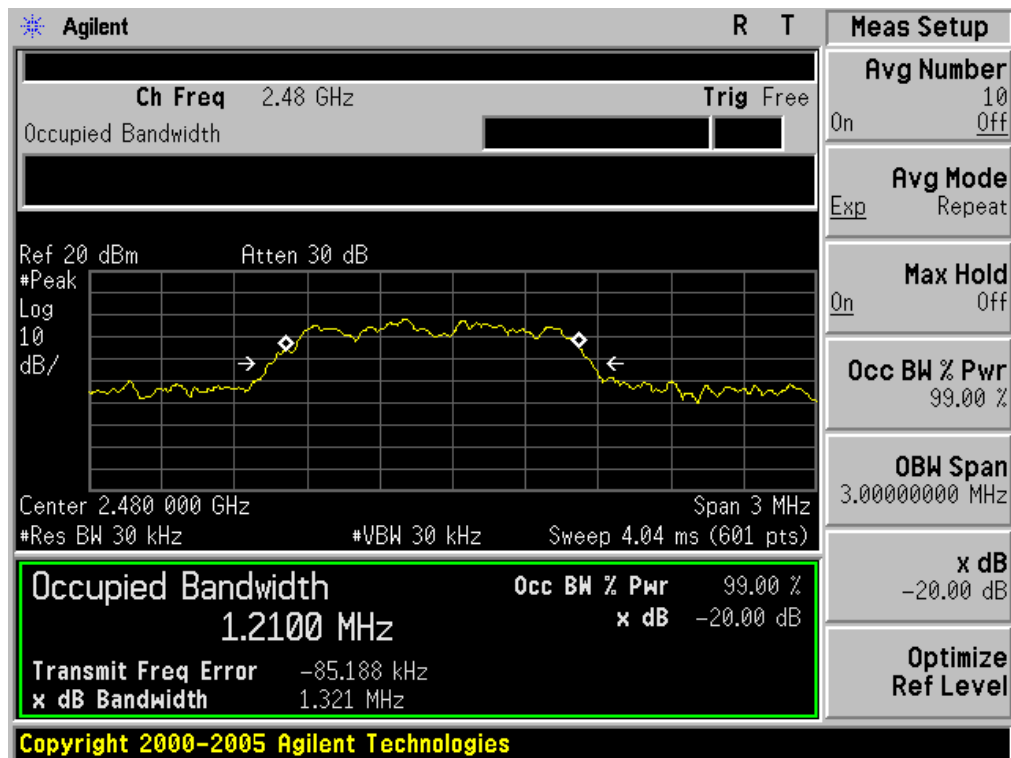


FOR BLE

BLUETOOTH 1Mbps LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.188	PASS
	Middle Channel	1.196	PASS
	High Channel	1.207	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

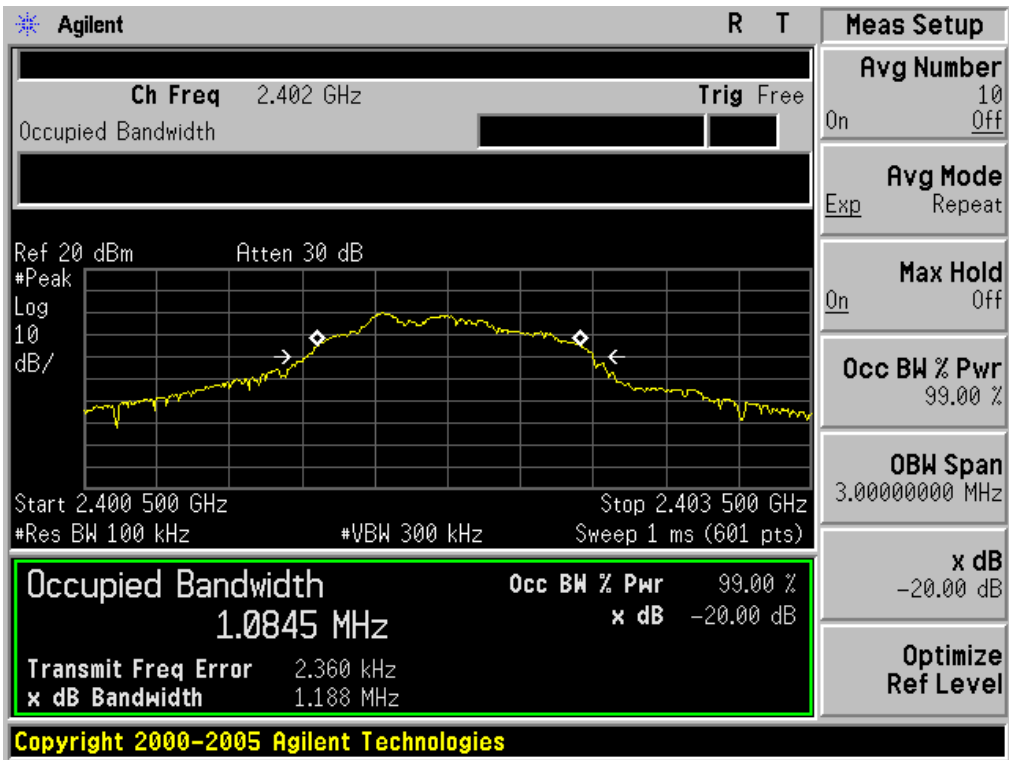

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

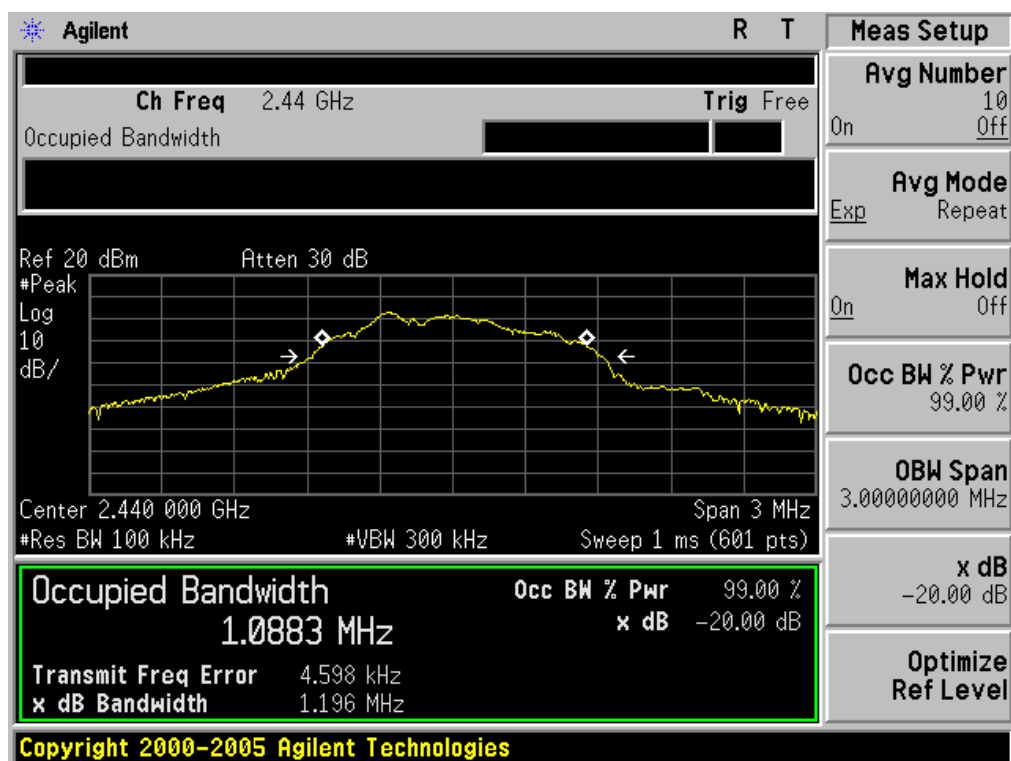

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

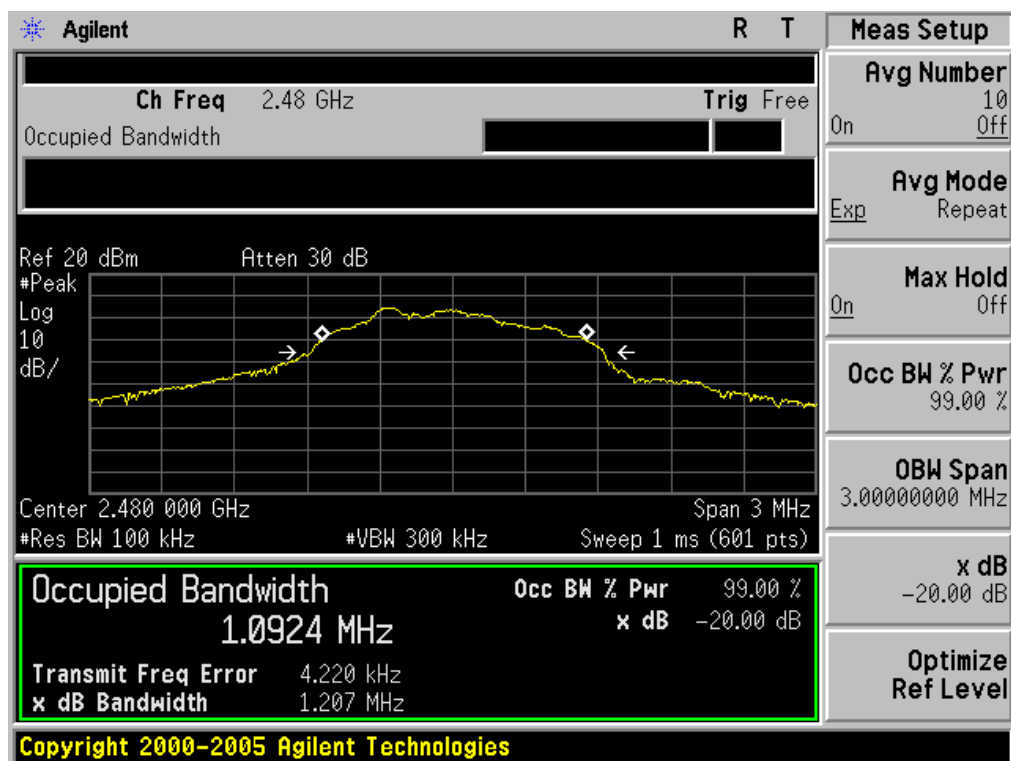

11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

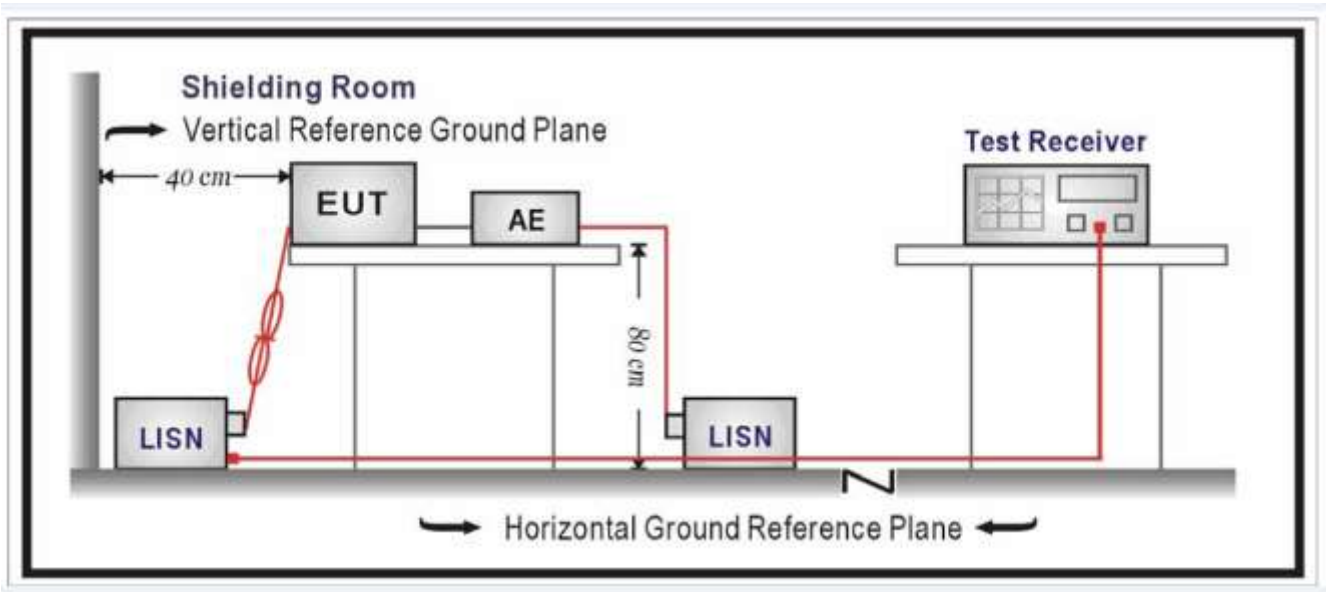

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by PC which received 120V/60Hz power by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
 3. The test data of the worst case condition(s) was reported on the Summary Data page.


11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST
FOR TRADITIONAL BLUETOOTH

Line Conducted Emission Test Line 1-L

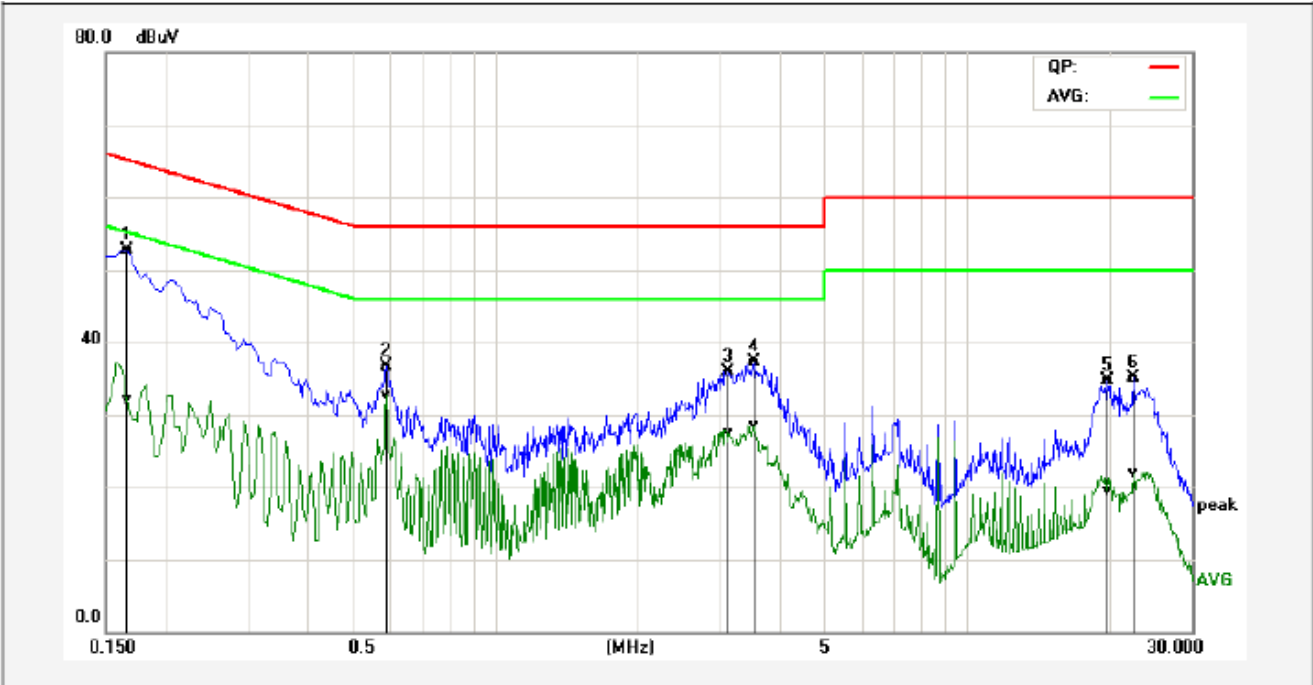

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1660	43.17	22.47	9.61	52.78	32.08	65.15	55.16	-12.37	-23.08	Pass
2P	0.5899	26.88	22.97	9.72	36.60	32.69	56.00	46.00	-19.40	-13.31	Pass
3P	3.1260	26.19	17.74	9.71	35.90	27.45	56.00	46.00	-20.10	-18.55	Pass
4P	3.5580	27.62	18.82	9.71	37.33	28.53	56.00	46.00	-18.67	-17.47	Pass
5P	19.8740	24.89	9.73	9.83	34.72	19.56	60.00	50.00	-25.28	-30.44	Pass
6P	22.5660	25.19	12.11	9.86	35.05	21.97	60.00	50.00	-24.95	-28.03	Pass


Line Conducted Emission Test Line 2-N

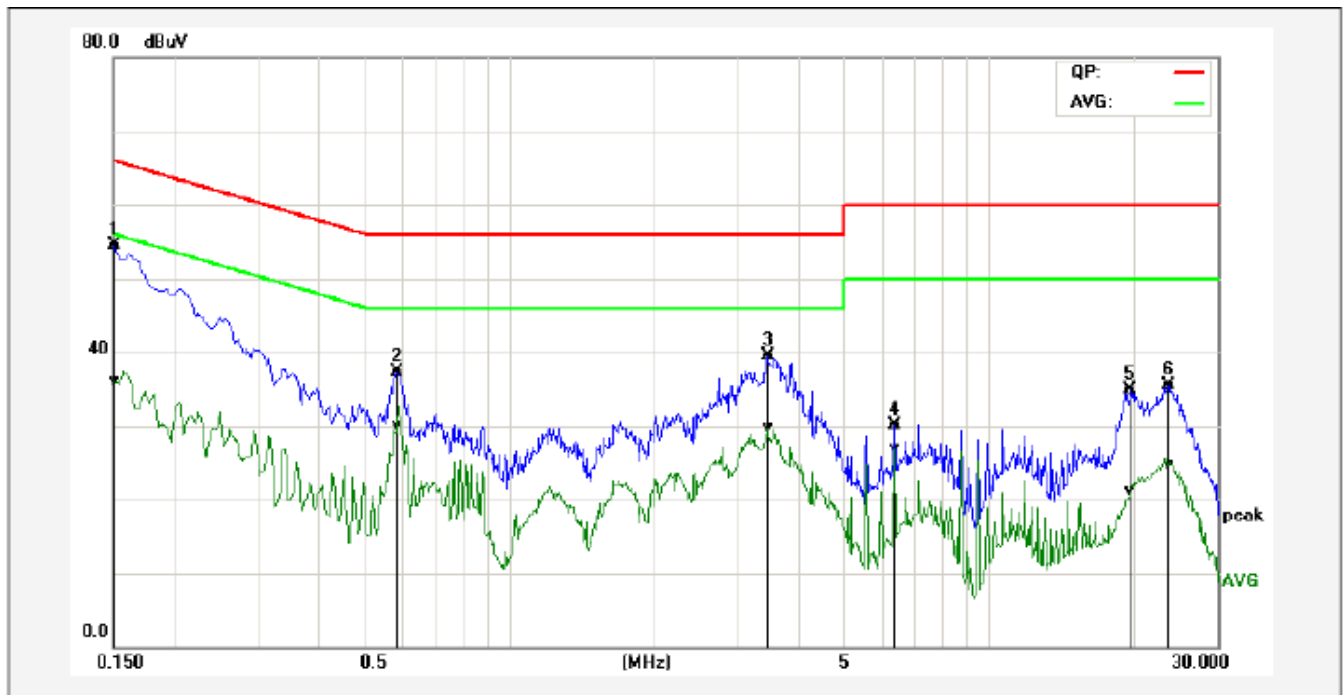

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1500	44.80	26.32	9.78	54.58	36.10	65.99	56.00	-11.41	-19.90	Pass
2P	0.5860	27.67	20.49	9.68	37.35	30.17	56.00	46.00	-18.65	-15.83	Pass
3P	3.4660	29.75	19.95	9.75	39.50	29.70	56.00	46.00	-16.50	-16.30	Pass
4P	6.3620	20.31	17.11	9.78	30.09	26.89	60.00	50.00	-29.91	-23.11	Pass
5P	19.8260	25.08	11.40	9.73	34.81	21.13	60.00	50.00	-25.19	-28.87	Pass
6P	23.7099	25.66	15.02	9.77	35.43	24.79	60.00	50.00	-24.57	-25.21	Pass


FOR BLE

Line Conducted Emission Test Line 1-L

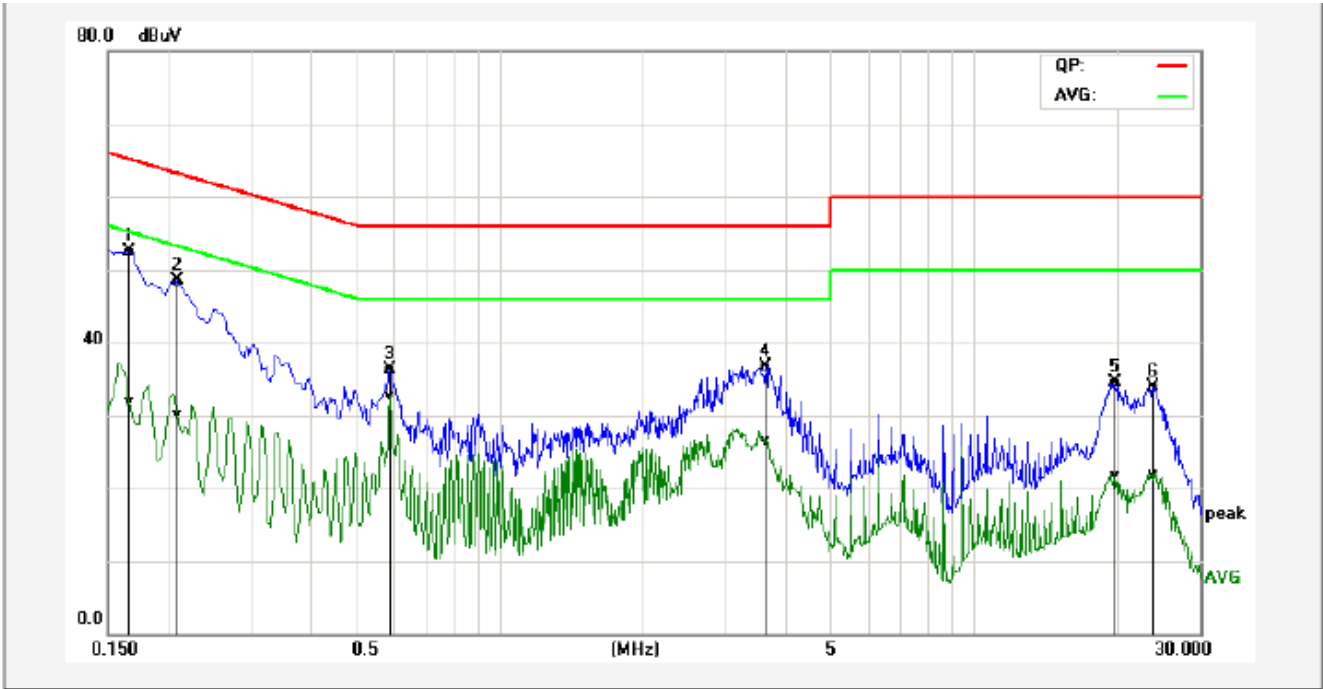

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1660	42.88	22.23	9.61	52.49	31.84	65.15	55.16	-12.66	-23.32	Pass
2P	0.2100	38.71	20.33	9.69	48.40	30.02	63.20	53.21	-14.80	-23.19	Pass
3P	0.5899	26.64	22.89	9.72	36.36	32.61	56.00	46.00	-19.64	-13.39	Pass
4P	3.6460	27.09	16.77	9.71	36.80	26.48	56.00	46.00	-19.20	-19.52	Pass
5P	19.9340	24.60	11.84	9.83	34.43	21.67	60.00	50.00	-25.57	-28.33	Pass
6P	23.8700	24.11	11.98	9.88	33.99	21.86	60.00	50.00	-26.01	-28.14	Pass

Line Conducted Emission Test Line 2-N

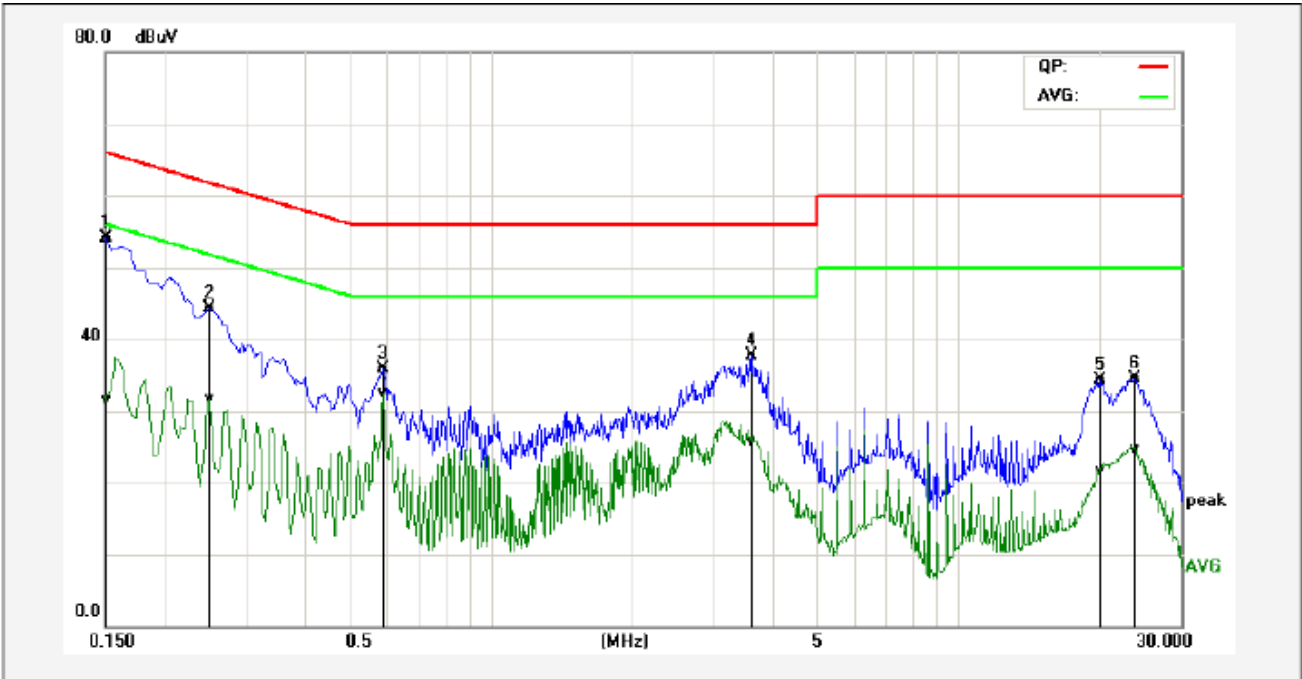

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1500	44.27	21.75	9.78	54.05	31.53	65.99	56.00	-11.94	-24.47	Pass
2P	0.2500	34.61	22.00	9.77	44.38	31.77	61.75	51.76	-17.37	-19.99	Pass
3P	0.5899	26.22	22.79	9.68	35.90	32.47	56.00	46.00	-20.10	-13.53	Pass
4P	3.6220	27.85	15.93	9.76	37.61	25.69	56.00	46.00	-18.39	-20.31	Pass
5P	20.0700	24.54	11.97	9.73	34.27	21.70	60.00	50.00	-25.73	-28.30	Pass
6P	23.8860	24.82	14.97	9.78	34.60	24.75	60.00	50.00	-25.40	-25.25	Pass

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP






APPENDIX B: PHOTOGRAPHS OF EUT

All VIEW OF EUT




TOP VIEW OF EUT

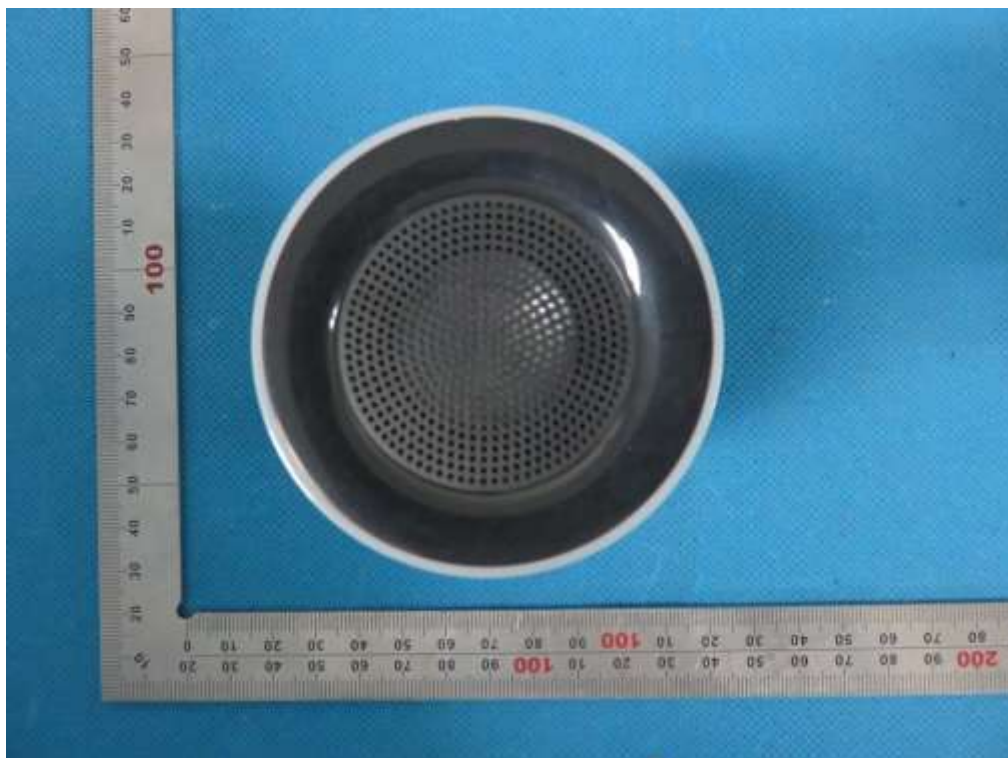

BOTTOM VIEW OF EUT



FRONT VIEW OF EUT

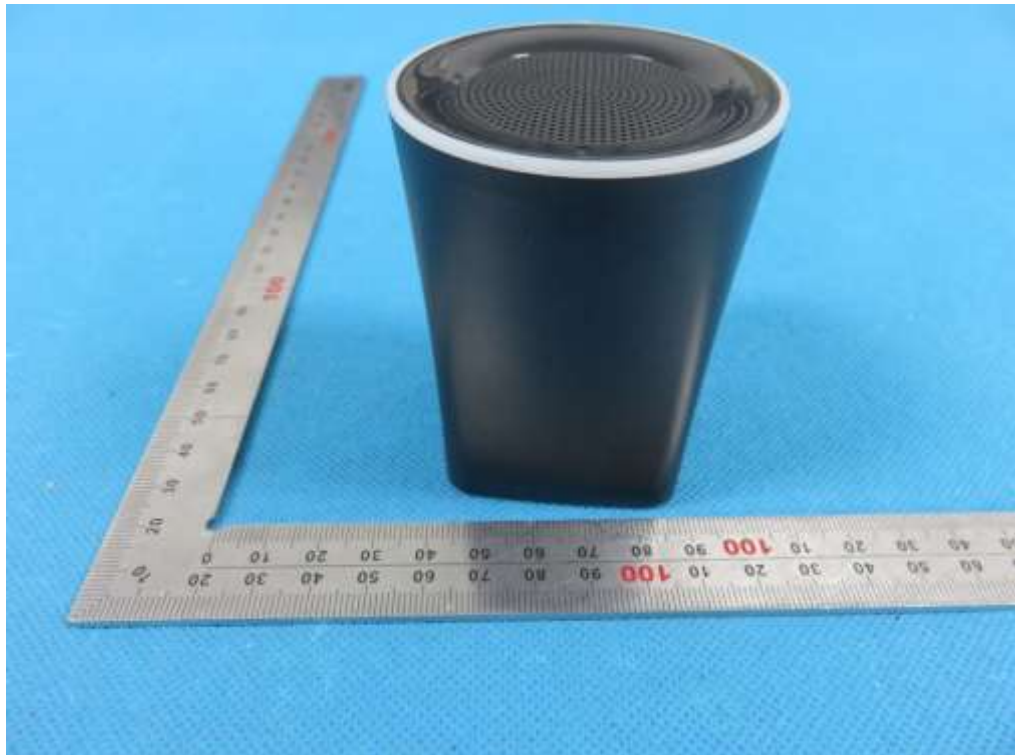

BACK VIEW OF EUT



LEFT VIEW OF EUT




RIGHT VIEW OF EUT




VIEW OF EUT(Port)




OPEN VIEW OF EUT

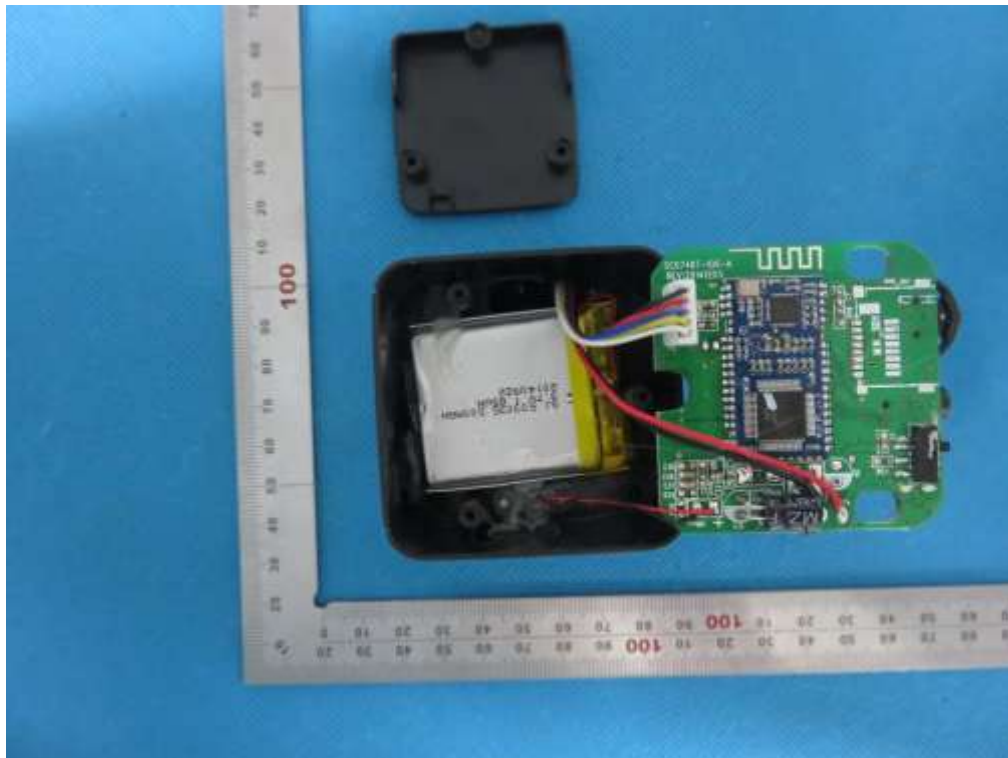


INTERNAL VIEW OF EUT-1

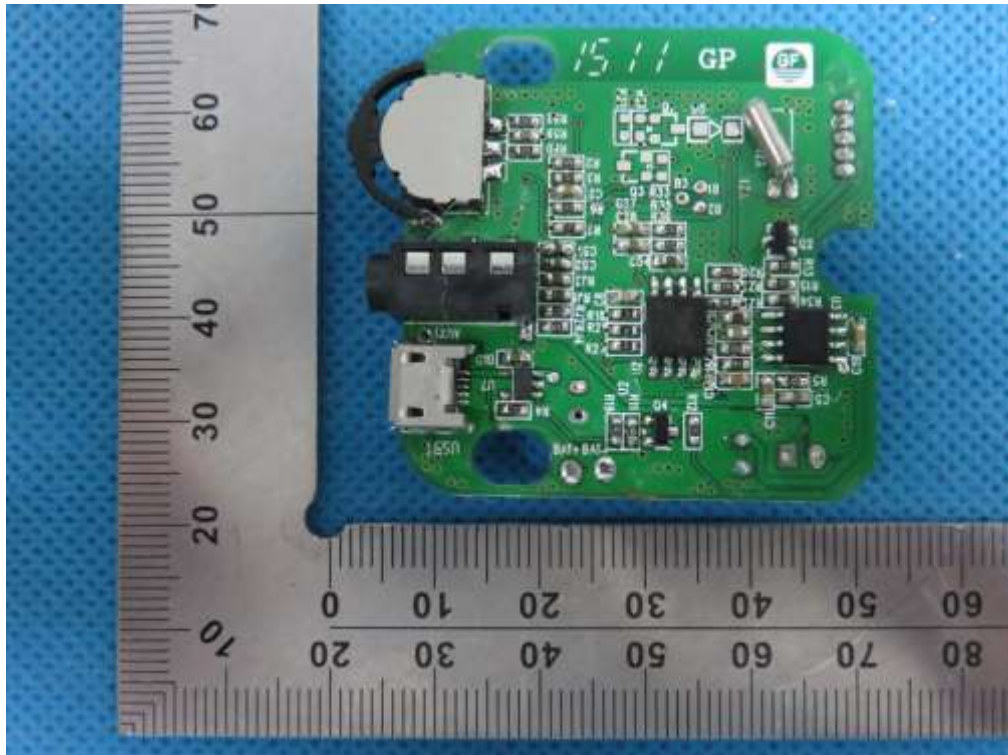

INTERNAL VIEW OF EUT-2

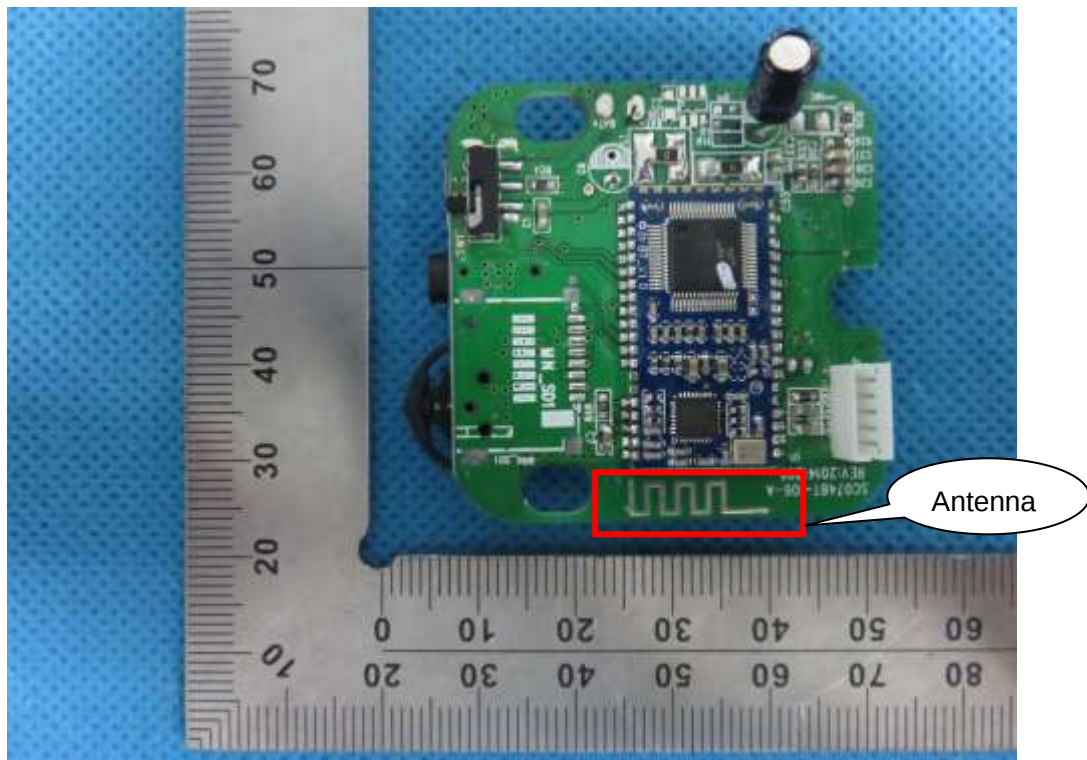

INTERNAL VIEW OF EUT-3

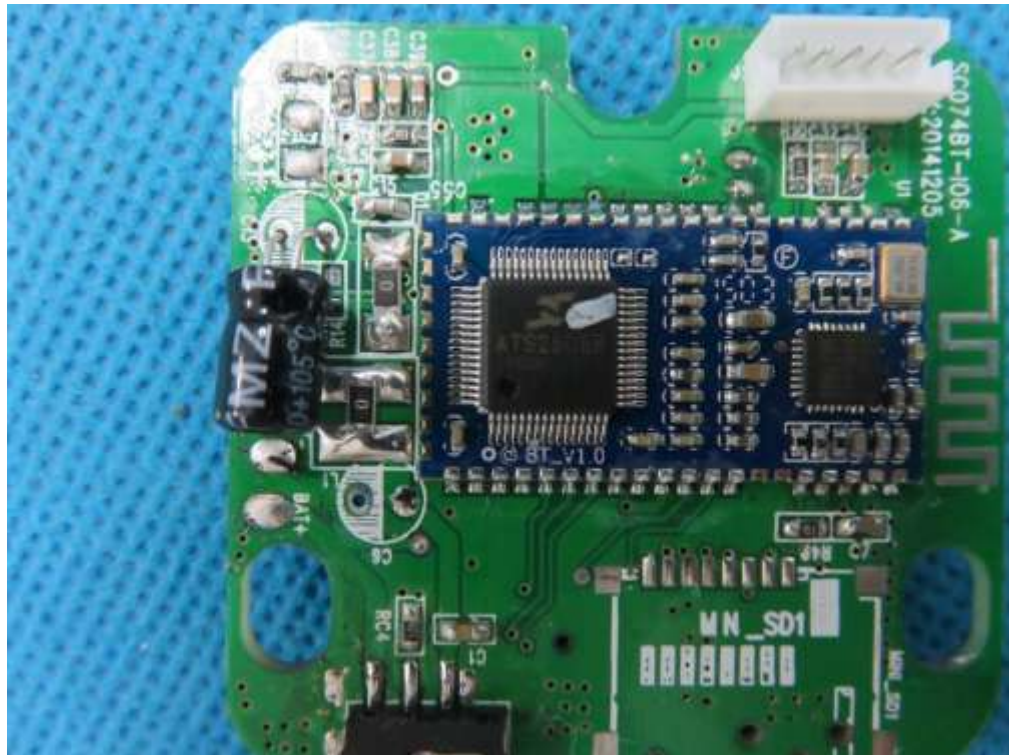

-----END OF REPORT-----