


Transmitter Block diagram

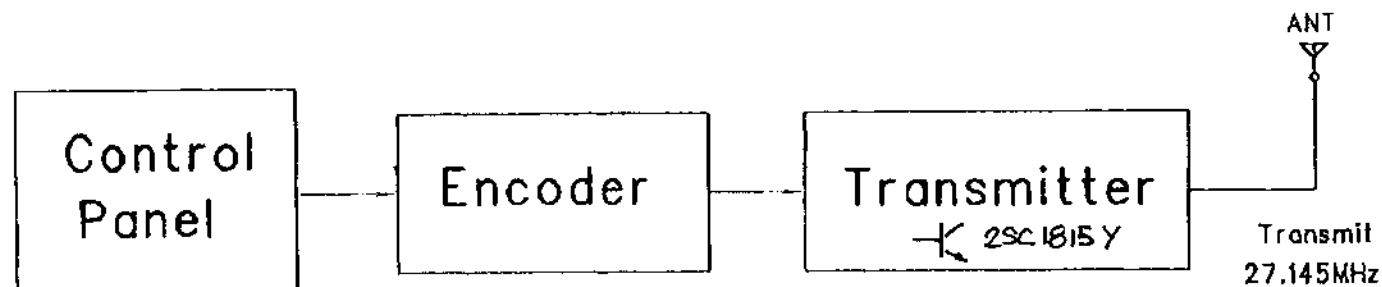

Technical description

encoding signal will be generated by IC-PT8A971P
 when pressing a function key and move the joystick, it will be mixed
 with carry frequency and amplified by Q2
 Modulating signal will be transmitted through antenno
 network

参考用

Silverlit® Silverlit Toys Manufactory Ltd. 20th floor, 38 Street Street, Causeway Bay, Hong Kong		DWG. NAME	BLOCK
		DWG. NO.	
ITEM NO.	86D11	ITEM NAME	Bubble Z
Transmit frequency :		DRAWN/DATE	Sam/Mor-24-2001
27.145MHz		CHK/DATE	
SCALE	PAGE	1 OF 1	APP/DATE

CE DE 0070 5/2000 0

REV	DETAIL OF CHANGE	DATE	APPROVED BY