


REV	DETAIL OF CHANGE	DATE	APPROVED BY

5/16

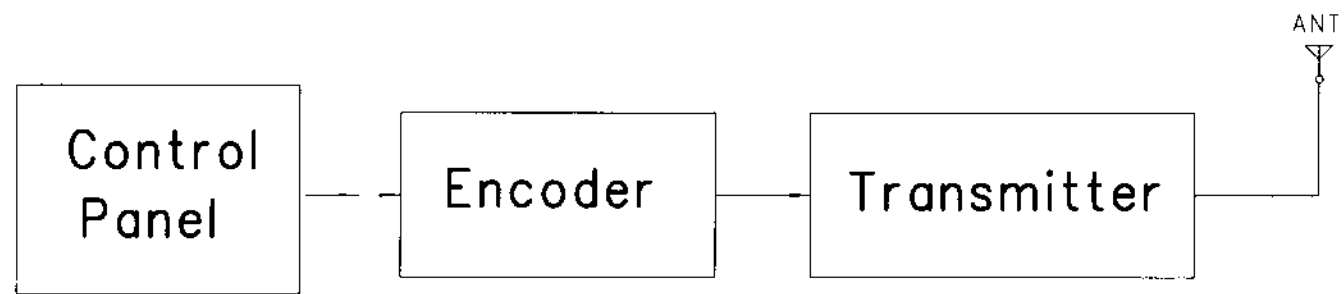


Transmit frequency :
49.860MHz

Transmitter Block diagram

Technical description	encoding signal will be generated by IC-PT8A971P when pressing a function key and move the joysytick, it will be mixed with carry frequency and amplified by Q2 Modulating signal will be transmitted through antenna network
-----------------------	---

參考用



 Silverlit Toys Manufacturing Ltd. 28th Floor, 38 Russell Street, Causeway Bay, Hong Kong		DWG. NAME	BLOCK DIAGRAM	
		DWG. NO.		
ITEM NO.	B2051	ITEM NAME	Scooter & Remoter (TX)	
Transmit frequency:		DRAWN/DATE	SAM/JAN-04-2001	
49.860MHz		CHK/DATE	<i>Paul</i> 4/1/2001	
SCALE		PAGE	1 OF 1	APP/DATE <i>Paul</i> 4/1/2001