



D	C	B	A	NO.	DESCRIPTION	PART NO.	MATERIAL	Q'TY	SURFACE TREATMENT	REMARK
					<i>LABEL</i>	<i>OFE</i>	<i>백색 P.E.T</i>	.	.	.

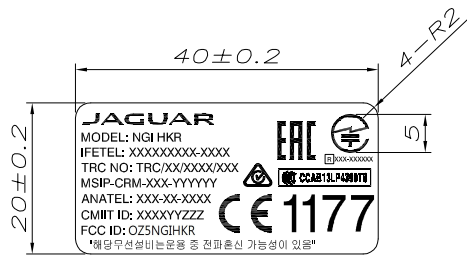

LABEL 부착 위치

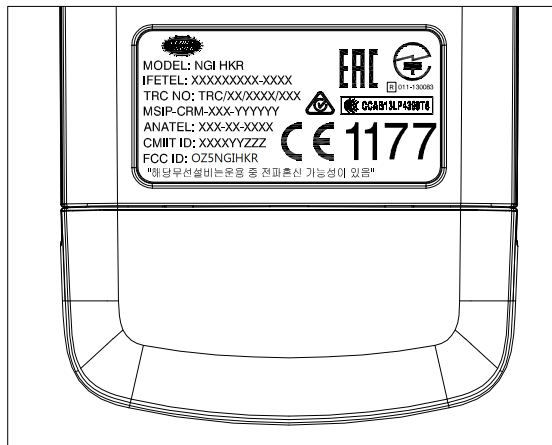

SCALE 2:1

LABEL	MATERIAL	백색 P.E.T 0.075t
	EXCEPT FOR DESIGNATE PRINT COLOR	SILVER
	EXCEPT FOR DESIGNATE GROUND COLOR	DIC-582 (BLACK)
	COATING	UV COATING

Appointment

1. That product specification acts in design appointment Film and specification.
2. That keeps written size. (Non-appointment tolerance : ± 0.2)
3. That noxious defect does not exist in external appearance (Press Burr, Scratch, Dirt sticking, Decolorization etc.)
4. That printing specification accords whit the limit of sample and plan and there must be no defect, such as printing spreading and eccentricity etc. . .
5. Pinting contate state has to be astisfied with this film standard (1 Kg, 20 times, Stroke:30mm). (A whole surface printing)
6. Submit sample before mass-producing product, then acquire design approval. That doubt item inquires in design re-approval.
7. In case of amendment happening, that notifies in design. Then acquire
8. All raw materials that purvey by wisdom electron .
Subsidiary materials and parts should be harmless in environment in Ohsung company's requirement, Cd, Pb, Hg, Cr6+, PBB, PBDE 6 element must not exceed standard PPM that decide in this firm.

DATE	AUTHORIZED	CHANGED DETAILS				CHANGED BASIS
SCALE 1:1	UNIT MM	LIMIT ± 0.1	DESC-RIPTION	<i>LABEL</i>		
Drafter	Checked	Approved	MODEL NAME	<i>OTMF-B306TYPE</i>		
MIN. S.B						
2014.01.04						
OH SUNG ELECTRONICS CO.,LTD.		REF. NO.	NGI	P/NO.	<i>OFE</i>	
		STOCK NO.				