

Tantalus Systems Corp.

VC-910

Report of Measurements

per

Industry Canada RSS-210 Issue 8

and

FCC CFR47 Part 15/B; FCC CFR47 Part 15/C – 15.247

Revision 2.0
May 16, 2014

Reviewed By:	 _____ Parm Singh, EMC Division Manager	May 16 2014 _____ Date
--------------	--	------------------------------

Tested By:	 _____ Aman Jathaul, EMC Project Manager	May 16 2014 _____ Date
------------	---	------------------------------

Quality Auditing Institute
19473 Fraser Way, Pitt Meadows, BC, V3Y 2V4, Canada

Test Report Summary

FCC 15.247 / IC RSS-210

Frequency Hopping 902.17 – 927.83MHz communication Module

FCC ID: OZFVC910 **IC:** 3669A-VC910

Organization Requesting Report: Tantalus Systems Corp.

Contact: Mark Fairburn, RF Design Engineer

Test Organization: Quality Auditing Institute Ltd.

Contact: Aman Jathaul, EMC Project Manager

Test Personnel: Aman Jathaul

Index

List of Figures	5
List of Tables	6
Section 1: Information for Test Report of Measurements	7
Section II: IC RSS-210 Iss.8 & FCC CFR47 Part 15/B Report of Measurements	10
Section III: IC RSS-210 Issue 8 Emissions Testing	11
Part 1 – Radiated Emissions Testing	12
Part 2 – Conducted Emissions Testing	13
Part 3 – Radiated Emissions – Transmit Mode	14
Low Data Rate	16
High Data Rate	16
Communication Data Rate to Certified OEM Part 15 Device	17
Part 4 – Output Power and EIRP Emissions	18
Part 5: Out of Band Emissions	19
Section IV: FCC CFR47 Part 15/C Report of Measurements	20
Part 1 – Radiated Emission Testing	21
Part 2 – Antenna Requirement – 15.203	22
Part 3 – Conducted Emissions Tests – 15.207	23
Part 4 – Frequency Hopping Spread Spectrum Operation – 15.247	24
Part 5: Output Power and EIRP Emissions	26
Part 6: Restricted Bands Review – 15.205(b)	27
Appendix A: Test Plots VC-910	28
Unintentional Radiated Emissions, Idle Mode	28
Intentional Radiated Emissions, Tx Mode	29
A.C. Mains Conducted Emissions	30

FHSS Compliance Tests.....	33
Output Power	33
Low Data Rate Tests.....	36
20 dB Bandwidth	36
Channel Separation.....	39
Number of Hopping Channels.....	40
Dwell Time and Time of Occupancy	44
Channel Bandedge.....	46
High Data Rate Tests.....	48
20 dB Bandwidth	48
Channel Separation.....	51
Number of Hopping Channels.....	52
Dwell Time and Time of Occupancy	58
Channel Bandedge.....	60
Tests when unit is communicating to OEM Part 15 approved Device	62
20 dB Bandwidth	62
Channel Separation.....	65
Number of Hopping Channels.....	66
Dwell Time and Time of Occupancy	75
Channel Bandedge.....	77
Radiated Spurious Harmonics	79
Appendix B: Test Setup Photos.....	80

List of Figures

Figure 1: 120V AC Conducted Emissions - Line 1 and Line 2	32
Figure 3: Output Power at LOW Frequency	33
Figure 4: Output Power at MID Frequency	34
Figure 5: Output Power at HIGH Frequency	35
Figure 6: 20dB Bandwidth at LOW Frequency – 112.8 kHz	36
Figure 7: 20dB Bandwidth at MID Frequency – 114.0 kHz	37
Figure 8: 20dB Bandwidth at HIGH Frequency – 114.0 kHz	38
Figure 9: Channel Separation = 258.0 kHz	39
Figure 10: Number of Hopping Frequencies 902MHz to 908MHz - 12 Frequencies	40
Figure 11: Number of Hopping Frequencies 908MHz to 914.5MHz - 10 Frequencies	41
Figure 12: Number of Hopping Frequencies 914.5MHz to 920.6MHz - 12 Frequencies	42
Figure 13: Number of Hopping Frequencies 920.6MHz to 928MHz - 16 Frequencies	43
Figure 14: Dwell Time – 4.4mS	44
Figure 15: Time Occupancy Per Frequency – 46.32mS*	45
Figure 16: Low Channel Bandedge	46
Figure 17: High Channel Bandedge	47
Figure 18: 20dB Bandwidth at LOW Frequency – 318 kHz	48
Figure 19: 20dB Bandwidth at MID Frequency – 318 kHz	49
Figure 20: 20dB Bandwidth at HIGH Frequency – 318 kHz	50
Figure 21: Channel Separation = 319.8kHz	51
Figure 22: Number of Hopping Frequencies 902MHz to 907.4MHz - 11 Frequencies	52
Figure 23: Number of Hopping Frequencies 907.4MHz to 9014.5MHz - 15	53
Figure 24: Number of Hopping Frequencies 914.5MHz to 918.4MHz - 7 Frequencies	54
Figure 25: Number of Hopping Frequencies 918.4MHz to 922.5MHz - 8 Frequencies	55
Figure 26: Number of Hopping Frequencies 922.5MHz to 924.7MHz - 6 Frequencies	56
Figure 27: Number of Hopping Frequencies 924.7MHz to 928MHz - 7 Frequencies	57
Figure 27: Dwell Time – 623.6uS.....	58
Figure 28: Time Occupancy Per Frequency – 109.3mS*	59
Figure 29: Low Channel Bandedge	60
Figure 30: High Channel Bandedge	61
Figure 31: 20dB Bandwidth at LOW Frequency – 156.6 kHz.....	62
Figure 32: 20dB Bandwidth at MID Frequency – 156.6 kHz	63
Figure 33: 20dB Bandwidth at HIGH Frequency – 155.7 kHz	64
Figure 34: Channel Separation = 200.6kHz	65
Figure 35: Number of Hopping Frequencies 902MHz to 905MHz - 11 Frequencies	66
Figure 36: Number of Hopping Frequencies 905MHz to 908MHz - 13	67
Figure 37: Number of Hopping Frequencies 908MHz to 911MHz - 15 Frequencies	68
Figure 38: Number of Hopping Frequencies 911MHz to 914MHz - 15 Frequencies	69
Figure 39: Number of Hopping Frequencies 914MHz to 917MHz - 15 Frequencies	70
Figure 40: Number of Hopping Frequencies 917MHz to 920MHz - 15 Frequencies	71
Figure 41: Number of Hopping Frequencies 920MHz to 922MHz - 15 Frequencies	72
Figure 42: Number of Hopping Frequencies 923MHz to 926MHz - 15 Frequencies	73
Figure 43: Number of Hopping Frequencies 926MHz to 928MHz - 8 Frequencies	74
Figure 41: Dwell Time – 6.4mS	75
Figure 42: Time Occupancy Per Frequency – 1.067mS*	76
Figure 43: Low Channel Bandedge	77
Figure 44: High Channel Bandedge	78
Figure 48: AC Conducted Test Setup.....	80
Figure 49: Emissions Test Setup – Intentional / Unintentional Radiated Emissions	81
Figure 50: Emissions Test Setup – Intentional / Unintentional Radiated Emissions	82
Figure 51: Emissions Test Setup – Intentional Harmonics	83

List of Tables

Table 1: FCC Class B Emissions, Idle Mode - 3m*	28
Table 2: FCC Class B Emissions, Tx Mode - 3m*	29
Table 3: AC Conducted Emissions, Line 1	30
Table 4: AC Conducted Emissions, Line 2	31
Table 5: Harmonics at Low Frequency	79
Table 6: Harmonics at Mid Frequency	79
Table 7: Harmonics at High Frequency	79

Section 1: Information for Test Report of Measurements

Testing Details

TESTED BY: Aman Jathaul

ENVIRONMENTAL CONDITIONS:

Day 1: Dec 18 2013	Temperature: 22.0°C, R.H.: 40.3%, Barometric Pressure: 1015.8 mBar.
Day 2: Dec 23 2013	Temperature: 20.5°C, R.H.: 38.4%, Barometric Pressure: 1016.8 mBar.
Day 3: Dec 23 2013	Temperature: 19.7°C, R.H.: 39.3%, Barometric Pressure: 1014.8 mBar.
Day 4: Jan 07 2014	Temperature: 21.5°C, R.H.: 39.7%, Barometric Pressure: 1014.3 mBar.
Day 5: Feb 04 2014	Temperature: 22.3°C, R.H.: 39.0%, Barometric Pressure: 1015.0 mBar.
Day 6: Mar 21 2014	Temperature: 23.4°C, R.H.: 41.2%, Barometric Pressure: 1015.3 mBar.

Test Facilities

Main Laboratory Headquarters: Quality Auditing Institute
 Headquarters Location/Address: 16 – 211 Schoolhouse Street, Coquitlam, BC, 3K 4X9, Canada

Associated Laboratory: Quality Auditing Institute (Remote Location)

EMC Test Laboratory Location/Address: 19473 Fraser Way, Pitt Meadows, BC, V3Y 2V4, Canada

FCC Test Site Registration Number: 3 m /10 m Open Area Test Site [OATS] and
 3 m Semi-Anechoic Chamber [SAC]: 226383

Industry Canada Test Site Registration Number (3m SAC): 9543B-1

Standard Council of Canada: ISO/IEC 17025:2005 Accredited Laboratory No. 743

International Accreditation Service Inc.: ISO/IEC 17025:2005 Accredited Laboratory: No. TL-239

Test Equipment List

Device	Model Number	Equipment Description	Serial No.	Last Cal	Next Cal
Antenna	Sunol Sciences JB3	Biconilog Antenna (30MHz-3GHz)	A042004	Mar 12, 2012	Mar 12, 2015
EMI Receiver	Rohde & Schwarz ESU40	EMI Receiver (20Hz-40GHz)	100011	June 26, 2012	June 26, 2015
LISN	COM-POWER LI-115	LISN (150kHz-30MHz)	241036	Mar 9, 2011	Mar 9, 2014
Horn Antenna	COM-POWER AHA-118	Horn Antenna with LNA (1-18Ghz)	711040	Mar 11, 2011	Mar 11, 2014
Turntable	ETS Lindgren 2165	00043677	N/A	N/A	N/A
Mast	ETS Lindgren 2165	00077487	N/A	N/A	N/A

Note: All the equipments have 3-years calibration cycle.

Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$ MHz
Radiated Emissions	± 3 dB
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$

DC and low frequency voltages

 $\pm 3\%$

Company Tested

NAME: Tantalus Systems Corp.

ADDRESS: 301-3480 Gilmore Way
Burnaby, BC V5G 4Y1
Canada

CONTACT PERSON: Mr. Mark Fairburn

PHONE NUMBER: 1-604-299-0458 x:229

Equipment Under Test

THE TEST SYSTEM:

The Tantalus Systems VC-910 is a high capacity LAN collector that allows electrical utilities to create LAN's with an endpoint capacity of upto 2000 devices with a variety of data rates and multi-level FSK modulation formats to achieve data rates of upto 640kbps.

Product ID: VC-910
Manufacturer: Tantalus Systems Corp.

LAN Controller
Part Numbers: 100-0161-B
Serial number: 001865F80A

WAN Controller
Part Numbers: 100-0090-L
Serial number: 0018633D9A

TEST SETUP: This EUT is designed to communicate with other LAN devices in the Tantalus Utility Network (TUNet®) and employs a Frequency Hopping Spread Spectrum (FHSS) system operating on the 902-928 MHz band for LAN communication.

CABLING:

Cable	Pins	Connector	Load/Termination	Shielded	Ferrites
Power	3	Terminal	No	No	No

MODIFICATIONS: No modifications were made for this unit to pass.

CONCLUSION: The VC-910 complies with the requirements of FCC CFR47 and the requirements of Industry Canada RSS-210.

Section II: IC RSS-210 Iss.8 & FCC CFR47 Part 15/B Report of Measurements

Markings

According to FCC Section 15.19 and ICES 003, a statement similar to the following must be included on an identification label, which also uniquely identifies the Manufactured date, either explicitly or through a Serial number etc.:

“This equipment complies with FCC Rules, Part 15 and Industry Canada’s ICES 003 for a Class B Digital Device. Operation is subject to two conditions:

- 1) This device may not cause harmful interference, and
- 2) This device must accept any interference that may cause any undesired operation”

Additionally, if the manufacturer markets product to Quebec, the following supplemental information should be added to the label:

“Cet Appareil numerique de la Classe B respecte toutes les exigences du Reglement sur le material brouilleur du Canada.”

Labeling

According to FCC Section 15.105, and ICES 003, the following statement must be included in a prominent location in your User’s Manual:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy, and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

It is also required according to FCC Part B Section 15.21 that a caution is included such as:

Caution: Changes or modifications to this equipment, not expressly approved by the manufacturer could void the user’s authority to operate the equipment.

This product is License Exempt for FCC and IC. There is a requirement for this product to be submitted for certification and requires both an FCC ID and an IC ID number to be added to the labels in accordance with FCC CFR47 Part 2 Subpart J (2.901 to 2.956) as well as IC Self-Marking standards.

Section III: IC RSS-210 Issue 8 Emissions Testing

Test Results – Summary

Testing was performed pursuant to Industry Canada RSS-210 Issue 8.

Test	Standard	Description	Result
Radiated Emissions Idle Mode Subclause 8.2	RSS-210 2.2(b)	The radiated emissions are measured in the 0.009 - 9280MHz range	Complies
Conducted Emissions Idle Mode Subclause 8.3	EN55022 Class A Limits	The Conducted Emissions are measured on the phase and neutral power lines in the 0.15 – 30.0 MHz range	Complies
Radiated Emissions Transmit Mode	RSS-210 A8.5	The radiated emissions are measured in the 0.009 -9280MHz range	Complies
Output Power and EIRP Emissions	RSS-210 A8.4(1)	Output power will not exceed 1 Watt and the E.I.R.P. will not exceed 4 Watts	Complies

Part 1 – Radiated Emissions Testing

DATE April 03, 2013

TEST STANDARD: RSS-210 2.2(b)

TEST SETUP: The EUT was operated and tested at 240Vac and 120Vac 60Hz in its normal mode of operation. It was in receive mode for these tests.

MINIMUM STANDARD: Class B Limit:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

METHOD OF MEASUREMENT: Measurements were made using a spectrum analyzer with a 9kHz RBW, Peak detector. Any emissions that are close to the limit are measured using a test receiver with a 9kHz bandwidth, CISPR Quasi-Peak detector as well as an averaging meter. The EUT was set up in a 3 meter semi-anechoic chamber, using the manufacturer's specified normal cabling configuration, with all cables over 1 meter in length bundled at 1 meter and retained from the floor. A typical application was tested.

Emissions in both horizontal and vertical polarization were measured while rotating the EUT on a turntable to maximize the emissions signal strength and the results recorded on the attached plots.

EMISSIONS DATA: See Appendix A for corresponding frequencies.

PERFORMANCE: Complies.

Part 2 – Conducted Emissions Testing

DATE: April 01, 2013

TEST STANDARD: EN55022

MINIMUM STANDARD: Class B Limit:

TEST SETUP: The EUT was connected to the conducted emissions LISN apparatus. The device was operated and tested at 240Vac and 120Vac 60Hz.

MINIMUM STANDARD: Class A Limit:

Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

METHOD OF MEASUREMENT: Measurements were made using a spectrum analyzer with a 9kHz RBW, Peak detector. Any emissions that are close to the limit are measured using a test receiver with a 9kHz bandwidth, CISPR Quasi-Peak detector as well as an averaging meter.

MEASUREMENT DATA: See Appendix A for Plots.

EMISSIONS DATA: See Appendix A for corresponding frequencies.

PERFORMANCE: Complies.

Part 3 – Radiated Emissions – Transmit Mode

DATE: April 03, 2013

TEST STANDARD: RSS-210 Iss.8 Annex 8 Frequency Hopping Systems 902-928MHz Band.

MINIMUM STANDARD: **A8.1 – Frequency Hopping Systems (General Conditions)**

Frequency hopping systems are spread spectrum systems in which the carrier is modulated with coded information in a conventional manner causing a conventional spreading of the RF energy about the carrier frequency. The frequency of the carrier is not fixed but changes at fixed intervals under the direction of a coded sequence. Frequency hopping systems are not required to employ all available hopping frequencies during each transmission. However the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream.

Incorporation of intelligence into a frequency hopping system that enables it to recognize other users of the band and to avoid occupied frequencies is permitted, provided that the frequency hopping system does it individually, and independently chooses or adapts its hopset. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

(a) The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped. The system RF bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The hopset shall be such that the near-term distribution of frequencies appears random, with sequential hops randomly distributed in both direction and magnitude of change in the hopset while the long-term distribution appears evenly distributed.

(b) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(c) For frequency hopping systems in the band 902-928 MHz: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20 second period. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

A8.4 Transmitter Output Power and e.i.r.p. Requirements

(1) For frequency hopping systems operating in the band 902-928 MHz, the maximum peak conducted output power shall not exceed 1.0 W, and the e.i.r.p. shall not exceed 4 W, if the hopset uses 50 or more hopping channels; the maximum peak conducted output power shall not exceed 0.25 W, and the e.i.r.p. shall not exceed 1 W, if the hopset uses less than 50 hopping channels. As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power (see RSS-Gen).

A8.5 Out-of-band Emissions

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under Section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB.

TEST SETUP: The EUT was operated and tested at 240Vac and 120V 60Hz for the tests and the unit was transmitting at its maximum rate based on the energy that it could sustain in normal operation.

METHOD OF MEASUREMENT: Measurements were made using a spectrum analyzer. The EUT was set up in a 3 meter Semi-Anechoic test site, using the manufacturer's specified normal cabling configuration, with all cables over 1 meter in length bundled at 1 meter and retained from the floor.

Emissions in both horizontal and vertical polarization were measured while rotating the EUT on a turntable to maximize the emissions signal strength and the results recorded on the attached plots.

All frequencies 0.009 -1000MHz were tested at 3m and all frequencies 1GHz and up were tested at 1m in accordance with ANSI c63.4.

EMISSIONS DATA: See Appendix A for results.

Test	Standard	Results
Spread Spectrum Method of Modulation	RSS-210 A8.1	This product meets the requirements of a Frequency Hopping Spread Spectrum (FHSS) system operating in the 902-928MHz band
Output Power and EIRP	RSS-210 A8.4(1)	See the Measurement Data section in Part 4 of this Section. The output EIRP is a maximum of 0.759W. The conducted output power is 550mW.
Out of Band Emissions	RSS-210 A8.5	See Tables 6 - 8 in Appendix A. All radiated emissions were within the RSS-210 A8.5 limit.

Low Data Rate

Channel Bandwidth	RSS-210 A8.1(a)	See Figures 6 - 8 in Appendix A. The 20dB bandwidth was measured to be 112.2 kHz.
Channel Separation	RSS-210 A8.1(c)	See Figure 9 in Appendix A. The Channel separation was measured to be 128.1 kHz.
Number of Hopping Channels	RSS-210 A8.1(c)	See Figures 10 -13 in Appendix A. The number of frequencies used is 50.
Hopping Channels Time of Occupancy	RSS-210 A8.1(c)	See Figures 14 and 15 in Appendix A; the time of occupancy is 4.4 milliseconds at an interval of 1.9 seconds. This is equal to an average time "ON" of 46.3 mSecs within a 20 second period.

High Data Rate

Channel Bandwidth	RSS-210 A8.1(a)	See Figures 18 - 20 in Appendix A. The 20dB bandwidth was measured to be 300 kHz.
Channel Separation	RSS-210 A8.1(c)	See Figure 21 in Appendix A. The Channel separation was measured to be 318.4 kHz.
Number of Hopping Channels	RSS-210 A8.1(c)	See Figures 22 - 27 in Appendix A. The number of frequencies used is 54.
Hopping Channels Time of Occupancy	RSS-210 A8.1(c)	See Figures 28 and 29 in Appendix A; the time of occupancy is 624 microseconds at an interval of 0.114 seconds. This is equal to an average time "ON" of 109.3 mSecs within a 20 second period.

Communication Data Rate to Certified OEM Part 15 Device

Channel Bandwidth	RSS-210 A8.1(a)	See Figures 31 - 33 in Appendix A. The 20dB bandwidth was measured to be 156.6 kHz.
Channel Separation	RSS-210 A8.1(c)	See Figure 21 in Appendix A. The Channel separation was measured to be 200.6 kHz.
Number of Hopping Channels	RSS-210 A8.1(c)	See Figures 35 - 43 in Appendix A. The number of frequencies used is 120.
Hopping Channels Time of Occupancy	RSS-210 A8.1(c)	See Figures 31 and 32 in Appendix A; the time of occupancy is 6.40 milliseconds at an interval of 120 seconds. This is equal to an average time "ON" of 1.067mSecs within a 20 second period.

PERFORMANCE: Complies.

Part 4 – Output Power and EIRP Emissions

DATE: April 05, 2013

TEST STANDARD: RSS-210 Iss.8 A8.4 – Frequency Hopping Spread Spectrum Systems 902-928MHz

MINIMUM STANDARD: For frequency hopping systems operating in the band 902-928 MHz, the maximum peak conducted output power shall not exceed 1.0 W, and the e.i.r.p. shall not exceed 4 W, if the hopset uses 50 or more hopping channels; the maximum peak conducted output power shall not exceed 0.25 W, and the e.i.r.p. shall not exceed 1 W, if the hopset uses less than 50 hopping channels.

TEST SETUP: Refer to setup in Part 3 above.

METHOD OF MEASUREMENT: The Antenna is connected directly to the PCB using a coaxial pigtail; the conducted output power was measured at this point. A 30dB attenuator was used to protect the instrumentation. See Figures 13-15.

EIRP was measured at the 3m distance and the measurement was adjusted to account for cable loss and Antenna factor.

EIRP measurements

Freq(MHz)	Corrected Field at 3m (dBµV/m)	3m EIRP (dBm)
902.17	124.02	28.79
915	123.78	28.55
927.83	123.33	28.10

Conducted Output Power measurements

Freq(MHz)	Meas. Output Power (dBm)	Correction Factor* (dB)	Output Power (dBm)
902.17	-2.78	30.3	27.52
915	-3.04	30.1	27.06
927.83	-2.86	30.1	27.44

* Correction Factor accounts for a nominal 30dB attenuator and 0.5dB cable loss.

PERFORMANCE: Complies.

Part 5: Out of Band Emissions

DATE: April 05, 2013

TEST STANDARD: RSS-210 A8.5

MINIMUM STANDARD: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under Section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB.

TEST SETUP: Refer to the setup in Part 3 above.

METHOD OF MEASUREMENT: Measurements were made using a horn antenna connected directly into a spectrum analyzer. The EUT was set up in a 1 meter open field test site, using the manufacturer's specified normal cabling configuration, with all cables over 1 meter in length bundled at 1 meter and retained from the floor. An application which transmitted a constant CW at the highest output power was used.

Emissions in the horizontal and vertical polarization were measured while rotating the EUT on a turntable to maximize the emissions signal strength and the results recorded on the attached plots.

Due to the presence of high ambient noise making it impossible to measure an emission at the required distance, the measurement was performed at 1 meter distance and the limit is adjusted per EN61000-6-3:2001

The following formula was used to convert the maximum field strength (FS) in volts/meter to calculate the EUT output power (TP) in Watts:

$$TP = ((FS \times D) \times 2) / (30 \times G)$$

Where D is the distance in meters between the two antennas and G is the EUT antenna numerical gain referenced to isotropic gain.

MEASUREMENT DATA: See Tables 6 to 8 in Appendix A.

PERFORMANCE: Complies.

Section IV: FCC CFR47 Part 15/C Report of Measurements

General

Tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15 – Subpart C - Intentional Radiators. The Testing was performed pursuant to ANSI 63.4, 2003.

Additionally, the specific section used for compliance is 15.247 – Operation within the bands 902-928MHz – limited to frequency hopping intentional radiator. This includes the use of the FCC Public Notice DA 00-705 (Filing and Measurement Guidelines for Frequency hopping Spread Spectrum Systems) that was used as a guide to the tests that were performed.

Labeling Requirements

Please refer to labeling requirements as outlined above in Section 1.

Test Results - Summary

Testing was performed pursuant to ANSI 63.4, 2003.

Test	Standard	Description	Result
Radiated Emissions Idle Mode	FCC Part 15 Subpart B Class B Limits	The radiated emissions are measured in the 0.009 - 9280MHz range	Complies
Conducted Emissions Idle Mode	FCC Part 15 Subpart B Class B Limits	The conducted emissions are measured on the phase and neutral power lines in the 0.15 – 30.0 MHz range.	Complies
Antenna Requirement	FCC Part 15 Subpart 15.203	Proper Antenna is specified and used	Complies
Radiated Emissions Transmit Mode – Frequency Hopping Spread Spectrum Operation	FCC Part 15 Subpart C 15.247	Radiated emission characteristics for Spread Spectrum devices operating in the range 902-928 MHz that use the Spread Spectrum Modulation technique. Emissions are measured in the 0.009 - 9280MHz range.	Complies

Part 1 – Radiated Emission Testing

DATE: April 02, 2013

TEST STANDARD: FCC CFR47, Part 15, Subpart B Class B and Subpart C-Section 15.247

TEST VOLTAGE: 240Vac 60Hz

TEST SETUP: The equipment was set up in a 3-meter semi-anechoic chamber. Emissions in both horizontal and vertical polarization's were measured while rotating the EUT on a turntable to maximize the emissions signal strength and the results recorded on the attached plots. In cases where the presence of high ambient noise makes it impossible to measure an emission at the required distance, the measurement is performed at a closer distance and the limit is adjusted 20dB per Decade using the formula

$$20 \cdot \log(d_1/d_2)$$

Where d1 is the required distance and d2 is the new distance.

MINIMUM STANDARD: When the EUT is operating in Receive mode FCC Part 15 Subpart B Unintentional Radiators Limits for a Class B product.:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

DEVICE DESCRIPTIONS: Refer to the Equipment Under Test information in the Section 1 above, for EUT Descriptions.

CABLING DETAILS: The EUT was set up using the manufacturer's specified normal cabling configuration.

CABLING:

Cable	Pins	Connector	Load/Termination	Shielded	Ferites
Power	3	Terminal	No	No	No

MODIFICATIONS: No modifications were required for the devices to pass the test.

MEASUREMENT DATA: See Appendix A for Plots.

EMISSIONS DATA: See This plot is for reference only. This plot was taken using the peak detector function, some of the emissions seems closer or over the limit line. But Final quasi peak readings meets the standard requirement as shown in the Table 1 below.

Table 1 in Appendix A for corresponding frequencies. Emissions that were attenuated by more than 20dB from the permissible value are not reported in accordance with 15.31(o). The device was tested to 10MHz since it uses clock circuitry at this frequency.

PERFORMANCE: Complies.

Part 2 – Antenna Requirement – 15.203

2.1 APPLICABLE REGULATIONS:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

2.2 RESULTS:

The Part 15 device inside the EUT is comprised of a proprietary design antenna that is soldered to the PCB by means of a coaxial cable. The entire module is underneath a clear plastic cover that is sealed at installation by the utility company and cannot be accessed.

PERFORMANCE:

Complies.

Part 3 – Conducted Emissions Tests – 15.207

3.1 Applicable Regulations

15.207 - (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (db μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

3.2 RESULT

MEASUREMENT DATA:

See Appendix A for Plots.

EMISSIONS DATA:

See Tables 3 - 4 and Figures 1 – 2 in Appendix A for corresponding data.

PERFORMANCE:

Complies.

Part 4 – Frequency Hopping Spread Spectrum Operation – 15.247

4.1 APPLICABLE REGULATIONS:

15.247(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

4.2 TEST PROCEDURES:

TEST STANDARD:

FCC CFR47, Part 15, Subpart C 15.247

DEVICE DESCRIPTIONS:

Refer to the Equipment Under Test Section, above, for EUT Descriptions.

TEST SETUP:

Frequency Range Measured	30MHz – 10000MHz
Test Distance	1m and 3m
Test Instrumentation Resolution	120kHz (30MHz to 1000MHz) 1MHz (1000MHz to 10000MHz)
Receive Antenna Scan Height	1m – 4m
Receive Antenna Polarization	Vertical and Horizontal

CABLING DETAILS:

Cable	Pins	Connector	Load/Termination	Shielded	Ferrites
Power	3	Terminal	No	No	No

4.3 RESULTS:

In all 3 configurations a minimum of at least 50 frequencies are used. A pseudorandom sequence is used at the transmitter and in order to receive the packet successfully the receiver must hop in synchronization with the transmitter. All frequencies are used equally.

MODIFICATIONS

No modifications were required for the devices to pass the test.

MEASUREMENT DATA:

See Figures 3-44 in Appendix A.

PERFORMANCE:

Complies.

Part 5: Output Power and EIRP Emissions

DATE: April 08, 2013

TEST STANDARD: FCC 15.247(b)(2) – Hopping Frequency Systems 902-928MHz

MINIMUM STANDARD: **15.247(b)(2)** – For the band 902-928MHz, the transmitter output power shall not exceed 1.0 watt and the E.I.R.P shall not exceed 4W for systems employing at least 50 Hopping Channels.

TEST SETUP: Refer to setup in Part 1 above.

METHOD OF MEASUREMENT: The Antenna is connected directly to the PCB using a coaxial pigtail; the conducted output power was measured at this point. A 30dB attenuator was used to protect the instrumentation. See Figures 13 - 15.

EIRP was measured at the 3m distance and the measurement was adjusted to account for cable loss and Antenna factor.

MEASUREMENT DATA:

EIRP measurements

Freq(MHz)	Corrected Field at 3m (dBμV/m)	3m EIRP (dBm)
902.17	124.02	28.79
915	123.78	28.55
927.83	123.33	28.10

Conducted Output Power measurements

Freq(MHz)	Meas. Output Power (dBm)	Correction Factor* (dB)	Output Power (dBm)
902.17	-2.78	30.3	27.52
915	-3.04	30.1	27.06
927.83	-2.86	30.1	27.44

* Correction Factor accounts for a nominal 30dB attenuator and 0.5dB cable loss.

PERFORMANCE: Complies.

Part 6: Restricted Bands Review – 15.205(b)

6.1 APPLICABLE REGULATIONS:

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

6.2 RESULTS


All of the measurements for the Part 15 device were made when the EUT was set into transmitting mode to allow measurements of spurious emissions. The spurious frequencies that have been identified to fall into restricted bands are the various harmonics generated from 902 to 928 MHz. The restricted bands affected are 2655-2900MHz, 3600-4400MHz, 4500-5150MHz, 5350- 5460MHz, 7250-7750MHz, 8025-8500MHz and 9000-9200MHz.

EMISSIONS DATA:

See Tables 6 -8 in Appendix A for corresponding data.

Appendix A: Test Plots VC-910

Unintentional Radiated Emissions, Idle Mode

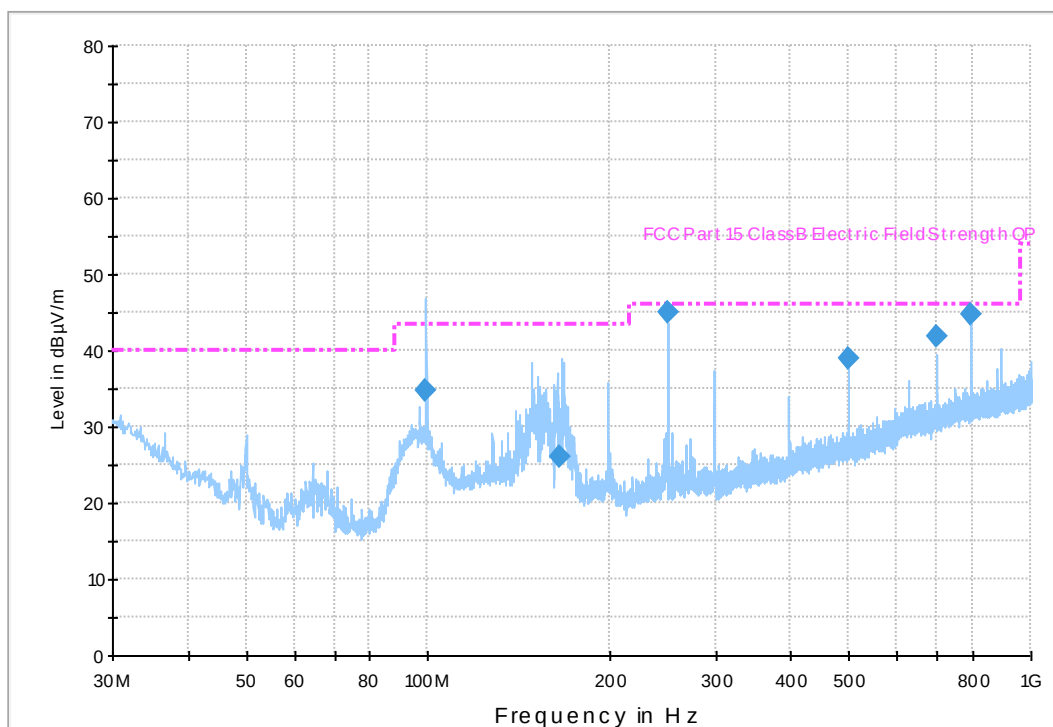


This plot is for reference only. This plot was taken using the peak detector function, some of the emissions seems closer or over the limit line. But Final quasi peak readings meets the standard requirement as shown in the Table 1 below.

Table 1: FCC Class B Emissions, Idle Mode - 3m*

Frequency	QuasiPeak	Meas. Time	Bandwidth	Antenna height	Polarity	Turntable position	Margin	Limit
(MHz)	(dBμV/m)	(ms)	(kHz)	(cm)		(deg)	(dB)	(dBμV/m)
99.3852	37.8	1000	120	100	V	134	2.2	40
165.15288	26.2	1000	120	211	H	238	14.3	40
249.9984	45.1	1000	120	100	V	38	2.4	46
496.61972	38.9	1000	120	100	V	3	8.6	46
695.27596	41.8	1000	120	125	H	301	5.7	46
794.65004	44.7	1000	120	100	H	317	2.8	46

* Unintentional emissions were measured from 0.009Mhz -1000MHz. In accordance with 15.31(o) emissions that are 20dB below the permissible value have not been reported.

Intentional Radiated Emissions, Tx Mode

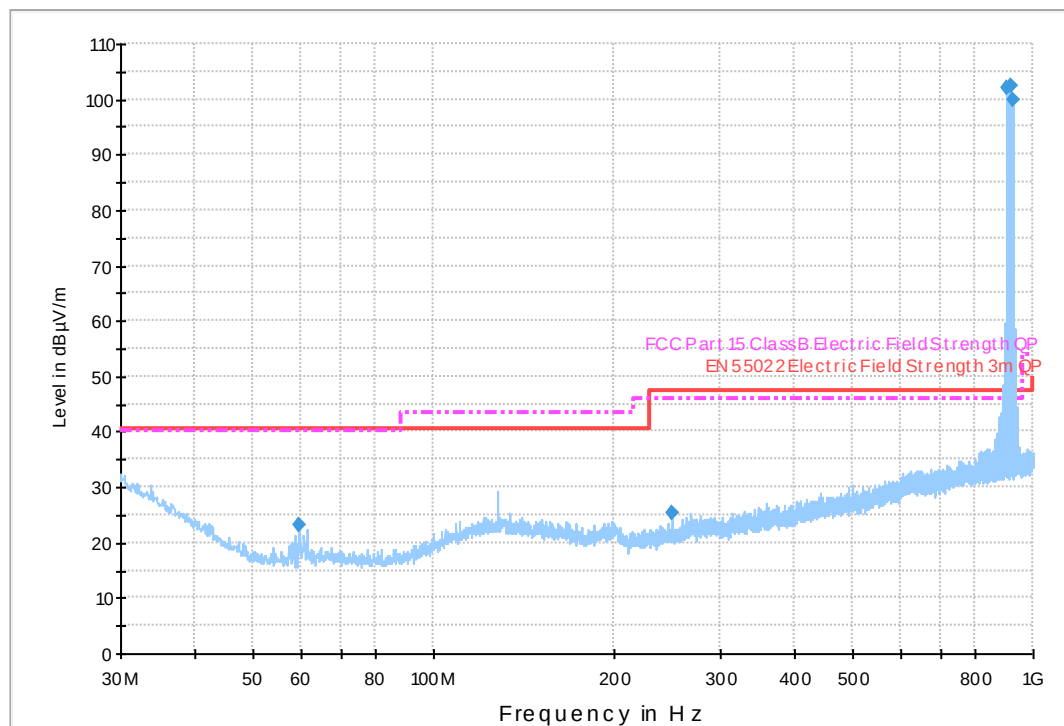

Note: A 20dB attenuator was placed in the circuit to prevent the receiver from compressing due to the fundamental power and therefore the noise floor is very high. The plot is misleading when compared to the unintentional emissions in idle mode, but it is included for a relative comparison to the unintentional emissions plot in idle mode. The results shown in Table 2 have all the appropriate correction applied. Frequency signals above the limit lines are fundamental frequencies between 902-928MHz

Table 2: FCC Class B Emissions, Tx Mode - 3m

Frequency	QuasiPeak	Meas. Time	Bandwidth	Antenna height	Polarity	Turntable position	Margin	Limit
(MHz)	(dBµV/m)	(ms)	(kHz)	(cm)		(deg)	(dB)	(dBµV/m)
59.7	24.1	1000	120	100	V	327	15.9	40
99.3852	37.8	1000	120	100	V	137	2.2	40
165.15288	27	1000	120	150	H	230	16.5	43.5
249.9984	44.9	1000	120	100	V	37	1.1	46
496.61972	39.2	1000	120	100	V	10	6.8	46
695.27596	43.5	1000	120	139	H	333	2.5	46
794.65004	43.6	1000	120	100	H	327	2.4	46

A.C. Mains Conducted Emissions

FCC/CE Class A - Emissions

Table 3: AC Conducted Emissions, Line 1



120VAC 60Hz

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150300	16.9	1000.000	9.000	On	L1	0.6	39.1	56.0
0.153027	17.6	1000.000	9.000	On	L1	0.6	38.2	55.8
0.162156	28.4	1000.000	9.000	On	L1	0.5	26.9	55.3
0.165428	31.7	1000.000	9.000	On	L1	0.5	23.4	55.1
0.203635	25.3	1000.000	9.000	On	L1	0.5	28.0	53.3
0.232804	12.7	1000.000	9.000	On	L1	0.5	39.4	52.1
0.243265	21.2	1000.000	9.000	On	L1	0.5	30.5	51.7
0.269360	21.6	1000.000	9.000	On	L1	0.4	29.3	50.9
0.295881	24.0	1000.000	9.000	On	L1	0.4	26.1	50.1
0.313531	29.1	1000.000	9.000	On	L1	0.4	20.5	49.6
0.328275	25.9	1000.000	9.000	On	L1	0.4	23.4	49.3
0.339617	24.9	1000.000	9.000	On	L1	0.4	24.1	49.0
0.360596	23.5	1000.000	9.000	On	L1	0.4	25.0	48.5
0.400076	22.1	1000.000	9.000	On	L1	0.4	25.6	47.7
0.535587	12.1	1000.000	9.000	On	L1	0.4	33.9	46.0
0.583636	12.6	1000.000	9.000	On	L1	0.4	33.4	46.0
0.629673	16.9	1000.000	9.000	On	L1	0.4	29.1	46.0
0.672590	16.1	1000.000	9.000	On	L1	0.5	29.9	46.0
0.851415	12.7	1000.000	9.000	On	L1	0.5	33.3	46.0
0.902205	16.2	1000.000	9.000	On	L1	0.5	29.8	46.0

Table 4: AC Conducted Emissions, Line 2


120VAC 60Hz

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154564	31.5	1000.000	9.000	On	L1	0.6	24.2	55.7
0.159584	30.2	1000.000	9.000	On	L1	0.6	25.2	55.4
0.161509	27.3	1000.000	9.000	On	L1	0.6	28.0	55.3
0.167758	30.9	1000.000	9.000	On	L1	0.5	24.1	55.0
0.172862	28.2	1000.000	9.000	On	L1	0.5	26.5	54.7
0.175647	27.4	1000.000	9.000	On	L1	0.5	27.2	54.6
0.209412	13.4	1000.000	9.000	On	L1	0.5	39.6	53.0
0.221461	22.1	1000.000	9.000	On	L1	0.5	30.4	52.5
0.224132	21.4	1000.000	9.000	On	L1	0.5	31.0	52.4
0.249168	23.6	1000.000	9.000	On	L1	0.4	27.9	51.5
0.266151	20.2	1000.000	9.000	On	L1	0.4	30.8	51.0
0.269360	18.2	1000.000	9.000	On	L1	0.4	32.7	50.9
0.289449	25.9	1000.000	9.000	On	L1	0.4	24.4	50.3
0.319220	25.6	1000.000	9.000	On	L1	0.4	23.9	49.5
0.335570	21.2	1000.000	9.000	On	L1	0.4	27.9	49.1
0.354170	20.9	1000.000	9.000	On	L1	0.4	27.8	48.7
0.371567	21.9	1000.000	9.000	On	L1	0.4	26.4	48.3
0.411425	19.7	1000.000	9.000	On	L1	0.4	27.8	47.5
0.455559	13.2	1000.000	9.000	On	L1	0.4	33.5	46.7
22.825007	20.5	1000.000	9.000	On	L1	0.8	29.5	50.0

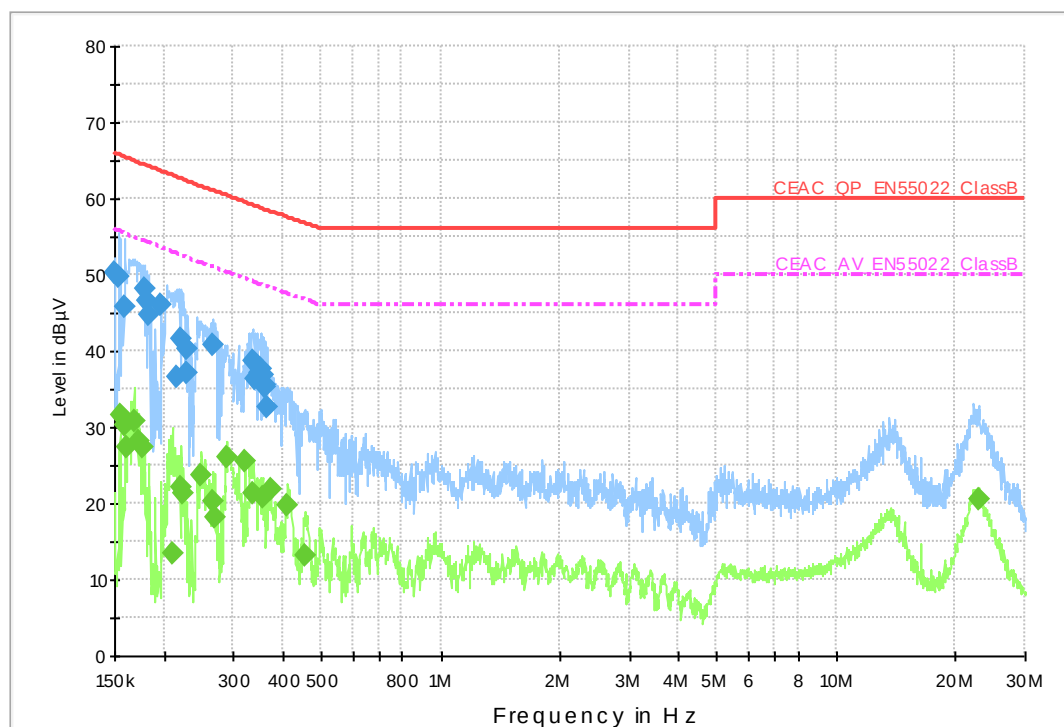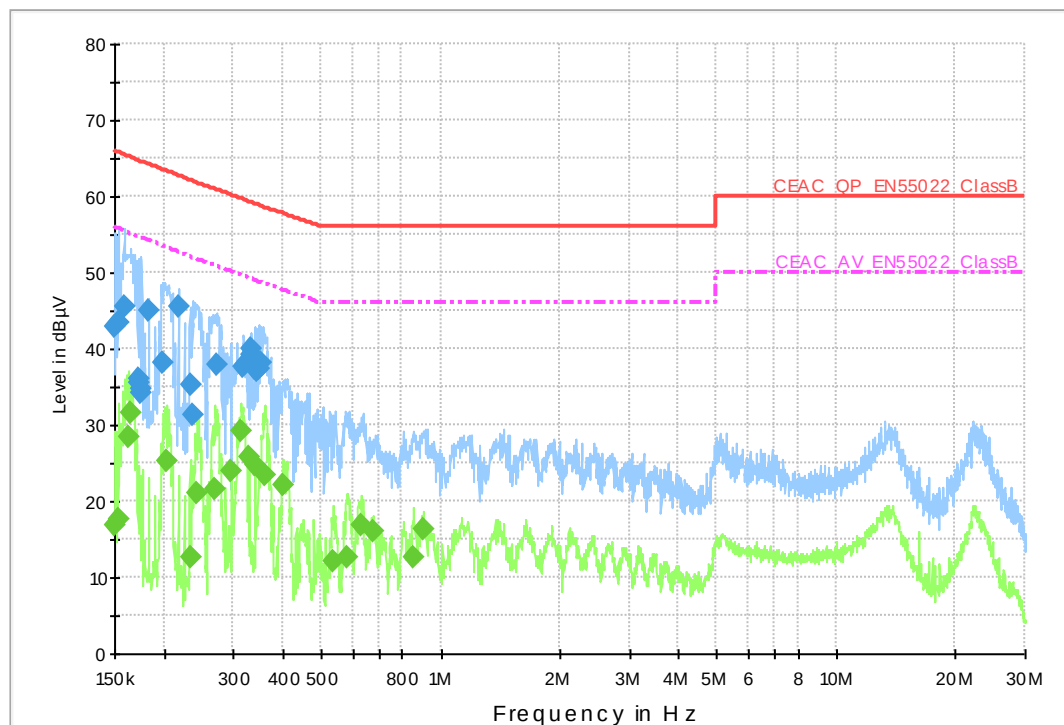**Figure 1: 120V AC Conducted Emissions - Line 1 and Line 2**

FHSS Compliance Tests

Output Power

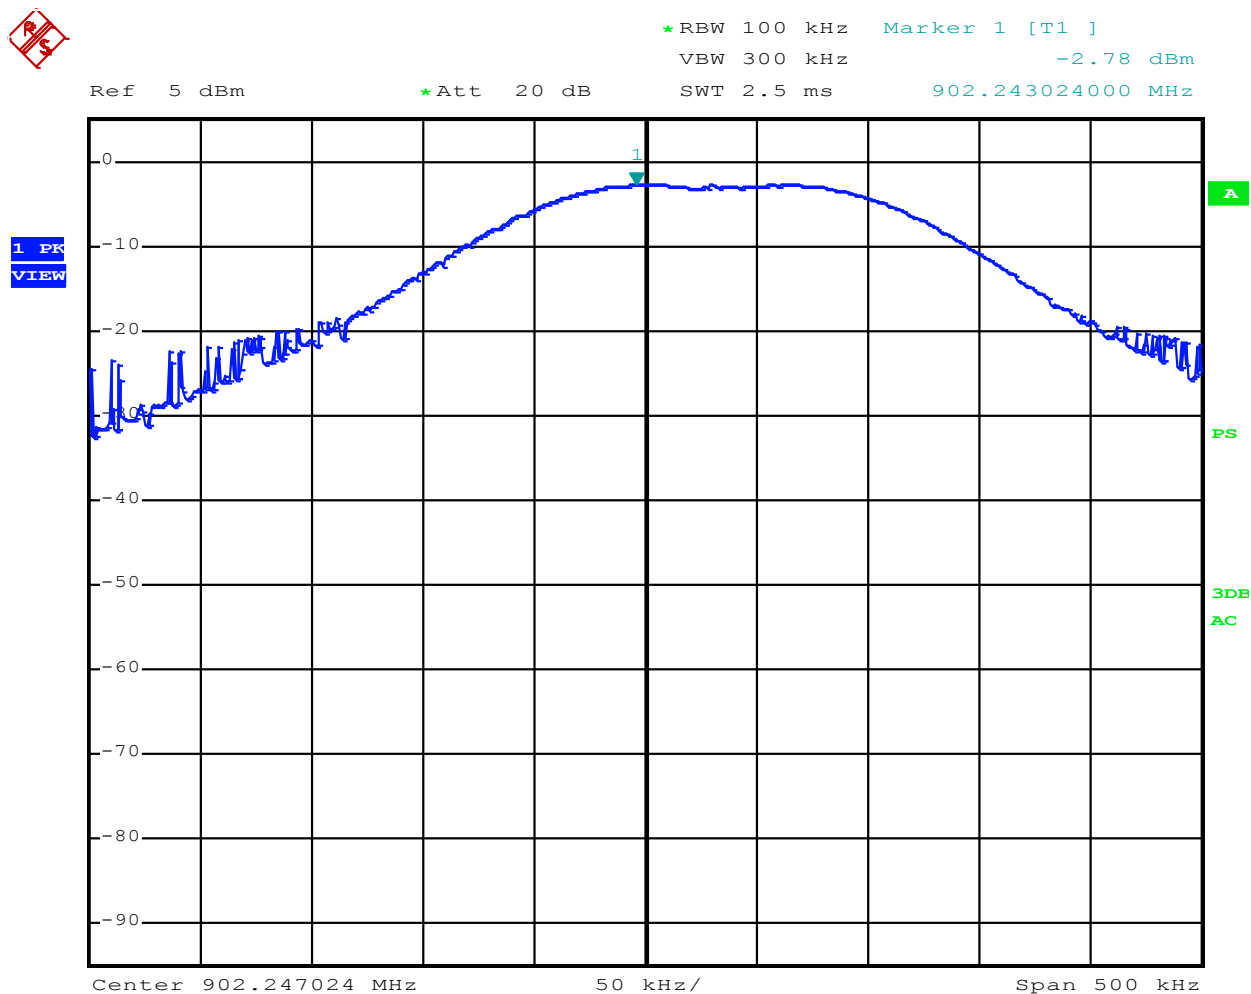

Date: 24.DEC.2013 09:39:31

Figure 2: Output Power at LOW Frequency




* RBW 300 kHz Marker 1 [T1]
VBW 1 MHz -3.04 dBm
SWT 2.5 ms 914.975600000 MHz

Ref 5 dBm

* Att 20 dB

SWT 2.5 ms

914.975600000 MHz

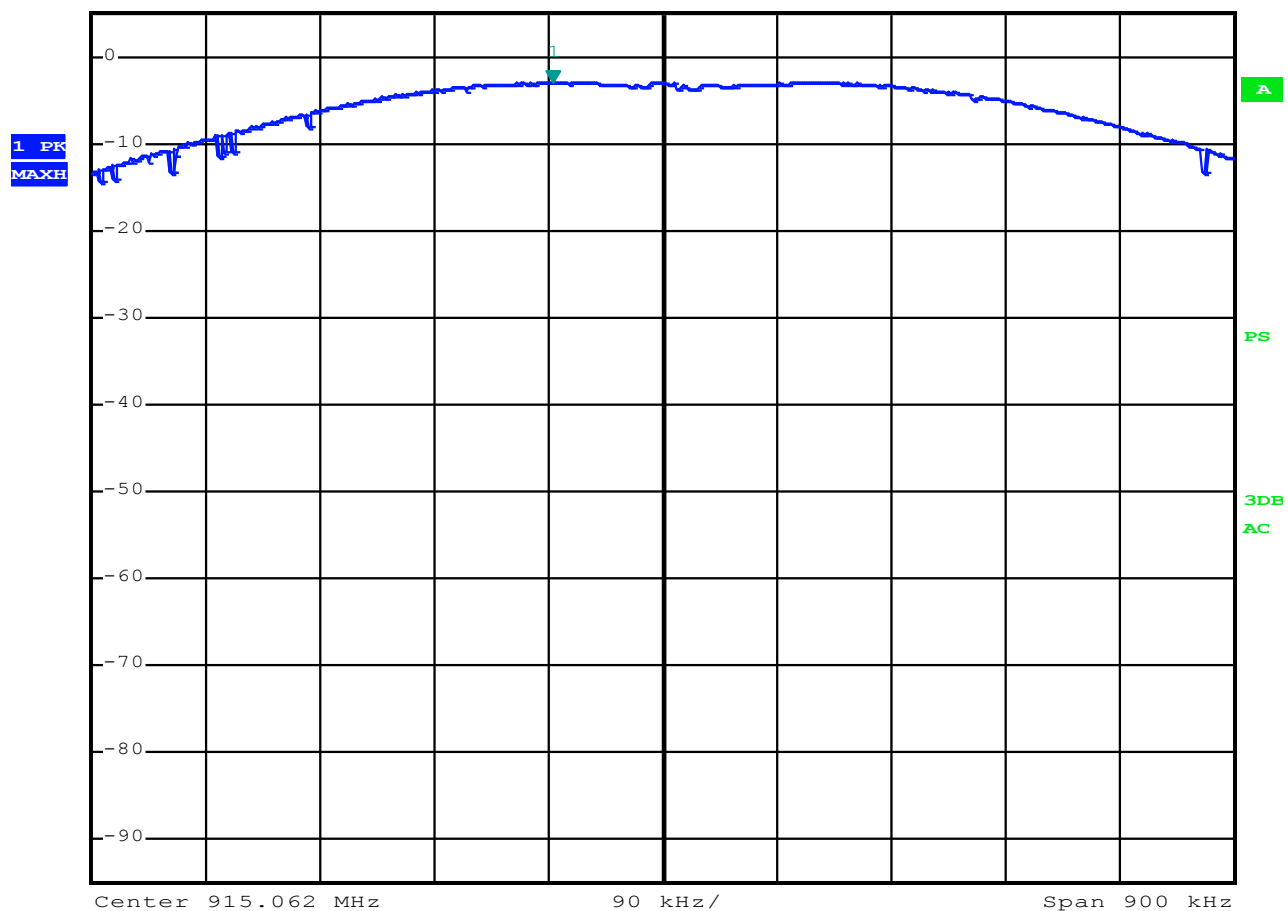

Date: 24.DEC.2013 11:09:55

Figure 3: Output Power at MID Frequency




*RBW 300 kHz Marker 1 [T1]
VBW 1 MHz -2.86 dBm
SWT 2.5 ms 927.812224000 MHz

Ref 5 dBm

*Att 20 dB

1 PK
MAXH

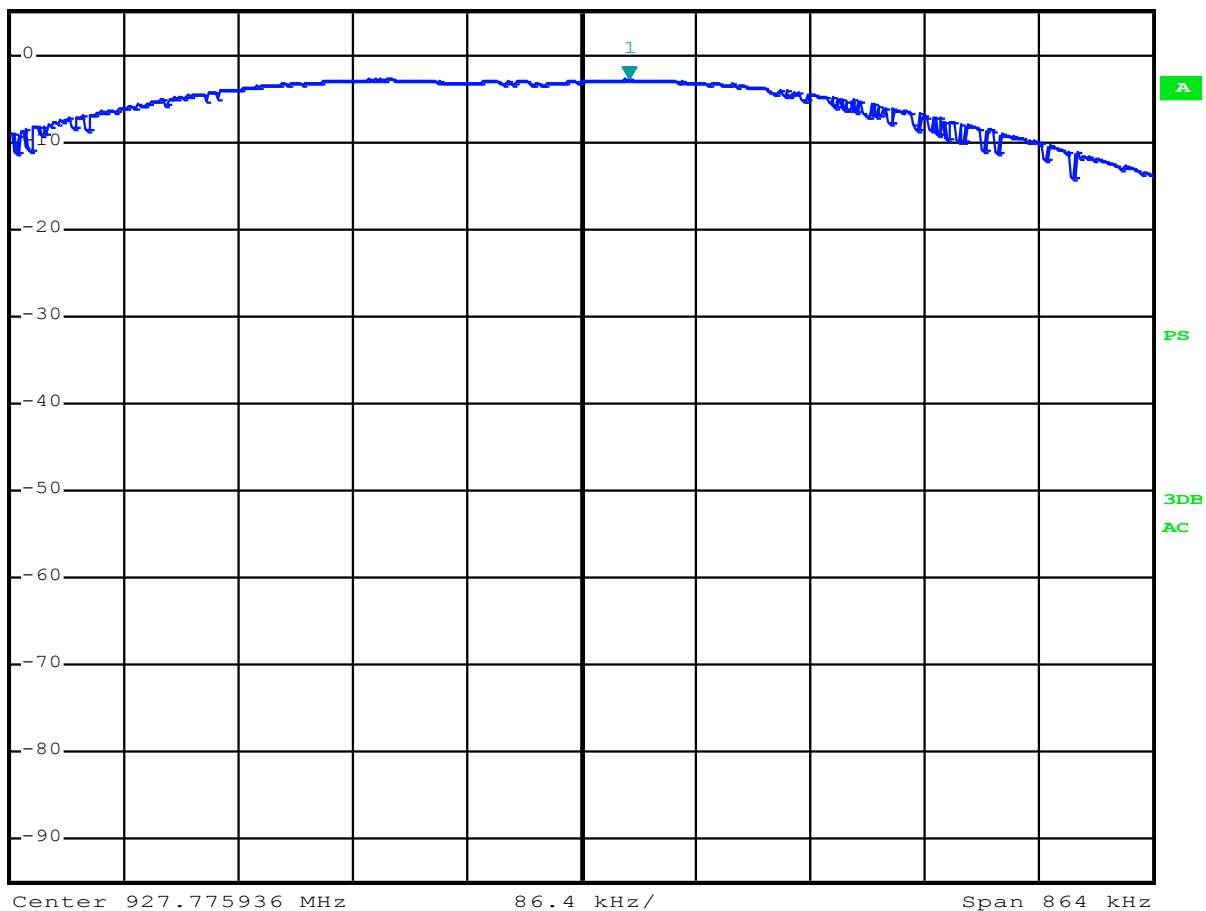


Date: 24.DEC.2013 11:20:32

Figure 4: Output Power at HIGH Frequency

Low Data Rate Tests

20 dB Bandwidth

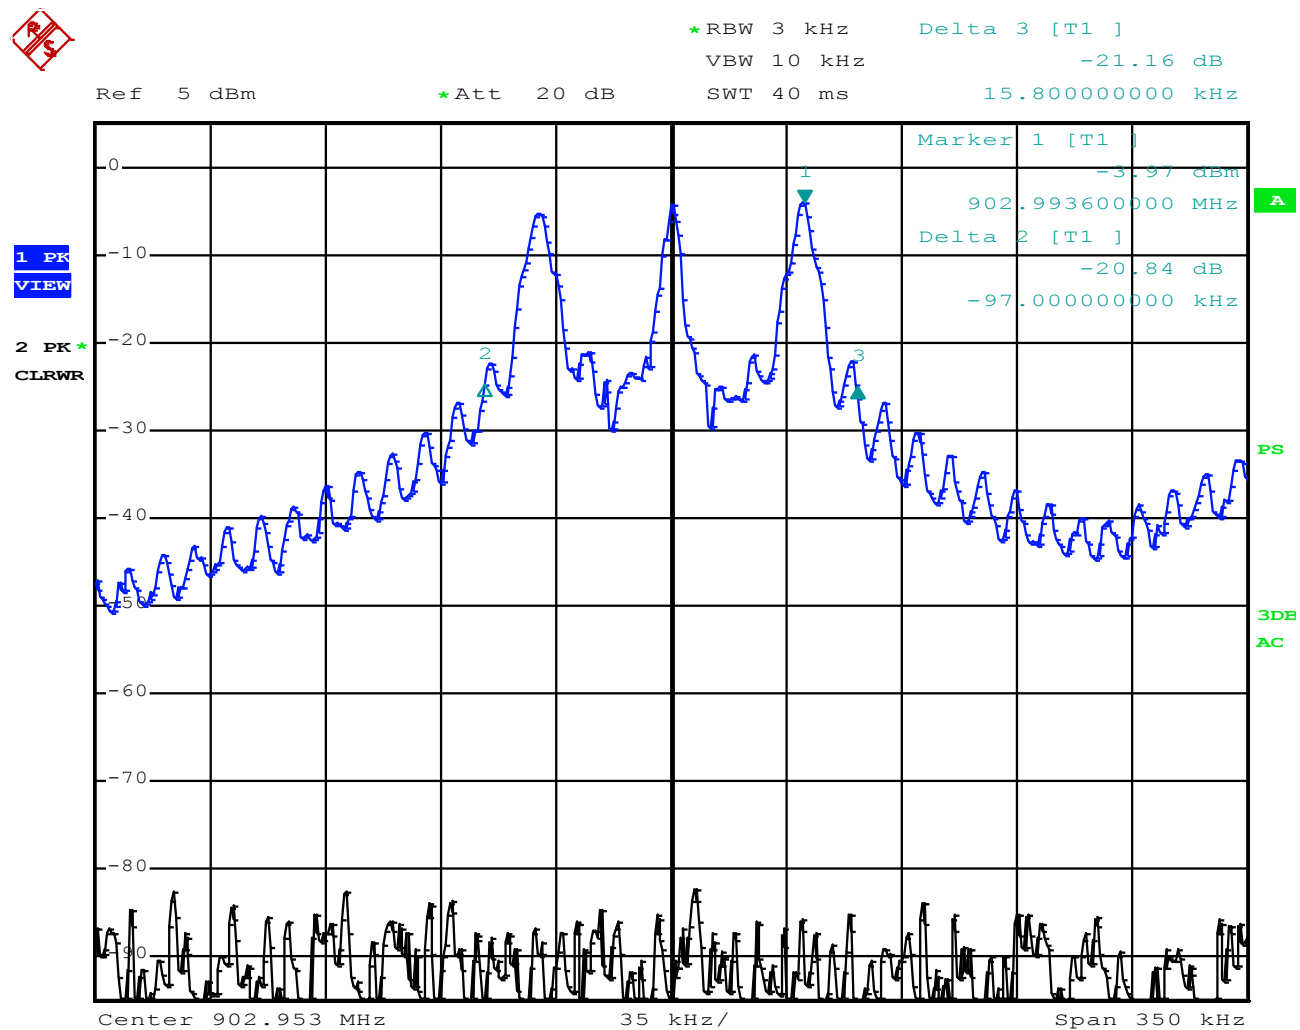

Date: 21.MAR.2014 09:40:42

Figure 5: 20dB Bandwidth at LOW Frequency – 112.8 kHz




*RBW 3 kHz Delta 2 [T1]
VBW 10 kHz -22.18 dB
SWT 35 ms 56.400000000 kHz

Ref 5 dBm

*Att 20 dB

1 PK
VIEW

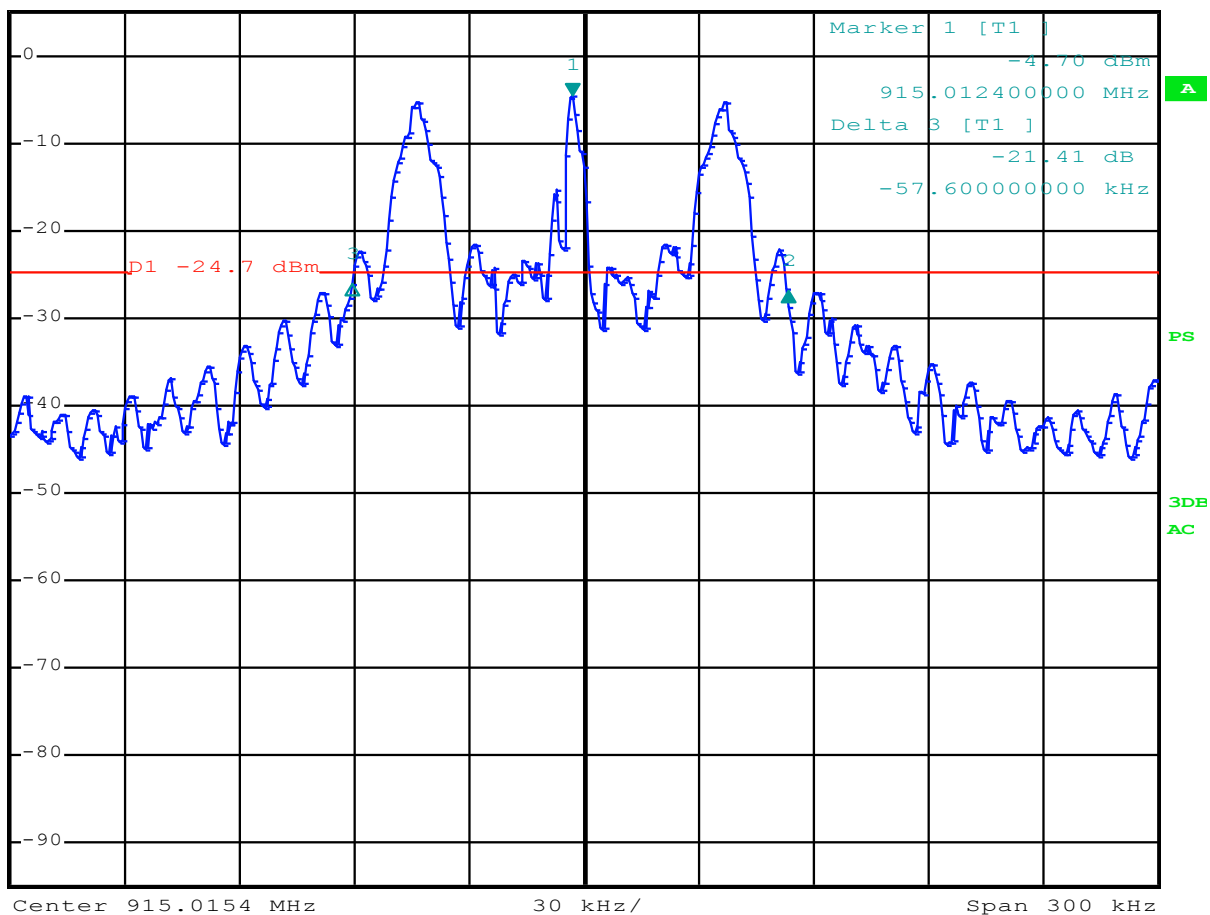

Date: 21.MAR.2014 11:19:23

Figure 6: 20dB Bandwidth at MID Frequency – 114.0 kHz




*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -5.72 dBm
SWT 35 ms 927.880800000 MHz

Ref 5 dBm

*Att 20 dB

SWT 35 ms

927.880800000 MHz

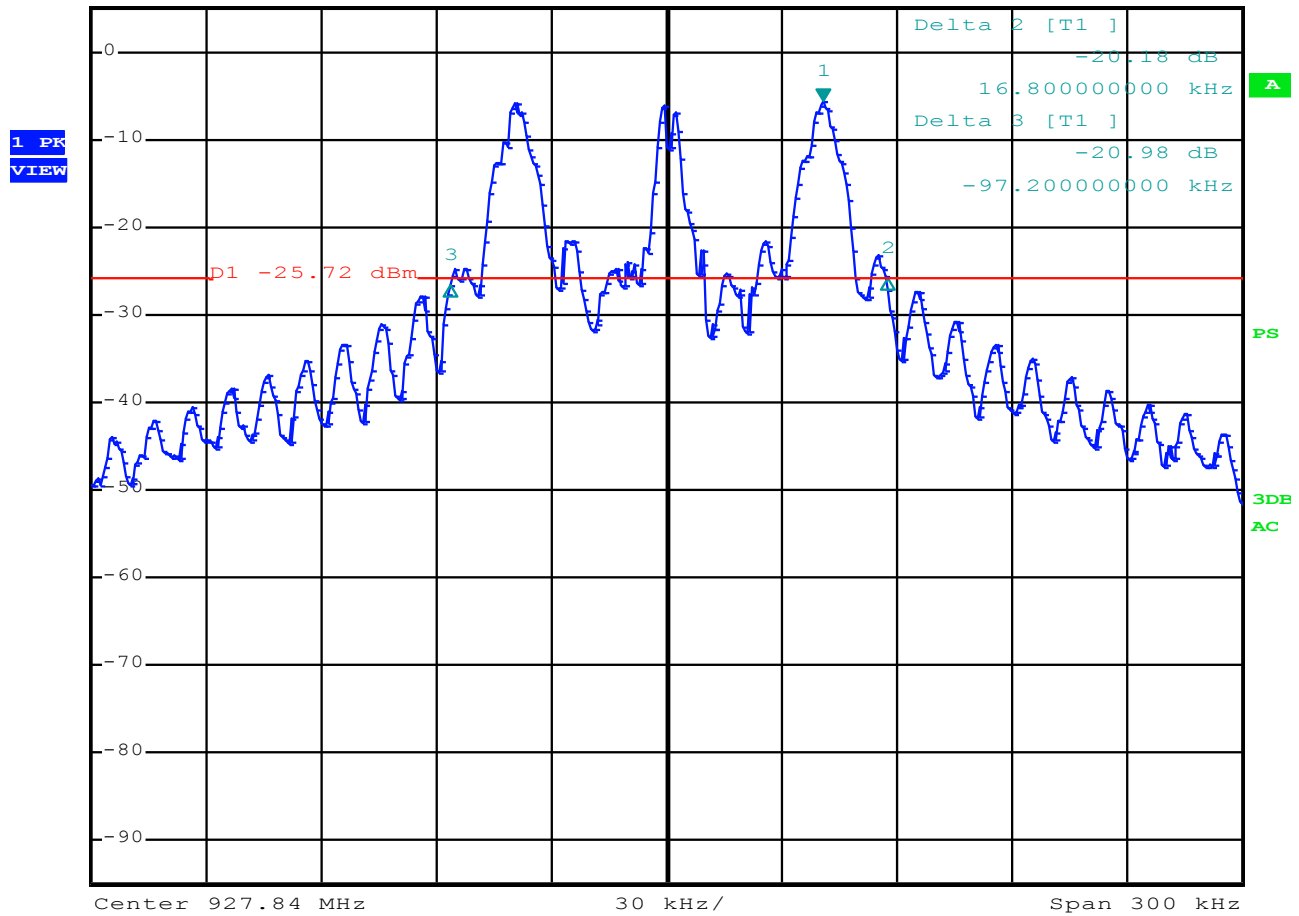

Date: 21.MAR.2014 11:25:43

Figure 7: 20dB Bandwidth at HIGH Frequency – 114.0 kHz

Channel Separation



*RBW 10 kHz Delta 2 [T1]
VBW 30 kHz -0.41 dB
SWT 5 ms -258.000000000 kHz


Ref 5 dBm

*Att 20 dB

SWT 5 ms

-258.000000000 kHz


1 PK
VIEW

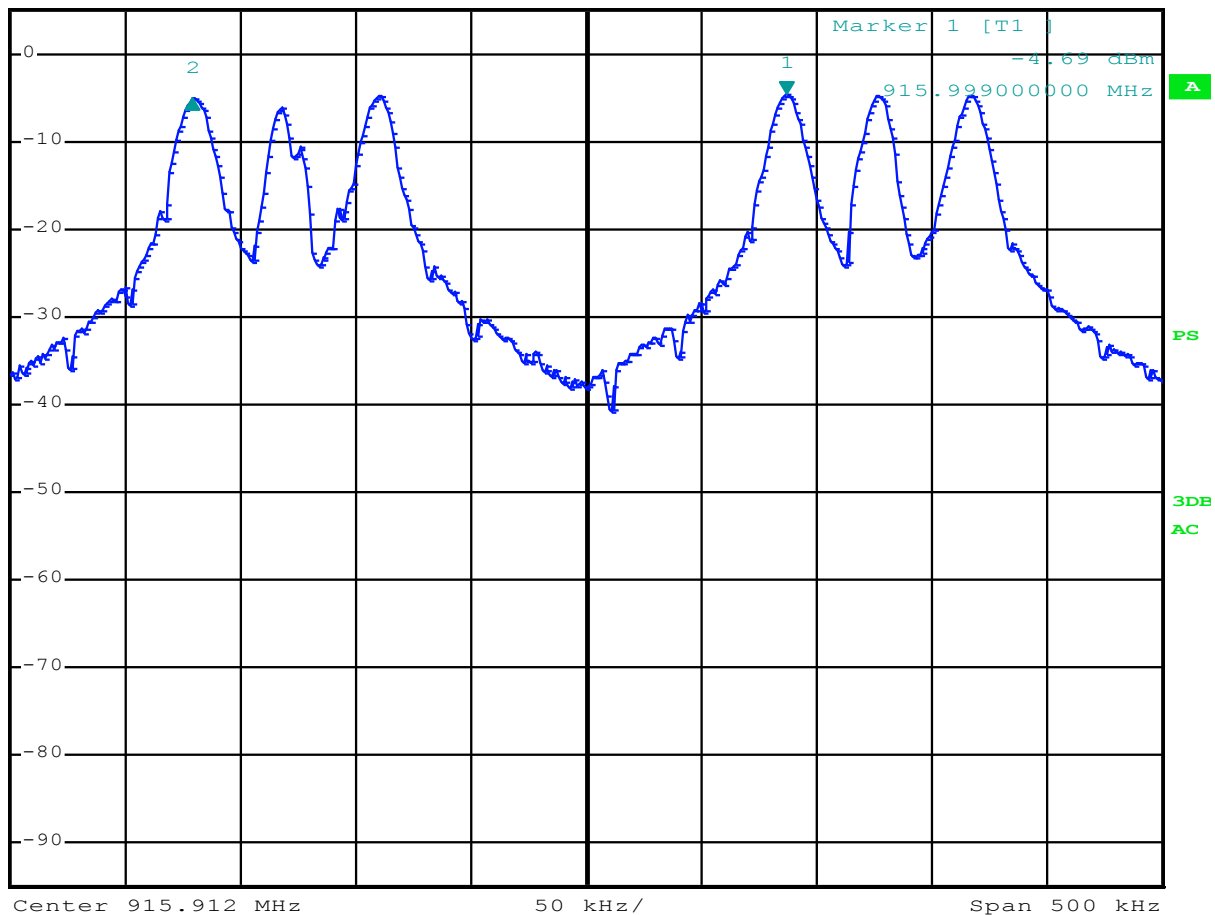

Date: 23.DEC.2013 11:42:23

Figure 8: Channel Separation = 258.0 kHz

Number of Hopping Channels

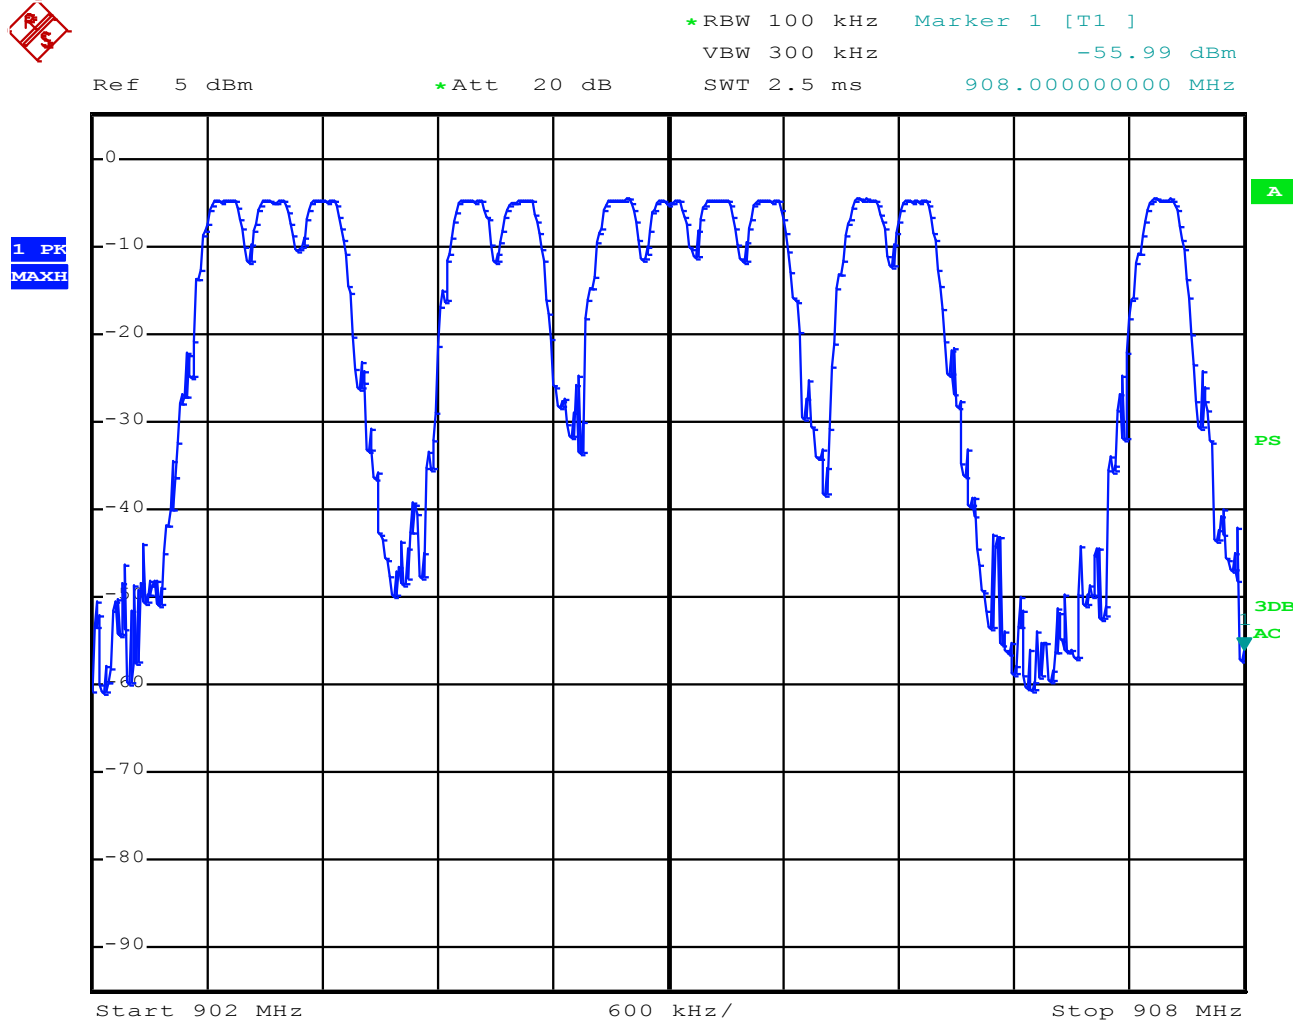

Date: 23.DEC.2013 11:20:01

Figure 9: Number of Hopping Frequencies 902MHz to 908MHz - 12 Frequencies




★ RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -36.62 dBm
SWT 2.5 ms 914.50000000 MHz

Ref 5 dBm

★ Att 20 dB

SWT 2.5 ms

914.50000000 MHz

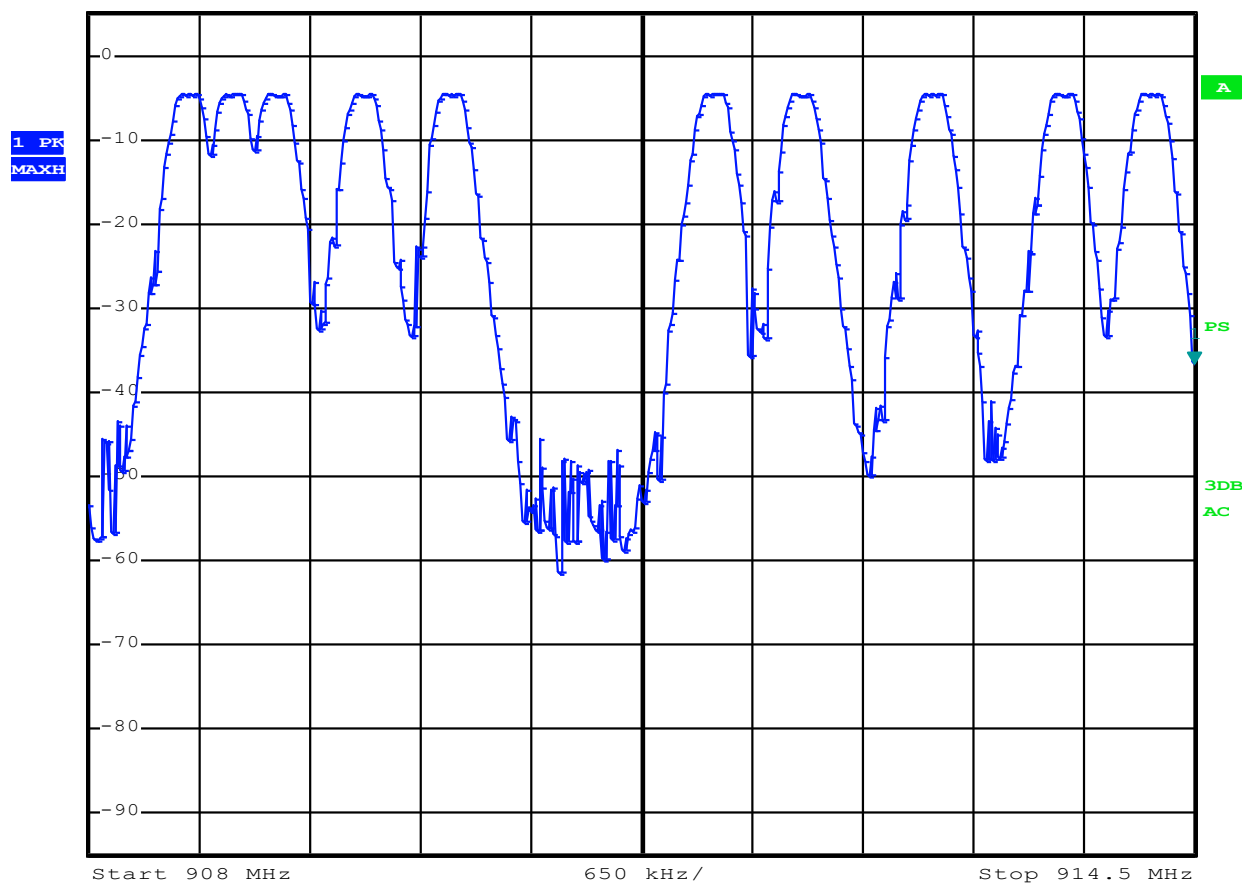

Date: 23.DEC.2013 11:06:54


Figure 10: Number of Hopping Frequencies 908MHz to 914.5MHz - 10 Frequencies



*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -23.20 dBm
SWT 2.5 ms 920.600000000 MHz

Ref 5 dBm

*Att 20 dB

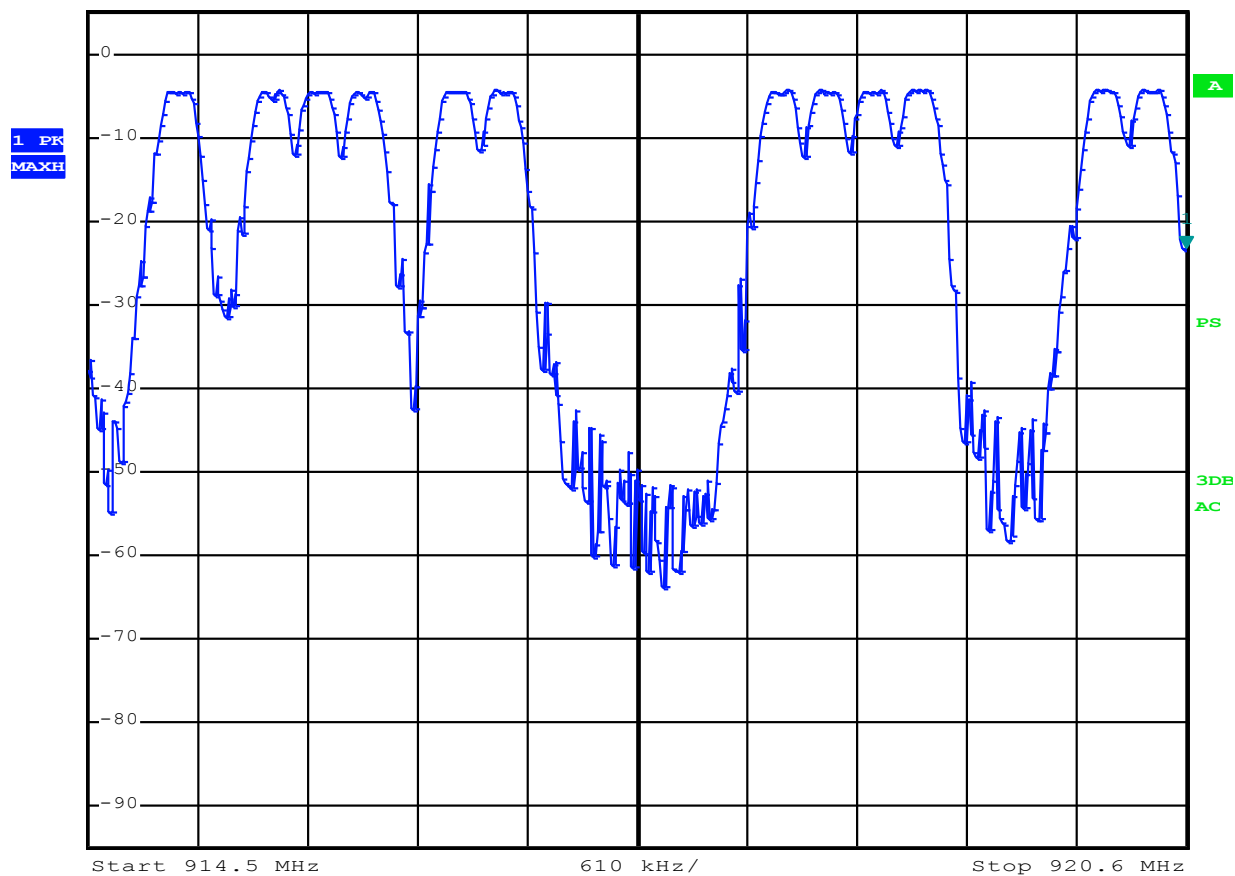

Date: 23.DEC.2013 11:09:22

Figure 11: Number of Hopping Frequencies 914.5MHz to 920.6MHz - 12 Frequencies




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -24.95 dBm
SWT 2.5 ms 920.60000000 MHz

Ref 5 dBm

*Att 20 dB

SWT 2.5 ms


920.60000000 MHz

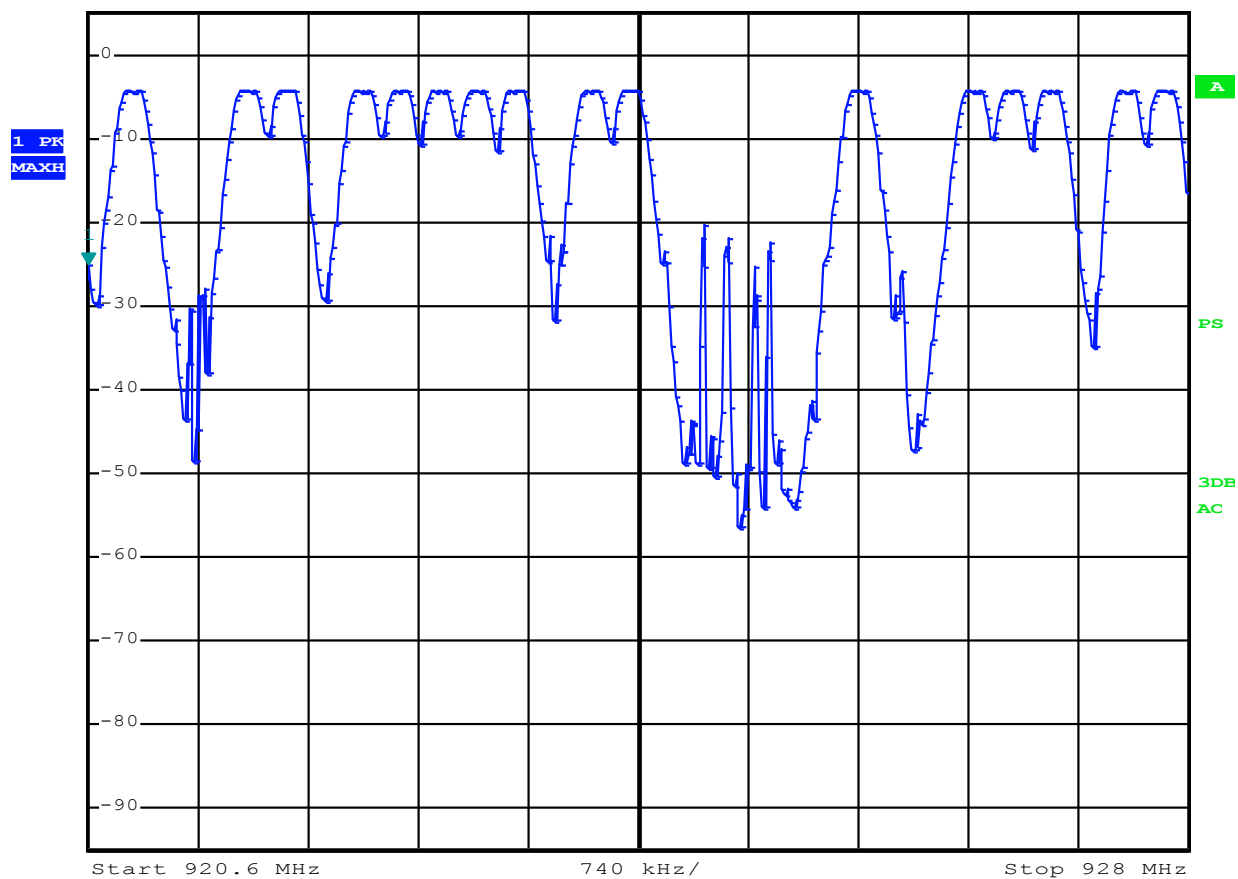

Date: 23.DEC.2013 11:17:30

Figure 12: Number of Hopping Frequencies 920.6MHz to 928MHz - 16 Frequencies

Dwell Time and Time of Occupancy

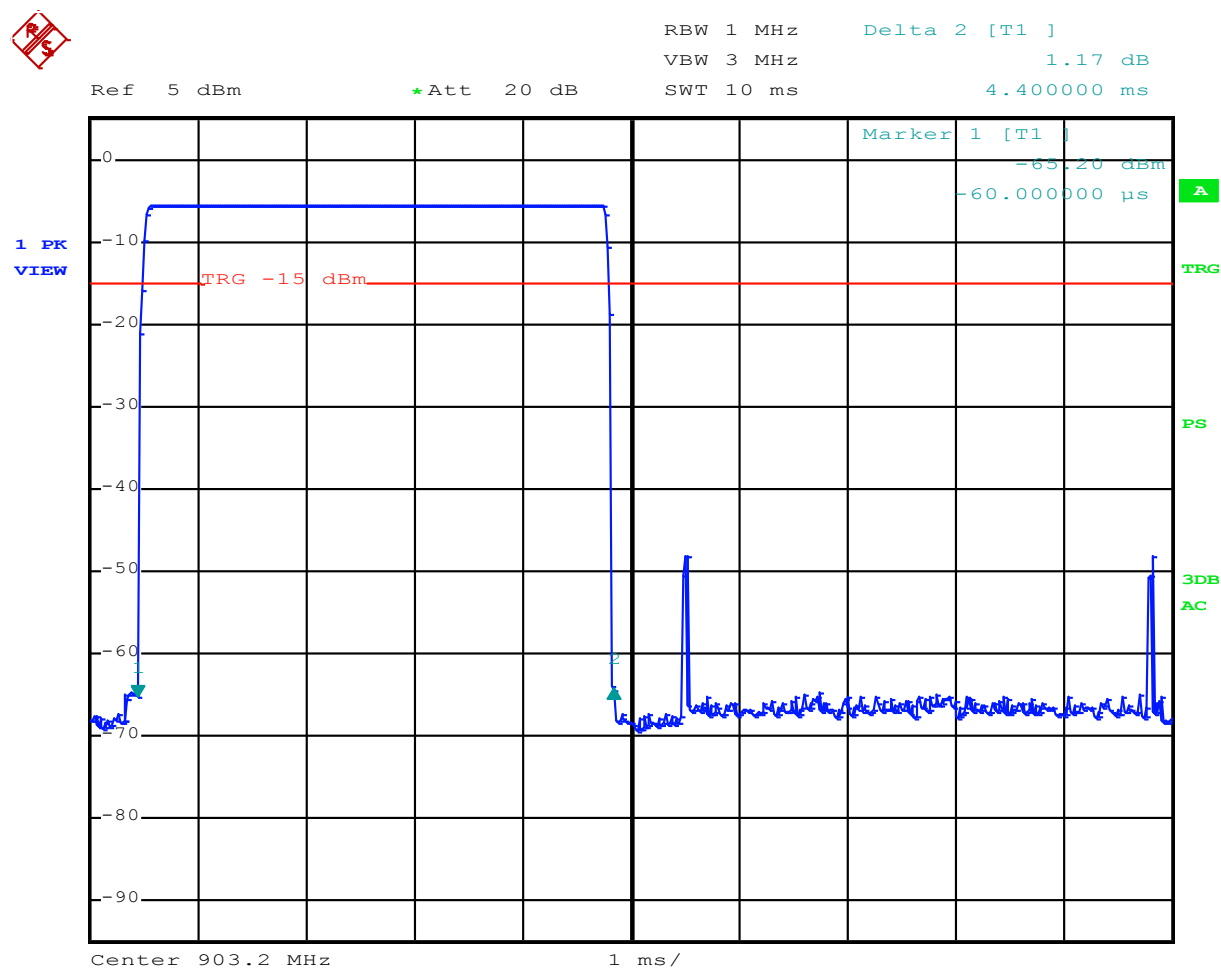

Date: 23.DEC.2013 13:49:53

Figure 13: Dwell Time – 4.4mS



RBW 1 MHz Delta 2 [T1]


VBW 3 MHz 0.41 dB

Ref 5 dBm

*Att 20 dB

SWT 3 s

1.899500 s

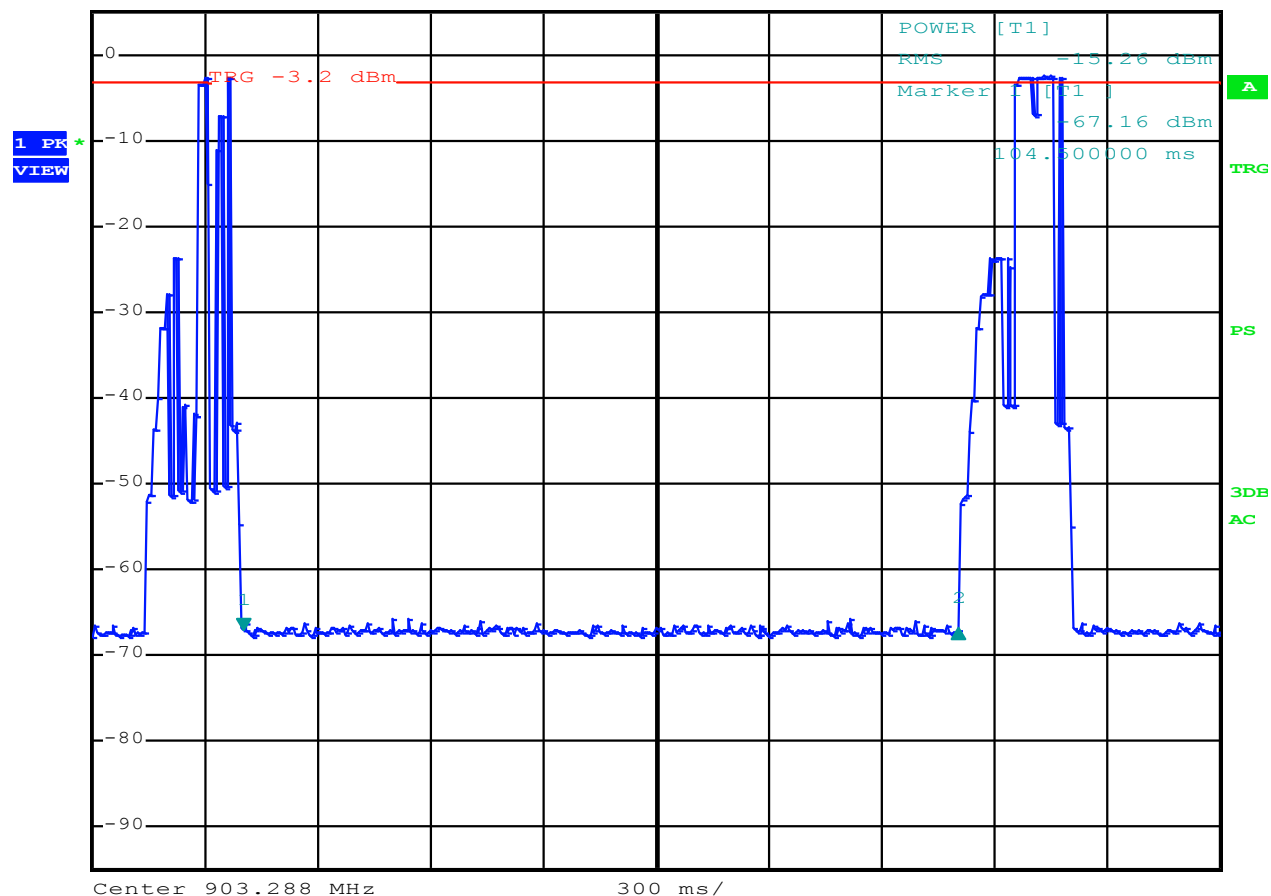

Date: 21.MAR.2014 09:17:52

Figure 14: Time Occupancy Per Frequency – 46.32mS*

(* Time between 2 consecutive transmissions on the same frequency is 1.9 Seconds, dwell time per frequency is 4.40mS, therefore occupancy time per frequency within a 20 Second period is 46.32mS)

Channel Bandedge


★RBW 10 kHz Delta 2 [T1]
VBW 30 kHz -43.66 dB
SWT 5 ms -176.000000000 kHz

Ref 112 dBμV

★Att 20 dB

SWT 5 ms

-176.000000000 kHz

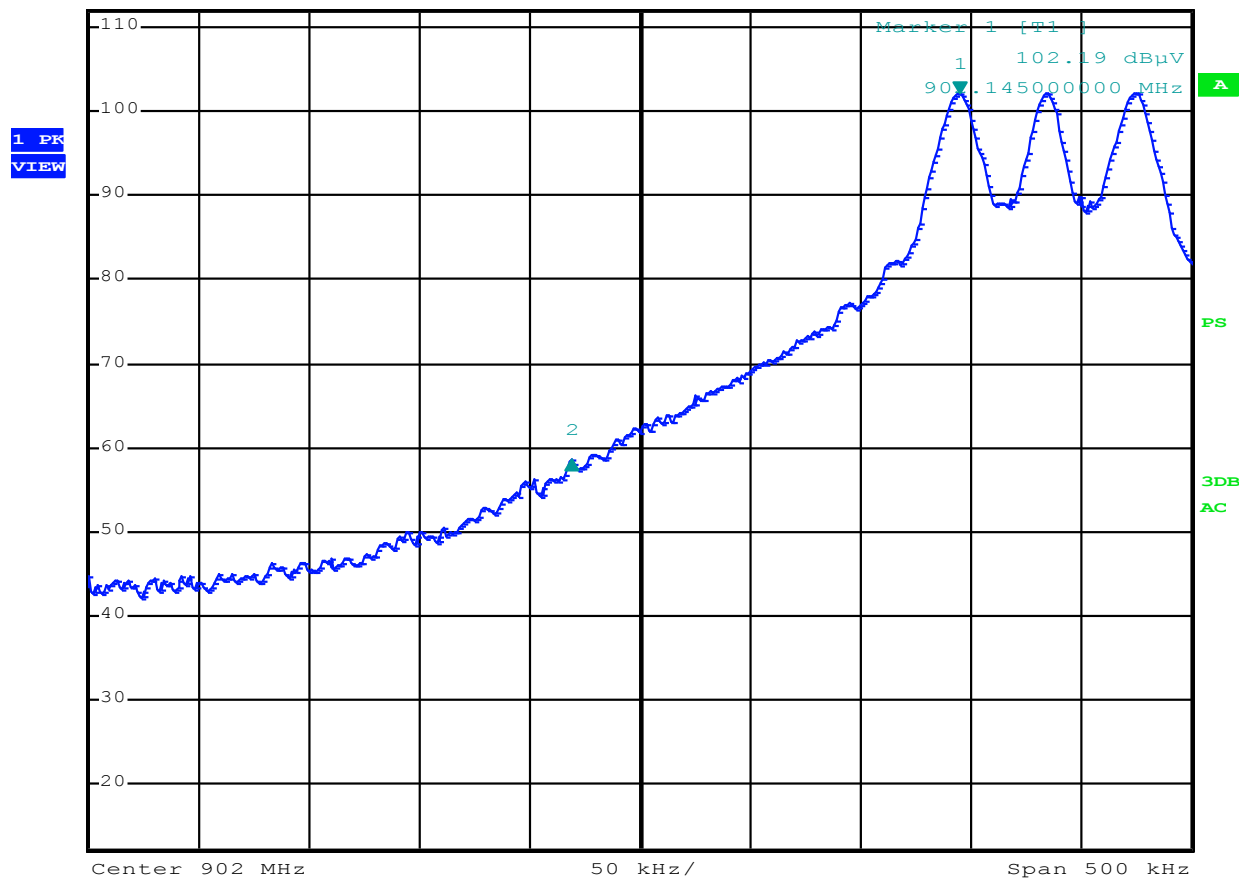

Date: 23.DEC.2013 09:46:24

Figure 15: Low Channel Bandedge



*RBW 10 kHz

Delta 2 [T1]

VBW 30 kHz


-42.06 dB

Ref 5 dBm

*Att 20 dB

SWT 5 ms

315.000000000 kHz

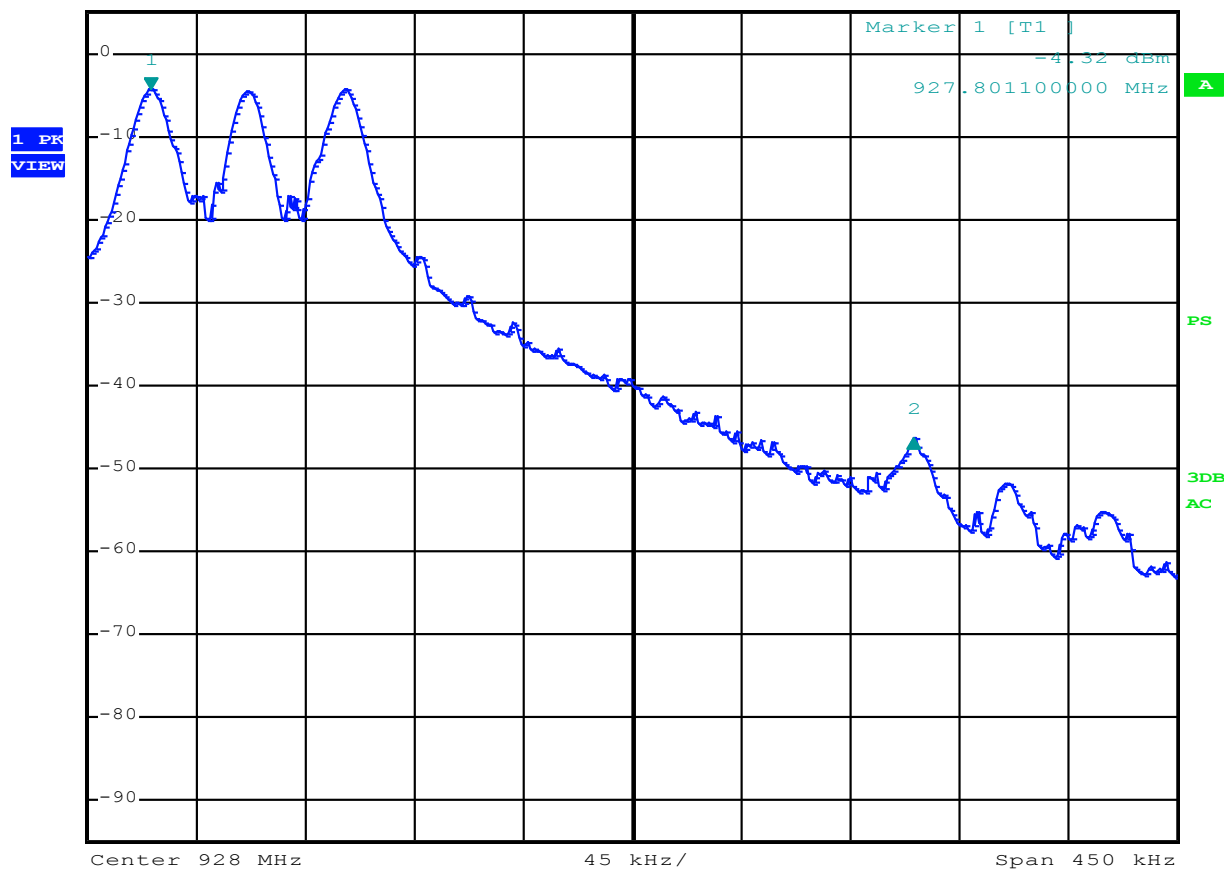


Date: 23.DEC.2013 10:24:44

Figure 16: High Channel Bandedge

High Data Rate Tests

20 dB Bandwidth

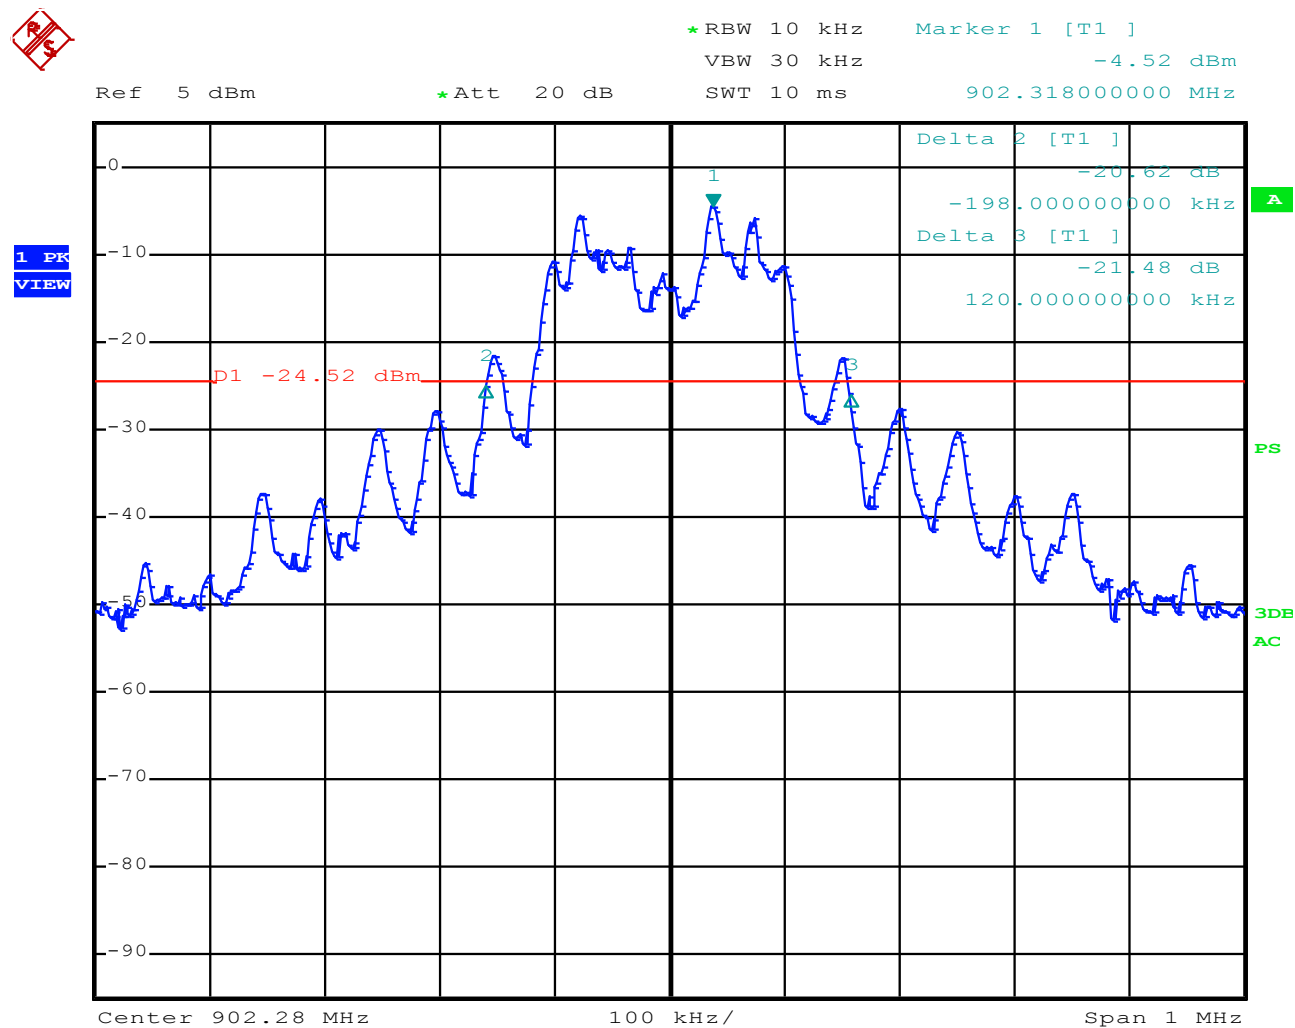


Date: 21.MAR.2014 11:56:31

Figure 17: 20dB Bandwidth at LOW Frequency – 318 kHz



*RBW 10 kHz Marker 1 [T1]
VBW 30 kHz -5.55 dBm
Ref 5 dBm *Att 20 dB SWT 10 ms 915.154000000 MHz

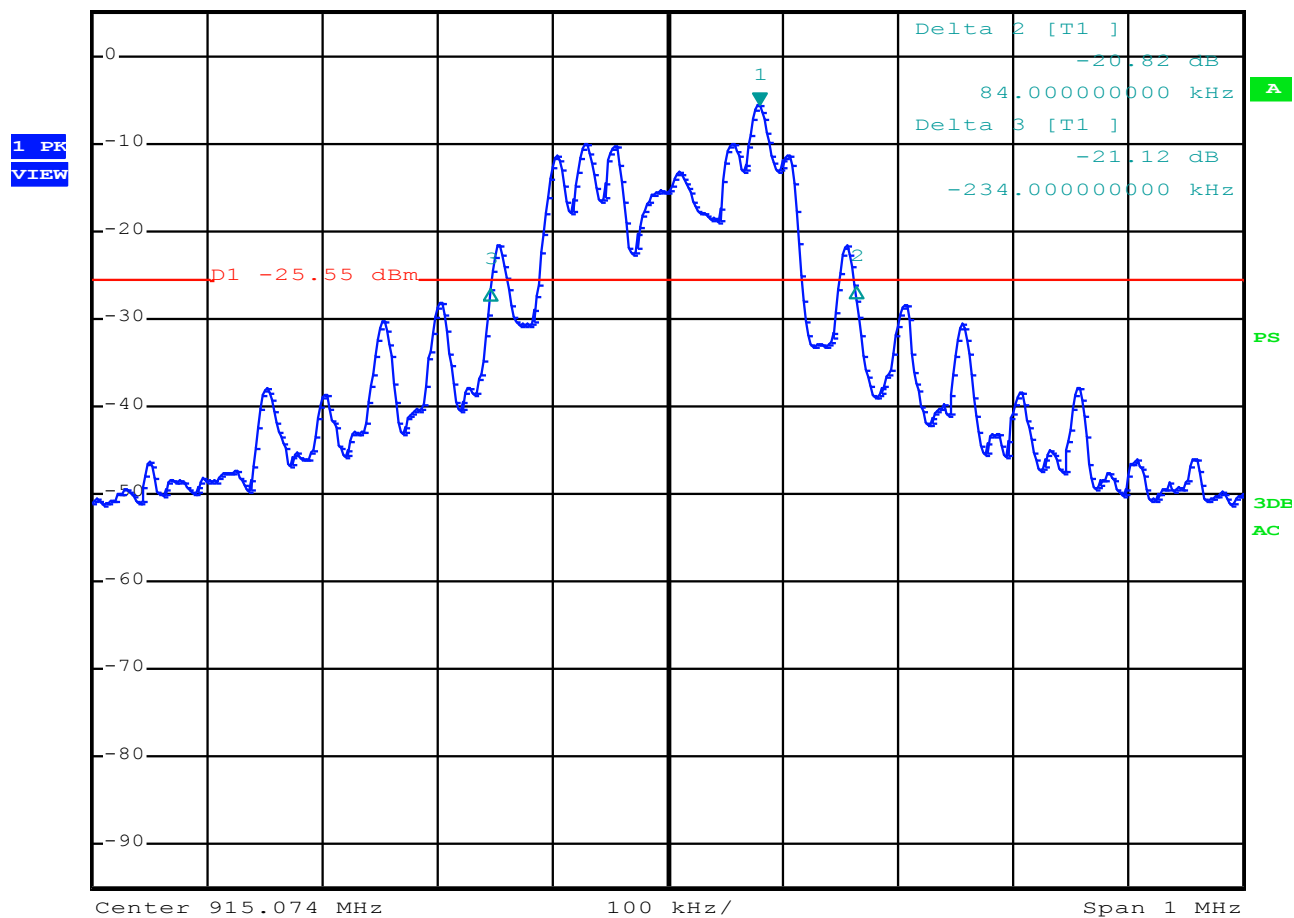

Date: 21.MAR.2014 11:47:33

Figure 18: 20dB Bandwidth at MID Frequency – 318 kHz




*RBW 10 kHz Delta 3 [T1]
VBW 30 kHz -20.73 dB
SWT 10 ms -234.00000000 kHz

Ref 5 dBm

*Att 20 dB


1 PK
VIEW

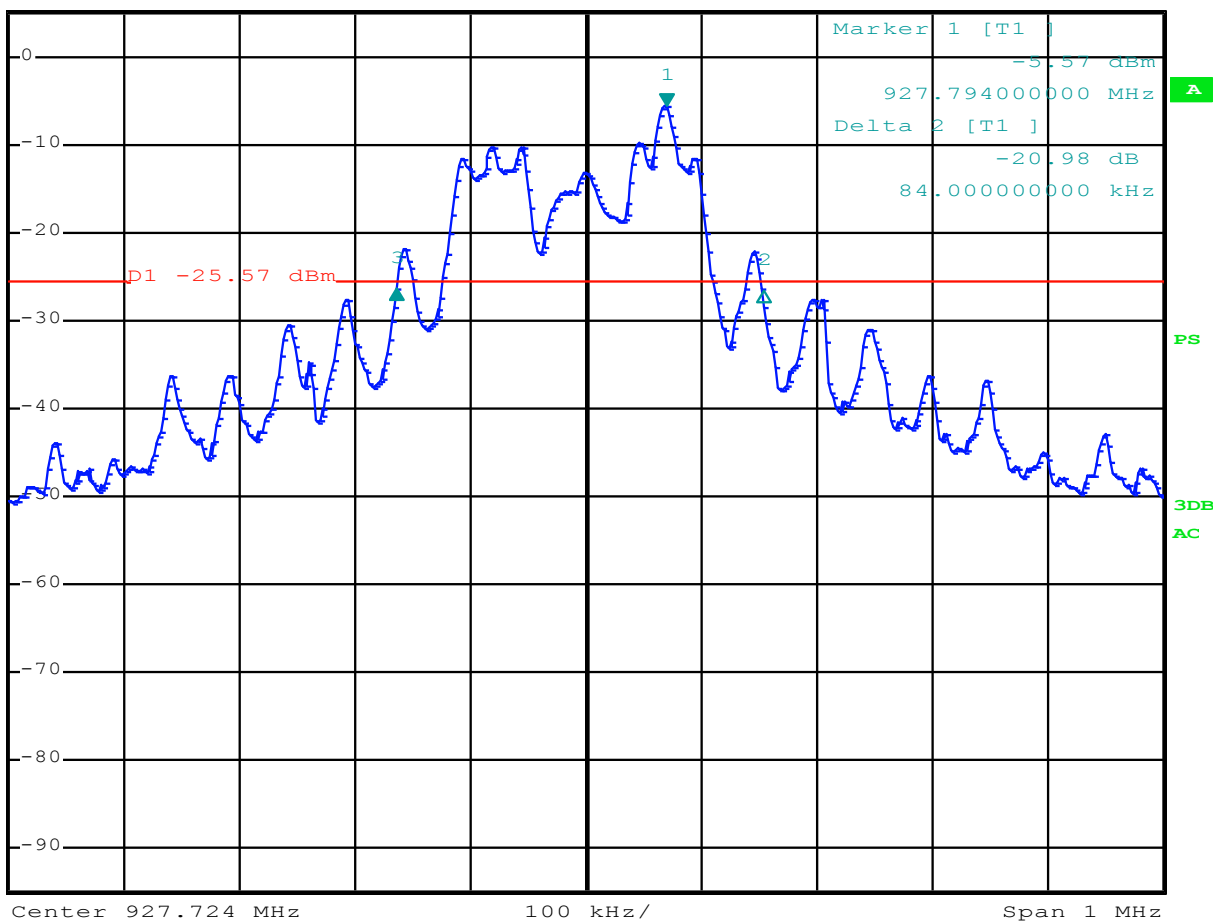

Date: 21.MAR.2014 11:42:31

Figure 19: 20dB Bandwidth at HIGH Frequency – 318 kHz

Channel Separation

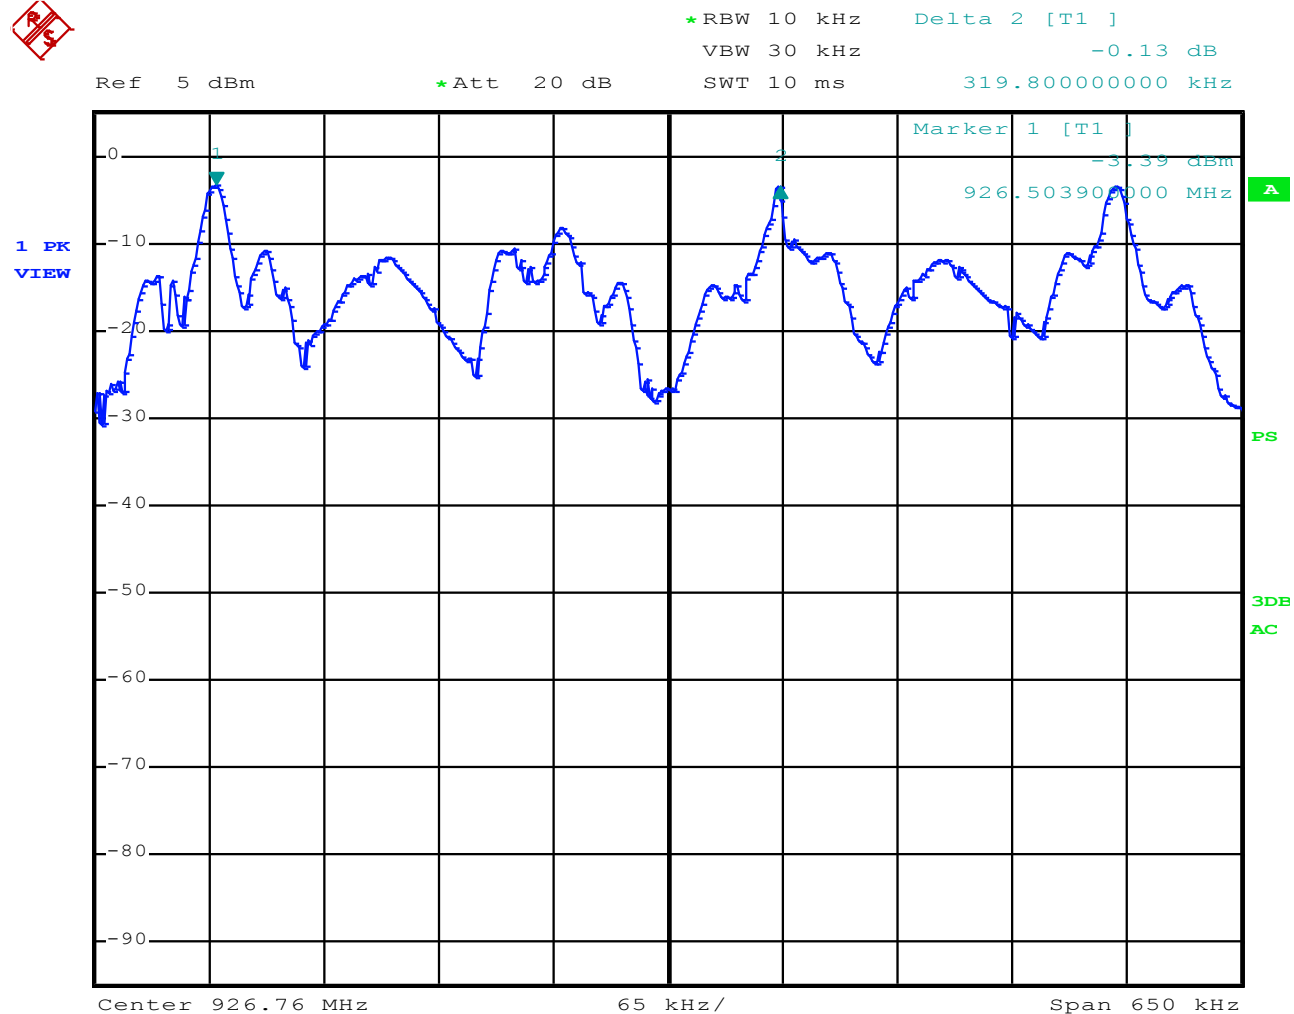

Date: 23.DEC.2013 17:15:18

Figure 20: Channel Separation = 319.8kHz

Number of Hopping Channels




* RBW 100 kHz

VBW 300 kHz

SWT 2.5 ms

Ref 5 dBm

* Att 20 dB

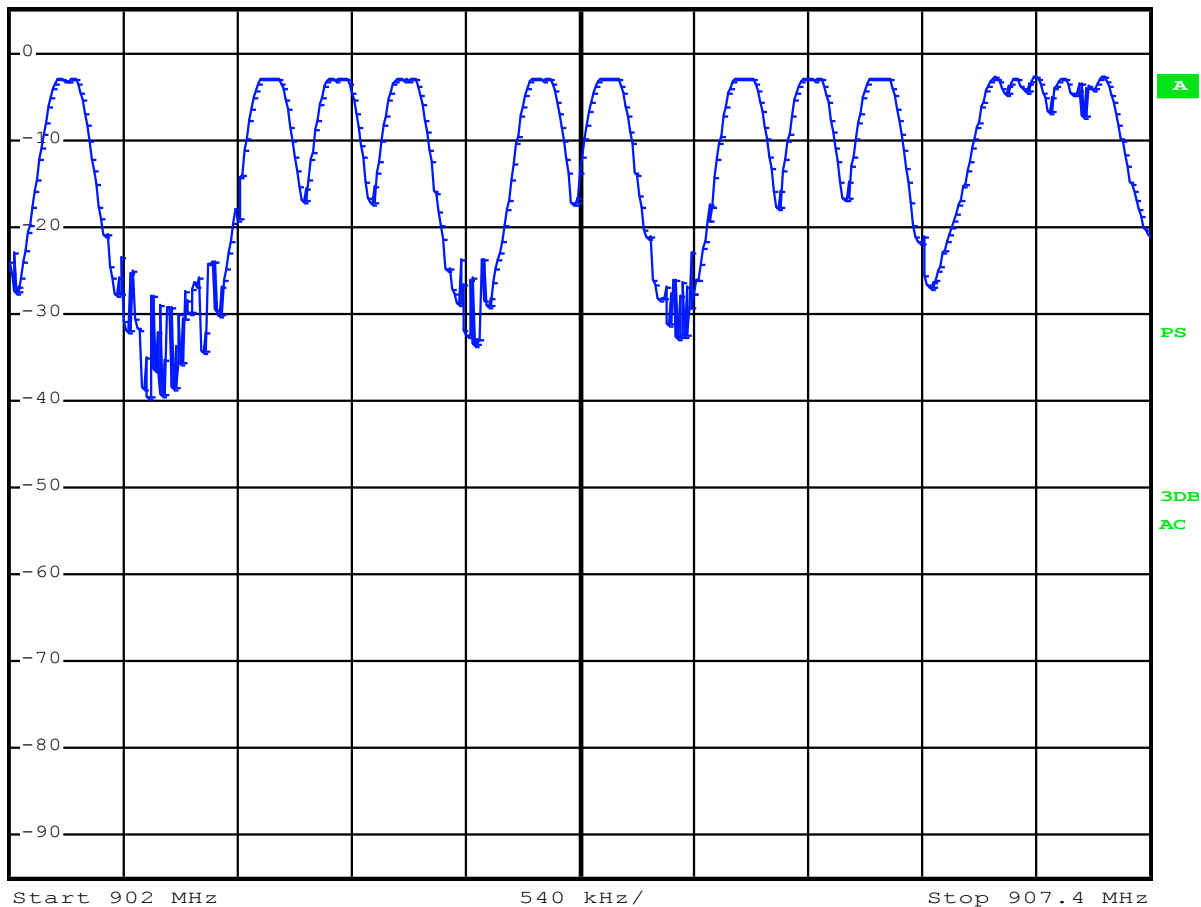1 PK
VIEW

Date: 23.DEC.2013 15:17:19

Figure 21: Number of Hopping Frequencies 902MHz to 907.4MHz - 11 Frequencies




* RBW 100 kHz

VBW 300 kHz

Ref 5 dBm


* Att 20 dB

SWT 2.5 ms

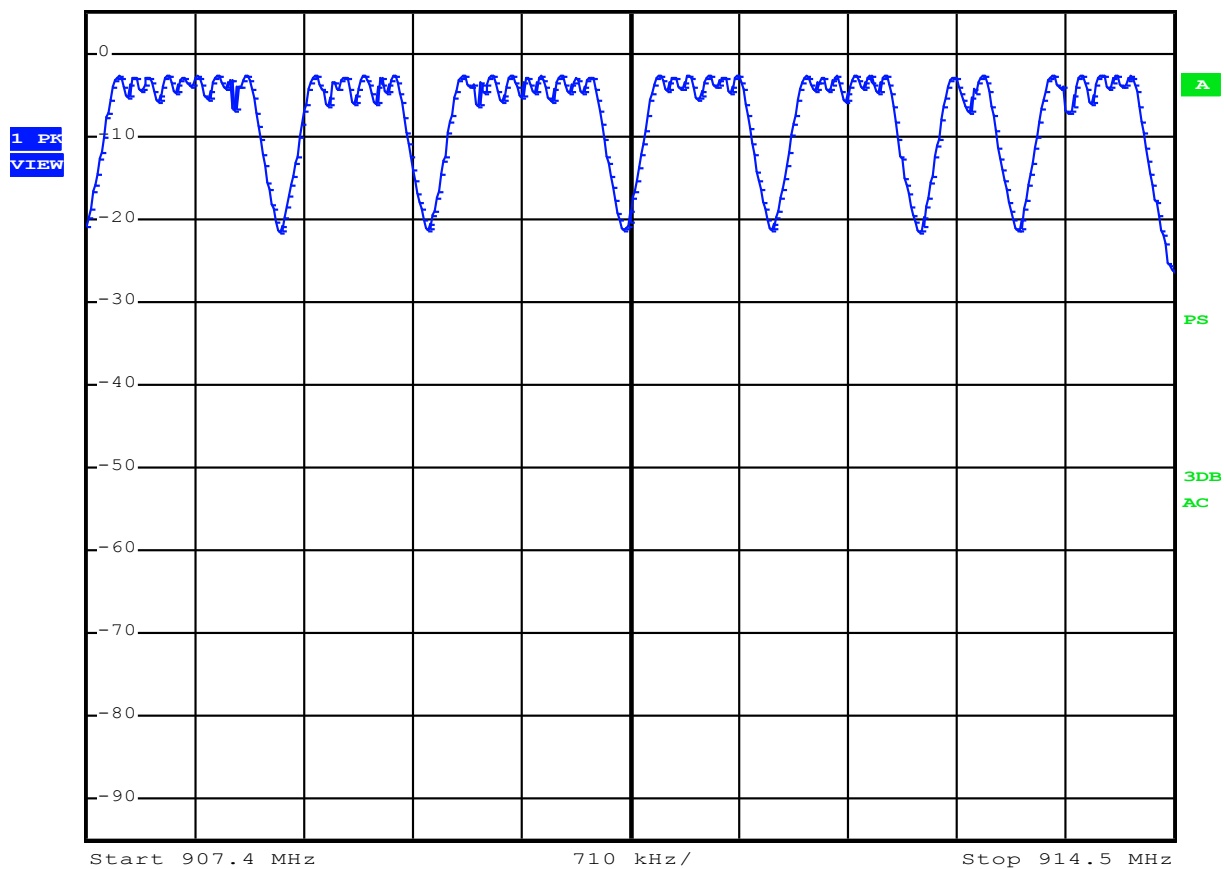

Date: 23.DEC.2013 15:25:36

**Figure 22: Number of Hopping Frequencies 907.4MHz to 914.5MHz - 15
Frequencies**

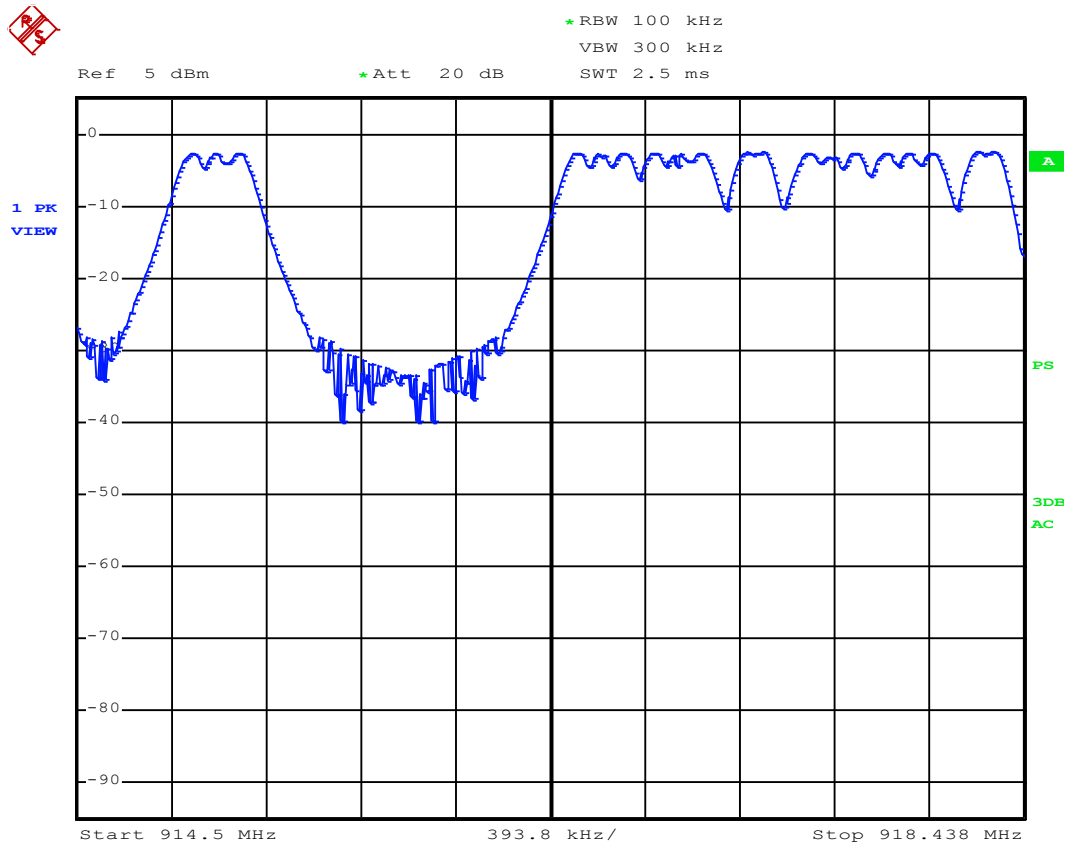

Date: 23.DEC.2013 15:41:17

Figure 23: Number of Hopping Frequencies 914.5MHz to 918.4MHz - 7 Frequencies




*RBW 100 kHz

VBW 300 kHz

SWT 2.5 ms

Ref 5 dBm

*Att 20 dB

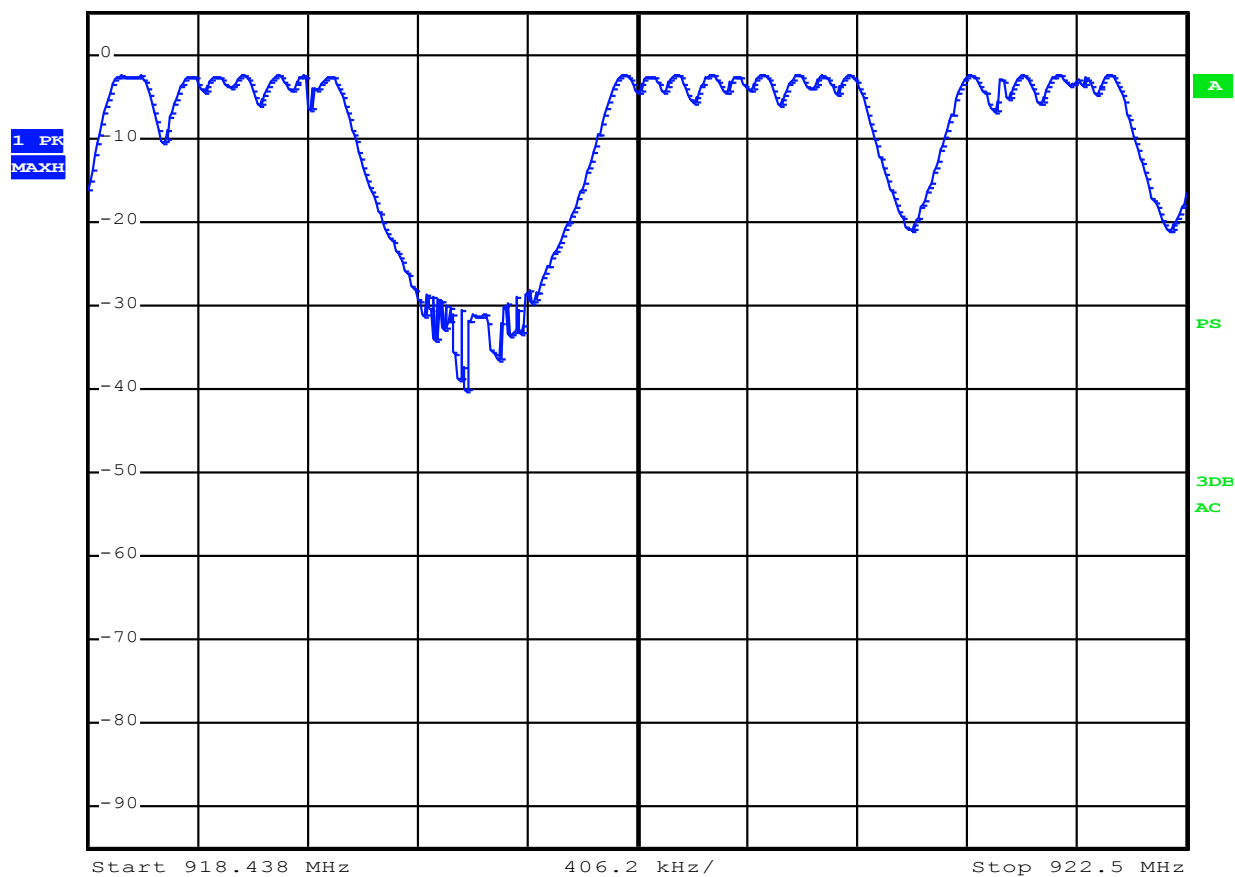

Date: 23.DEC.2013 15:46:37

Figure 24: Number of Hopping Frequencies 918.4MHz to 922.5MHz - 8 Frequencies




* RBW 100 kHz

VBW 300 kHz

Ref 5 dBm

* Att 20 dB

SWT 2.5 ms

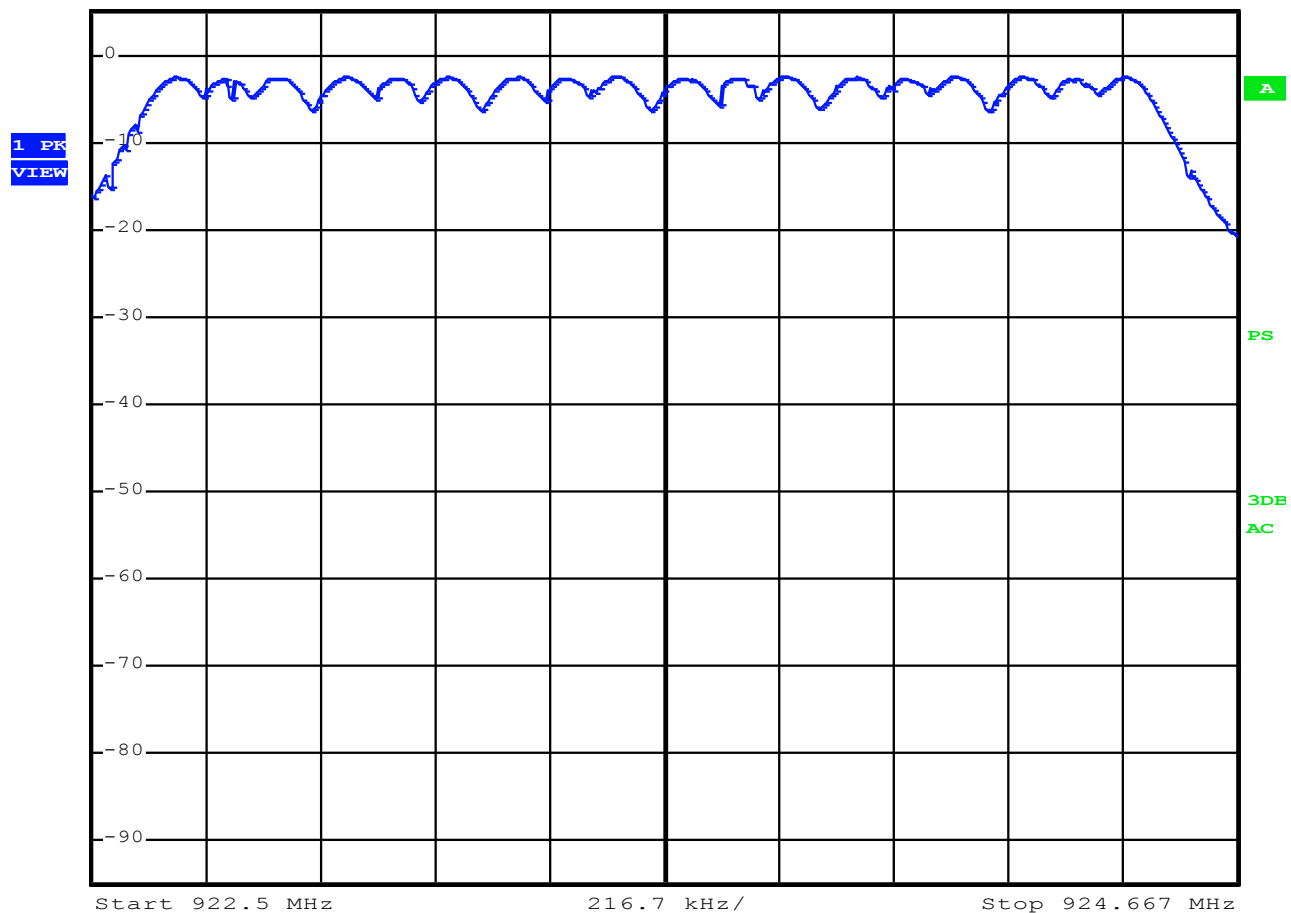

Date: 23.DEC.2013 15:59:14

Figure 25: Number of Hopping Frequencies 922.5MHz to 924.7MHz - 6 Frequencies




* RBW 100 kHz

VBW 300 kHz

Ref 5 dBm


* Att 20 dB

SWT 2.5 ms

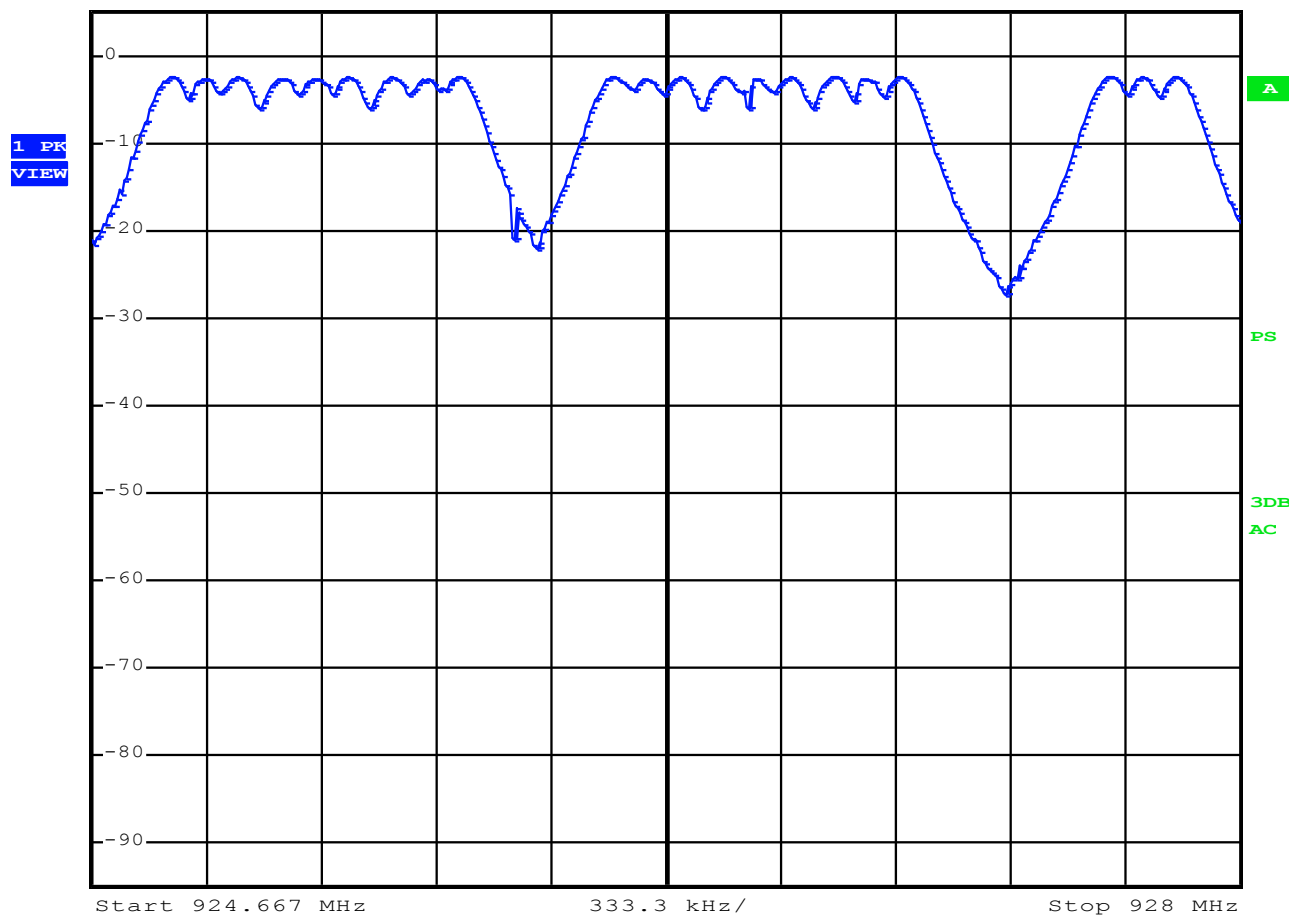

Date: 23.DEC.2013 16:05:44

Figure 26: Number of Hopping Frequencies 924.7MHz to 928MHz - 7 Frequencies

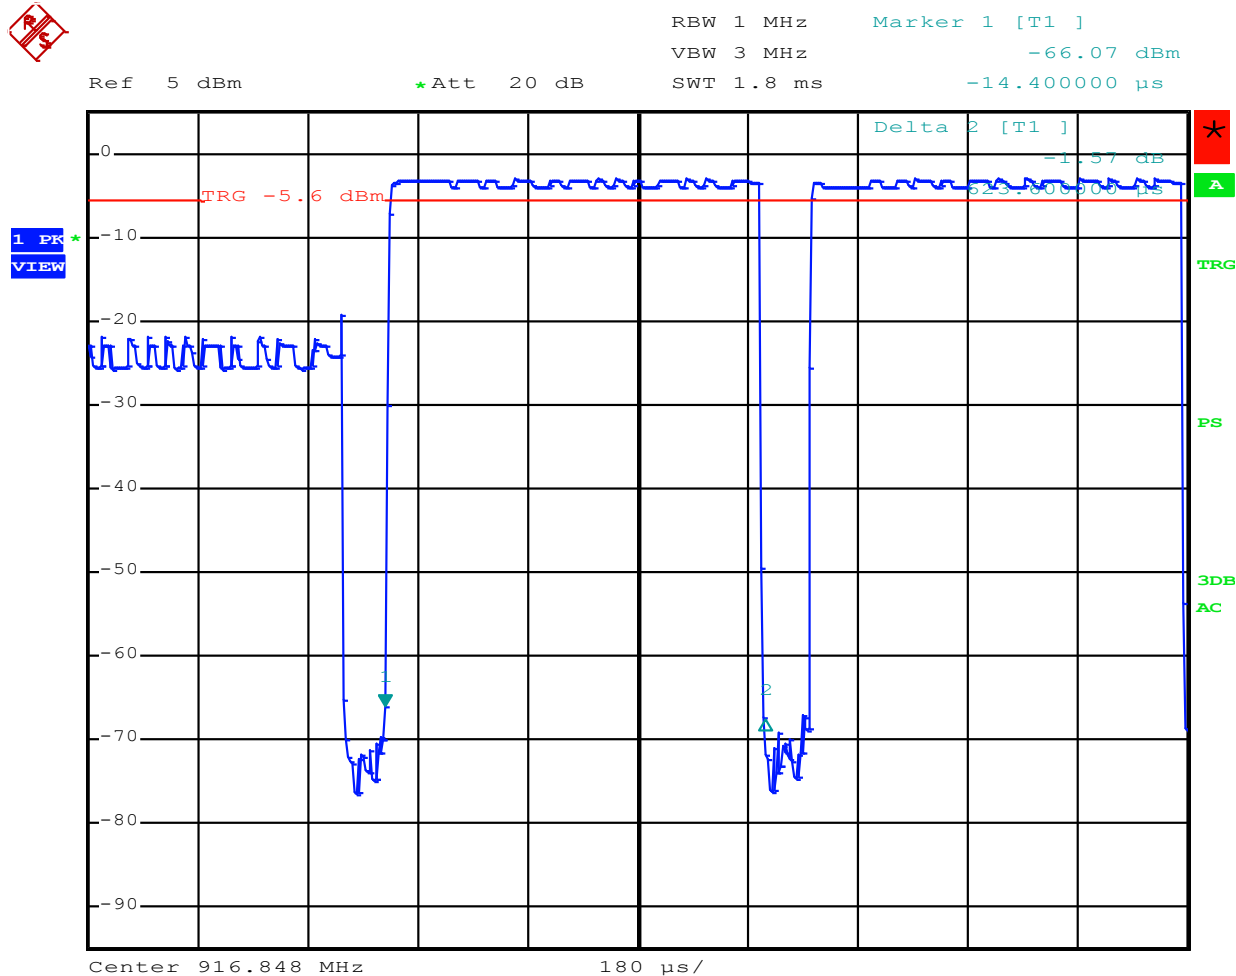Dwell Time and Time of Occupancy

Date: 24.DEC.2013 09:26:18

Figure 27: Dwell Time – 623.6uS



RBW 1 MHz Delta 2 [T1]


VBW 3 MHz -0.11 dB

Ref 0 dBm

*Att 55 dB

SWT 1 s

114.000000 ms

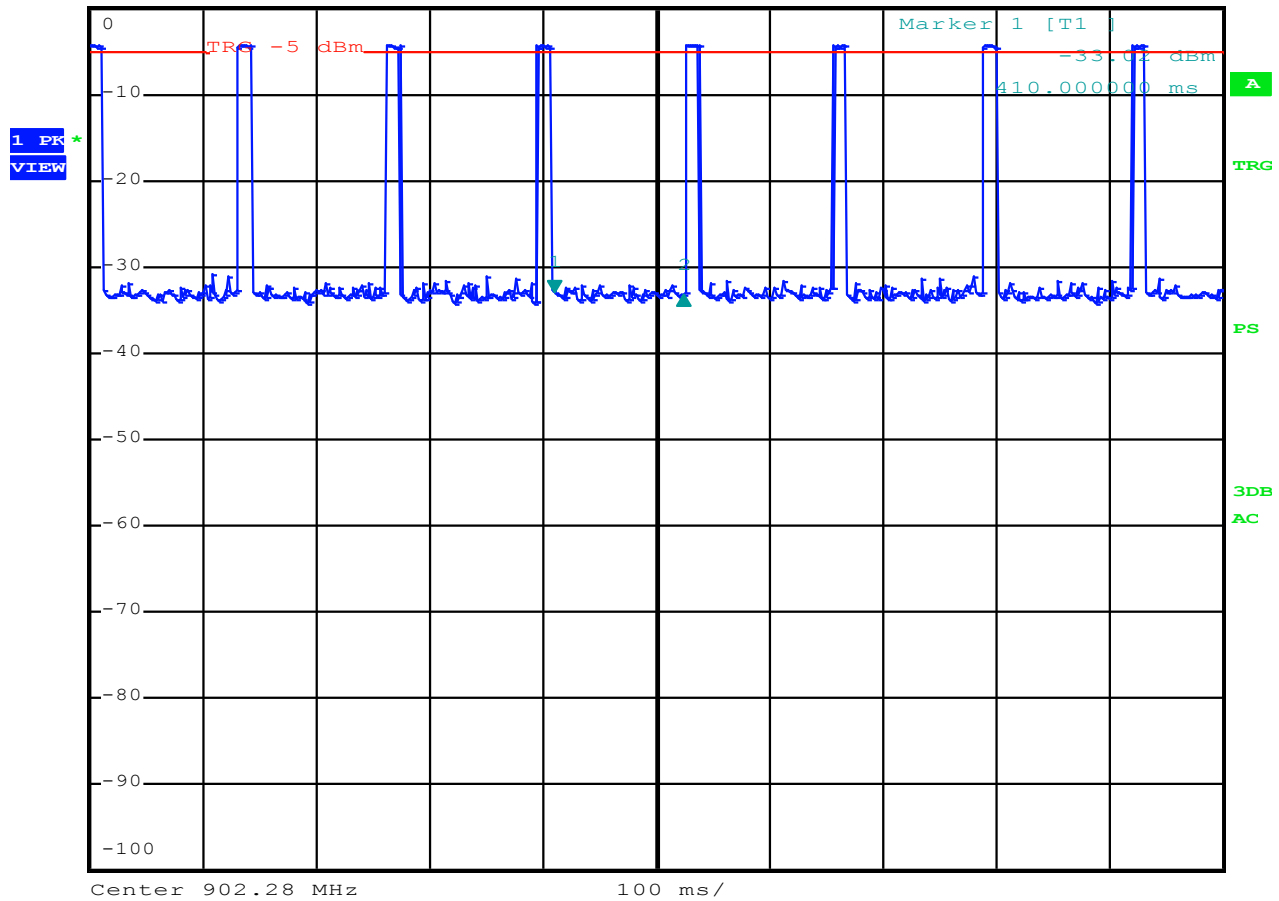

Date: 21.MAR.2014 09:03:38

Figure 28: Time Occupancy Per Frequency – 109.3mS*

(* Time between 2 consecutive transmissions on the same frequency is 0.114 Seconds, dwell time per frequency is 0.623mS, therefore occupancy time per frequency within a 20 Second period is 109.3 mS)

Channel Bandedge


*RBW 10 kHz Delta 2 [T1]
VBW 30 kHz -37.29 dB
SWT 10 ms -254.000000000 kHz

Ref 5 dBm

*Att 20 dB

SWT 10 ms

-254.000000000 kHz

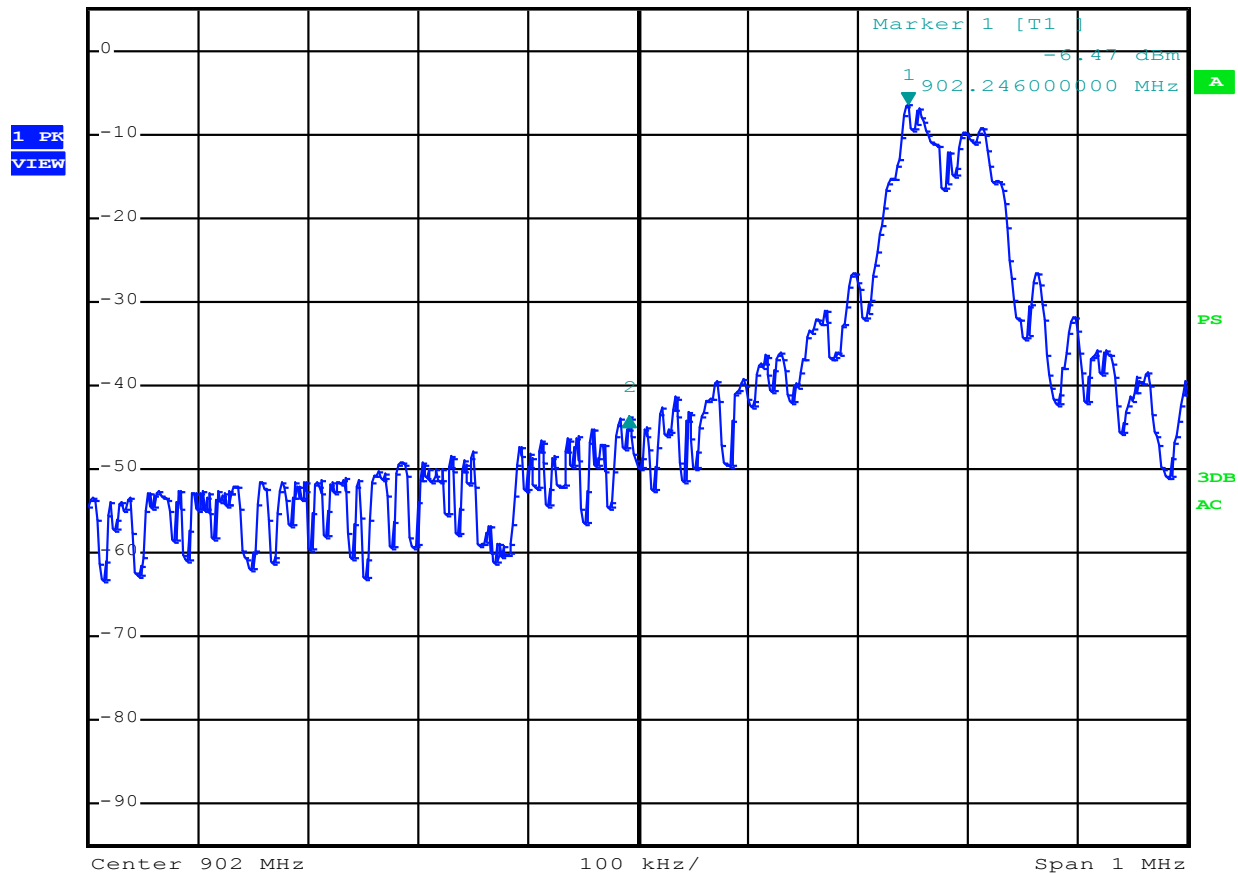

Date: 23.DEC.2013 16:56:03

Figure 29: Low Channel Bandedge



*RBW 10 kHz

Delta 2 [T1]

VBW 30 kHz


-31.27 dB

Ref 5 dBm

*Att 20 dB

SWT 10 ms

434.00000000 kHz

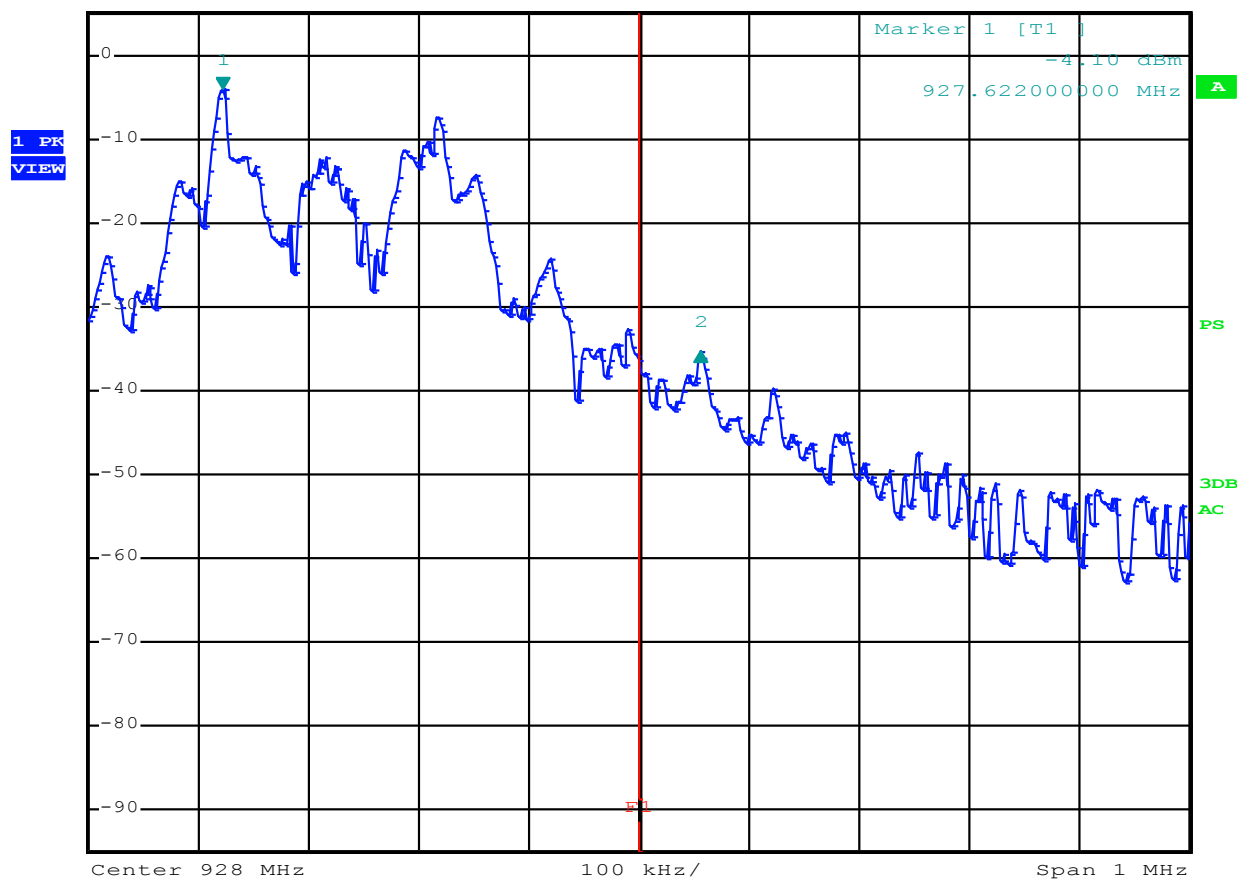

Date: 23.DEC.2013 16:58:48

Figure 30: High Channel Bandedge

Tests when unit is communicating to OEM Part 15 approved Device**20 dB Bandwidth**


*RBW 10 kHz Delta 2 [T1]
VBW 30 kHz -20.25 dB
SWT 5 ms -28.800000000 kHz

Ref 112 dBμV

*Att 20 dB

SWT 5 ms

-28.800000000 kHz

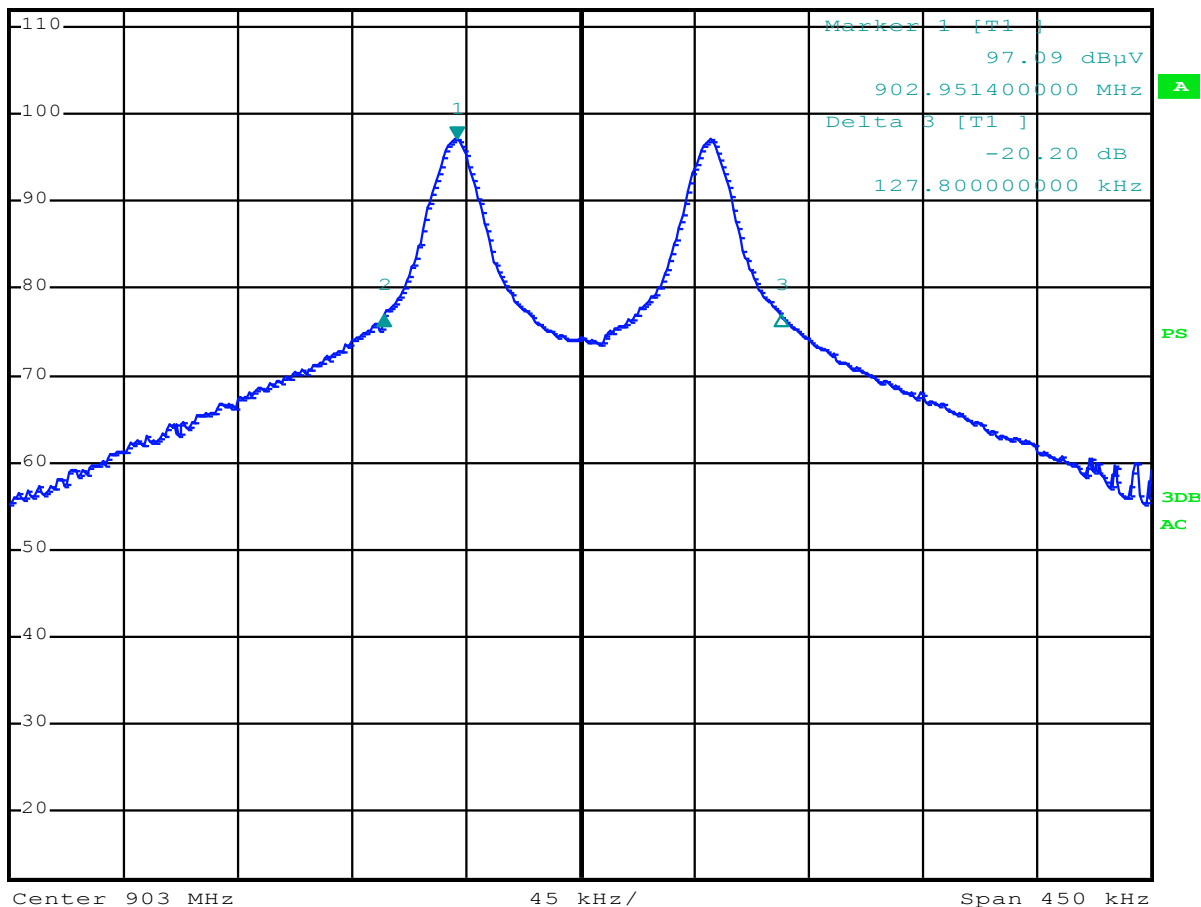**1 PK
VIEW**

Date: 18.DEC.2013 16:06:09

Figure 31: 20dB Bandwidth at LOW Frequency – 156.6 kHz




*RBW 10 kHz Delta 3 [T1]
VBW 30 kHz -20.29 dB
SWT 5 ms 27.000000000 kHz

Ref 112 dBμV

*Att 20 dB

SWT 5 ms

27.000000000 kHz

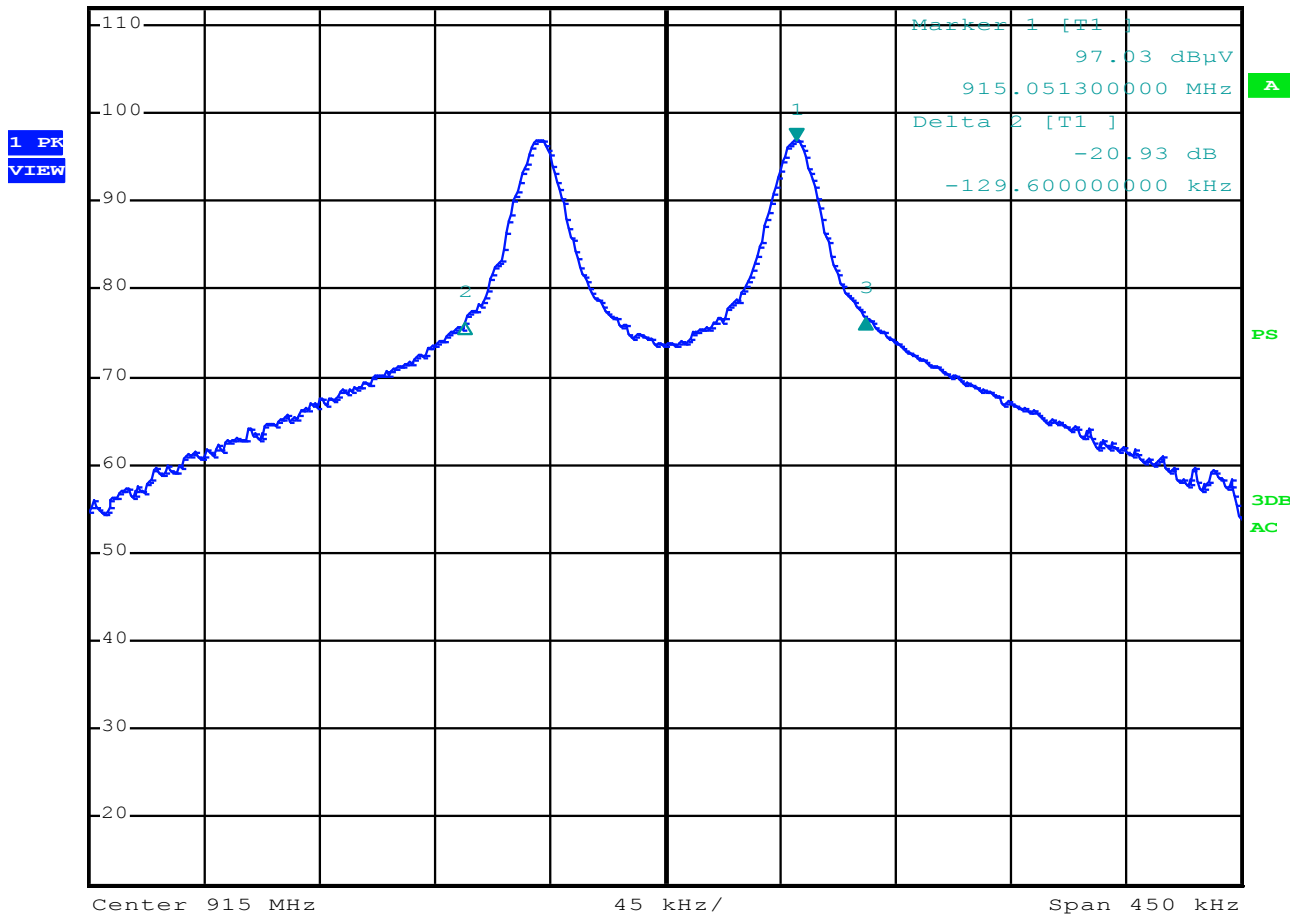

Date: 18.DEC.2013 16:00:51

Figure 32: 20dB Bandwidth at MID Frequency – 156.6 kHz



*RBW 10 kHz Delta 3 [T1]
VBW 30 kHz -20.11 dB
SWT 5 ms 27.000000000 kHz


Ref 112 dBμV

*Att 20 dB

SWT 5 ms

27.000000000 kHz


1 PK
VIEW

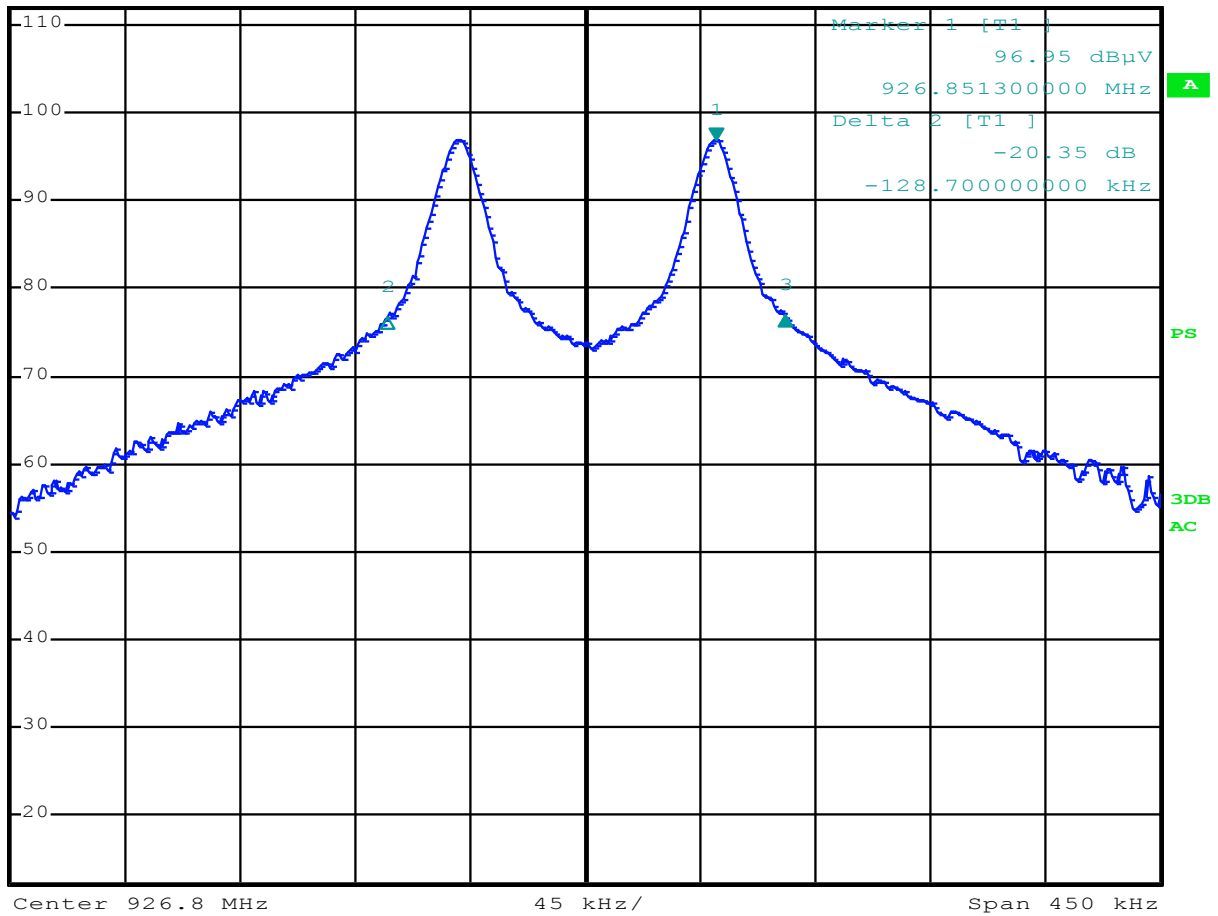

Date: 18.DEC.2013 16:12:21

Figure 33: 20dB Bandwidth at HIGH Frequency – 155.7 kHz

Channel Separation

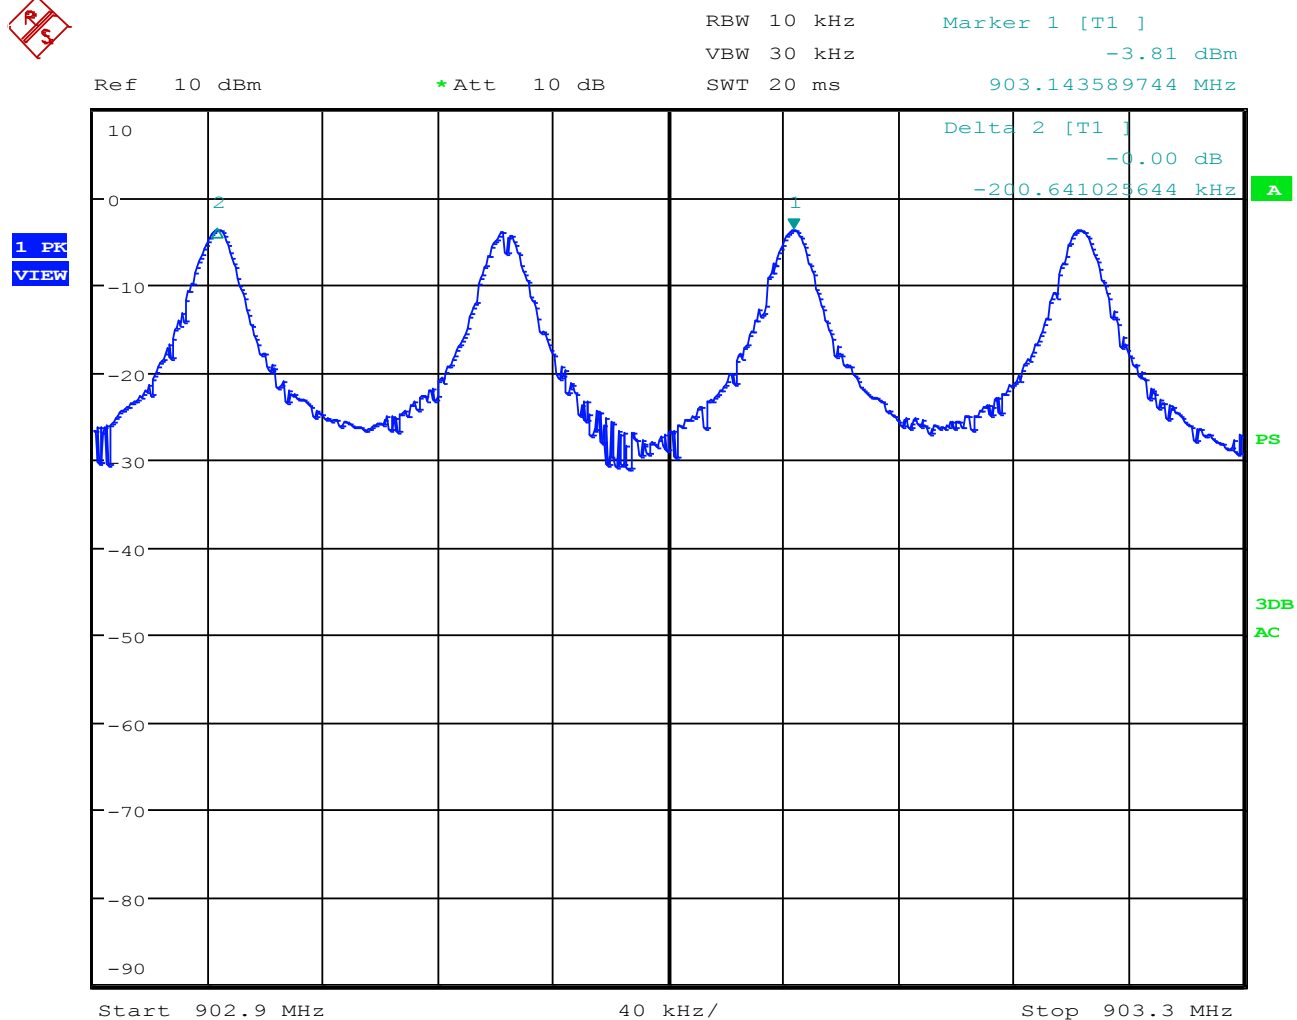


TTTTTT

Date: 7.JAN.2014 13:55:37

Figure 34: Channel Separation = 200.6kHz

Number of Hopping Channels

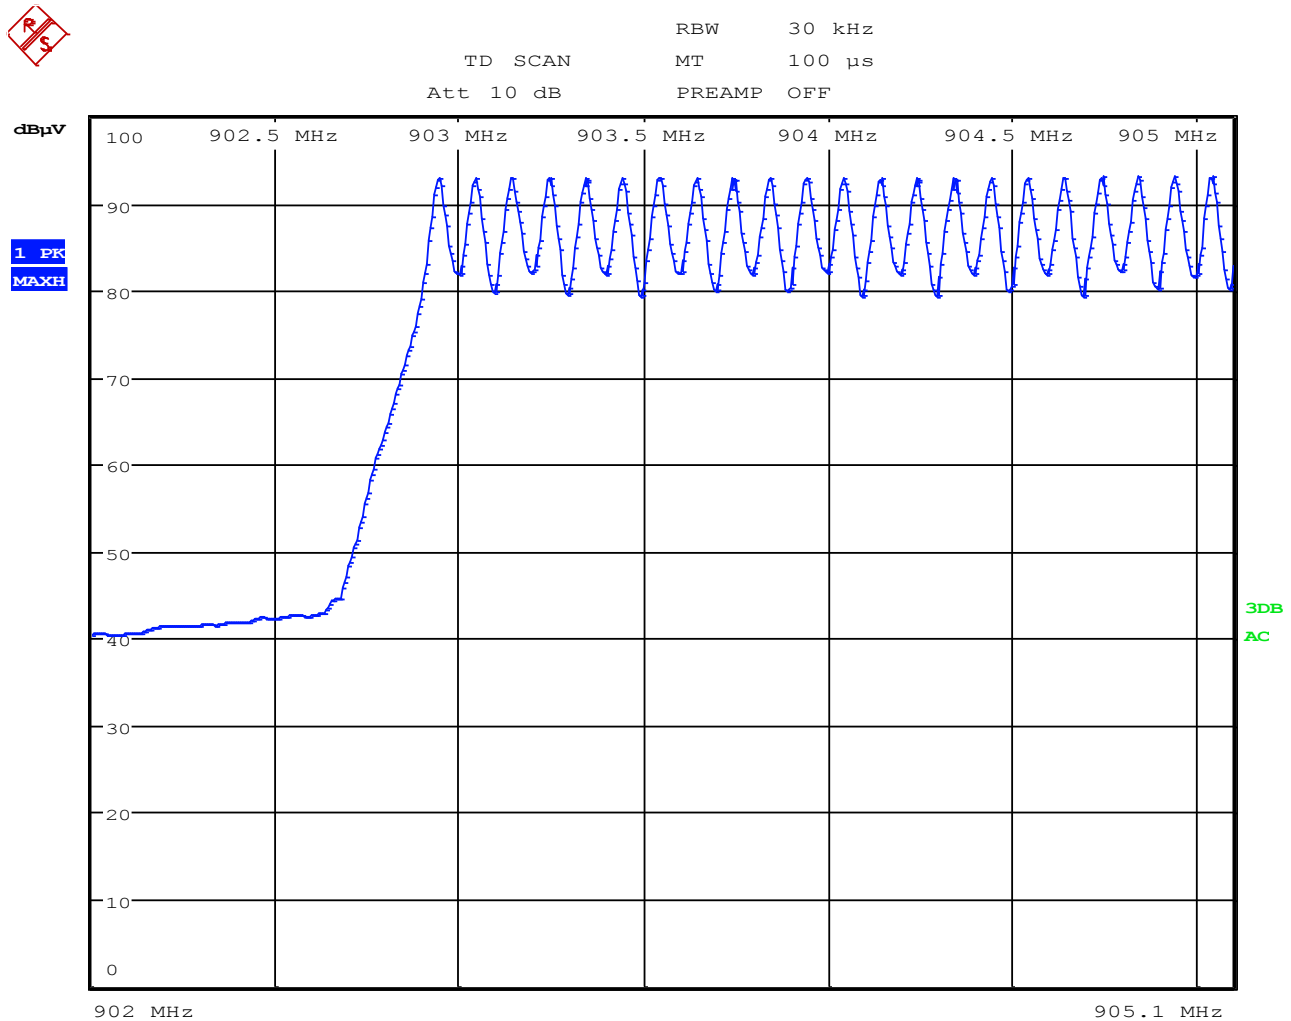

TTTTTT

Date: 7.JAN.2014 15:32:13

Figure 35: Number of Hopping Frequencies 902MHz to 905MHz - 11 Frequencies




RBW 30 kHz

TD SCAN

MT 1 ms

Att 10 dB


PREAMP OFF

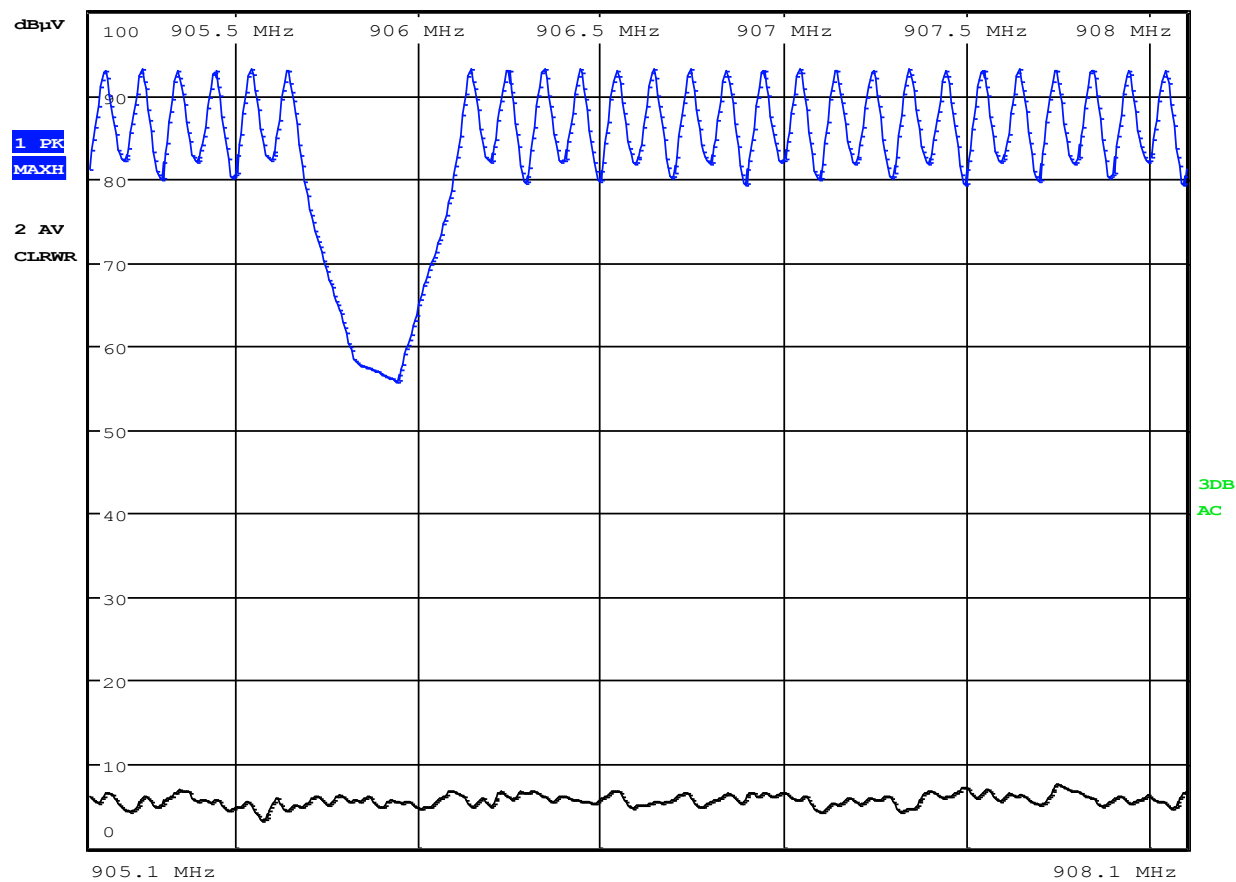

TTTTTT

Date: 7.JAN.2014 16:18:05


**Figure 36: Number of Hopping Frequencies 905MHz to 908MHz - 13
Frequencies**

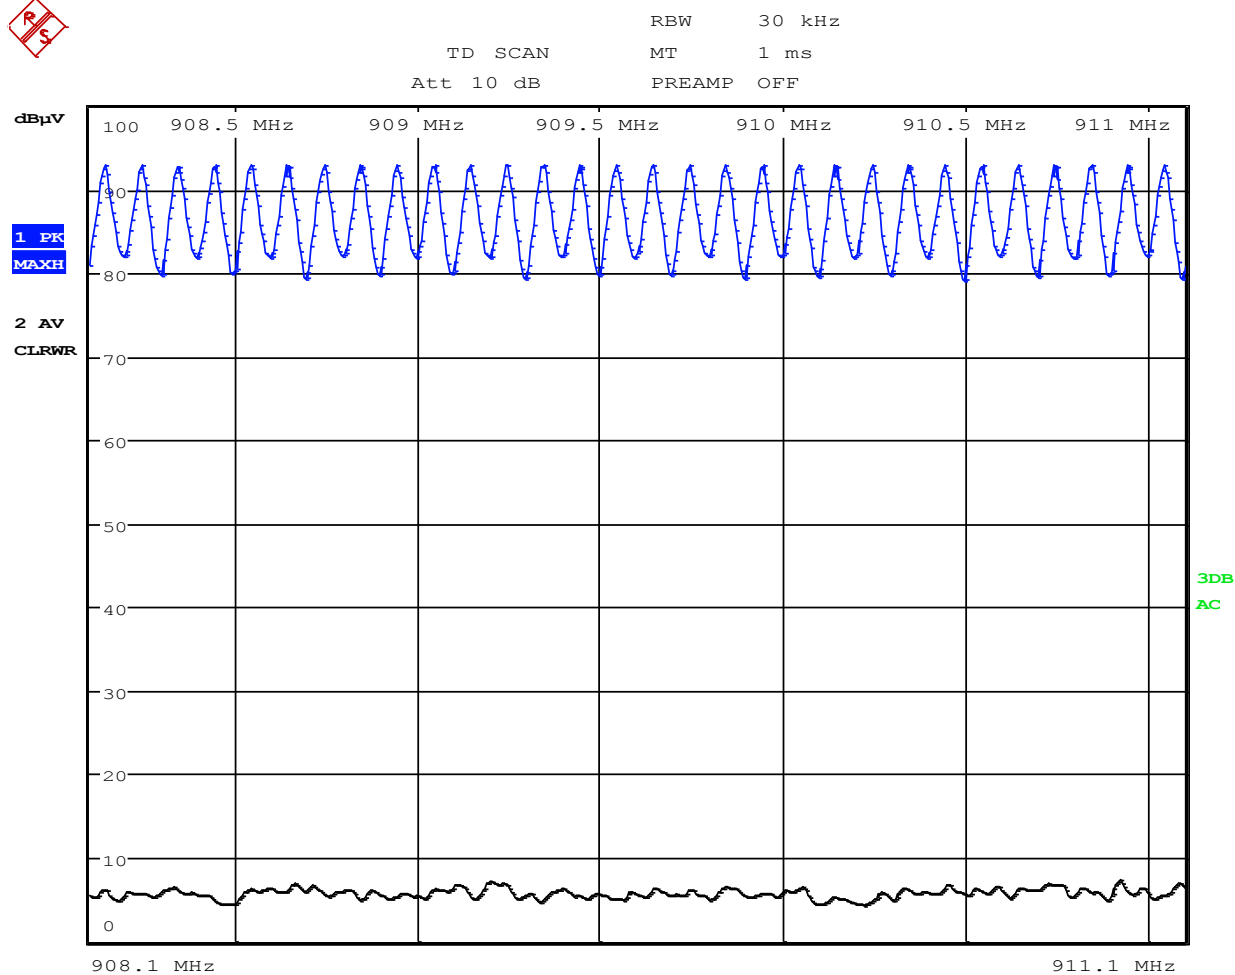

TTTTTT

Date: 7.JAN.2014 15:41:12

Figure 37: Number of Hopping Frequencies 908MHz to 911MHz - 15 Frequencies

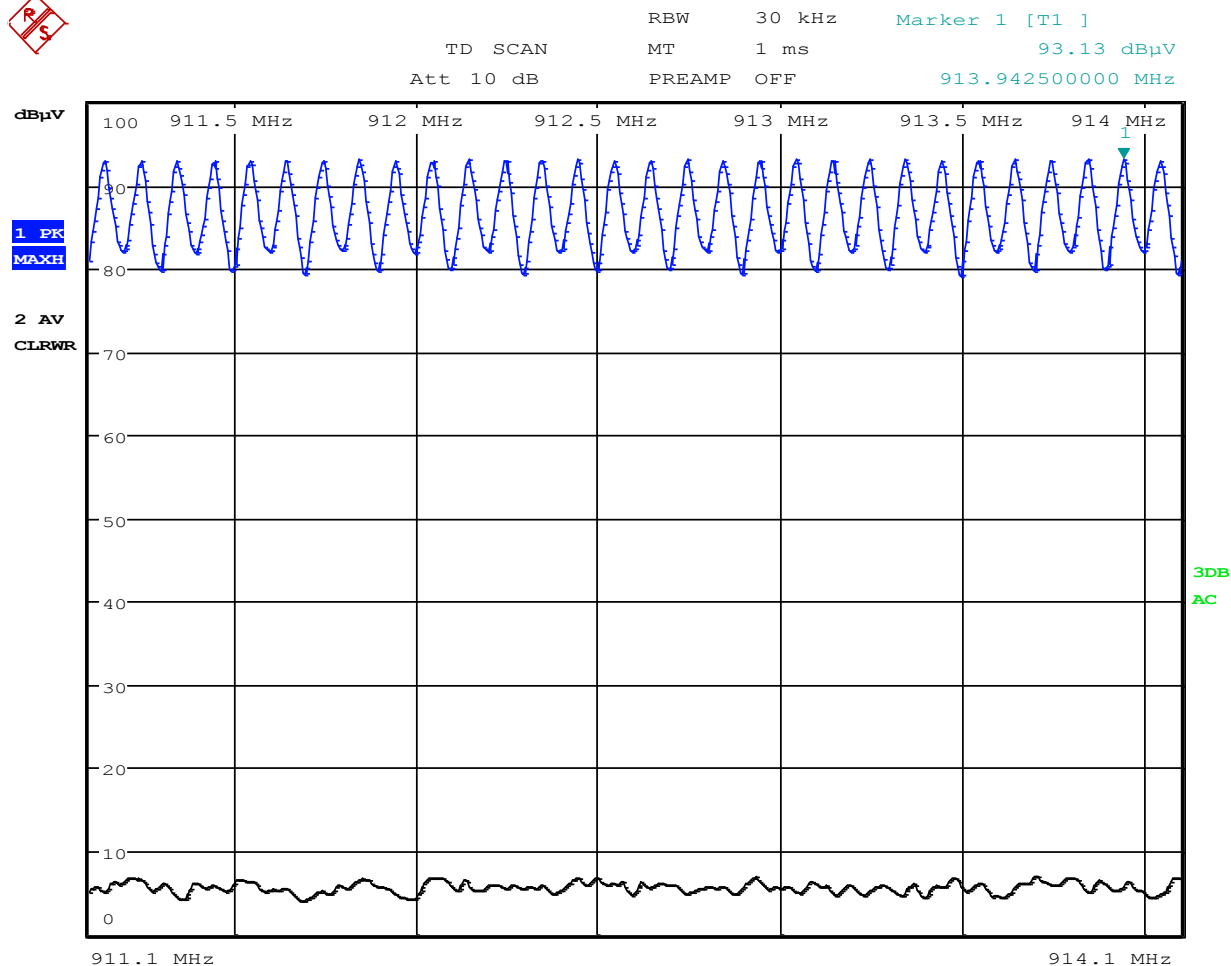


TTTTTT

Date: 7.JAN.2014 16:33:12

Figure 38: Number of Hopping Frequencies 911MHz to 914MHz - 15 Frequencies




RBW 30 kHz
 TD SCAN MT 1 ms
 Att 10 dB PREAMP OFF

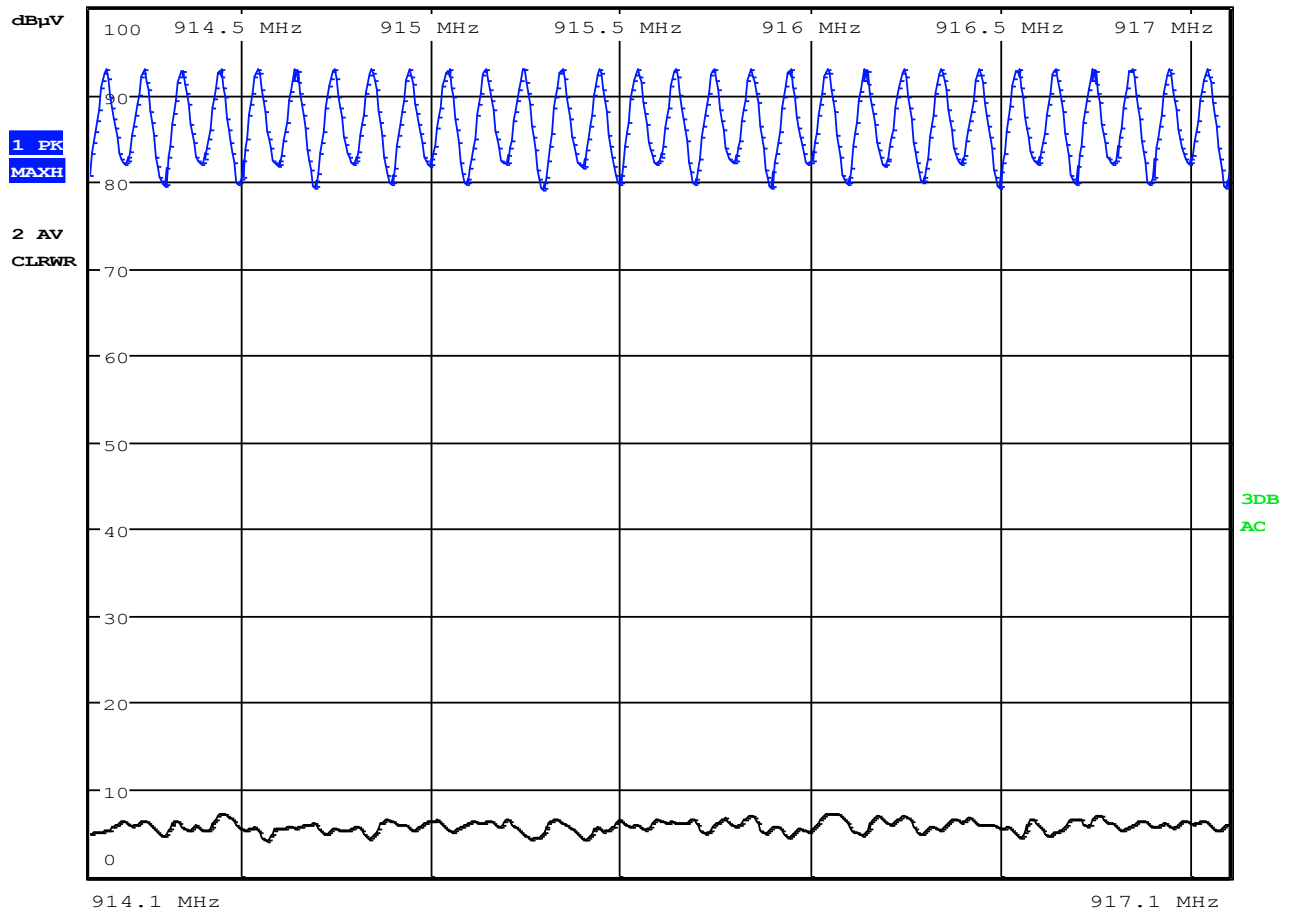

TTTTTT

Date: 7.JAN.2014 15:52:41

Figure 39: Number of Hopping Frequencies 914MHz to 917MHz - 15 Frequencies

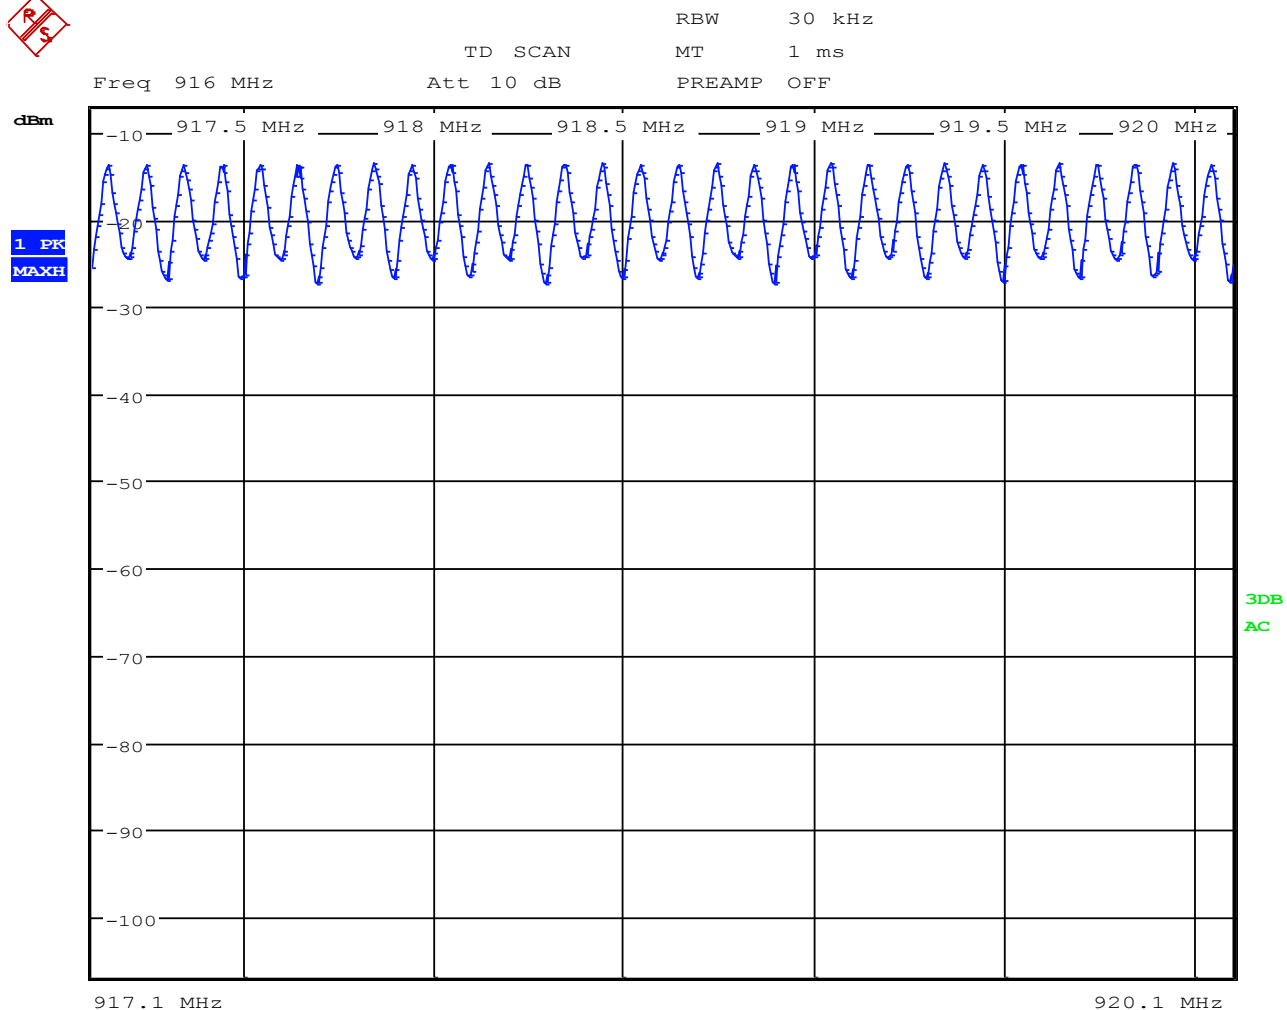

TTTTTT

Date: 8.JAN.2014 19:40:08

Figure 40: Number of Hopping Frequencies 917MHz to 920MHz - 15 Frequencies




RBW 30 kHz

TD SCAN

MT 1 ms

Att 10 dB


PREAMP OFF

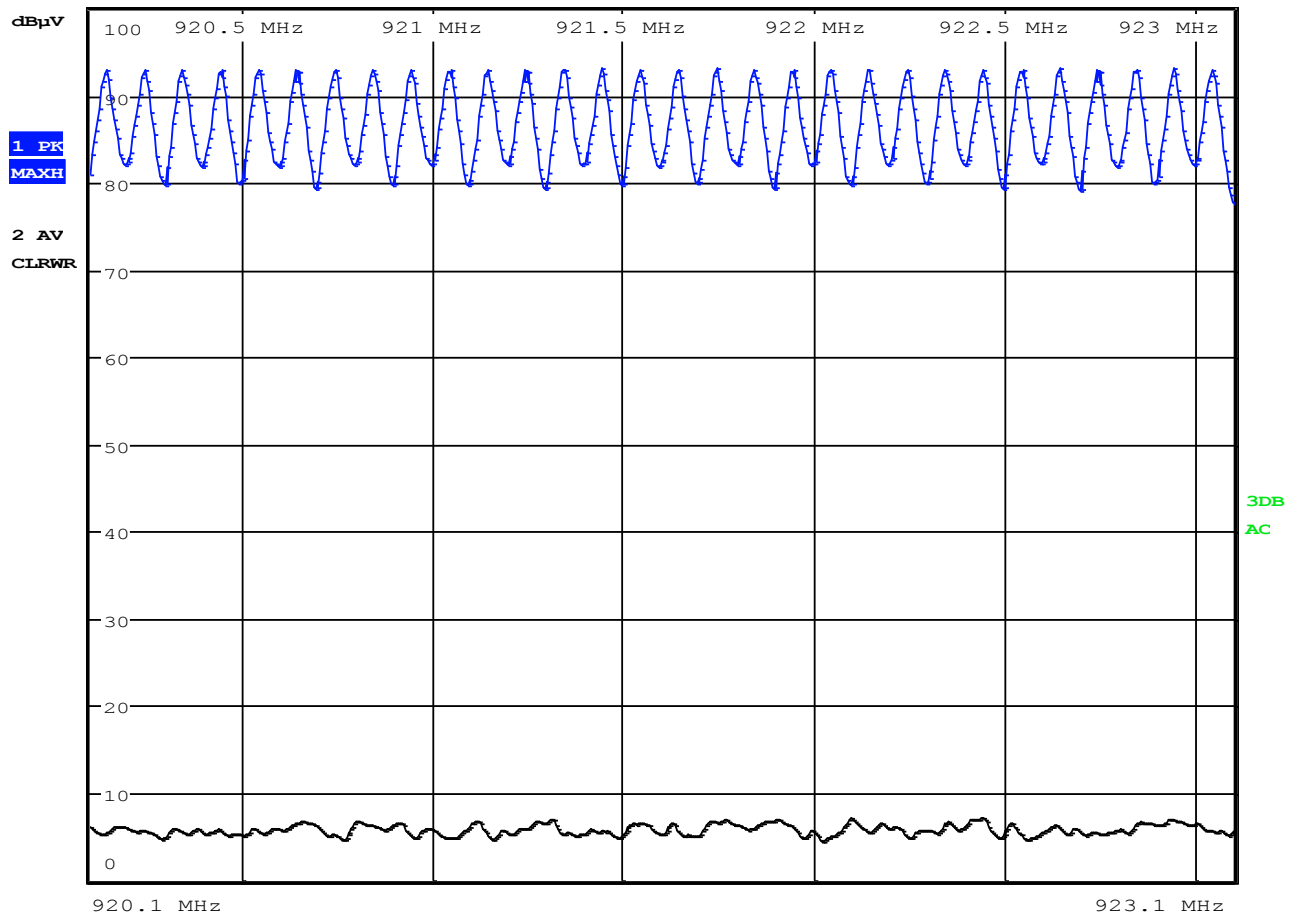

TTTTTT

Date: 7.JAN.2014 16:00:54

Figure 41: Number of Hopping Frequencies 920MHz to 922MHz - 15 Frequencies

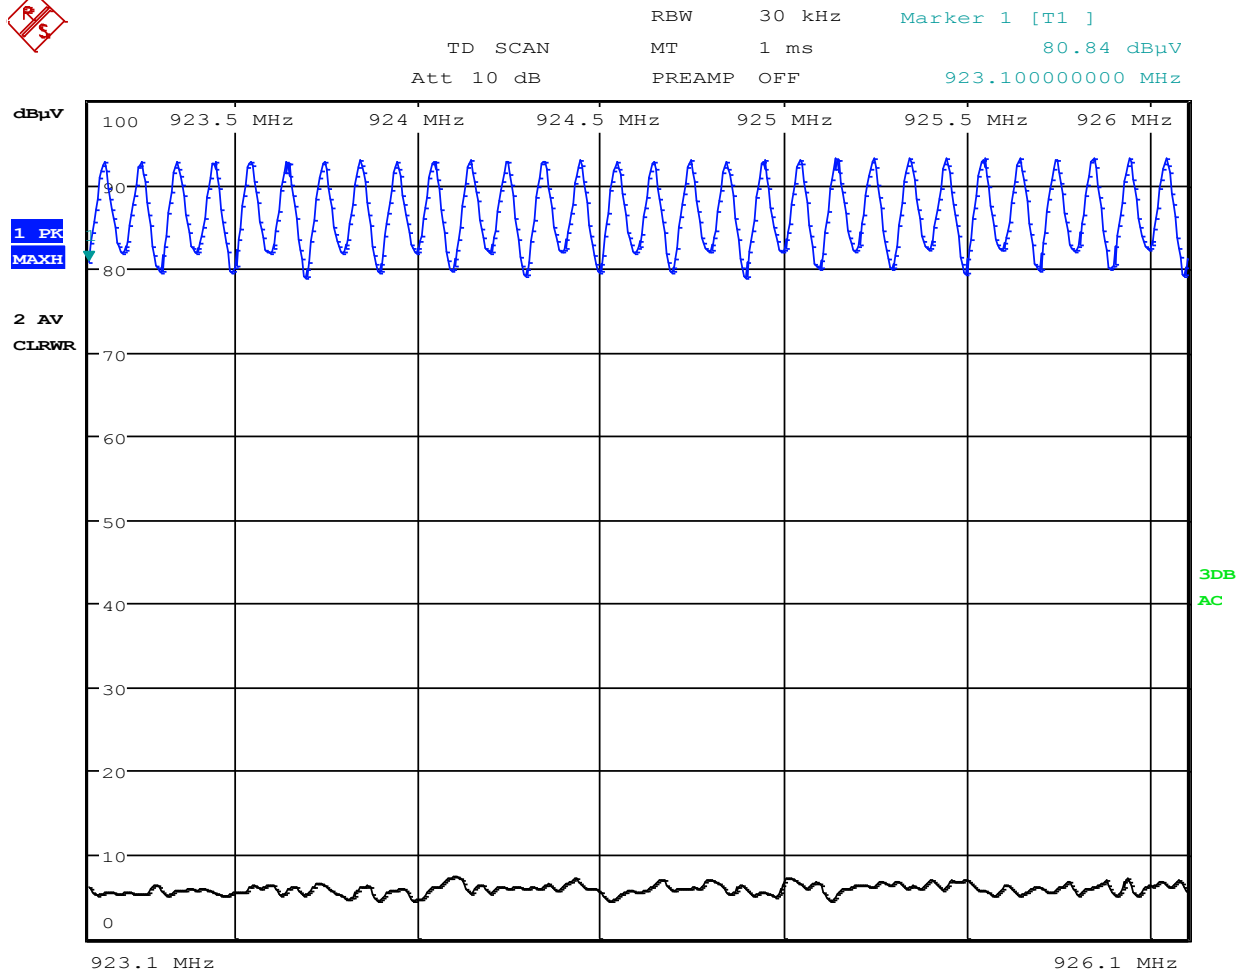


TTTTTT

Date: 7.JAN.2014 17:46:50

Figure 42: Number of Hopping Frequencies 923MHz to 926MHz - 15 Frequencies



RBW 30 kHz
TD SCAN MT 1 ms
Att 10 dB PREAMP OFF

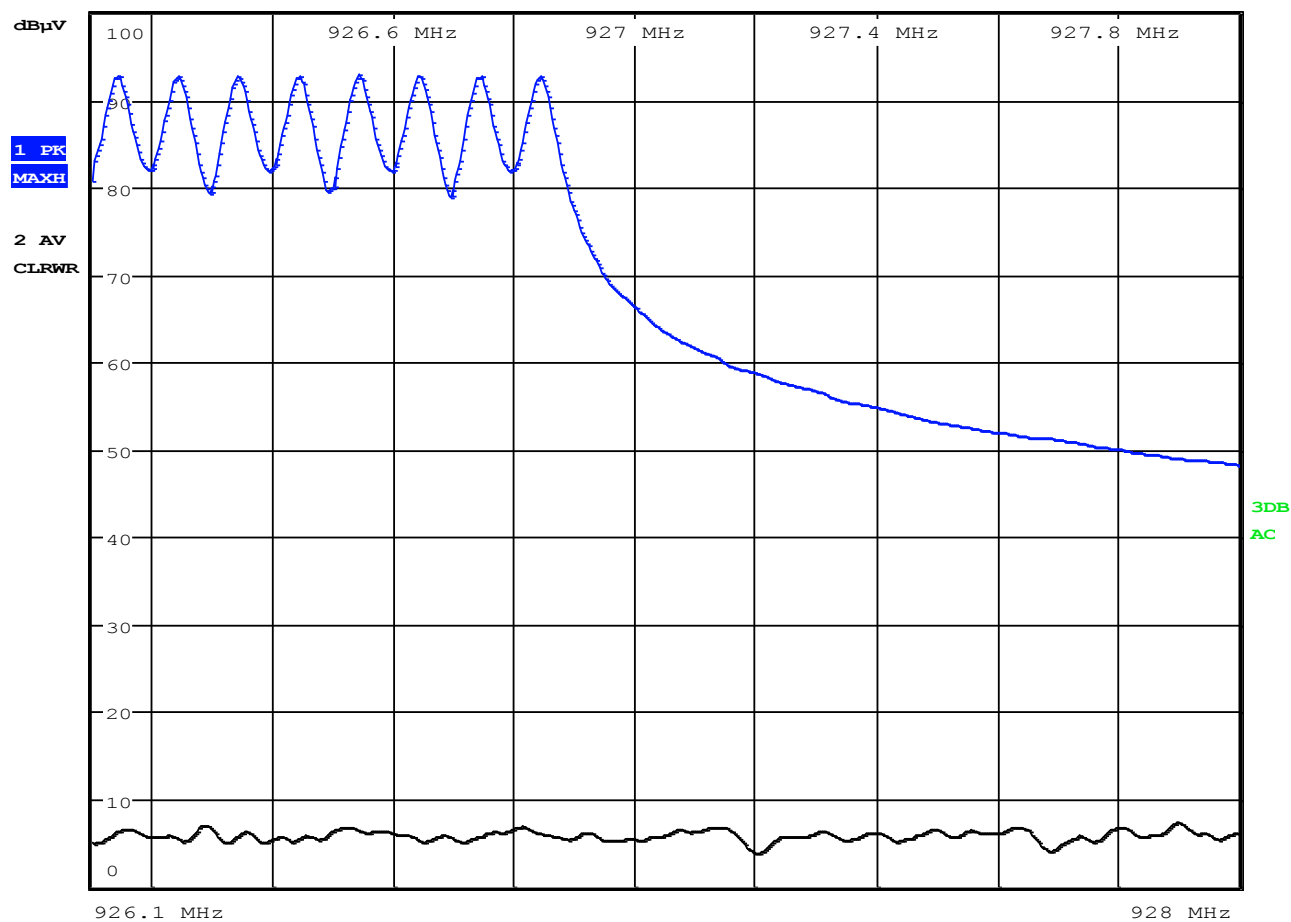


TTTTTT

Date: 7.JAN.2014 16:07:51

Figure 43: Number of Hopping Frequencies 926MHz to 928MHz - 8 Frequencies


Dwell Time and Time of Occupancy

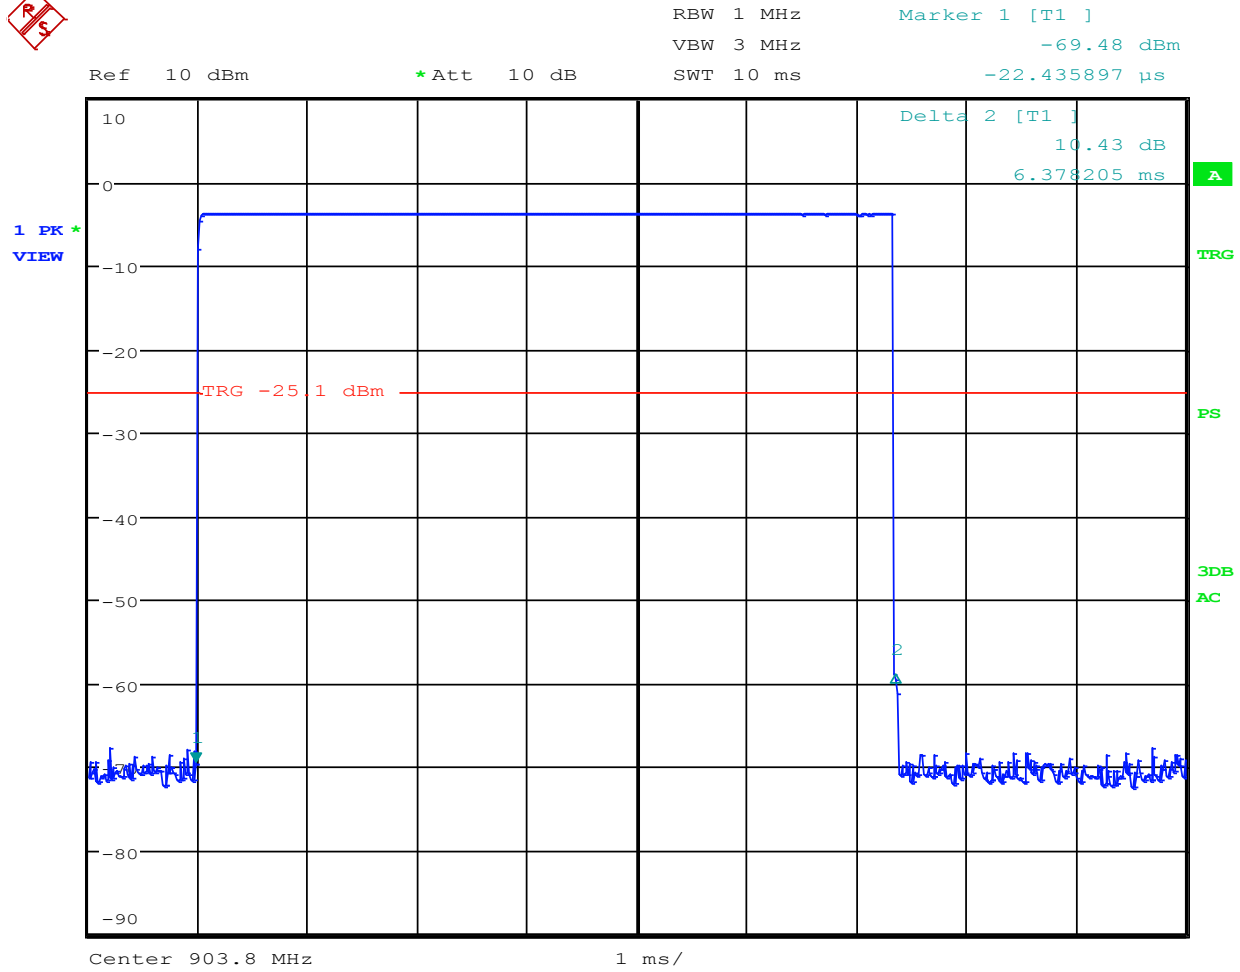


TTTTTT

Date: 7.JAN.2014 13:46:45

Figure 44: Dwell Time – 6.4mS

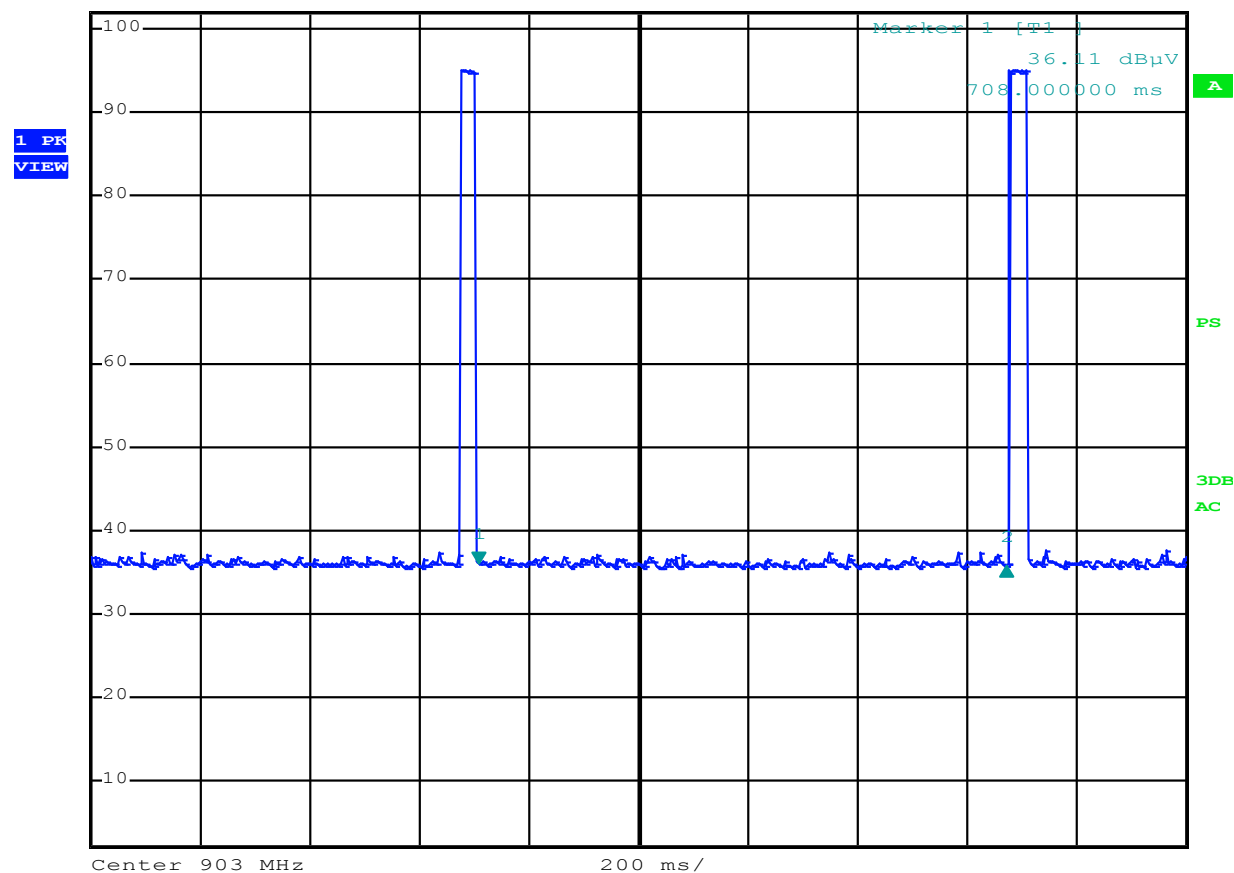

Channel Bandedge

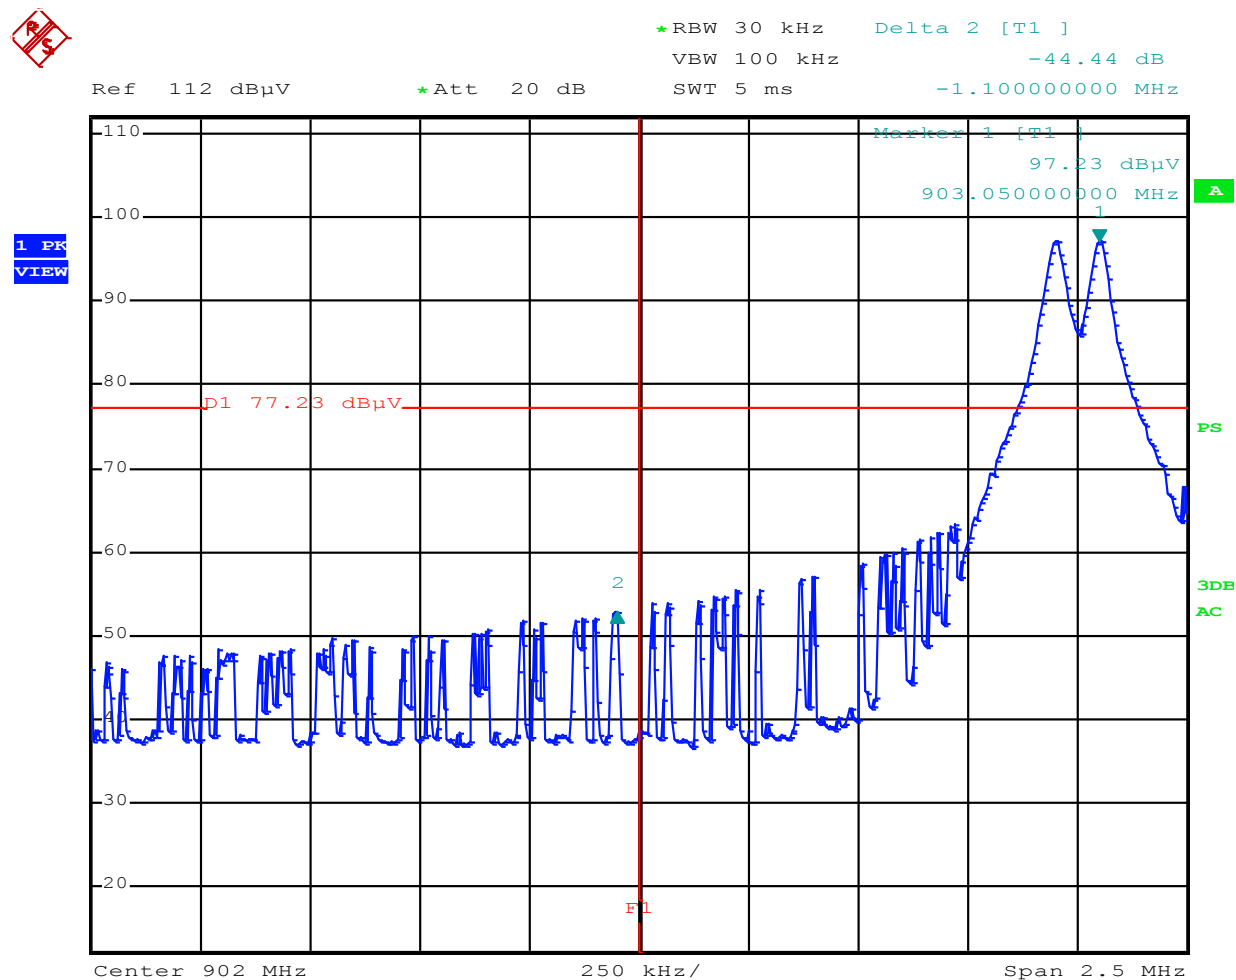

Date: 18.DEC.2013 17:08:46

Figure 46: Low Channel Bandedge




*RBW 30 kHz Delta 2 [T1]
VBW 100 kHz -45.10 dB
SWT 5 ms 1.328000000 MHz

Ref 112 dBμV

*Att 20 dB

SWT 5 ms

1.328000000 MHz

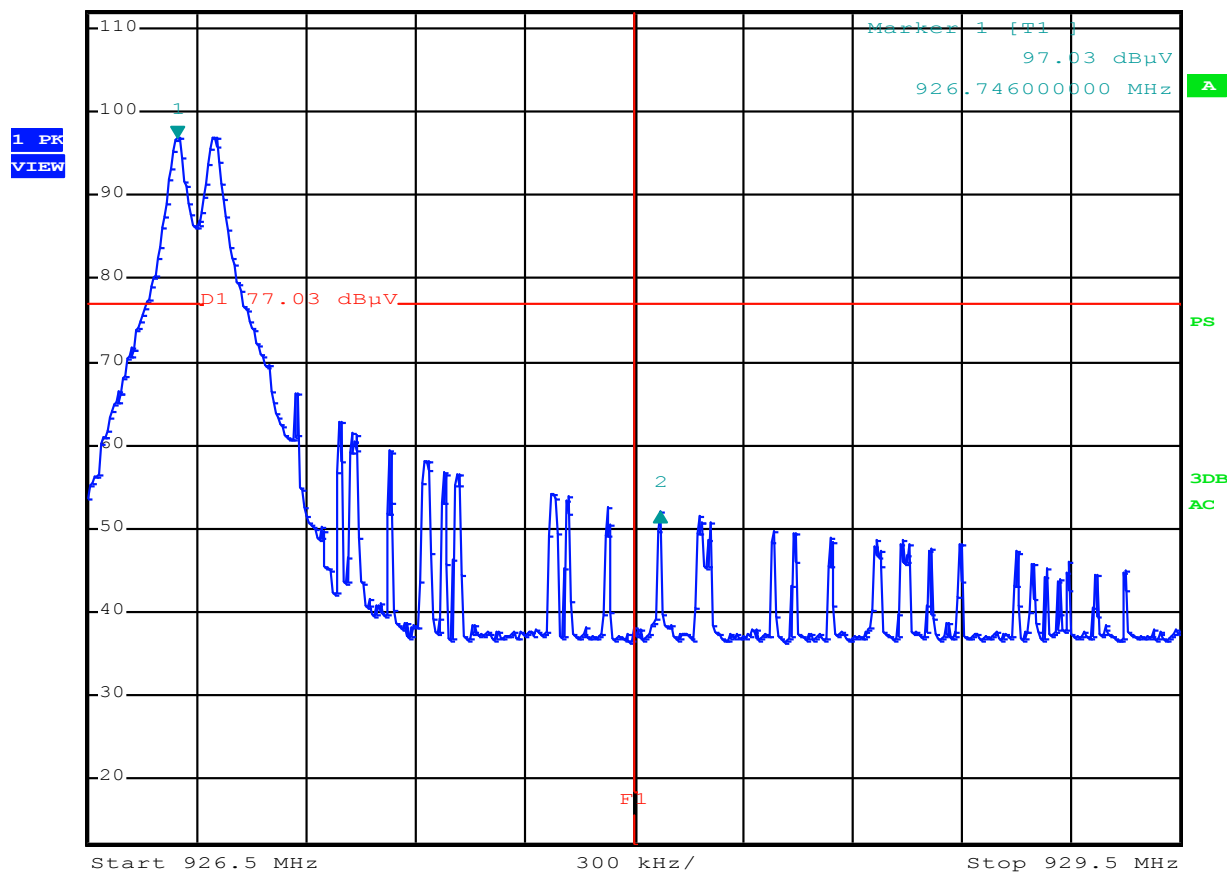

Date: 18.DEC.2013 16:39:00

Figure 47: High Channel Bandedge

Radiated Spurious Harmonics

Measurement Date: July 1, 2013

Setup:

Correction factor includes antenna, cables.

NOTE: The EUT worst case "ON" time was measured to be 0.624 ms per 100ms. This equates to a duty cycle correction factor of -44.1 dB that has been applied to the measured average values in accordance with 15.35(c). In accordance with 15.31(o) emissions that are 20dB below the permissible value have not been reported.

All emissions, when the fundamental frequency is at the low frequency band of operation, were below 20dB of the permissible value and in accordance with 15.31(o) they have not been reported.

Table 5: Harmonics at Low Frequency

Frequency	Pol.	Corrected Value	Average Limit at 3m	Duty Cycle Correction	Delta Limit-Meas.	Peak Limit at 3m	Delta Limit-Meas
(MHz)		(dBuV/m)	(dBuV/m)	(dB)	(dB)	dB(uV/m)	(dB)
8234.8	H	56.4	54	44.1	41.7	74	17.6

Table 6: Harmonics at Mid Frequency

Frequency	Pol.	Corrected Value	Average Limit at 3m	Duty Cycle Correction	Delta Limit-Meas.	Peak Limit at 3m	Delta Limit-Meas
(MHz)		(dBuV/m)	(dBuV/m)	(dB)	(dB)	dB(uV/m)	(dB)
7420.9	H	54.6	54	44.1	43.5	74	19.4
7420.9	V	57.1	54	44.1	41.0	74	16.9

Table 7: Harmonics at High Frequency

Appendix B: Test Setup Photos

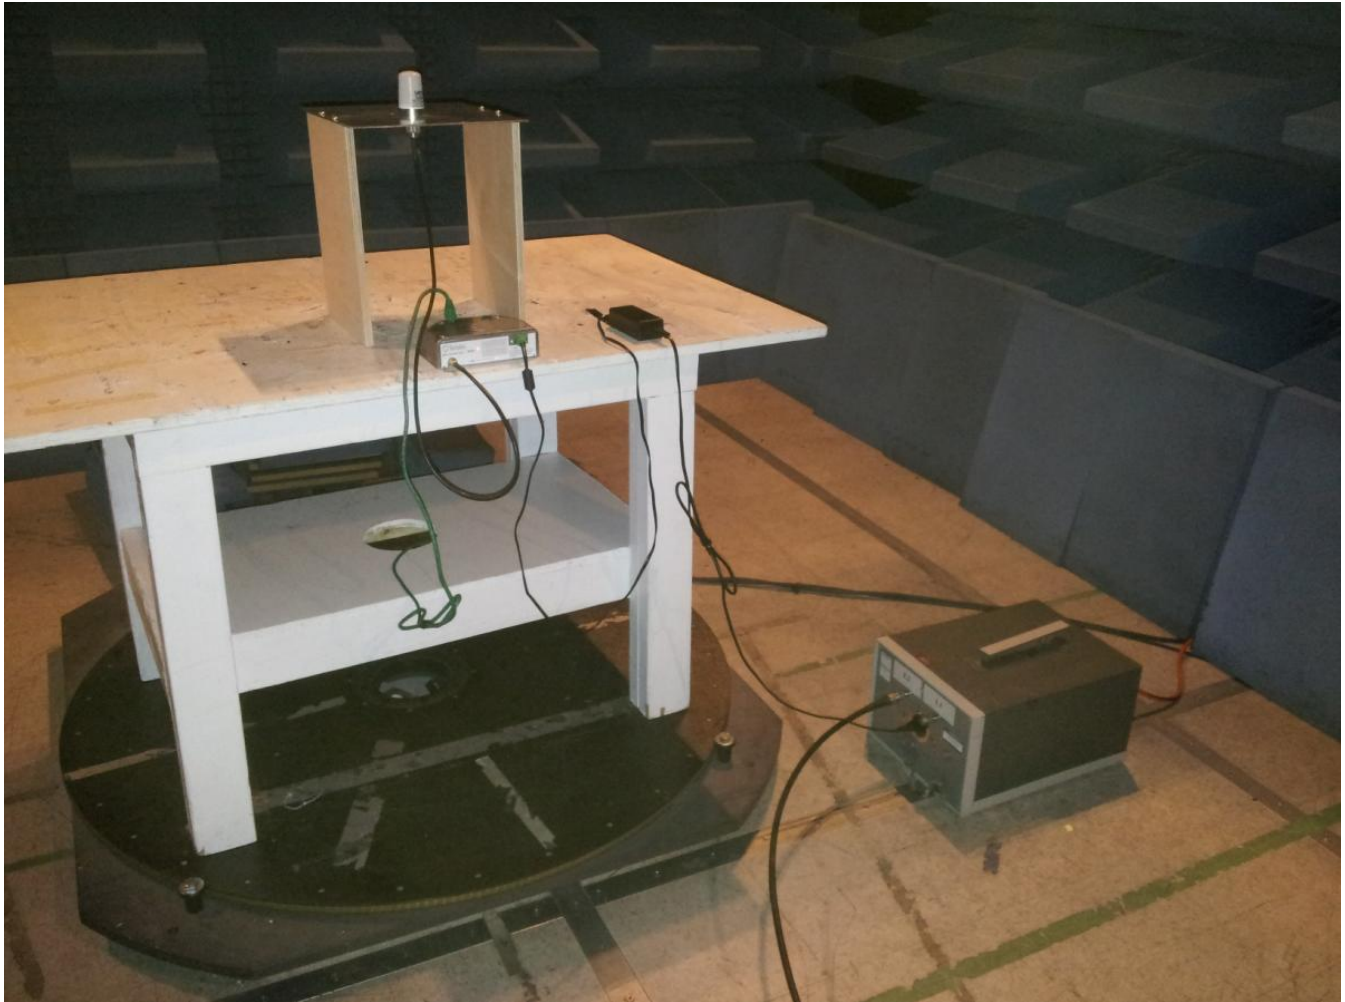


Figure 48: AC Conducted Test Setup




Intentional / Unintentional Radiated Emission 9kHz – 30 MHz setup.

Figure 49: Emissions Test Setup – Intentional / Unintentional Radiated Emissions



Intentional / Unintentional Radiated Emission 30 – 1000 MHz setup.

Figure 50: Emissions Test Setup – Intentional / Unintentional Radiated Emissions

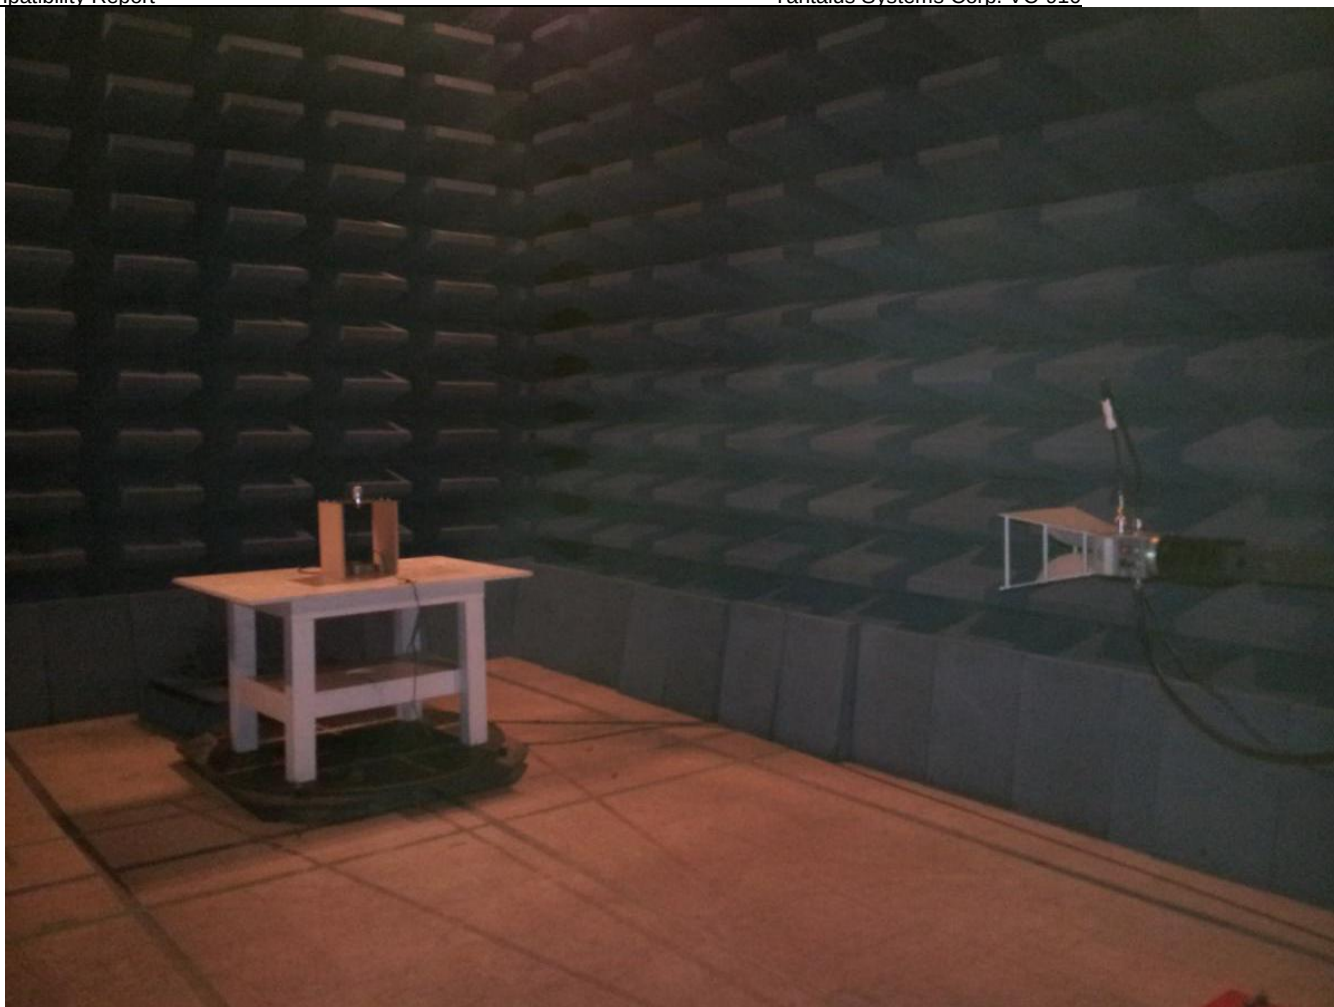

Intentional Radiated Emissions 1000 – 10000 MHz setup.

Figure 51: Emissions Test Setup – Intentional Harmonics