



RF MEASUREMENT REPORT

FCC ID: P27-ADTPLUS-YS
Applicant: Sercomm Corporation
Product: Live Light™
Model No.: ADTPLUS-YS-R0
Brand Name: ADT
FCC Classification: Unlicensed PCS Base Station
FCC Rule Part(s): FCC Part 15, Subpart D
Result: Complies
Receiver Date: 2025-08-01
Test Date: 2025-08-04 ~ 2025-08-11

Reviewed By:

Vincent Yu

Vincent Yu

Approved By:

Robin Wu

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.17. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1001085-U201	V01	Initial Report	2025-09-30	Valid

CONTENTS

Description	Page
1. General Information.....	6
1.1. Applicant.....	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information	7
1.5. Radio Specification under Test.....	7
1.6. Working Frequencies.....	7
1.7. Description of Available Antennas	7
2. Test Configuration	8
2.1. Test Mode	8
2.2. Test System Connection Diagram	8
2.3. Applied Standards	8
2.4. Test Environment Condition	8
3. Antenna Requirements.....	9
4. Measuring Instrument	10
5. Measurement Uncertainty	11
6. Test Result	12
6.1. Summary	12
6.2. AC Power Line Conducted Measurement Emissions	13
6.2.1. Test Limit	13
6.2.2. Test Setup	13
6.2.3. Test Result	13
6.3. Emission Bandwidth Measurement.....	14
6.3.1. Test Limit	14
6.3.2. Test Procedure	14
6.3.3. Test Setup	14
6.3.4. Test Result	15
6.4. Peak Transmit Power and Antenna Gain	16
6.4.1. Test Limit	16
6.4.2. Test Procedure	16
6.4.3. Test Setup	16
6.4.4. Test Result	17
6.5. Power Spectral Density	18
6.5.1. Test Limit	18

6.5.2.	Test Procedure	18
6.5.3.	Test Setup	18
6.5.4.	Test Result	19
6.6.	In-Band Unwanted Emissions	20
6.6.1.	Test Limit	20
6.6.2.	Test Procedure	20
6.6.3.	Test Setup	20
6.6.4.	Test Result	21
6.7.	Out-of-Band Emissions, Conducted	22
6.7.1.	Test Limit	22
6.7.2.	Test Procedure	22
6.7.3.	Test Setup	22
6.7.4.	Test Result	23
6.8.	Radiated Spurious Emission Measurement	24
6.8.1.	Test Limit	24
6.8.2.	Test Procedure	24
6.8.3.	Test Setting	25
6.8.4.	Test Setup	27
6.8.5.	Test Result	29
6.9.	Frame Repetition Stability and Period and Jitter	33
6.9.1.	Test Limit	33
6.9.2.	Test Procedure	33
6.9.3.	Test Setup	33
6.9.4.	Test Result	34
6.10.	Carrier Frequency Stability	35
6.10.1.	Test Limit	35
6.10.2.	Test Procedure	35
6.10.3.	Test Setup	35
6.10.4.	Test Result	36
6.11.	Listen Before Transmit (LBT)	37
6.11.1.	Test Limit	37
6.11.2.	Test Procedure	38
6.11.3.	Test Setup	38
6.11.4.	Test Result	39
6.12.	Least Interfered Channel (LIC) Requirements	40
6.12.1.	Test Limit	40
6.12.2.	Test Procedure	40
6.12.3.	Test Result	41
6.13.	Random waiting Requirements	42

6.13.1.	Test Limit	42
6.13.2.	Test Procedure	42
6.13.3.	Test Result	42
6.14.	Monitoring Requirements	43
6.14.1.	Test Limit	43
6.14.2.	Test Procedure	43
6.14.3.	Test Result	44
6.15.	Monitoring Antenna Requirements	45
6.15.1.	Test Limit	45
6.15.2.	Test Procedure	45
6.15.3.	Test Result	45
6.16.	Monitoring Threshold Relaxation Requirements	46
6.16.1.	Test Limit	46
6.16.2.	Test Procedure	46
6.16.3.	Test Result	46
6.17.	Duplex System LBT	47
6.17.1.	Test Limit	47
6.17.2.	Test Procedure	47
6.17.3.	Test Result	47
6.18.	Alternative monitoring interval for co-located devices Requirements	48
6.18.1.	Test Limit	48
6.18.2.	Test Procedure	48
6.18.3.	Test Result	48
6.19.	Fair Access	49
6.19.1.	Test Limit	49
6.19.2.	Test Result	49
6.20.	Automatic Discontinuation of Transmission	50
Appendix A - Test Setup Photograph		51
Appendix B - EUT Photograph		52

1.1. Applicant

8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.

Sercomm Corporation

8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.

☒	Test Site – MRT Suzhou Laboratory				
	Laboratory Location (Suzhou - Wuzhong)				
	D8 Building, No.2 Tian’edang Rd., Wuzhong Economic Development Zone, Suzhou, China				
	Laboratory Location (Suzhou - SIP)				
	4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China				
	Laboratory Location (Suzhou - Wujiang)				
	Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China				
☒	Laboratory Accreditations				
	A2LA: 3628.01		CNAS: L10551		
	FCC: CN1166		ISED: CN0001		
	VCCI:	☐ R-20025	☐ G-20034	☐ C-20020	☐ T-20020
		☐ R-20141	☐ G-20134	☐ C-20103	☐ T-20104
☐	Test Site – MRT Shenzhen Laboratory				
	Laboratory Location (Shenzhen)				
	1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China				
	Laboratory Accreditations				
	A2LA: 3628.02		CNAS: L10551		
FCC: CN1284		ISED: CN0105			
☐	Test Site – MRT Taiwan Laboratory				
	Laboratory Location (Taiwan)				
	No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)				
	Laboratory Accreditations				
	TAF: 3261		FCC: 291082, TW3261		
		ISED: TW3261			

1.4. Product Information

Product Name	Live Light™
Model No.	ADTPLUS-YS-R0
Brand Name.	ADT
EUT Identification No.	250801Sample#02 (Conducted) 250801Sample#03 (Radiated)
DECT Specification	1920 MHz - 1930 MHz
Antenna Specification	Refer to clause 1.7
Operating Temp.	-20 ~ 50 °C
Product Voltage	4.5V=AA battery, AA x3 (Not included in package)
Accessory(ies)	
AA batteries	Brand: Energizer Model: AA L91 Type: Li Metal Voltage: 1.5 V
Note: The information of the EUT (Equipment Under Test) was provided by the manufacturer. The accuracy, completeness, and validity of the information are solely the responsibility of the manufacturer.	

1.5. Radio Specification under Test

Frequency Range	1921.536 ~ 1928.448 MHz
Channel Number	5
Type of Modulation	GFSK

1.6. Working Frequencies

UPCS Channel	Frequency (MHz)
Highest Band Edge	1930.000
0 (Highest)	1928.448
1	1926.720
2	1924.992
3	1923.264
4 (Lowest)	1921.536
Lowest Band Edge	1920.000

1.7. Description of Available Antennas

Antenna Type	Frequency Band (MHz)	T _x Paths	Max Antenna Gain (dBi)
PIFA	1920 ~ 1930	1	3.75


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by DECT channel

2.2. Test System Connection Diagram

Connection Diagram

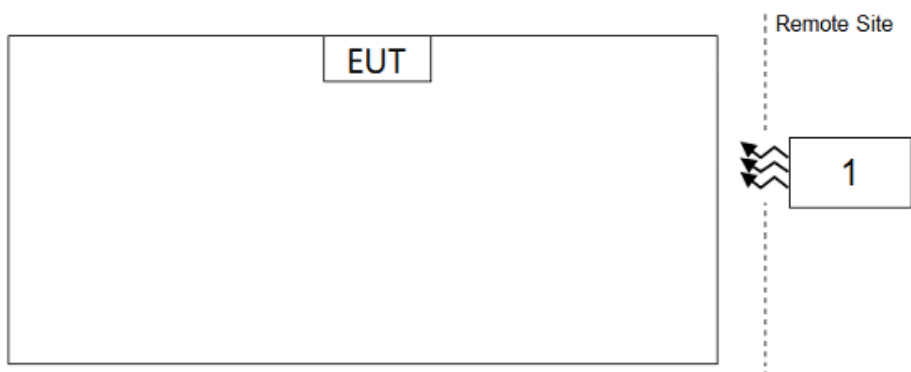

Product		Manufacturer	Model No.
1	DECT Tester	RTX	RTX2012

2.3. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 D
- ANSI C63.17-2013

2.4. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the unit is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2026-01-04	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2026-04-17	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2025-10-16	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2026-05-11	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2026-07-19	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2025-11-08	WZ-AC1
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2025-12-05	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2025-10-13	WZ-AC1/WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2025-11-03	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2026-01-09	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2026-04-17	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11263	1 year	2025-10-16	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2026-04-24	WZ-SR5
DECT Tester	RTX	RTX2012	MRTSUE06408	1 year	2026-01-21	WZ-SR5/WZ-TR3
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2026-04-26	WZ-SR5
Signal Generator	R&S	SMBV100B	MRTSUE07095	1 year	2026-03-31	WZ-SR5
Signal Generator	Keysight	N5182B	MRTSUE06451	1 year	2026-05-29	WZ-SR5
Signal Generator	Keysight	N5173B	MRTSUE06606	1 year	2026-06-12	WZ-SR5
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2025-09-02	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE11268	1 year	2025-12-10	WZ-TR3
Attenuator	MVE	MVE2213	MRTSUE11081	1 year	2026-06-02	WZ-SR5/WZ-TR3
Cable	UCwave	UCE500	MRTSUE07381	1 year	2026-07-20	WZ-SR5/WZ-TR3
Cable	UCwave	UCE500	MRTSUE07379	1 year	2026-07-20	WZ-SR5

Software	Version	Function
e3	230711	RE & CE
BenchVue Power Meter	2018.1	Power
Controller_MF 7802	1.02	RE Antenna & Turntable
Controller_MF 7802	2.03C	RE Antenna & Turntable

5. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9 kHz ~ 150 kHz: 3.58 dB 150 kHz ~ 30 MHz: 3.20 dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9 kHz ~ 30 MHz: 2.35 dB Coplanar: 9 kHz ~ 30 MHz: 2.37 dB Horizontal: 30 MHz ~ 200 MHz: 3.47 dB 200 MHz ~ 1 GHz: 4.17 dB 1 GHz ~ 40 GHz: 4.97 dB Vertical: 30 MHz ~ 200 MHz: 4.07 dB 200 MHz ~ 1 GHz: 5.28 dB 1 GHz ~ 40 GHz: 4.84 dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 2.5 dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 1.5 dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 2.5 dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 3.2%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.319(b)	Digital Modulation Techniques	Declared	Pass
15.19(a)(3)	Labeling requirements		Pass
15.319(f)	Automatic discontinuation of transmission	Conducted	Pass
15.317, 15.203	Antenna Requirement	Declared	Pass
15.315	AC Power Line Conducted Emission	Line Conducted	N/A
15.323(a)	Emission Bandwidth	Conducted	Pass
15.319(c)	Peak Transmit Power		Pass
15.319(d)	Power Spectral Density		Pass
15.323(d)	In-band emissions		Pass
15.323(d)	Out-of-band emissions	Conducted and Radiated	Pass
15.323(e)	Frame Repetition Stability and period and Jitter	Conducted	Pass
15.323(f)	Carrier frequency stability		Pass
15.323(c1, c2, c3, c4)	Listen Before Transmit (LBT)		Pass
15.323(c5)	Least Interfered Channel (LIC)		Pass
15.323(c6)	Random Waiting		N/A
15.323(c7)	Monitoring Requirements		Pass
15.323(c8)	Monitoring Antenna	Declared	Pass
15.323(c9)	Monitoring Threshold Relaxation	Conducted	N/A
15.323(c10)	Duplex System LBT		N/A
15.323(c11)	Co-Located Device LBT		N/A
15.323(c12)	Fair Access	Declared	N/A
Remark: "N/A" means that this item is not applicable, and the detail information refer to relevant section.			

6.2. AC Power Line Conducted Measurement Emissions

6.2.1. Test Limit


An unlicensed PCS device that is designed to be connected to the public utility (AC) power line must meet the limits specified in § 15.207.

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBμV)	AV (dBμV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

6.2.2. Test Setup

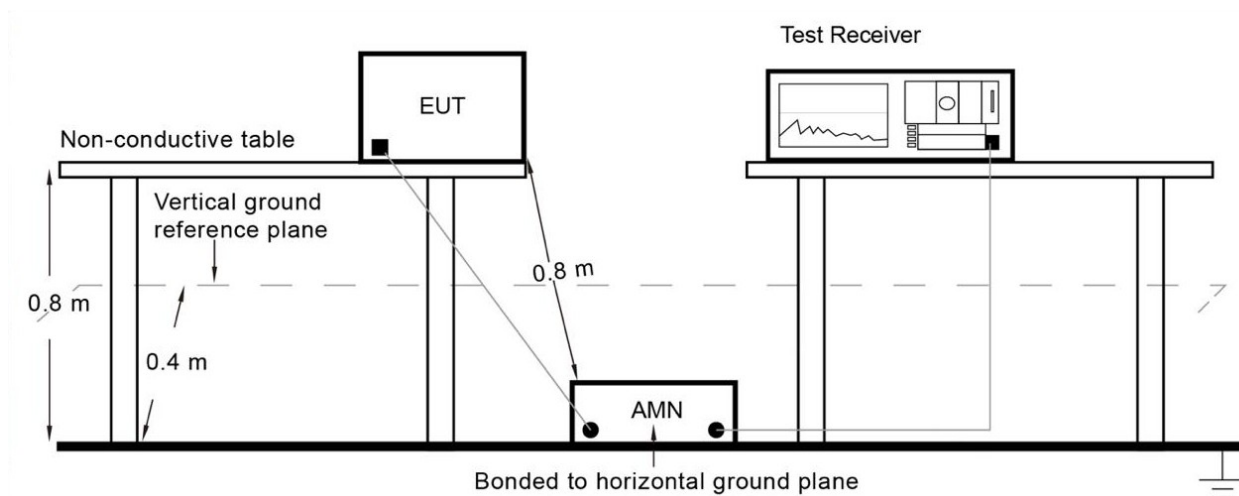

6.2.3. Test Result

This sample is powered by batteries, so this item is not applicable.

6.3. Emission Bandwidth Measurement

6.3.1. Test Limit


The 26 dB Bandwidth B shall be larger than 50 kHz and less than 2.5 MHz.

No requirement for 6 dB and 12 dB Bandwidth. These values are only used for testing Monitoring Bandwidth if the Simple Compliance test fails (ANSI C63.17, clause 7.4).

6.3.2. Test Procedure

ANSI C63.17, Clause 6.1.3


6.3.3. Test Setup

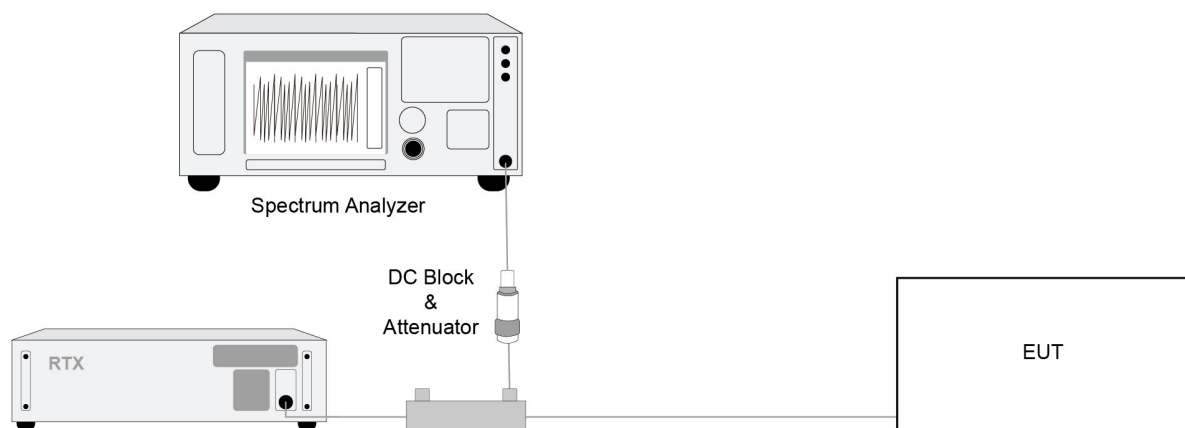

6.3.4. Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-08-11		

Channel No.	Frequency (MHz)	26 dB Bandwidth (MHz)	Limit (MHz)	Result
04	1921.536	1.431	0.05 ~ 2.5	Pass
02	1924.992	1.425	0.05 ~ 2.5	Pass
00	1928.448	1.438	0.05 ~ 2.5	Pass

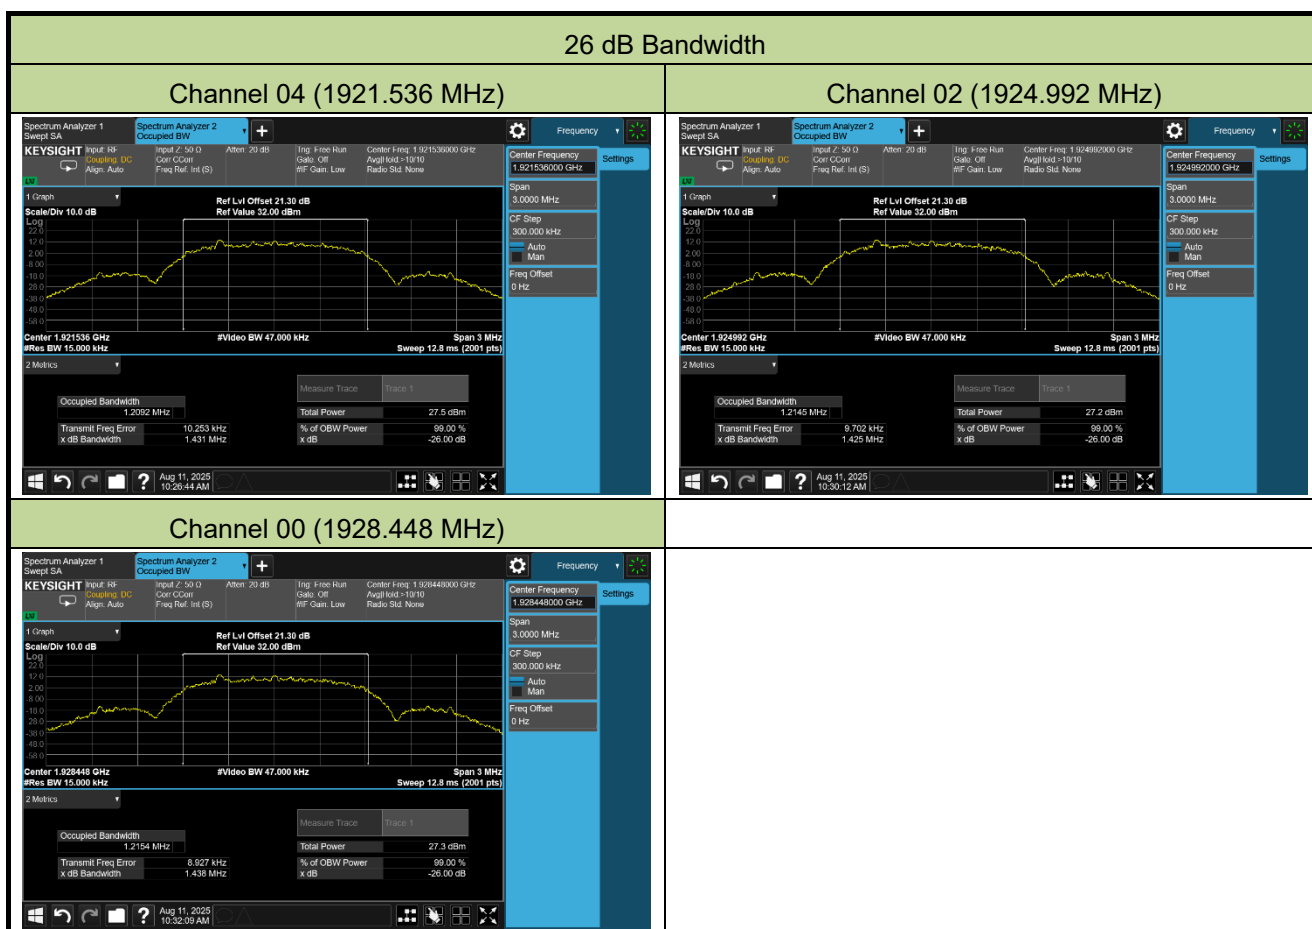

6.4. Peak Transmit Power and Antenna Gain

6.4.1. Test Limit


Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in Hertz.

The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

6.4.2. Test Procedure

ANSI C63.17, Clause 6.1.2

6.4.3. Test Setup

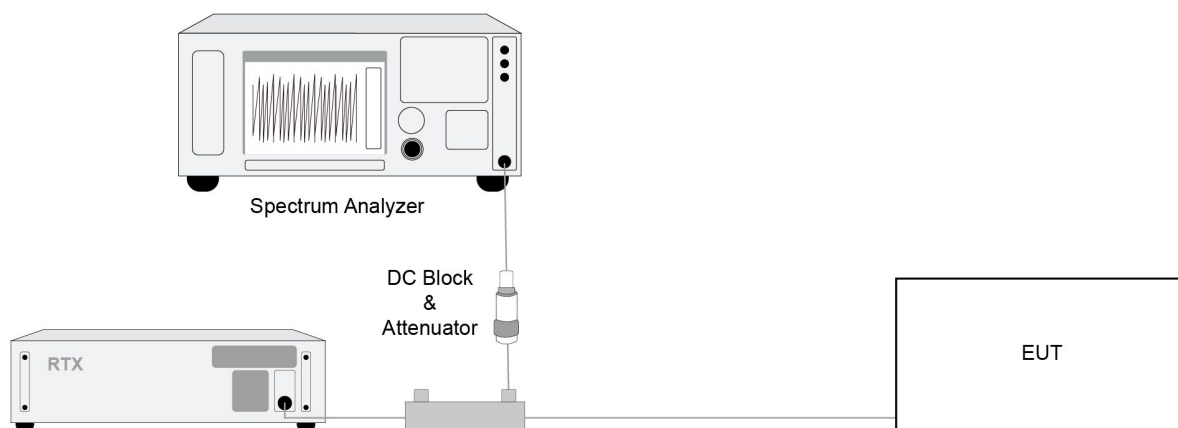

6.4.4. Test Result


Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-08-11		

Channel No.	Frequency (MHz)	Peak Transmit Power (dBm)	Limit (dBm)	Result
04	1921.536	18.83	≤ 20.02	Pass
02	1924.992	18.93	≤ 20.02	Pass
00	1928.448	19.03	≤ 20.02	Pass

Note 1: The min EBW = 1425000 Hz

Limit = $10 \cdot \log(100\mu\text{W} \times (\text{EBW})^{1/2} \div 1000) - (\text{Antenna Gain} - 3) = 20.02 \text{ dBm}$.

Note 2: Antenna Gain = 3.75 dBi > 3 dBi

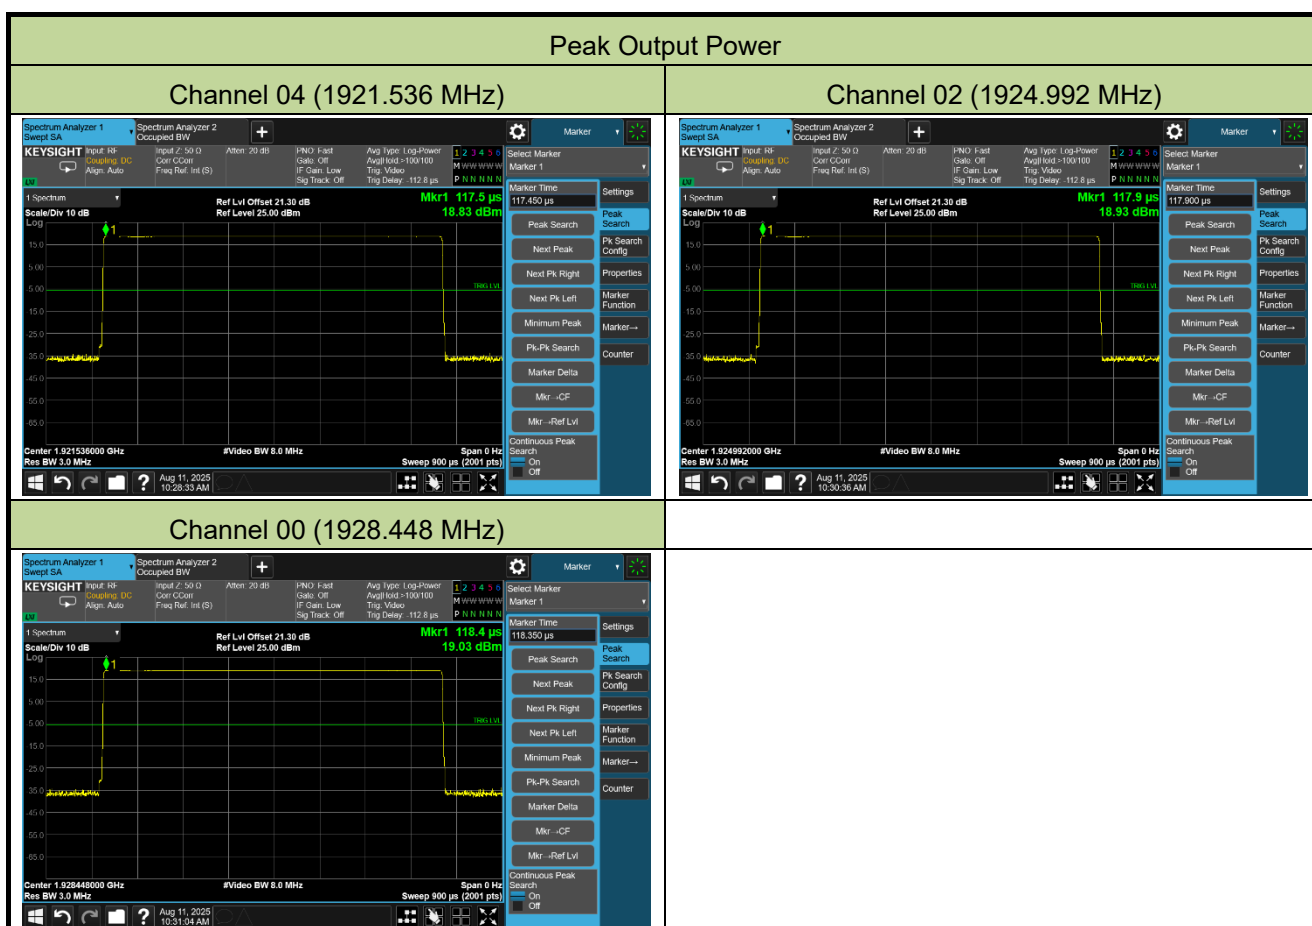

6.5. Power Spectral Density


6.5.1. Test Limit

Power spectral density shall not exceed 3 milliwatts in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

6.5.2. Test Procedure

ANSI C63.17, Clause 6.1.5


6.5.3. Test Setup

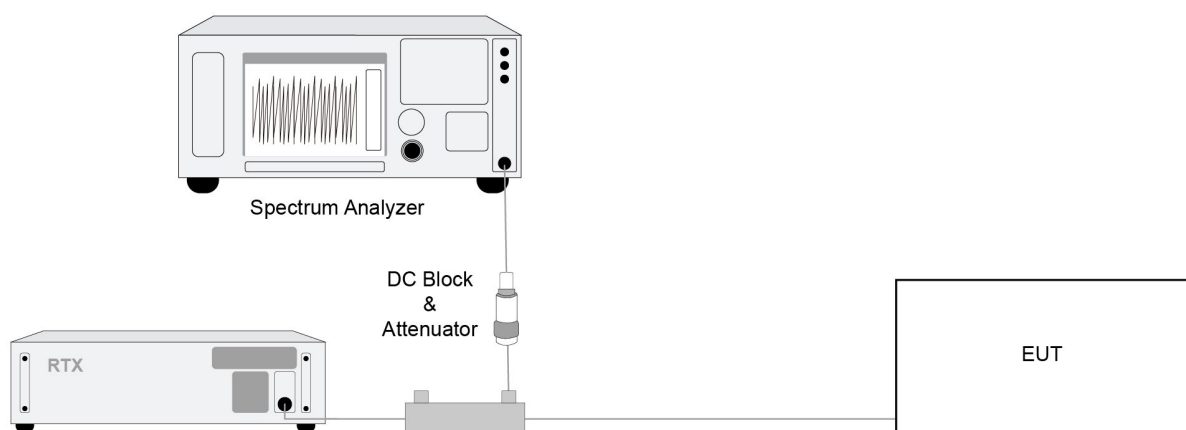

6.5.4. Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-08-11		

Channel No.	Frequency (MHz)	Measured PSD (dBm / 3 kHz)	Measured PSD (mW / 3 kHz)	Limit (mW / 3 kHz)	Result
04	1921.536	-1.81	0.66	≤ 3.00	Pass
02	1924.992	-1.35	0.73	≤ 3.00	Pass
00	1928.448	-1.76	0.67	≤ 3.00	Pass

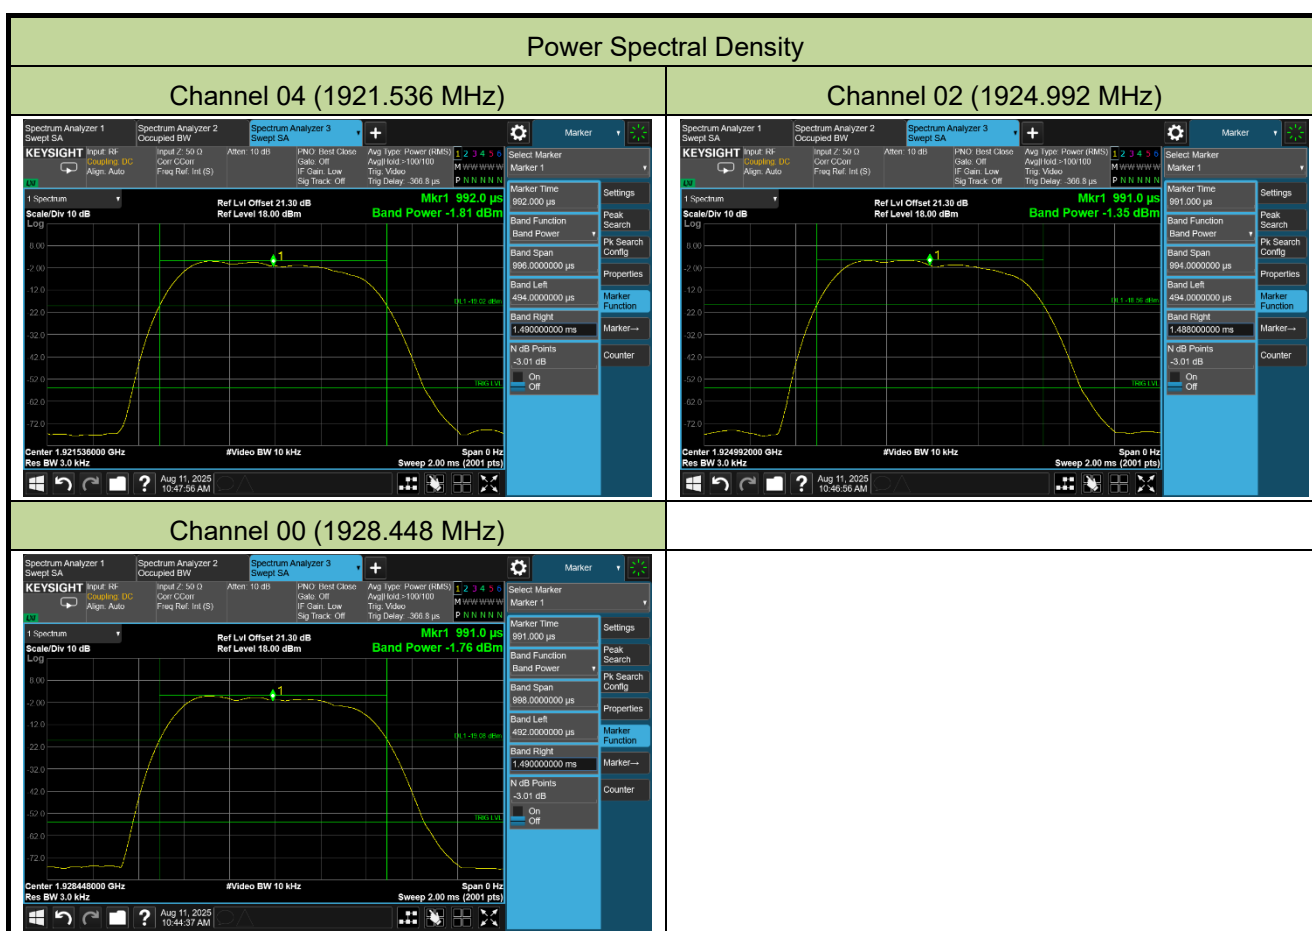

6.6. In-Band Unwanted Emissions

6.6.1. Test Limit

$B < f2_2$ B: less than or equal to 30 dB below maximum permitted peak power level.


$2 B < f2_3$ B: less than or equal to 50 dB below maximum permitted peak power level.

$3 B < f2_UPCS$ Band Edge: less than or equal to 60 dB below maximum permitted peak power level.

6.6.2. Test Procedure


ANSI C63.17, Clause 6.1.6.1

6.6.3. Test Setup

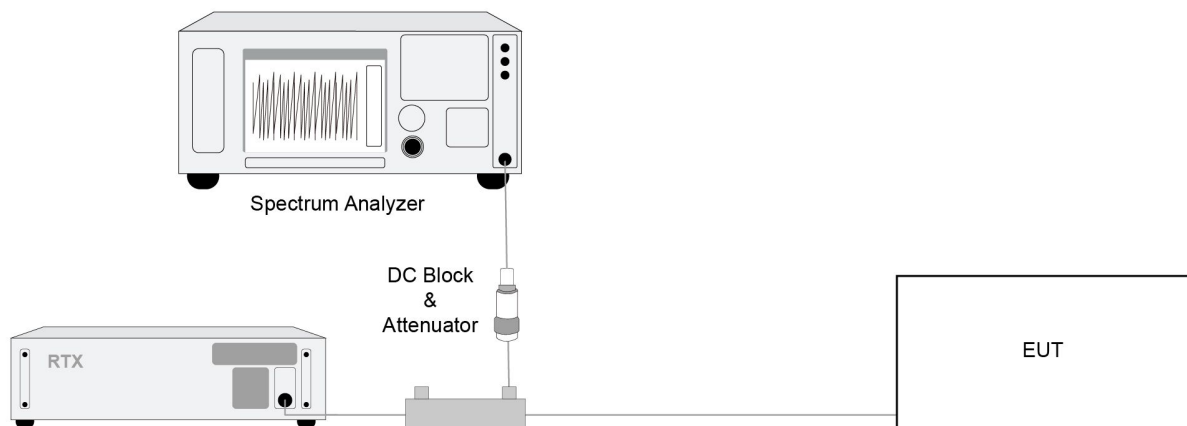

6.6.4. Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-08-11		

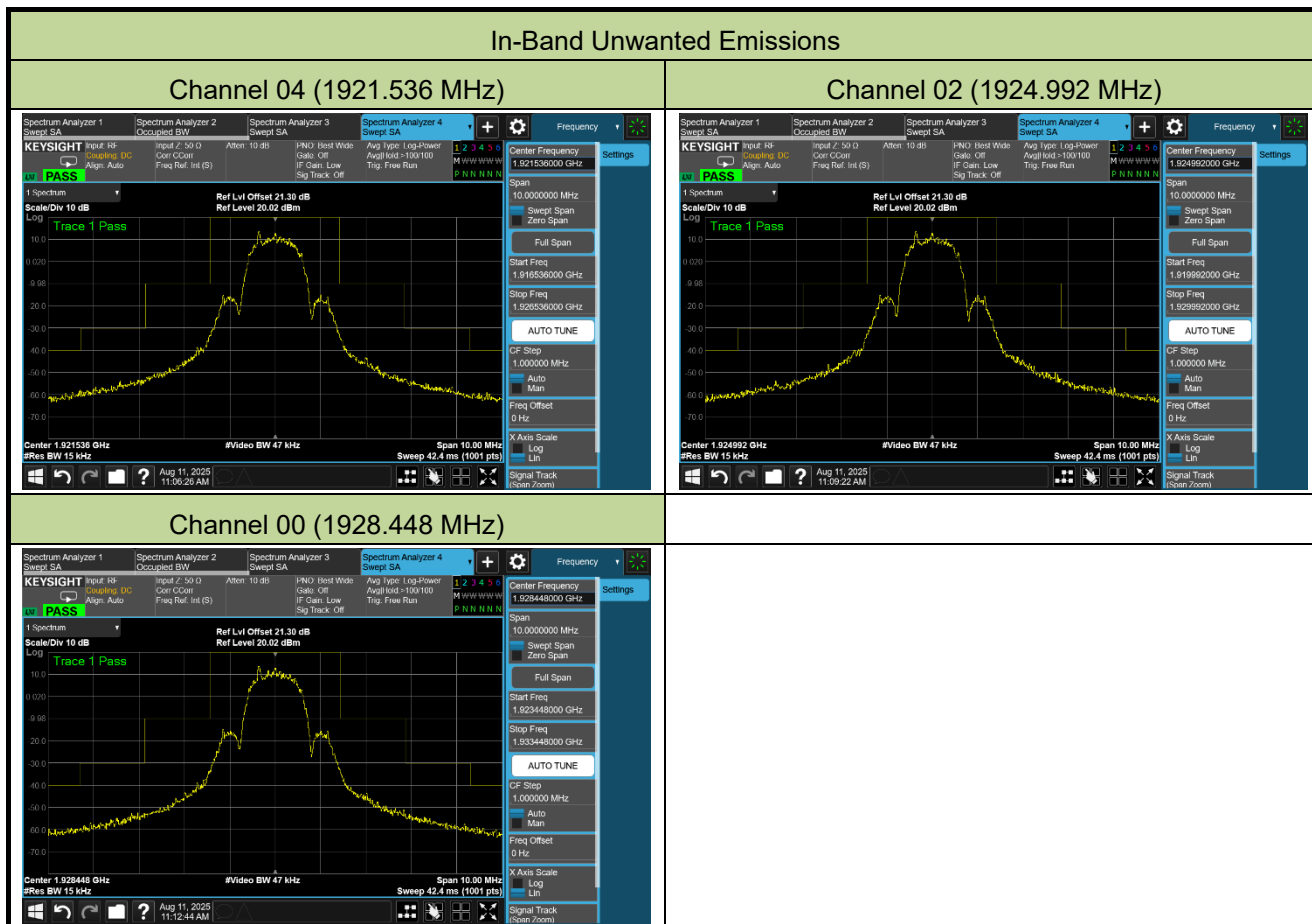

6.7. Out-of-Band Emissions, Conducted

6.7.1. Test Limit

$f \leq 1.25$ MHz outside UPCS band: ≤ -9.5 dBm


1.25 MHz $\leq f \leq 2.5$ MHz outside UPCS band: ≤ -29.5 dBm

$f \geq 2.5$ MHz outside UPCS band: ≤ -39.5 dBm

6.7.2. Test Procedure

ANSI C63.17, Clause 6.1.6.2

6.7.3. Test Setup

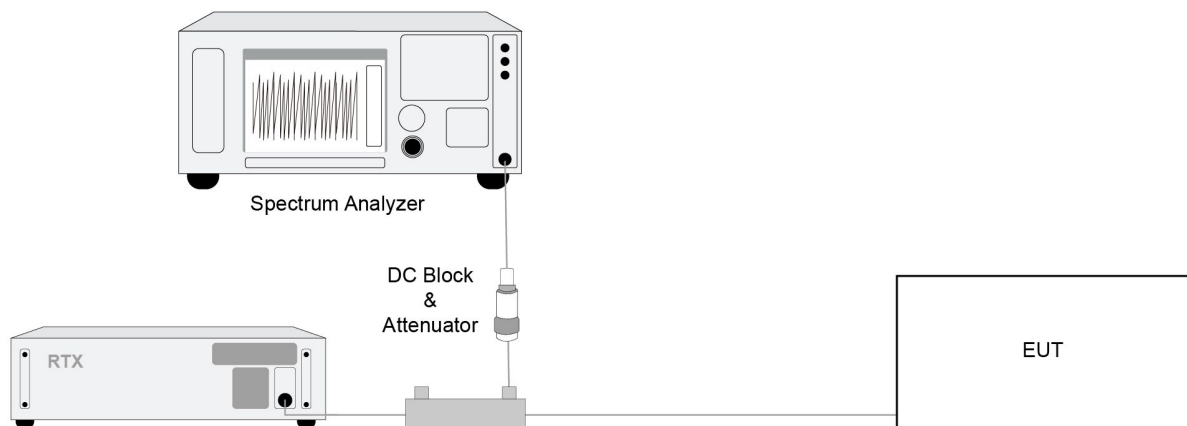


6.7.4. Test Result


Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-08-11		

Out-Band Unwanted Emissions – Channel 04

1.915 GHz ~ 1.92 GHz

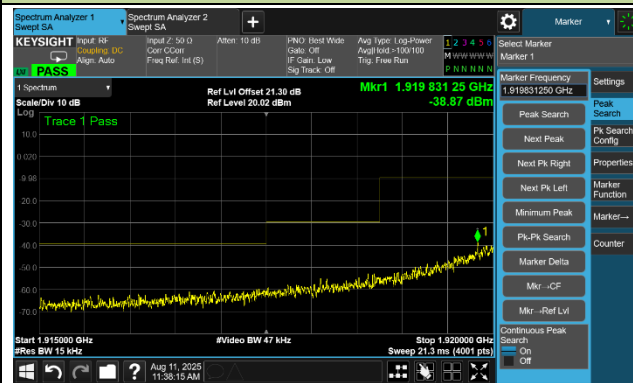


1.93 GHz ~ 1.935 GHz

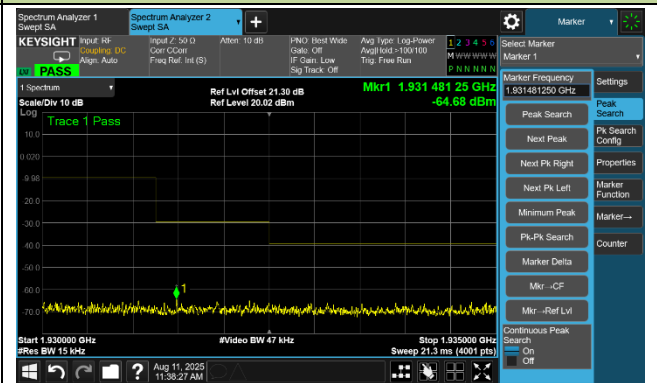


Out-Band Unwanted Emissions – Channel 02

1.915 GHz ~ 1.92 GHz

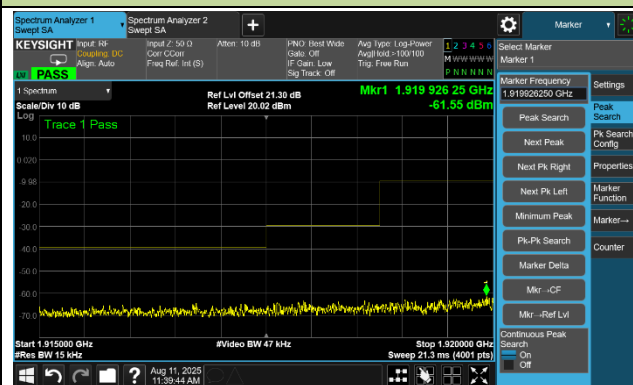


1.93 GHz ~ 1.935 GHz

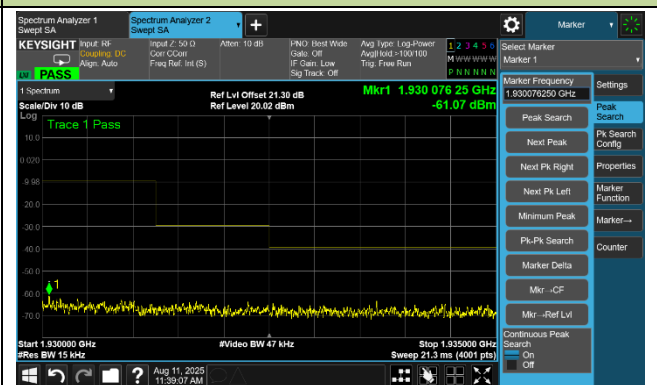


Out-Band Unwanted Emissions – Channel 00

1.915 GHz ~ 1.92 GHz

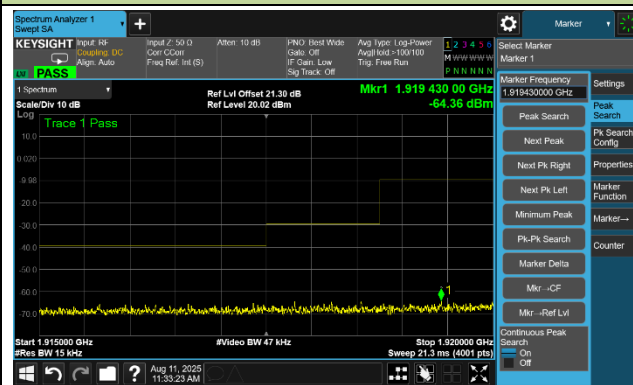

1.93 GHz ~ 1.935 GHz

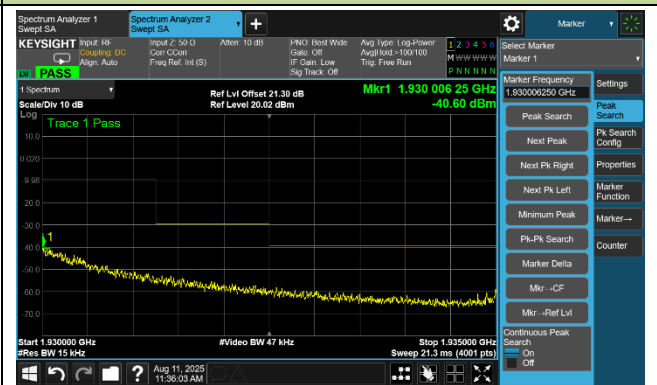

6.8. Radiated Spurious Emission Measurement

6.8.1. Test Limit

For section 15.323(d): Emission outside the band shall be attenuation below a reference power of 112 milliwatts: 60 dB at 2.5 MHz or greater above or below the band

For section 15.319(g): Notwithstanding other technical requirements specified in this subpart, attenuation of emissions below the general emission limits in 15.209 is not required.

Where the limit is more stringent than 15.209, the limits of 15.209 take precedence as indicated in 15.319(g).

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30 MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30 MHz to 1 GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1 GHz)

6.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1 GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1 MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1 GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1 GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.8.4. Test Setup


Below 30 MHz Test Setup:

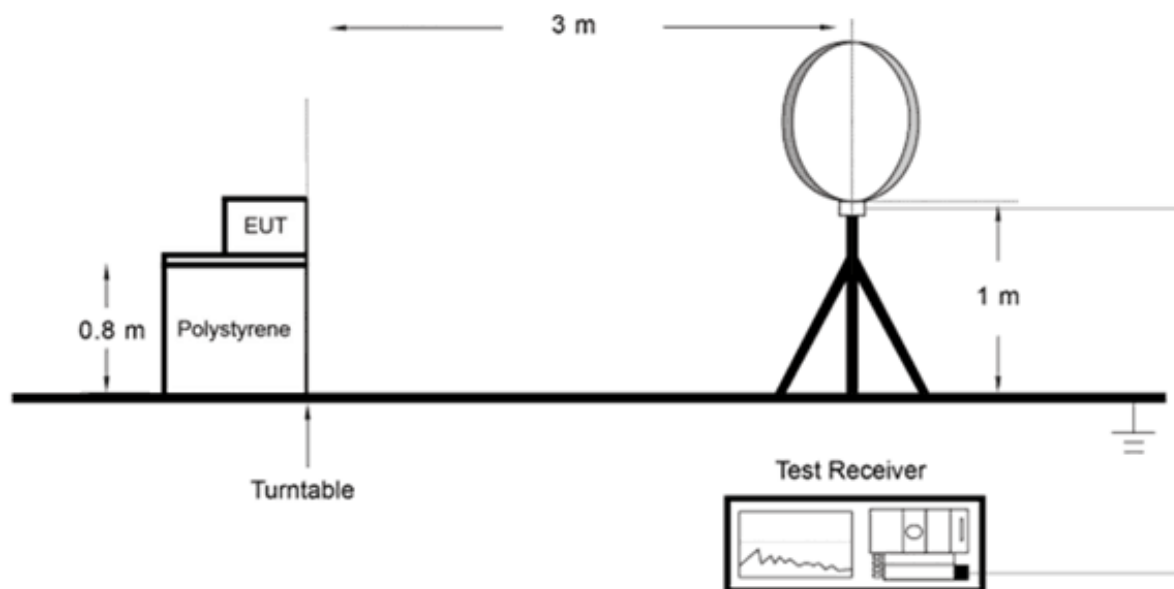

Below 1 GHz Test Setup:

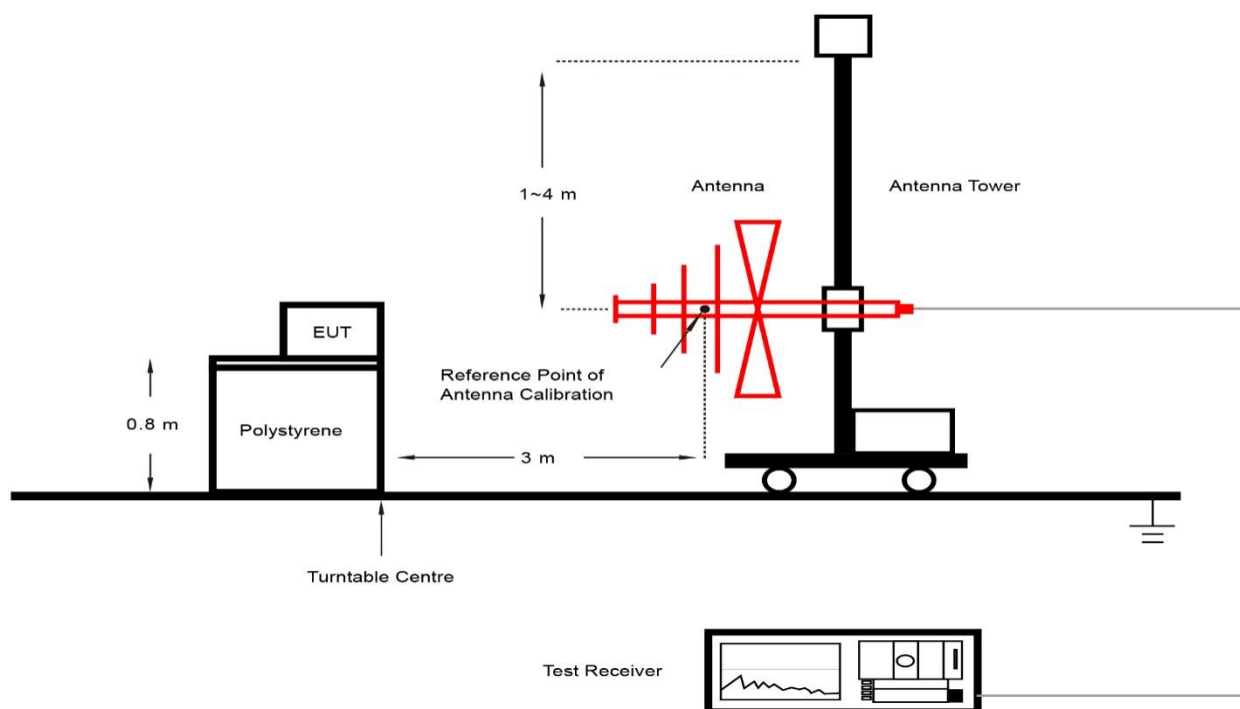

Above 1 GHz Test Setup:

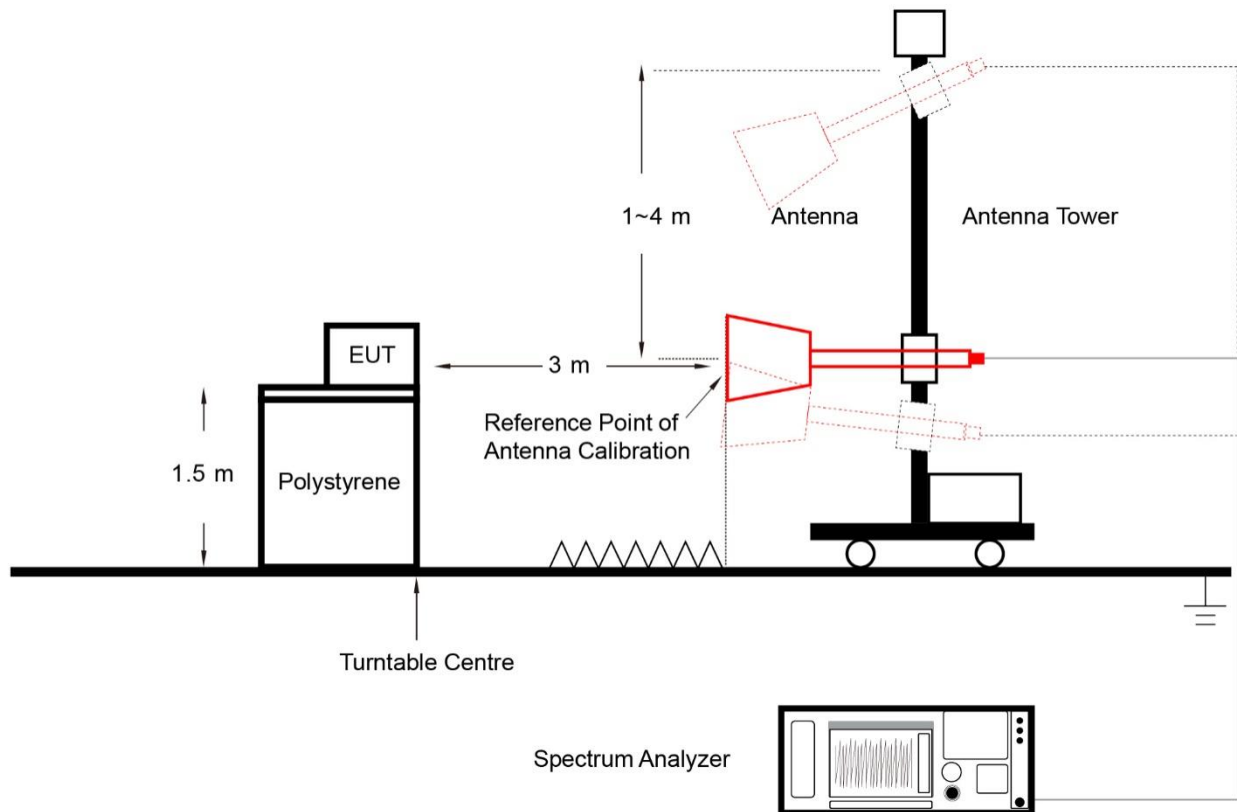

6.8.5. Test Result

Test Site	WZ-AC1	Test Engineer	Jerry Lu
Test Date	2025-08-04		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
04	8461.30	38.30	10.56	48.86	74.00	-25.14	Peak	Horizontal
	10972.20	23.68	14.92	38.60	54.00	-15.40	Average	Horizontal
	10972.20	36.39	14.92	51.31	74.00	-22.69	Peak	Horizontal
	17998.30	15.22	24.15	39.37	54.00	-14.63	Average	Horizontal
	17998.30	35.51	24.15	59.66	74.00	-14.34	Peak	Horizontal
	9324.90	36.19	13.69	49.88	74.00	-24.12	Peak	Vertical
	11444.80	20.59	14.27	34.86	54.00	-19.14	Average	Vertical
	11444.80	37.26	14.27	51.53	74.00	-22.47	Peak	Vertical
	17967.70	15.26	23.48	38.74	54.00	-15.26	Average	Vertical
	17967.70	36.82	23.48	60.30	74.00	-13.70	Peak	Vertical
02	2888.70	53.86	-1.20	52.66	54.00	-1.34	Average	Horizontal
	2888.70	56.00	-1.20	54.80	74.00	-19.20	Peak	Horizontal
	10623.70	35.92	14.98	50.90	74.00	-23.10	Peak	Horizontal
	17996.60	16.24	24.13	40.37	54.00	-13.63	Average	Horizontal
	17996.60	35.78	24.13	59.91	74.00	-14.09	Peak	Horizontal
	2888.70	42.45	-1.20	41.25	74.00	-32.75	Peak	Vertical
	10905.90	35.97	14.89	50.86	74.00	-23.14	Peak	Vertical
	17979.60	15.76	23.88	39.64	54.00	-14.36	Average	Vertical
	17979.60	35.14	23.88	59.02	74.00	-14.98	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	2892.10	53.15	-1.18	51.97	54.00	-2.03	Average	Horizontal
	2892.10	54.57	-1.18	53.39	74.00	-20.61	Peak	Horizontal
	10805.60	24.52	14.97	39.49	54.00	-14.51	Average	Horizontal
	10805.60	36.33	14.97	51.30	74.00	-22.70	Peak	Horizontal
	17993.20	35.43	24.10	59.53	74.00	-14.47	Peak	Horizontal
	8218.20	37.26	10.07	47.33	74.00	-26.67	Peak	Vertical
	11574.00	36.83	13.91	50.74	74.00	-23.26	Peak	Vertical
	17949.00	15.47	23.23	38.70	54.00	-15.30	Average	Vertical
	17949.00	36.21	23.23	59.44	74.00	-14.56	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst Result of Radiated Emission below 1 GHz:

Site	WZ-AC1	Test Date	2025-08-06
Temperature	25.6 °C	Humidity	52.8 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Lucas Wang
Factor	VULB 9168_00662	Polarity	Horizontal
EUT	Live Light™	Test Voltage	By Battery
Test Mode	Transmit at 1928.448 MHz		

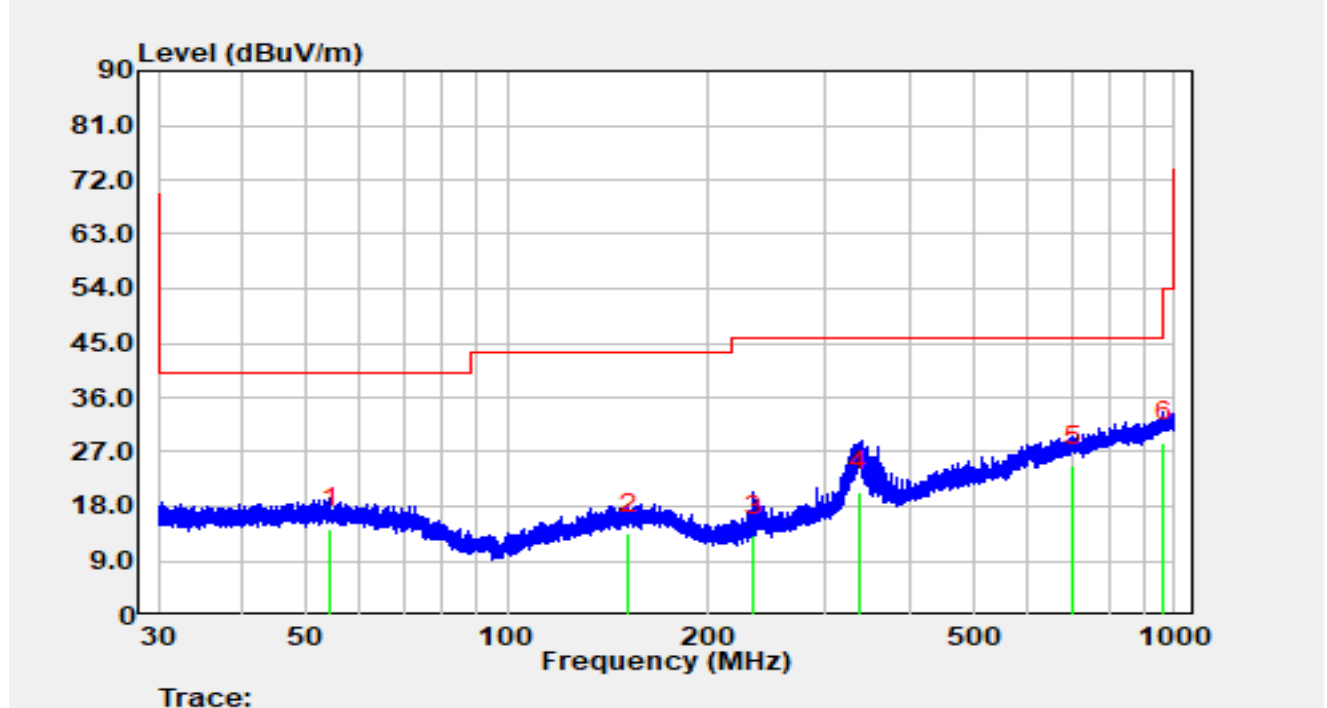


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		54.34	-4.27	18.55	14.28	-25.72	40.00	QP
2		151.76	-4.78	18.28	13.50	-30.00	43.50	QP
3		234.25	-2.59	15.84	13.24	-32.76	46.00	QP
4		335.74	0.50	19.89	20.39	-25.61	46.00	QP
5	*	705.21	-2.94	27.65	24.70	-21.30	46.00	QP
6		963.18	-2.22	30.86	28.64	-25.36	54.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of the radiated emissions in the frequency range from 9kHz to 30MHz and 18GHz to 20GHz is close to the ambient noise level, and all emissions are at least 20 dB below the applicable limit. Therefore, the data is not presented in this report.

Site	WZ-AC1	Test Date	2025-08-06
Temperature	25.6 °C	Humidity	52.8 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Lucas Wang
Factor	VULB 9168_00662	Polarity	Vertical
EUT	Live Light™	Test Voltage	By Battery
Test Mode	Transmit at 1928.448 MHz		

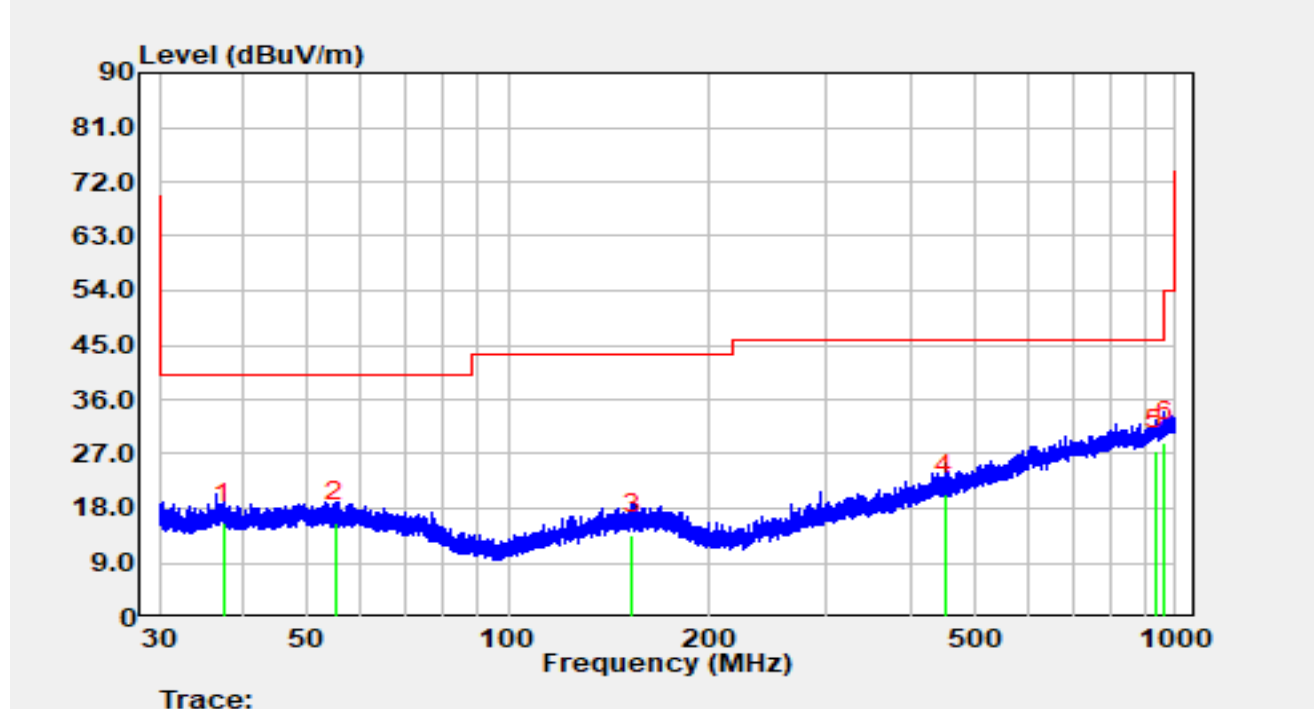

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		37.42	-2.29	17.76	15.47	-24.53	40.00	QP
2		54.97	-2.84	18.53	15.69	-24.31	40.00	QP
3		153.58	-4.59	18.29	13.70	-29.80	43.50	QP
4		452.09	-2.55	22.89	20.34	-25.66	46.00	QP
5	*	933.25	-2.99	30.67	27.68	-18.32	46.00	QP
6		964.53	-2.02	30.89	28.88	-25.12	54.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of the radiated emissions in the frequency range from 9kHz to 30MHz and 18GHz to 20GHz is close to the ambient noise level, and all emissions are at least 20 dB below the applicable limit. Therefore, the data is not presented in this report.

6.9. Frame Repetition Stability and Period and Jitter


6.9.1. Test Limit

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in this band shall be 20 milliseconds or 10 milliseconds/X where X is a positive whole number. Each device that implements time division for the purposes of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per million (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm. The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions. Transmissions shall be continuous in every time and spectrum window during the frame period defined for the device.

6.9.2. Test Procedure

ANSI C63.17, Clause 6.2.2 & 6.2.3

6.9.3. Test Setup

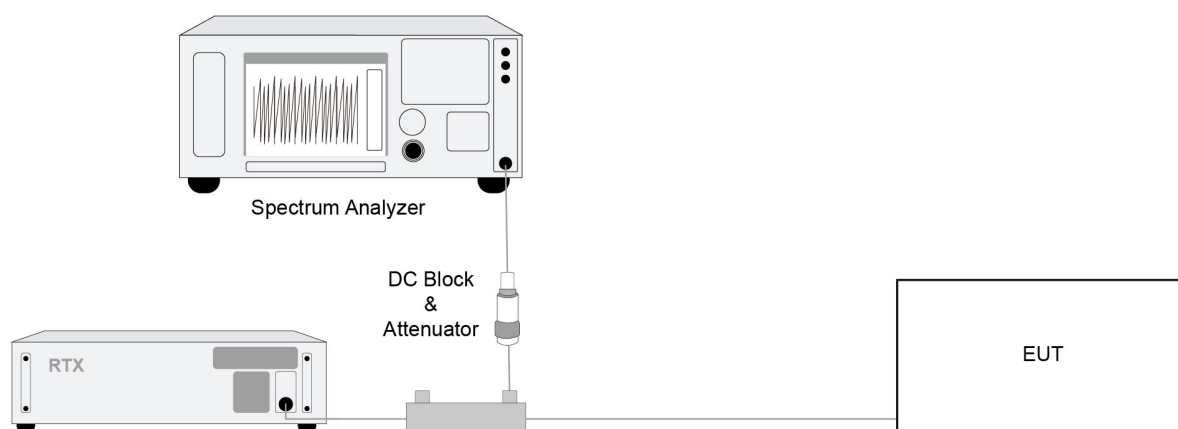

6.9.4. Test Result

Test Site	WZ-TR3	Test Engineer	Lynn Yang
Test Date	2025-08-11		

Carrier Frequency (MHz)	Frame Repetition Stability (ppm)					Limit (ppm)
	Standard deviation		Frame Repetition Stability			
1924.992	3.065		9.195			±10
Carrier Frequency (MHz)	Frame Jitter (μs)					Limit (μs)
	min	mean	max	Δmin	Δmax	
1924.992	-0.2	0	0.2	-0.2	0.2	±25

6.10. Carrier Frequency Stability


6.10.1. Test Limit

Per §15.323(f), the frequency stability of the carrier frequency of the intentional radiator shall be maintained within ± 10 ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of -20°C to $+50^{\circ}\text{C}$ at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20°C . For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage.

6.10.2. Test Procedure

ANSI C63.17, Clause 6.2.1

6.10.3. Test Setup

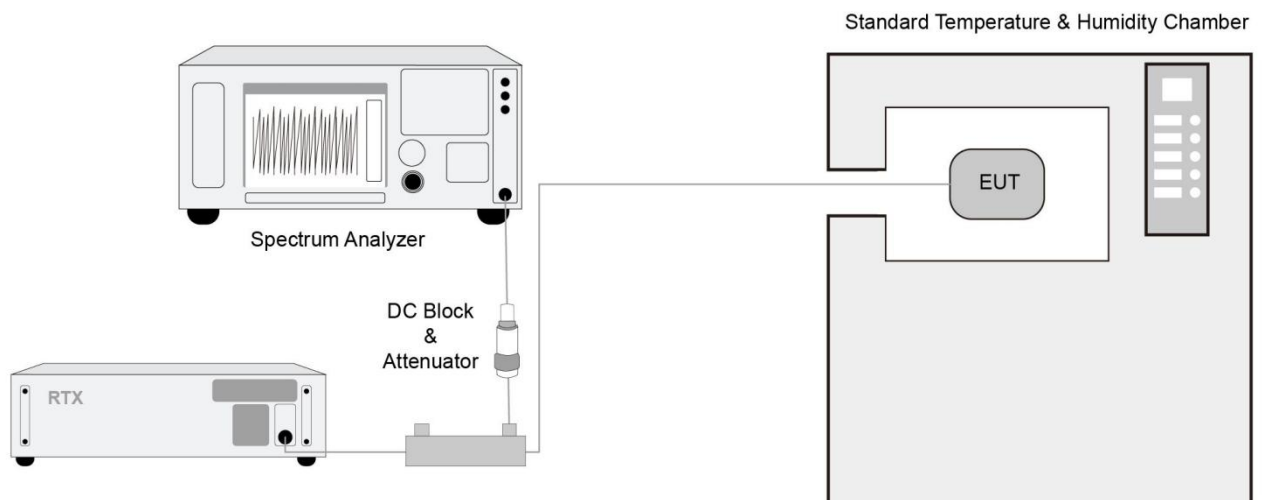

6.10.4. Test Result

Test Site	WZ-TR3	Test Engineer	Lynn Yang
Test Date	2025-08-11		

Carrier Frequency Stability over Time at Nominal Temperature

Average Mean Carrier Frequency (MHz)	Max. Diff. (kHz)	Min. Diff. (kHz)	Max Dev. (ppm)	Limit (ppm)
1924.9979	6.9	3.8	0.52	±10

Carrier Frequency Stability over Temperature

Voltage	Average Mean Carrier Frequency (MHz)	Max. Diff (kHz)	Deviation (ppm)	Limit (ppm)
T = +20°C	1924.9979	Ref	Ref	±10
T = -20°C		7.1	0.62	
T = +50°C		2.0	-2.03	

Note 1: Mean. Diff = Average Mean Carrier Frequency - Carrier Frequency

Deviation ppm = ((Max. Diff. - Mean. Diff.) / Mean Carrier Freq.) * 10⁶.

Note 2: This sample is powered by batteries, so the stability over power supply voltage is not applicable.

Note 3: The carrier frequency stability was measured at the extreme temperatures declared by the manufacturer.

6.11. Listen Before Transmit (LBT)

6.11.1. Test Limit

Monitoring Time Requirements

Immediately prior to initiating transmission, devices must monitor the combined time and spectrum window in which they intend to transmit. For a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period.

Monitoring Threshold

The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth of the device.

Calculation of monitoring threshold limits for isochroous devices:

Monitoring threshold: $T_L = -174 + 10 \log_{10} B + M_U + P_{MAX} - P_{EUT}$ (dBm)

Where: B=Emission bandwidth (Hz)

M_U =dB the threshold may exceed thermal noise (30 dB)

$P_{MAX}=5 \cdot \log_{10} B - 10$ (dBm)

P_{EUT} =Transmitted power (dBm)

For Radio A

Monitor Threshold	B (MHz)	M_U (dB)	P_{MAX} (dBm)	P_{EUT} (dBm)	Threshold (dBm)
T_L	1.390	30	20.58	18.40	-80.39

The EUT must not transmit until the interference level is less than or equal to:

Measured Threshold Level $\leq T_L + U_m = -80.39 + 6 = -74.39$ dBm

For Radio B

Monitor Threshold	B (MHz)	M_U (dB)	P_{MAX} (dBm)	P_{EUT} (dBm)	Threshold (dBm)
T_L	1.385	30	20.30	18.00	-80.41

The EUT must not transmit until the interference level is less than or equal to:

Measured Threshold Level $\leq T_L + U_m = -80.41 + 6 = -74.41$ dBm

Maximum Transmit Period

If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring. However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 h is not permitted without repeating the access criteria.


System Acknowledgement

Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease.

Periodic acknowledgements must be received at least every 30 s or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 s without receiving an acknowledgement, at which time the access criteria must be repeated.

6.11.2. Test Procedure

ANSI C63.17, Clause 7.3 & 8.2.

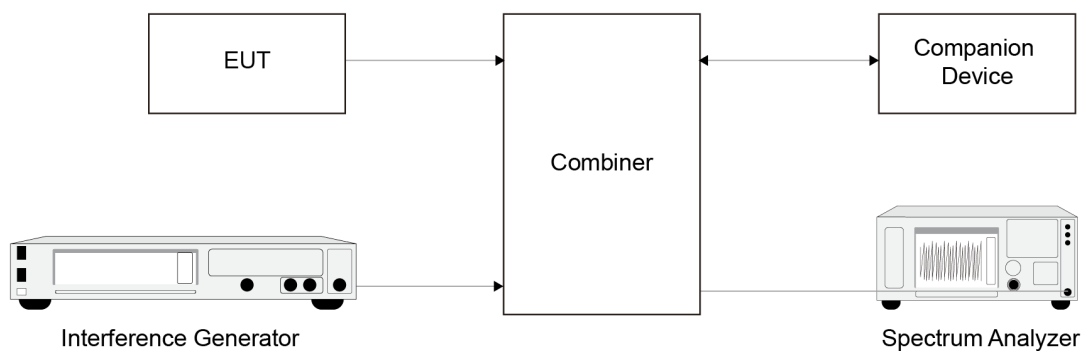6.11.3. Test Setup

6.11.4. Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-08-11		

Monitoring Time Requirements

Interference ref. to ANSI C63.17 clause 7.3.3	Reaction of EUT	Results
Apply the interference on f1 at level $T_L + U_M + 20$, and no interference on f2. Initiate transmission and verify the transmission on f2.	EUT transmits on f2	Pass
Apply the interference on f2 at level $T_L + U_M + 20$, at the same time, no interference on f1. After about 20 ms, initiate transmission and verify the transmission on f1.	EUT transmits on f1	Pass

Monitoring Threshold Requirements

The test is not applicable, because the EUT supports at least of 20 duplex system access channels and implements Least Interfered Channel (LIC) algorithm.

Maximum Transmit Period

Test ref. to ANSI C63.17 clause 8.2.2	Observation	Verdict
Transmission duration on same time and frequency window	Only for initiating device that controls which time slot is used	N/A

System Acknowledgements

Test ref. to ANSI C63.17 clause 8.2.1	Observation	Verdict
Initial transmission without acknowledgements	Not applicable for EUT that transmits control and signaling information	N/A
Transmission time after loss of acknowledgements	5.4 sec	Pass

6.12. Least Interfered Channel (LIC) Requirements

6.12.1. Test Limit

LIC Selection

If access to spectrum is not available as determined by the above, and a minimum of 20 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level may be accessed.

Least Interfered Channel Confirmation

A device utilizing the provisions of this paragraph must have monitored all access channels defined for its system within the last 10 s and must verify, within the 20 ms (40 ms for devices designed to use a 20 ms frame period) immediately preceding actual channel access, that the detected power of the selected time and spectrum windows is no higher than the previously detected value.

Power Measurement Resolution

The power measurement resolution for this comparison must be accurate to within 6 dB.

Maximum Spectrum Occupancy

No device or group of co-operating devices located within 1 m of each other shall, during any frame period, occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.

6.12.2. Test Procedure

ANSI C63.17, Clause 7.3.2 & 7.3.3

6.12.3. Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-08-11		

LIC Selection

The customer claims the product supports a minimum of 20 duplex system access channels.

Least Interfered Channel Confirmation

The test result is reported in section 6.11.

Power Measurement Resolution

Test ref. to ANSI C63.17 clause 7.3.2	Observation	Verdict
b) Apply interference to the EUT on f_1 at a level of $T_L + U_M + 7$ dB and on f_2 at a level of $T_L + U_M$. Initiate transmission. The EUT should transmit on f_2 . Terminate the connection. Repeat five times.	EUT transmit on f_2	Pass
c) Apply interference to the EUT on f_1 at a level of $T_L + U_M$ and on f_2 at a level of $T_L + U_M + 7$ dB. Initiate transmission. The EUT should transmit on f_1 . Terminate the connection. Repeat five times.	EUT transmit on f_1	Pass
d) Apply interference to the EUT on f_1 at a level of $T_L + U_M + 1$ dB and on f_2 at a level of $T_L + U_M - 6$ dB. Initiate transmission. If the EUT transmits on f_2 , terminate the connection. Repeat five times.	EUT transmit on f_2	Pass
e) Apply interference to the EUT on f_1 at a level of $T_L + U_M + 1$ dB and on f_2 at a level of $T_L + U_M - 6$ dB. Initiate transmission. If the EUT transmits on f_2 , terminate the connection. Repeat five times.	EUT transmit on f_1	Pass

Maximum Spectrum Occupancy

According to the technical description provided, the total number of the time and spectrum windows defined by the system is more than 20.

During any frame period, the maximum number of different channels will be 5, which is less than one third of the time and spectrum windows defined by the system.

6.13. Random waiting Requirements

6.13.1. Test Limit

If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same window after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.

6.13.2. Test Procedure

ANSI C63.17, Clause 8.1.3

6.13.3. Test Result

For systems that do implement the LIC algorithm and offer at least 20 duplex communications channels, the test is not applicable.

6.14. Monitoring Requirements

6.14.1. Test Limit

Threshold and LIC Monitoring Bandwidth

The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission.

Reaction Time and Monitoring Interval

The monitoring system shall have a maximum reaction time less than $50 \times \text{SQRT}(2.5/\text{emission bandwidth in MHz}) \mu\text{s}$ for signals at the applicable threshold level but shall not be required to be less than $50 \mu\text{s}$. If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be $35 \times \text{SQRT}(2.5/\text{emission bandwidth in MHz}) \mu\text{s}$ but shall not be required to be less than $35 \mu\text{s}$. and have a maximum reaction time less than $50 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds.

6.14.2. Test Procedure

ANSI C63.17, Clause 7.4 & 7.5

6.14.3. Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-08-11		

Monitoring Bandwidth

Monitoring bandwidth of the EUT is equal to the occupied bandwidth of the intended transmission.

Monitoring is made through the radio receiver used by the EUT for communication.

Monitoring Reaction Time

Test Equation (μs)	B (MHz)	Pulse width(μs)
$50 (1.25/B)^{1/2}$	1.425	46.83
$25 (1.25/B)^{1/2}$	1.425	23.41

Test ref. to ANSI C63.17 clause 7.5	Observation	Verdict
1) Additionally apply a CW signal on f_2 at the level T_L and interference pulse on f_1 at level $T_L + U_M$ to the receive port of the EUT. Verify that the EUT establishes a connection only on f_2 when the width of the interference pulse exceeds $50\mu\text{s}$.	EUT transmit on f_2	Pass
2) Change the time-synchronized, pulsed interference on f_1 to the level $T_L + U_M + 6\text{ dB}$. Verify that the EUT establishes a connection only on f_2 when the width of the interference pulse exceeds $35\mu\text{s}$.	EUT transmit on f_2	Pass

6.15. Monitoring Antenna Requirements

6.15.1. Test Limit

The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

6.15.2. Test Procedure

ANSI C63.17 Clause 4

6.15.3. Test Result

The antenna of the EUT used for transmission is the same interior antenna that used for monitoring.

6.16. Monitoring Threshold Relaxation Requirements

6.16.1. Test Limit

Devices that have a power output Lowest than the maximum permitted under the rules can increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

6.16.2. Test Procedure

ANSI C63.17 Clause 4

6.16.3. Test Result

The test is not applicable. Because the EUT supports at least of 20 duplex system access channels and implements Least Interfered Channel (LIC) algorithm, so the monitoring threshold is not applicable.

6.17. Duplex System LBT

6.17.1. Test Limit

An initiating device may attempt to establish a duplex connection by monitors both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

6.17.2. Test Procedure

ANSI C63.17, Clause 8.3.1 & 8.3.2

6.17.3. Test Result

The test is not applicable. Because the test is only applicable for EUT that can be initiating device.

6.18. Alternative monitoring interval for co-located devices Requirements**6.18.1. Test Limit**

An initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a co-located (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The monitored time and spectrum window must total at least 50 percent of the 10 milliseconds frame interval and the monitored spectrum must be within 1.25 MHz of the center frequency of channel(s) already occupied by that device or co-located co-operating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in the intended transmit window by the initiating device may commence.

6.18.2. Test Procedure

ANSI C63.17, Clause 8.4

6.18.3. Test Result

The test is not applicable. Because the test is only applicable for EUT that can be initiating device.

6.19. Fair Access**6.19.1. Test Limit**

The provisions of (c)(10) or (c)(11) shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.

6.19.2. Test Result

The test is not applicable. Because the test is only applicable for EUT that can be initiating device.

6.20. Automatic Discontinuation of Transmission

Does the EUT transmit Control and Signaling Information?	☒ Yes	☐ No
Does the EUT support Least Interfered Channel algorithm?	☒ Yes	☐ No
Type of EUT	☐ Initiating Device	☒ Responding Device

The following tests simulate the reaction of the EUT in case of either absence of information to transmit or operational failure after a connection with the companion device is established.

Number	Test	EUT Reaction	Verdict
1	Power Removed from EUT	A	Pass
2	Switch off EUT	N/A	Pass
3	Power Removed from Companion Device	B	Pass
4	Switch off Companion Device	B	Pass

A - Connection breakdown, Cease of all transmissions

B - Connection breakdown, EUT transmits control and signaling information

C - Connection breakdown, Companion Device transmits control and signaling information

N/A - Not Applicable (EUT does not have on/off switch)

Requirements, FCC 15.319(f)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Appendix A - Test Setup Photograph

Refer to “R25S1001085-UT” file.

Appendix B - EUT Photograph

Refer to “R25S1001085-UE” file.

_____ The End _____