




FCC RADIO TEST REPORT

FCC ID : P27AIR4992-41
Equipment : AT&T ALL-Fi Extender
Brand Name : Sercomm
Model Name : WFEXT4992-41
Applicant : Sercomm Corporation
8F, No. 3-1, Yuan-Qu St., Nan-Kang Dist., Taipei, Taiwan
Manufacturer : Sercomm Corporation
8F, No. 3-1, Yuan-Qu St., Nan-Kang Dist., Taipei, Taiwan
Standard : 47 CFR FCC Part 15.407

The product was received on Mar. 22, 2026, and testing was started from Jun. 09, 2026 and completed on Aug. 13, 2026. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.



Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	11
1.3 Testing Location Information	11
1.4 Measurement Uncertainty	12
2 Test Configuration of EUT	13
2.1 Test Channel Mode	13
2.2 The Worst Case Measurement Configuration	16
2.3 Accessories	17
2.4 Support Equipment.....	17
2.5 Test Setup Diagram	18
3 Transmitter Test Result	19
3.1 AC Power-line Conducted Emissions	19
3.2 Emission Bandwidth	21
3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	22
3.4 Peak Power Spectral Density (E.I.R.P.)	25
3.5 Unwanted Emissions.....	28
3.6 Contention Based Protocol.....	33
4 Test Equipment and Calibration Data	34
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	
Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Results of Contention-Based Protocol	
Appendix G. TEST results of Radiated Emission Co-location	
Appendix H. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: HE1-D1-1 Ver.2.9
FCC ID: P27AIR4992-41



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.4	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	PASS	-
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
3.6	15.407(d)	Contention-Based Protocol	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The EUT supports beamforming and CDD modes, and the beamforming mode is the worst case. Therefore, all test items are evaluated in the report.

Reviewed by: Barry Hsiao

Report Producer: Michelle Tsai



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925 ~ 7125	ax (HEW20), be (EHT20)	5955 ~ 7095	1 ~ 229 [58]
5925 ~ 7125	ax (HEW40), be (EHT40)	5965 ~ 7085	3 ~ 227 [29]
5925 ~ 7125	ax (HEW80), be (EHT80)	5985 ~ 7025	7 ~ 215 [14]
5925 ~ 7125	ax (HEW160), be (EHT160)	6025 ~ 6985	15 ~ 207 [7]
5925 ~ 7125	ax HEW320), be (EHT320)	6105 ~ 6905	31 ~ 191 [6]

Non-Beamforming_Multi-RU

Band	Mode	BWch	Nant
5.925-6.425GHz	802.11be EHT80	80	4TX
6.875-7.125GHz	802.11be EHT80	80	4TX
5.925-6.425GHz	802.11be EHT160	160	4TX
6.875-7.125GHz	802.11be EHT160	160	4TX
5.925-6.425GHz	802.11be EHT320	320	4TX
6.525-6.875GHz	802.11be EHT320	320	4TX

Beamforming

Band	Mode	BWch	Nant
5.925-6.425GHz	802.11be EHT20-BF	20	4TX
6.425-6.525GHz	802.11be EHT20-BF	20	4TX
6.525-6.875GHz	802.11be EHT20-BF	20	4TX
6.875-7.125GHz	802.11be EHT20-BF	20	4TX
5.925-6.425GHz	802.11be EHT40-BF	40	4TX
6.425-6.525GHz	802.11be EHT40-BF	40	4TX
6.525-6.875GHz	802.11be EHT40-BF	40	4TX
6.875-7.125GHz	802.11be EHT40-BF	40	4TX
5.925-6.425GHz	802.11be EHT80-BF	80	4TX
6.425-6.525GHz	802.11be EHT80-BF	80	4TX
6.525-6.875GHz	802.11be EHT80-BF	80	4TX
6.875-7.125GHz	802.11be EHT80-BF	80	4TX
5.925-6.425GHz	802.11be EHT160-BF	160	4TX
6.425-6.525GHz	802.11be EHT160-BF	160	4TX
6.525-6.875GHz	802.11be EHT160-BF	160	4TX

6.875-7.125GHz	802.11be EHT160-BF	160	4TX
5.925-6.425GHz	802.11be EHT320-BF	320	4TX
6.425-6.525GHz	802.11be EHT320-BF	320	4TX
6.525-6.875GHz	802.11be EHT320-BF	320	4TX

Note:

- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20, EHT40, EHT80, and EHT160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- BWch is the nominal channel bandwidth.
- The channel defined in the IEEE Standard P802.11ax™/D6.1.
- Evaluated EHT20/EHT40/EHT80/EHT160 mode only due to the similar modulation. The power setting of HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.

1.1.2 MRU (static preamble puncturing)

RU-tone	MRU(static preamble puncturing)	Bandwidth(MHz)		6GHz Test CH	
		80		CH7	CH215
484+242	1	242	484	--	V
	2	242	484	V	V
	3	484	242	V	V
	4	484	242	V	--

RU-tone	MRU(static preamble puncturing)	Bandwidth(MHz)		6GHz Test CH	
		160		CH15	CH207
996+484	1	484	996	--	V
	2	484	996	V	V
	3	996	484	V	V
	4	996	484	V	--
996+484+242	1	242	484	996	--
	2	242	484	996	V
	3	484	242	996	V
	4	484	242	996	V
	5	996	242	484	V
	6	996	242	484	V
	7	996	484	242	V
	8	996	484	242	--

RU-tone	MRU(static preamble puncturing)	Bandwidth(MHz)		6GHz Test CH	
		320		CH31	CH191
2x996+484	1	484	996	--	--
	2	484	996	V	--
	3	996	484	V	--
	4	996	484	V	--
	5	996	484	V	--
	6	996	484	V	--
	7	996	484	--	V
	8	484	996	--	V
	9	996	484	--	V
	10	996	484	--	V
	11	996	484	--	V
	12	996	484	--	--
3x996	1	996	996	--	V
	2	996	996	V	V
	3	996	996	V	V
	4	996	996	V	V
3x996+484	1	484	996	--	V
	2	484	996	V	V
	3	996	484	V	V
	4	996	484	V	V
	5	996	484	V	V
	6	996	484	V	V
	7	996	484	V	V
	8	996	484	V	--

**1.1.3 Worst case of MRU (static preamble puncturing) evaluation procedure**

1. Complete test Full RU BE & PSD
2. Measure the PSD of each MRU(static preamble puncturing) by conducted method and it is less than the Full RU conducted PSD.
3. Measure the Band edge emission of each MRU(static preamble puncturing) by conducted method and find out the MRU(static preamble puncturing) worst case configuration
4. Follow step 3 to find the worst MRU(static preamble puncturing) configuration and perform radiated PSD testing
5. Follow step 3 to find the worst MRU(static preamble puncturing) configuration and perform radiated unwanted emission testing
6. Confirm whether the worst MRU(static preamble puncturing) configuration setting in steps 2 and step 4 is the same. If there is a channel where the setting drops due to the test in step 4, the PSD of MRU(static preamble puncturing) needs to be retested.
7. Use worst configuration of MRU(static preamble puncturing) and perform MASK measurements by conducted method .

**1.1.4 Antenna Information**

Ant.	Brand	Model Name	Antenna Type	Connector	Support	Radio
1	Galtronics	02102140-08418-1A	Cabled PCB Dipole -like Antenna	I-Pex	2.4G+5G	Radio 1
2		02102140-08418-2A		I-Pex	2.4G+5G	Radio 1
3		02102142-08418-1A		I-Pex	5G	Radio 1
4		02102142-08418-2A		I-Pex	5G	Radio 1
5		02102475-08418-1A		I-Pex	6G	Radio 2
6		02102475-08418-2A		I-Pex	6G	Radio 2
7		02102475-08418-3A		I-Pex	6G	Radio 2
8		02102475-08418-4A		I-Pex	6G	Radio 2

Ant.	Port	Gain (dBi)								
		2.4G	5G				6G			
			UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8
1	1	3.32	3.83	3.75	3.51	3.85	-	-	-	-
2	2	4.24	5.31	4.78	4.55	4.81	-	-	-	-
3	3	-	4.65	4.88	4.97	5.04	-	-	-	-
4	4	-	5	4.94	4.95	5.01	-	-	-	-
5	1	-	-	-	-	-	5.24	4.43	4.83	4.75
6	2						5.13	5.25	5.25	4.98
7	3	-	-	-	-	-	5.47	4.42	5.3	5.26
8	4	-	-	-	-	-	5.35	5.11	5.11	5.03

Correlated Gain (dBi)			
Wi-Fi Mode	2.4G	5G	6G
DG [1SS]	4.37	5.39	6.78

Note 1: The EUT has eight antennas.

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/2RX) (Radio 1)

Ant. 1 (port 1) and Ant. 2 (port 2) could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be mode (4TX/4RX) (Radio 1)

Ant. 1 (port 1), Ant. 2 (port 2), Ant. 3 (port 3) and Ant. 4 (port 4) could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11 ax/be mode (2TX/2RX) (Radio 2)

Ant. 5 (port 1), Ant. 6 (port 2), Ant. 7 (port 3) and Ant. 8 (port 4) could transmit/receive simultaneously.

**1.1.5 EUT Information**

Operational Condition			
EUT Power Type	From AC Adapter		
EUT Function	☒	Indoor Access Point	☐ Dual Client
	☐	Indoor Client	☐ Fixed Client
	☒	Subordinate	☐ Standard Client
	☐	Very Low Power	☐ Standard Power Access Point
			☐ Indoor use
			☐ Outdoor use
Beamforming Function	☒	With beamforming	☐ Without beamforming
Resource Unit	☒	Full RU	☐ Partial RU
	☒	Multi-RU	
Channel Puncturing	☒	Support	☐ Not support
Software / Firmware Version for CBP		4.226.16.0_wltest	
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.:		...
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:		
☐	Other:		

Note: The above information was declared by manufacturer.

**1.1.6 Mode Test Duty Cycle****Non-Beamforming_Multi-RU**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX	0.945	0.25	544.687u	2k
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX	0.945	0.25	544.687u	2k
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 4_4TX	0.895	0.48	268.125u	5k
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 8_4TX	0.895	0.48	268.125u	5k
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	0.904	0.44	300u	5k
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	0.904	0.44	300u	5k
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 4_4TX	0.842	0.75	169.687u	10k
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX	0.842	0.75	169.687u	10k
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 2_4TX	0.87	0.6	210u	5k
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 10_4TX	0.87	0.6	210u	5k
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 2_4TX	0.855	0.68	186.562u	10k
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	0.856	0.68	186.562u	10k

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Beamforming

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20-BF_Nss1,(MCS0)_4TX	0.951	0.22	3.123m	500
802.11be EHT40-BF_Nss1,(MCS0)_4TX	0.961	0.17	4.645m	300
802.11be EHT80-BF_Nss1,(MCS0)_4TX	0.961	0.17	4.4m	300
802.11be EHT160-BF_Nss1,(MCS0)_4TX	0.961	0.17	5.103m	200
802.11be EHT320-BF_Nss1,(MCS0)_4TX	0.963	0.16	5.106m	200

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ KDB 987594 D01 v03r01
- ♦ KDB 987594 D02 v03
- ♦ KDB 662911 D01 v02r01
- ♦ KDB 412172 D01 v01r01
- ♦ KDB 414788 D01 v01r01

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
☒ Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)			
	TEL: 886-3-327-3456		FAX: 886-3-327-0973	
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CON04-HY	Lego Lin	20.5~22.7°C / 57~59%	11/Aug/2026
Contention Based Protocol	DFS03-HY	Elbert Peng	23.4~24.5°C / 55~60%	21/Jul/2026~30/Jul/2026
☒ Wenhua 3rd. (TAF: 3785)	ADD: No. 58, Aly. 75, Ln. 564, Wenhua 3rd Rd., Guishan Dist. Taoyuan City 333, Taiwan (R.O.C.)			
	TEL: 886-3-327-0868			
Test site Designation No. TW0036 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH06-HY	Wayne Chiu	23.4~23.9°C / 52~55%	16/Jun/2026~13/Aug/2026
Radiated (Non-Beamforming)	03CH26-HY	Andy Wang	22.6~23.3°C / 52~57%	12/Jun/2026~12/Aug/2026
Radiated (Beamforming)	03CH26-HY	Andy Wang	23.4~24.5°C / 52~55%	09/Jun/2026~11/Aug/2026
Radiated (Co-Location)	03CH26-HY	Andy Wang	23.8~24.2°C / 54~58%	02/Aug/2026



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
AC Power-line Conducted Emissions	3.24 dB	Confidence levels of 95%
Emission Bandwidth	0.07 MHz	Confidence levels of 95%
Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	1.12 dB	Confidence levels of 95%
Peak Power Spectral Density (E.I.R.P.)	1.22 dB	Confidence levels of 95%
Contention-Based Protocol	0.94 dB	Confidence levels of 95%
Radiated Emission (9 kHz ~ 30 MHz)	1.76 dB	Confidence levels of 95%
Radiated Emission (30 MHz ~ 1 GHz)	5.38 dB	Confidence levels of 95%
Radiated Emission (1 GHz ~ 18 GHz)	4.94 dB	Confidence levels of 95%
Radiated Emission (18 GHz ~ 40 GHz)	4.92 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Test Software Version	AccessMTool 3_3_0_6
-----------------------	---------------------

Non-Beamforming_Multi-RU

Mode	Radiated Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX	-
5985MHz	53
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX	-
7025MHz	46
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 8_4TX	-
6025MHz	68
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	-
6025MHz	67
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 4_4TX	-
6985MHz	65
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-
6985MHz	61
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX	-
6105MHz	83
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-
6105MHz	81
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 2_4TX	-
6105MHz	78
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 4_4TX	-
6905MHz	56
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 2_4TX	-
6905MHz	53
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 10_4TX	-
6905MHz	59

**Beamforming**

Mode	Radiated Setting
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-
5955MHz	38
6195MHz	42
6415MHz	41
6435MHz	28
6475MHz	35
6515MHz	28
6535MHz	37
6695MHz	50
6875MHz	46
6895MHz	43
6995MHz	38
7095MHz	44
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-
5965MHz	41
6205MHz	48
6405MHz	47
6445MHz	41
6485MHz	41
6525MHz	48
6565MHz	38
6685MHz	45
6885MHz	53
6925MHz	57
7005MHz	57
7085MHz	55
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-
5985MHz	59
6225MHz	54
6385MHz	57
6465MHz	58
6545MHz	50
6625MHz	55
6705MHz	54
6785MHz	51
6865MHz	57
6945MHz	61
7025MHz	54
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-
6025MHz	74
6185MHz	74



Mode	Radiated Setting
6345MHz	66
6505MHz	72
6665MHz	71
6825MHz	64
6985MHz	68
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-
6105MHz	86
6265MHz	75
6425MHz	75
6585MHz	76
6745MHz	79
6905MHz	69

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	Adapter Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Contention Based Protocol
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.) Unwanted Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	Adapter Mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT			V

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Test Condition	Radiated measurement
Operating Mode	CTX
1	Radio 1: WLAN 2.4GHz + WLAN 5GHz + Radio 2: WLAN 6G
Refer to Sporton Test Report No.: FA632615 for Co-location RF Exposure Evaluation and Appendix G for Radiated Emission Co-location.	



2.3 Accessories

Accessories				
AC Adapter	Brand Name	AT&T	Model Name	EPS26R0-16
	Power Rating	I/P: 120Vac, .725A Max 60Hz, O/P: 12Vdc, 2.2A, 26.4 W		
	Power Cord	1.8 meter, non-shielded cable, w/o ferrite core		
RJ45 Cable	Brand Name	TAIKE	Model Name	8050000008882160
	Category	CAT 6	In/Out door	Indoor
	Signal Line	1.5 meter, non-shielded cable		


Reminder: Regarding to more detail and other information, please refer to user manual.

2.4 Support Equipment

Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-

Support Equipment – Contention Based Protocol					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Shielding Box	EMEC	EM-SHB-650550300-M		
2	Client(Slave) (BE200)	HP	EliteBook 820 G3		

2.5 Test Setup Diagram

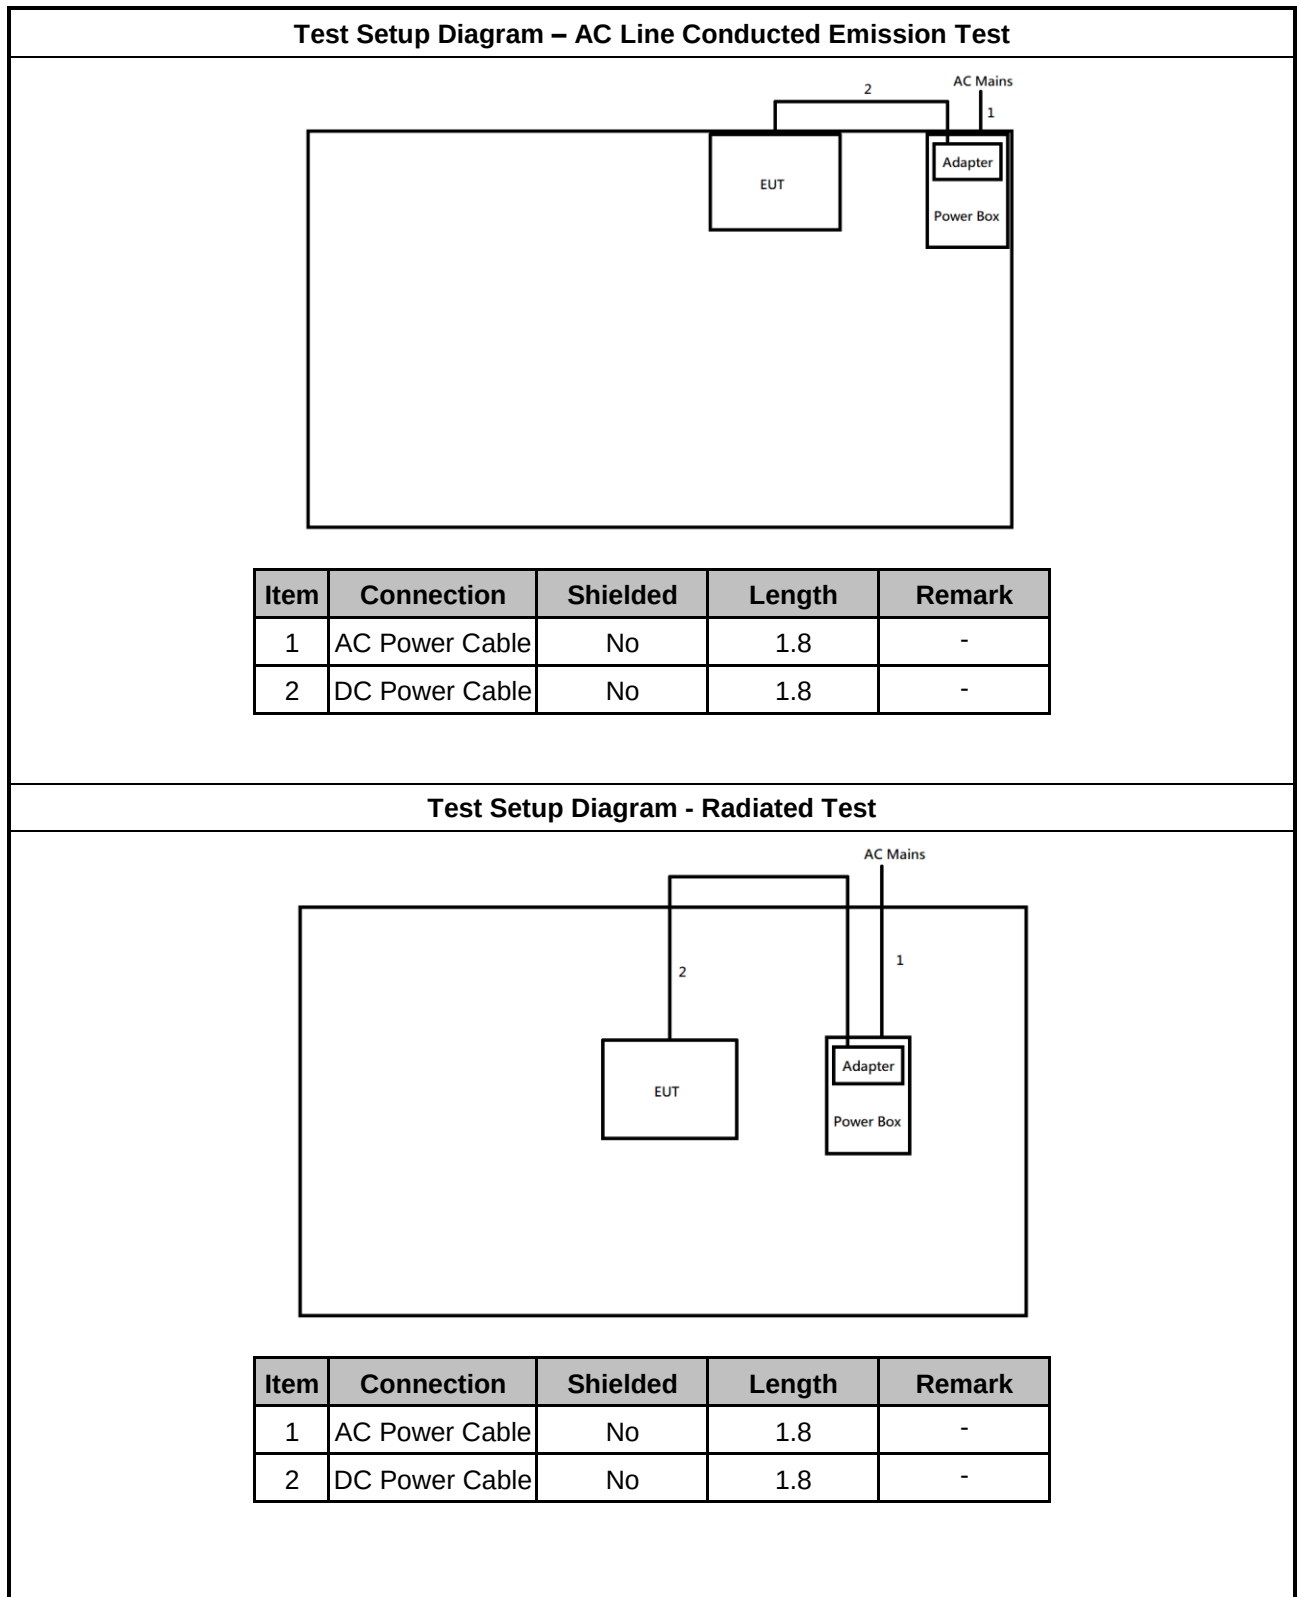



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
☒ Refer as ANSI C63.10, clause 6.2 for AC power-line conducted emissions.

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

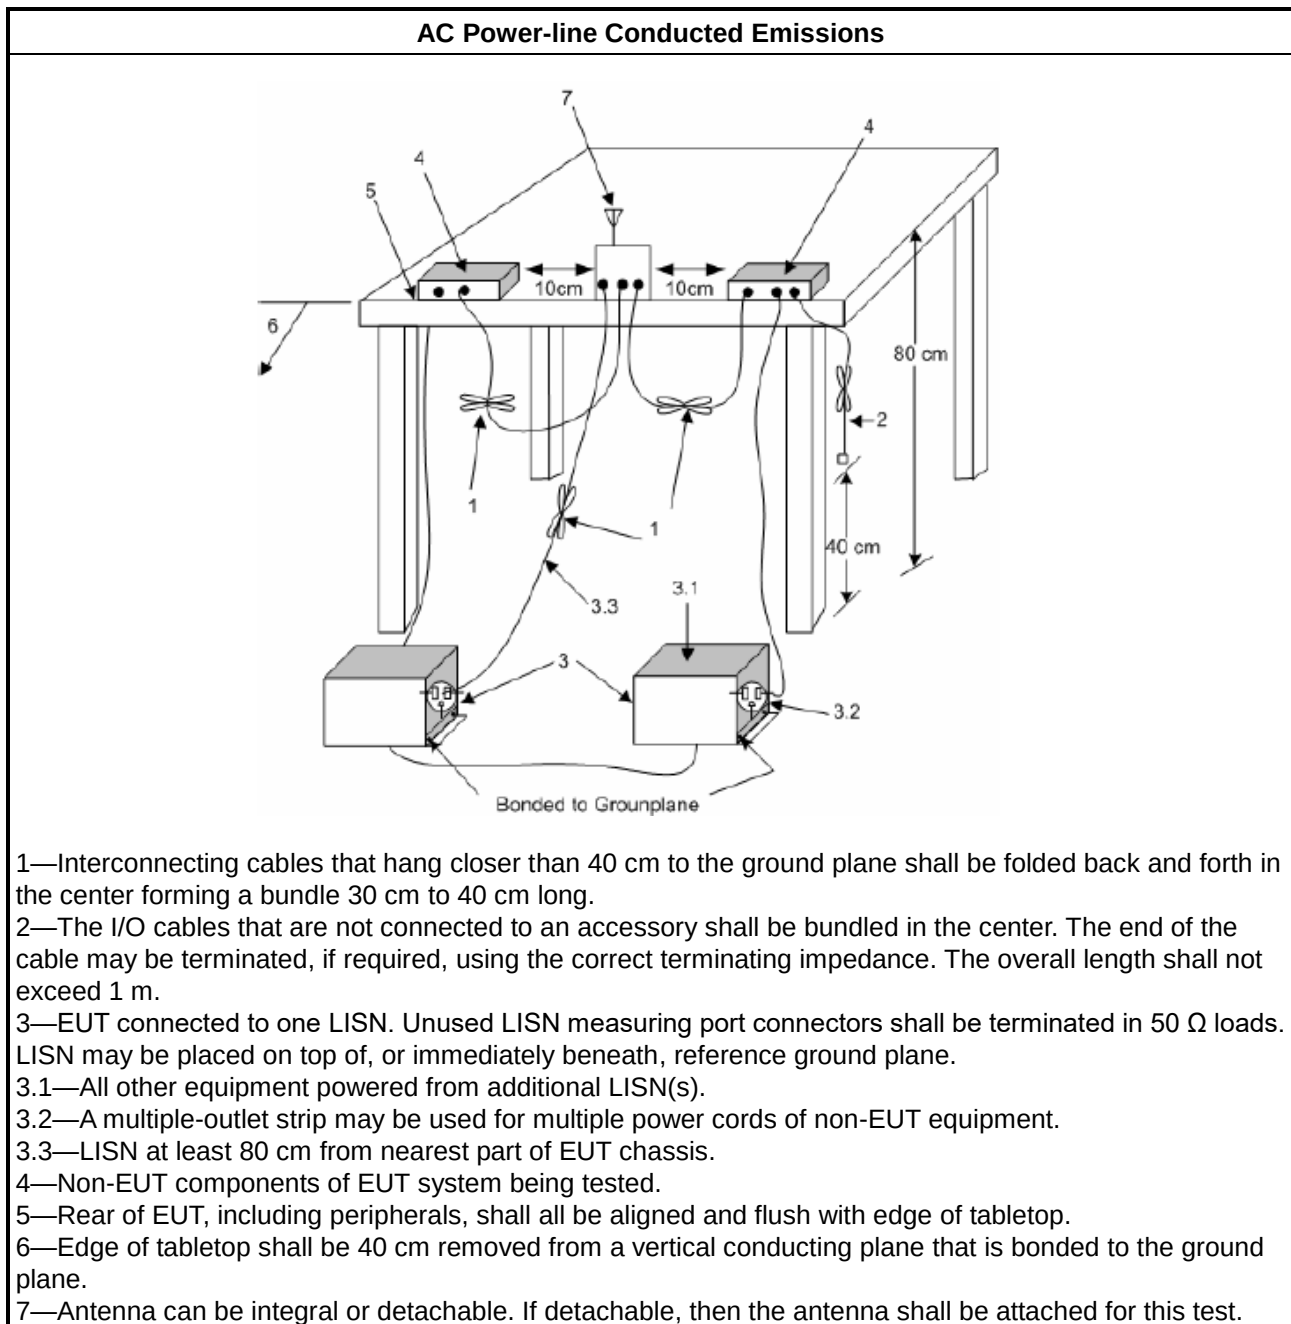

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, N/A
☒	For the 6425-6525 GHz band, N/A
☒	For the 6525-6875 GHz band, N/A
☒	For the 6875-7125 GHz band, N/A


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 6.7 for bandwidth testing.

3.2.4 Test Setup

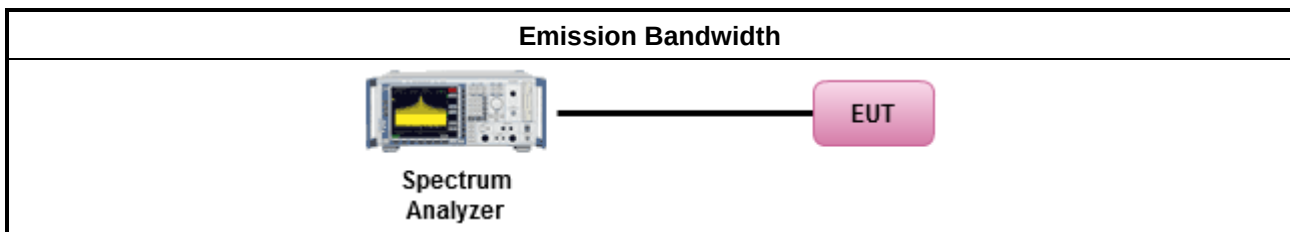

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm , For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm , For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

**3.3.3 Test Procedures**

Test Method	
▪ Maximum Output Power Setting	
☐	Duty cycle $\geq 98\%$
☐	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
☐	Duty cycle $< 98\%$
☒	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
☐	Refer as FCC KDB 789033, clause E Method PM-G (using an RF average power meter).
☐ For conducted measurement.	
☐	▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☐	▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☒ For radiated measurement.	
☐	▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
☐	▪ Refer as FCC KDB 789033, clause II A.1.F "Antenna-port Conducted versus Radiated Testing"
☐	▪ Refer as KDB 412172, clause 2.2 for EIRP calculation.

3.3.4 Test Setup

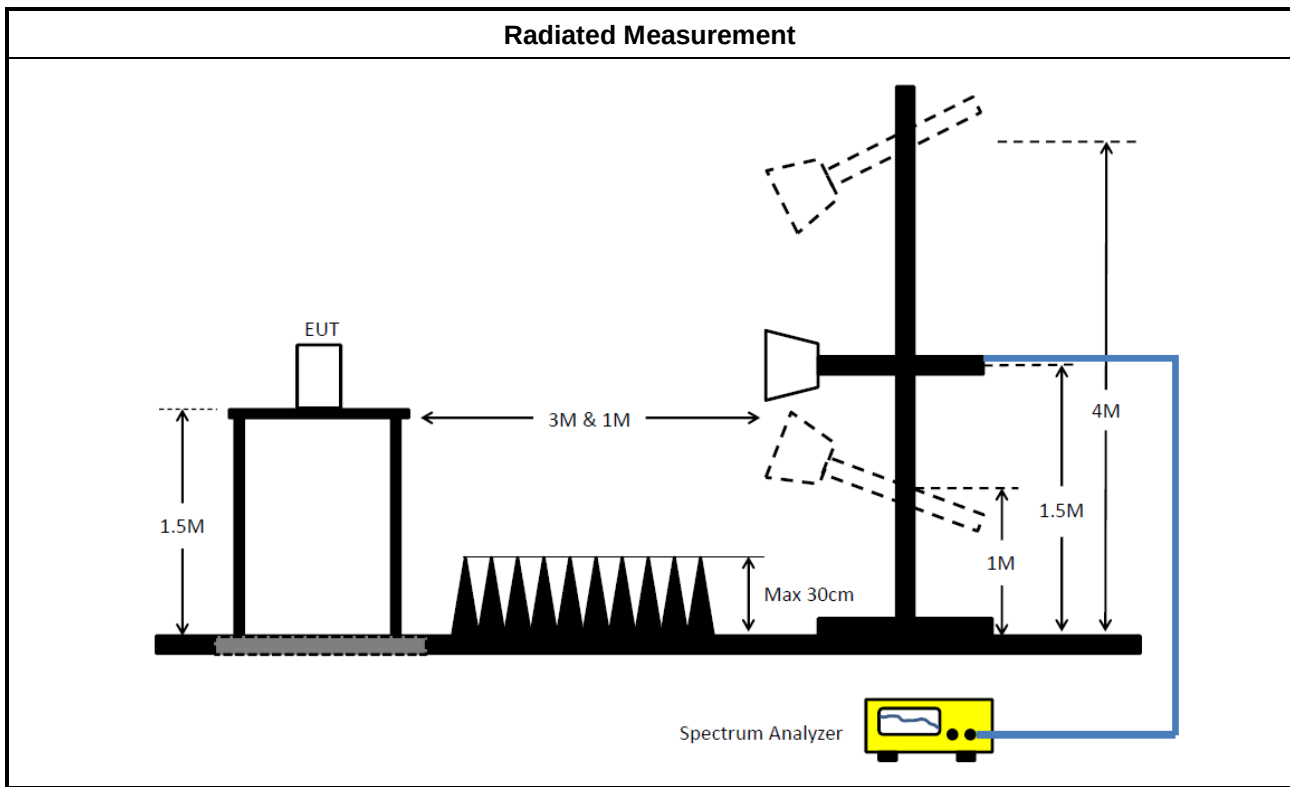

3.3.5 Test Result of Maximum Equivalent Isotropically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p < -5 dBm.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p < -5 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p < -5 dBm.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p < -5 dBm.


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

**3.4.3 Test Procedures**

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
☒	Refer as FCC KDB 789033, clause E Method SA-2. (spectral trace averaging)
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☐ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☐	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	
☒ For radiated measurement.	
Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.	
Refer as KDB 789033, clause II A.1.F "Antenna-port Conducted versus Radiated Testing"	
Refer as KDB 412172, clause 2.2 for EIRP calculation.	

3.4.4 Test Setup

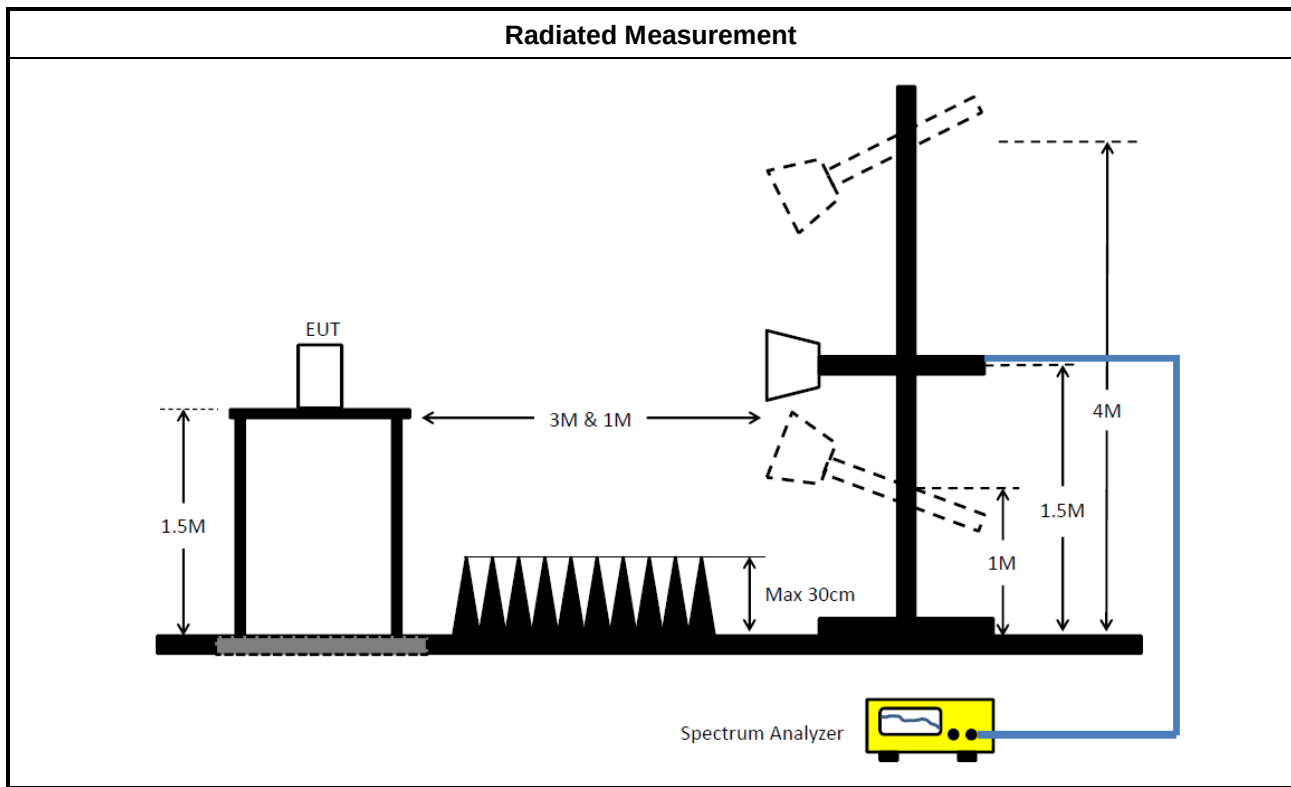

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3


Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = 54dBuV/m at 3m + 9.54dB = 63.54 dBuV/m at 1m.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.945 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = 68.2dBuV/m at 3m + 9.54dB = 77.74 dBuV/m at 1m.
Frequency	Emission MASK Limit
5.945 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the

limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. The channel bandwidth is defined as 26 dB EBW.

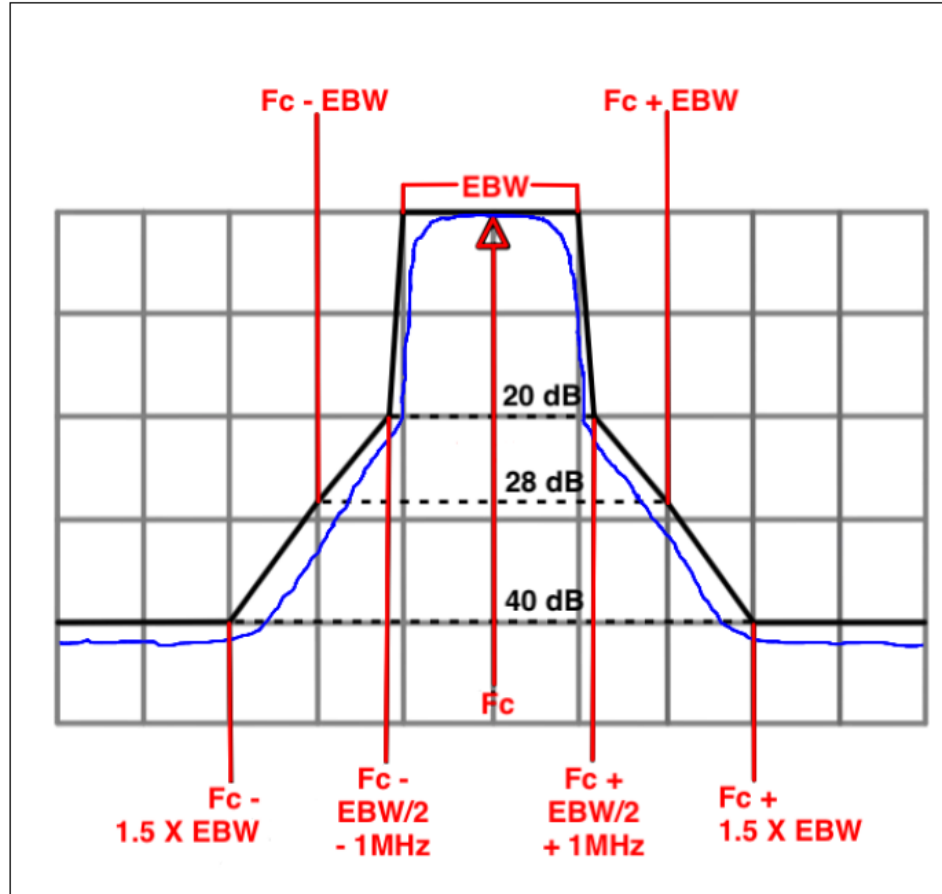



3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.5.2.2 measurement procedure peak limit.
	☒ Refer as FCC KDB 789033, clause G)3)d)ii) for Band edge Integration measurements.
For emission MASK shall be measured using following options below:	
	☒ Refer as KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	


Use the following spectrum analyzer settings:	
	Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.
KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.	
	Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
	Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


3.5.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamp Factor)

3.5.5 Test Setup

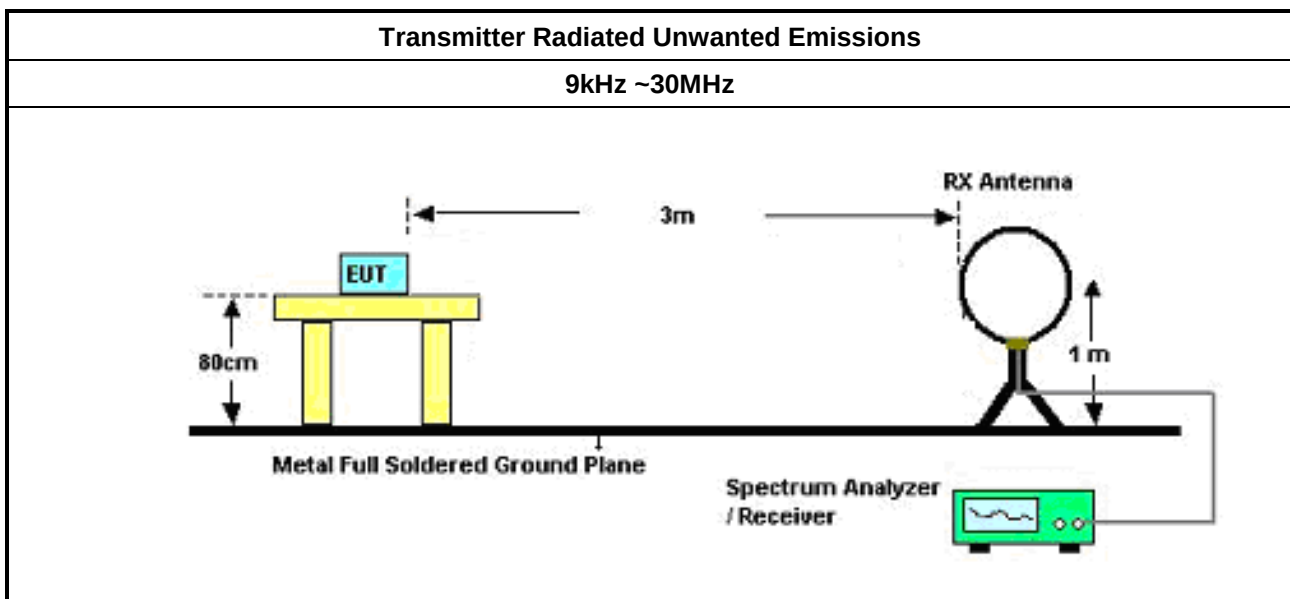

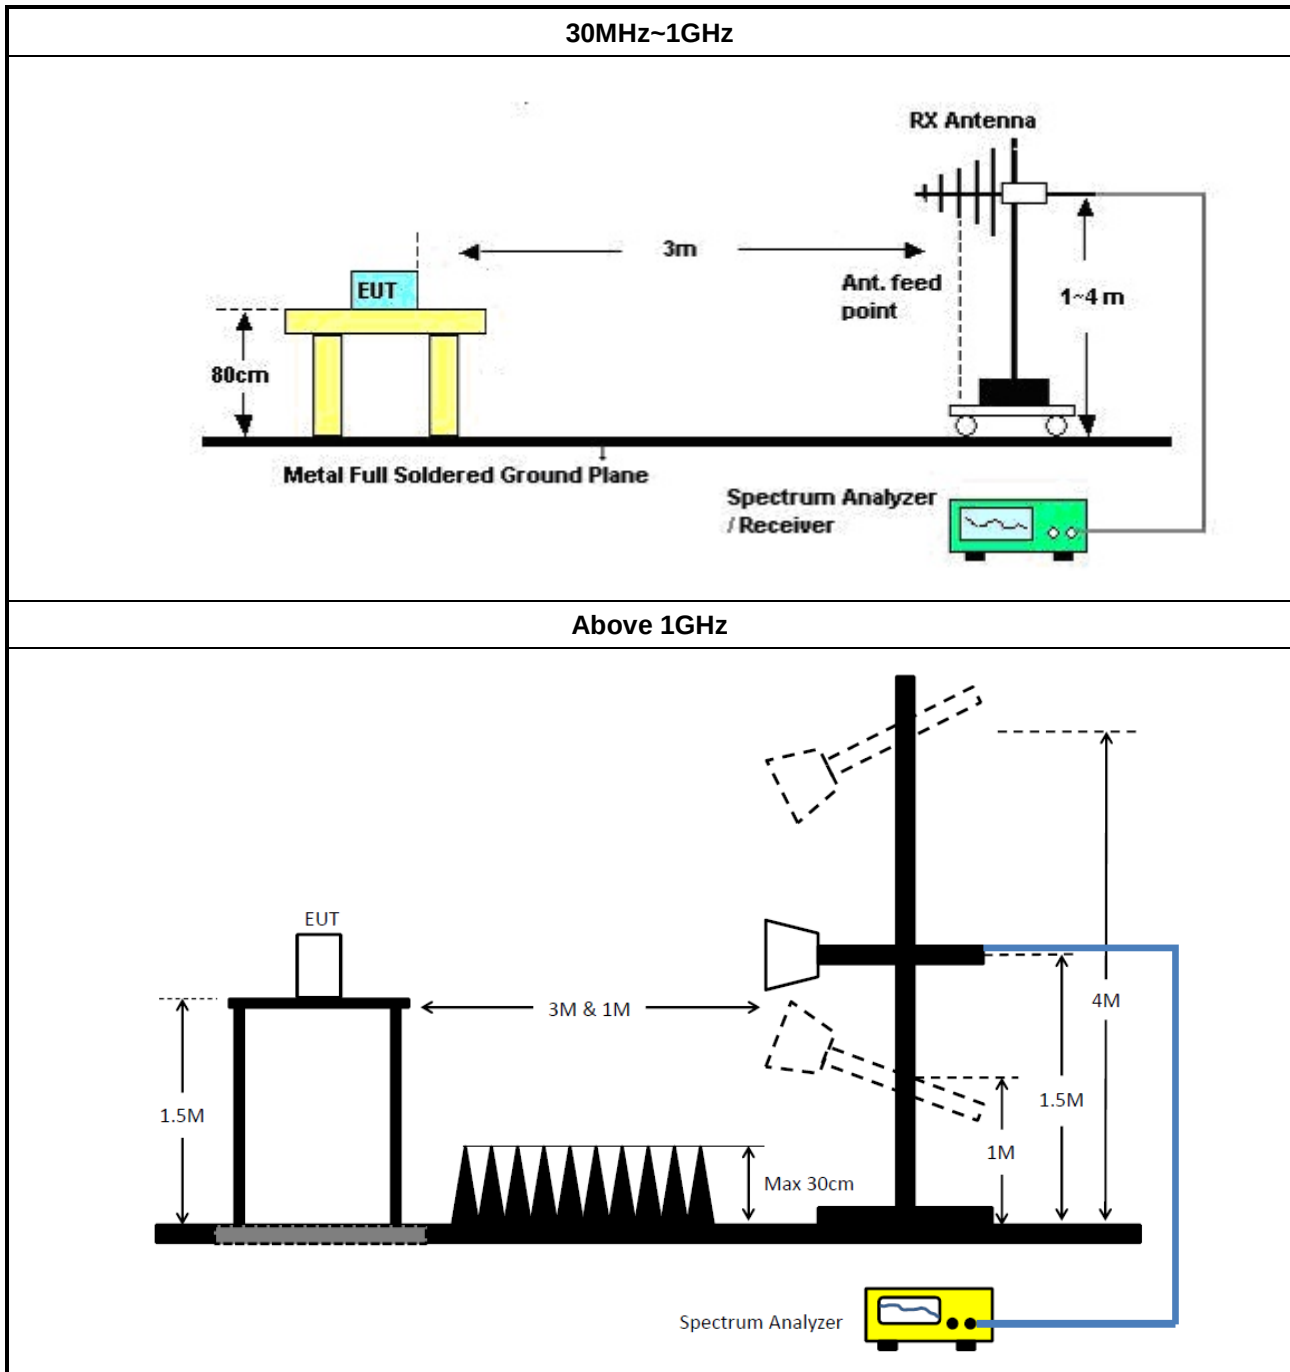

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

3.6 Contention Based Protocol

3.6.1 Contention Based Protocol Limit

EUT can detect an AWGN signal with 90% (or better) level of certainty.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
■	For Contention Based Protocol shall be measured using following options below:
☒	Refer as KDB 987594 D02, I) Contention Based Protocol.

3.6.4 Test Setup

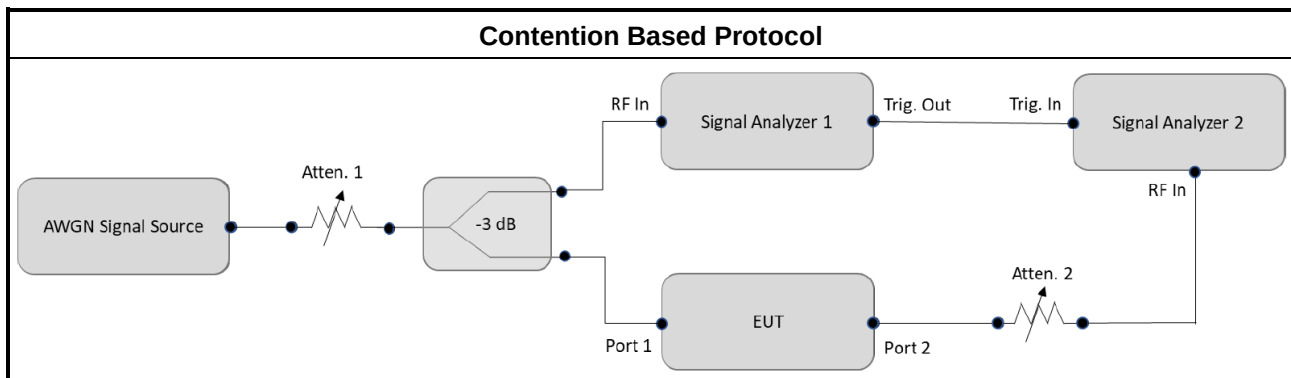

3.6.5 Test Result of Contention Based Protocol

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESR3	102051	9kHz ~ 3.6GHz	05/Jun/2026	04/Jun/2027
Two-Line V-Network	ROHDE & SCHWARZ	ENV 216	101578	9kHz ~ 30MHz	24/Aug/2025	23/Aug/2026
RF Cable 5m	TITAN	TITAN	CO04-cable-01	9 kHz~200MHz	25/Feb/2026	24/Feb/2027
Pulse Limiter	SCHWARZBECK	VTSD 9561F-F	9561-F041	9kHz ~ 30MHz	27/Oct/2025	26/Oct/2026
Software	Sporton	SENSE-EMI	V5.11.6	-	NCR	NCR

Instrument for Conducted Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101515	10Hz~40GHz	05/Jan/2026	04/Jan/2027
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	29/Oct/2025	28/Oct/2026
Power Meter	Anritsu	ML2495A	1517010	300MHz~40GHz	17/Dec/2025	16/Dec/2026
Pulse Sensor	Anritsu	MA2411B	1339407	300MHz~40GHz	17/Dec/2025	16/Dec/2026
SENSE-15407_NII	Sporton	V5.11.28a	N/A	N/A	N/A	N/A

Instrument for Radiated Test (03CH26-HY) (Non-Beamforming_Multi-RU)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	1GHz~18GHz 3m	05/Aug/2026	04/Aug/2027
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101411	10Hz~44GHz	30/Sep/2025	29/Sep/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02877	1GHz~18GHz	14/Jul/2026	13/Jul/2027
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB009	1GHz~40GHz	03/Oct/2025	02/Oct/2026
Preamplifier	SGH	PRAMP 118-H	20230515-4	1GHz ~18GHz	20/May/2026	19/May/2027
Microwave Preamplifier	Agilent	8449B	3008A02602	1GHz ~18GHz	10/Mar/2026	09/Mar/2027
Amplifier	EM	EM18G40G	060874	18GHz ~ 40GHz	27/Apr/2026	26/Apr/2027
SENSE-15407-NII	Sporton	V5.11.27	NA	NA	NA	NA

**Instrument for Radiated Test (03CH26-HY) (Beamforming)**

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	1GHz~18GHz 3m	06/Aug/2025	05/Aug/2026
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	30MHz~1GHz 3m	06/Aug/2025	05/Aug/2026
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	1GHz~18GHz 3m	05/Aug/2026	04/Aug/2027
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	30MHz~1GHz 3m	05/Aug/2026	04/Aug/2027
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101411	10Hz~44GHz	30/Sep/2025	29/Sep/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02877	1GHz~18GHz	02/Jul/2025	01/Jul/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02877	1GHz~18GHz	14/Jun/2026	13/Jun/2027
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1534	1GHz~18GHz	11/Mar/2026	10/Mar/2027
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB009	1GHz~40GHz	03/Oct/2025	02/Oct/2026
Preamplifier	SGH	PRAMP 118-H	20230515-4	1GHz ~18GHz	20/May/2026	21/May/2027
Microwave Preamplifier	Agilent	8449B	3008A02602	1GHz ~18GHz	10/Mar/2026	09/Mar/2027
Amplifier	EM	EM18G40G	060874	18GHz ~ 40GHz	27/Apr/2026	26/Apr/2027
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	16/Mar/2026	15/Mar/2027
Bilog Antenna & 6dB Attenuator	TESEQ & VGT	CBL 6111D & VFA 04002-06	63540/002	30MHz~1GHz	03/Jun/2026	02/Jun/2027
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB009	9kHz~1GHz	03/Oct/2025	02/Oct/2026
Preamplifier	SGH	PRAMP 903	20230515-2	30MHz~1GHz	20/May/2026	21/May/2027
SENSE-15407-NII	Sporton	V5.11.27	NA	NA	NA	NA

Instrument for Radiated Test (03CH26-HY) (Co-Location)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	1GHz~18GHz 3m	06/Aug/2025	05/Aug/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101411	10Hz~44GHz	30/Sep/2025	29/Sep/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02877	1GHz~18GHz	14/Jul/2026	13/Jul/2027
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB009	1GHz~40GHz	03/Oct/2025	02/Oct/2026
Preamplifier	SGH	PRAMP 118-H	20230515-4	1GHz ~18GHz	20/May/2026	21/May/2027
Amplifier	EM	EM18G40G	060874	18GHz ~ 40GHz	27/Apr/2026	26/Apr/2027
SENSE-EMI	Sporton	V5.11.9	NA	NA	NA	NA

**Instrument for Contention-Based Protocol Test**

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSP 40	100305	9kHz~40GHz	20/Mar/2026	19/Mar/2027
Vector Signal Generator	R&S	SMW200A	111529	100kHz~7.5GHz	27/Mar/2026	26/Mar/2027
DFS-Adaptivity	Sporton	Ver 2.13	N/A	N/A	N/A	N/A
Adaptivity Analysis-5G	Sporton	Ver 2.12	N/A	N/A	N/A	N/A



Conducted Emissions at Powerline

Appendix A


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	340.018k	34.71	49.19	-14.48	Neutral

Result


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	153.636k	35.59	65.81	-30.22	Line
Mode 1	Pass	AV	153.636k	23.24	55.81	-32.57	Line
Mode 1	Pass	QP	221.817k	25.80	62.75	-36.95	Line
Mode 1	Pass	AV	221.817k	16.66	52.75	-36.09	Line
Mode 1	Pass	QP	342.744k	34.44	59.14	-24.70	Line
Mode 1	Pass	AV	342.744k	31.48	49.14	-17.66	Line
Mode 1	Pass	QP	1.131M	19.28	56.00	-36.72	Line
Mode 1	Pass	AV	1.131M	15.55	46.00	-30.45	Line
Mode 1	Pass	QP	2.573M	14.13	56.00	-41.87	Line
Mode 1	Pass	AV	2.573M	8.97	46.00	-37.03	Line
Mode 1	Pass	QP	9.269M	18.53	60.00	-41.47	Line
Mode 1	Pass	AV	9.269M	13.57	50.00	-36.43	Line
Mode 1	Pass	QP	153.024k	35.64	65.83	-30.19	Neutral
Mode 1	Pass	AV	153.024k	22.85	55.83	-32.98	Neutral
Mode 1	Pass	QP	191.358k	32.87	63.97	-31.10	Neutral
Mode 1	Pass	AV	191.358k	22.96	53.97	-31.01	Neutral
Mode 1	Pass	QP	340.018k	37.73	59.19	-21.46	Neutral
Mode 1	Pass	AV	340.018k	34.71	49.19	-14.48	Neutral
Mode 1	Pass	QP	1.375M	17.95	56.00	-38.05	Neutral
Mode 1	Pass	AV	1.375M	13.68	46.00	-32.32	Neutral
Mode 1	Pass	QP	4.272M	16.61	56.00	-39.39	Neutral
Mode 1	Pass	AV	4.272M	11.53	46.00	-34.47	Neutral
Mode 1	Pass	QP	10.323M	17.85	60.00	-42.15	Neutral
Mode 1	Pass	AV	10.323M	12.77	50.00	-37.23	Neutral

Conducted Emissions at Powerline_Mode 1

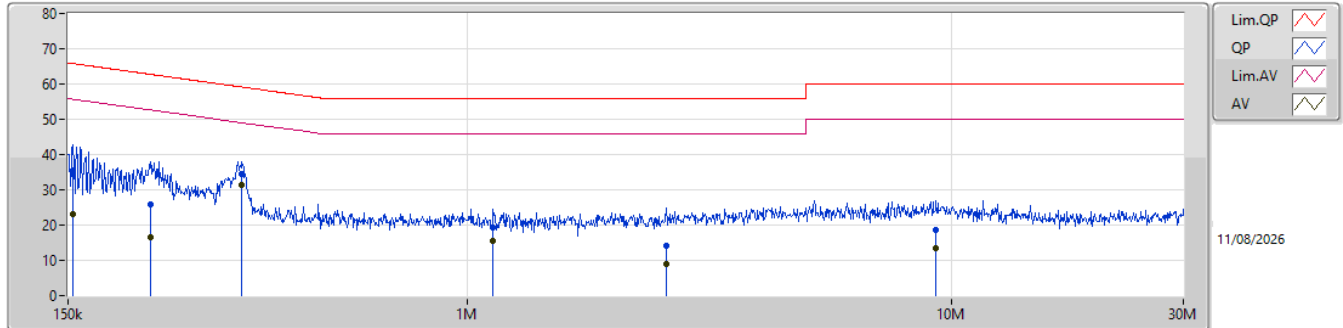

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)								
QP	153.636k	35.59	65.81	-30.22	19.79	Line	15.80	9.64	0.17	9.98								
AV	153.636k	23.24	55.81	-32.57	19.79	Line	3.45	9.64	0.17	9.98								
QP	221.817k	25.80	62.75	-36.95	19.78	Line	6.02	9.64	0.13	10.01								
AV	221.817k	16.66	52.75	-36.09	19.78	Line	-3.12	9.64	0.13	10.01								
QP	342.744k	34.44	59.14	-24.70	19.74	Line	14.70	9.63	0.11	10.00								
AV	342.744k	31.48	49.14	-17.66	19.74	Line	11.74	9.63	0.11	10.00								
QP	1.131M	19.28	56.00	-36.72	19.76	Line	-0.48	9.64	0.06	10.06								
AV	1.131M	15.55	46.00	-30.45	19.76	Line	-4.21	9.64	0.06	10.06								
QP	2.573M	14.13	56.00	-41.87	19.71	Line	-5.58	9.65	0.07	9.99								
AV	2.573M	8.97	46.00	-37.03	19.71	Line	-10.74	9.65	0.07	9.99								
QP	9.269M	18.53	60.00	-41.47	19.86	Line	-1.33	9.69	0.23	9.94								
AV	9.269M	13.57	50.00	-36.43	19.86	Line	-6.29	9.69	0.23	9.94								

Conducted Emissions at Powerline_Mode 1

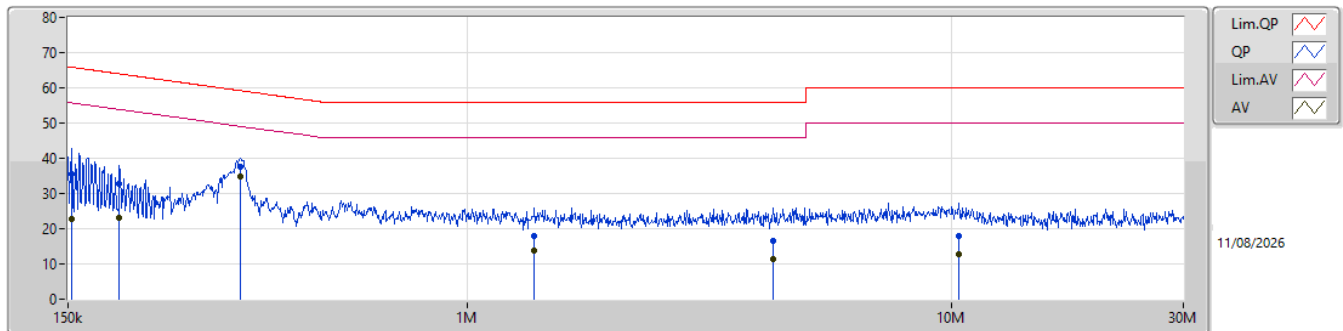

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)								
QP	153.024k	35.64	65.83	-30.19	19.79	Neutral	15.85	9.64	0.17	9.98								
AV	153.024k	22.85	55.83	-32.98	19.79	Neutral	3.06	9.64	0.17	9.98								
QP	191.358k	32.87	63.97	-31.10	19.78	Neutral	13.09	9.63	0.14	10.01								
AV	191.358k	22.96	53.97	-31.01	19.78	Neutral	3.18	9.63	0.14	10.01								
QP	340.018k	37.73	59.19	-21.46	19.74	Neutral	17.99	9.63	0.11	10.00								
AV	340.018k	34.71	49.19	-14.48	19.74	Neutral	14.97	9.63	0.11	10.00								
QP	1.375M	17.95	56.00	-38.05	19.72	Neutral	-1.77	9.64	0.06	10.02								
AV	1.375M	13.68	46.00	-32.32	19.72	Neutral	-6.04	9.64	0.06	10.02								
QP	4.272M	16.61	56.00	-39.39	19.84	Neutral	-3.23	9.66	0.14	10.04								
AV	4.272M	11.53	46.00	-34.47	19.84	Neutral	-8.31	9.66	0.14	10.04								
QP	10.323M	17.85	60.00	-42.15	19.88	Neutral	-2.03	9.70	0.25	9.93								
AV	10.323M	12.77	50.00	-37.23	19.88	Neutral	-7.11	9.70	0.25	9.93								

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	21.67M	19.102M	19M1D1D	21.12M	19.026M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	41.14M	38.174M	38M2D1D	40.15M	37.612M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	82.06M	77.401M	77M4D1D	80.08M	76.781M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	165.88M	156.933M	157MD1D	164.12M	156.063M
802.11be EHT320-BF_Nss1,(MCS0)_4TX	412.72M	316.527M	317MD1D	328.24M	315.14M
6.425-6.525GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	21.615M	19.149M	19M1D1D	21.23M	19.029M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	41.36M	37.986M	38MD1D	40.37M	37.786M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	81.62M	77.606M	77M6D1D	80.74M	77.051M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	167.64M	157.378M	157MD1D	163.68M	156.556M
802.11be EHT320-BF_Nss1,(MCS0)_4TX	330M	317.671M	318MD1D	328.24M	314.667M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	21.945M	19.215M	19M2D1D	20.845M	18.959M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	41.36M	38.16M	38M2D1D	40.15M	37.599M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	81.84M	77.455M	77M5D1D	80.3M	76.66M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	166.76M	157.001M	157MD1D	164.12M	155.351M
802.11be EHT320-BF_Nss1,(MCS0)_4TX	330M	316.928M	317MD1D	328.24M	314.546M
6.875-7.125GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	21.89M	19.176M	19M2D1D	21.01M	18.973M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	41.47M	37.981M	38MD1D	40.37M	37.615M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	81.84M	77.244M	77M2D1D	80.3M	76.769M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	165.44M	156.358M	156MD1D	164.12M	155.612M

Max-N dB = Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	320M	21.505M	19.102M	21.12M	19.043M	21.395M	19.057M	21.67M	19.053M
6195MHz	Pass	320M	21.285M	19.082M	21.175M	19.055M	21.56M	19.067M	21.23M	19.036M
6415MHz	Pass	320M	21.45M	19.078M	21.395M	19.086M	21.56M	19.026M	21.395M	19.09M
6435MHz	Pass	320M	21.23M	19.079M	21.285M	19.05M	21.34M	19.055M	21.34M	19.08M
6475MHz	Pass	320M	21.34M	19.029M	21.505M	19.115M	21.34M	19.144M	21.34M	19.05M
6515MHz	Pass	320M	21.505M	19.087M	21.45M	19.149M	21.285M	19.07M	21.615M	19.099M
6535MHz	Pass	320M	21.945M	19.161M	20.845M	19.12M	21.34M	19.056M	21.505M	19.096M
6695MHz	Pass	320M	21.175M	18.959M	21.395M	18.977M	21.34M	19.215M	21.395M	19.016M
6875MHz	Pass	320M	21.505M	19.096M	21.725M	19.037M	21.505M	19.07M	21.285M	19.134M
6895MHz	Pass	320M	21.615M	18.973M	21.505M	18.994M	21.505M	19.119M	21.01M	19.162M
6995MHz	Pass	320M	21.175M	19.042M	21.615M	19.176M	21.285M	19.077M	21.89M	19.052M
7095MHz	Pass	320M	21.615M	19.069M	21.45M	19.119M	21.395M	19.029M	21.34M	19.058M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	320M	40.92M	37.612M	40.7M	37.712M	40.92M	38.174M	41.03M	37.936M
6205MHz	Pass	320M	40.92M	37.887M	40.7M	37.862M	40.59M	38.022M	40.59M	37.775M
6405MHz	Pass	320M	40.15M	37.882M	41.14M	37.919M	40.92M	37.822M	41.14M	37.861M
6445MHz	Pass	320M	40.37M	37.986M	40.92M	37.835M	40.59M	37.822M	40.7M	37.935M
6485MHz	Pass	320M	40.37M	37.852M	41.03M	37.786M	41.14M	37.899M	40.59M	37.968M
6525MHz	Pass	320M	40.7M	37.887M	41.36M	37.882M	41.14M	37.85M	40.59M	37.939M
6565MHz	Pass	320M	41.14M	38.16M	40.81M	37.993M	40.81M	37.714M	41.36M	37.89M
6685MHz	Pass	320M	41.03M	38.012M	40.48M	37.824M	41.03M	37.913M	40.92M	37.987M
6885MHz	Pass	320M	40.37M	37.92M	40.7M	37.903M	40.26M	37.952M	40.15M	37.599M
6925MHz	Pass	320M	41.14M	37.866M	40.7M	37.835M	40.59M	37.699M	40.92M	37.615M
7005MHz	Pass	320M	40.92M	37.759M	41.03M	37.952M	40.81M	37.981M	41.25M	37.879M
7085MHz	Pass	320M	40.92M	37.932M	41.36M	37.88M	40.37M	37.981M	41.47M	37.931M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	320M	80.96M	77.156M	80.08M	76.958M	80.52M	76.852M	80.74M	77.225M
6225MHz	Pass	320M	81.18M	77.113M	81.18M	77.232M	80.74M	77.022M	80.3M	76.781M
6385MHz	Pass	320M	82.06M	77.181M	80.96M	76.962M	80.96M	77.401M	80.52M	77.181M
6465MHz	Pass	320M	80.74M	77.276M	81.18M	77.308M	80.96M	77.323M	81.4M	77.051M
6545MHz	Pass	320M	81.62M	77.413M	81.62M	77.259M	80.96M	77.064M	81.4M	77.606M
6625MHz	Pass	320M	80.52M	76.66M	81.18M	76.925M	80.52M	76.774M	80.74M	76.737M
6705MHz	Pass	320M	80.3M	76.742M	81.4M	77.401M	81.4M	77.181M	81.18M	77.401M
6785MHz	Pass	320M	80.3M	77.109M	81.18M	77.222M	81.18M	77.389M	81.84M	77.272M
6865MHz	Pass	320M	80.52M	77.455M	81.18M	77.366M	80.96M	77.211M	80.52M	77.379M
6945MHz	Pass	320M	80.3M	77.244M	81.62M	77.13M	80.96M	76.769M	81.18M	77.218M
7025MHz	Pass	320M	80.52M	77.101M	80.52M	77.155M	80.74M	77.115M	81.84M	77.167M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	320M	164.56M	156.4M	164.12M	156.874M	165M	156.587M	164.12M	156.063M
6185MHz	Pass	320M	165.88M	156.665M	165.44M	156.311M	164.56M	156.22M	164.56M	156.69M
6345MHz	Pass	320M	165.44M	156.524M	164.56M	156.699M	164.12M	156.933M	165.44M	156.757M
6505MHz	Pass	320M	165M	156.556M	163.68M	156.998M	167.64M	157.378M	166.32M	156.713M
6665MHz	Pass	320M	165.88M	156.122M	165.88M	157.001M	166.76M	156.562M	165M	156.562M
6825MHz	Pass	320M	165M	156.798M	165.88M	156.989M	164.12M	156.752M	164.12M	155.351M
6985MHz	Pass	320M	164.12M	156.152M	165.44M	155.932M	165M	155.612M	165M	156.358M
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	320M	329.12M	315.556M	401.28M	315.82M	337.04M	316.4M	412.72M	316.346M
6265MHz	Pass	320M	328.24M	315.14M	329.12M	315.53M	330M	315.362M	329.12M	316.527M
6425MHz	Pass	320M	330M	315.64M	329.12M	315.778M	329.12M	315.584M	328.24M	314.667M
6585MHz	Pass	320M	328.24M	316.216M	328.24M	316.804M	330M	317.671M	329.12M	315.548M
6745MHz	Pass	320M	328.24M	316.928M	329.12M	316.654M	330M	315.379M	328.24M	314.673M
6905MHz	Pass	320M	329.12M	315.04M	330M	314.546M	328.24M	316.185M	328.24M	315.103M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

5955MHz

23/07/2026

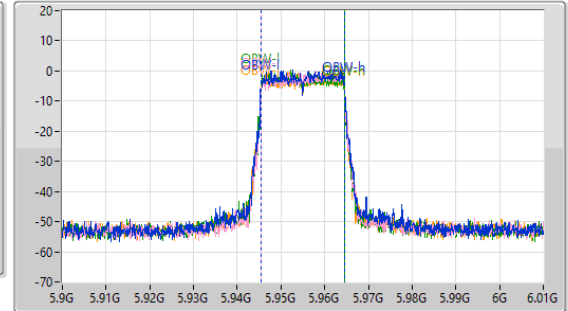
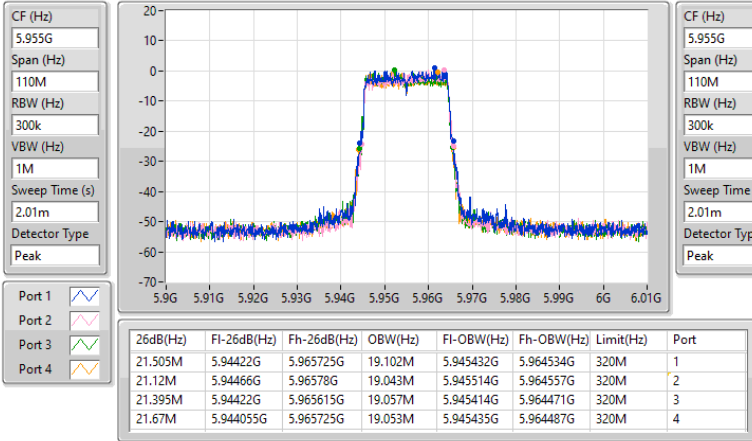


5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

6405MHz

23/07/2026

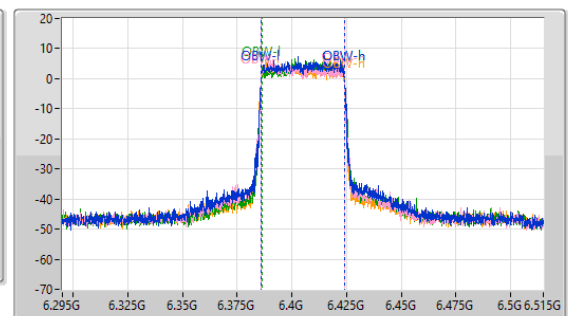
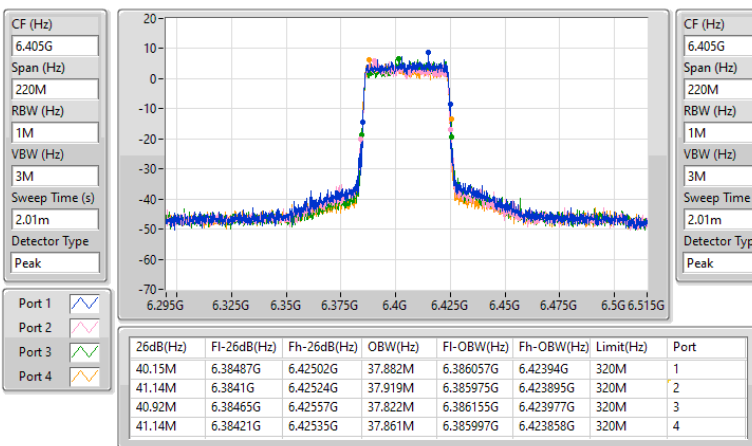


5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

6385MHz

01/07/2026

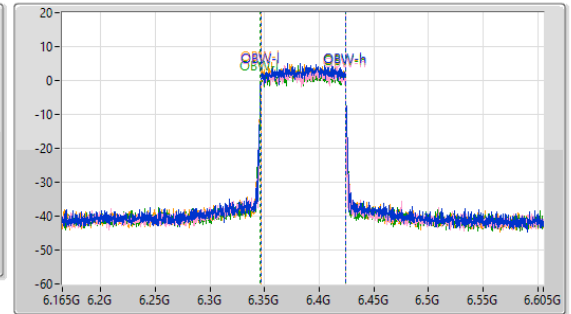
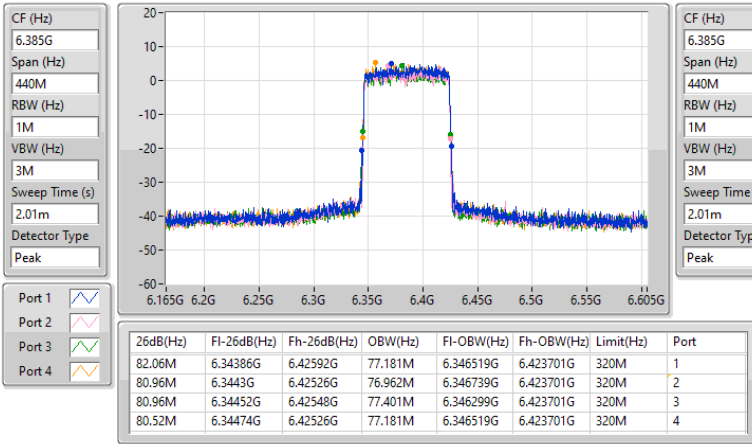


5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

6185MHz

06/08/2026

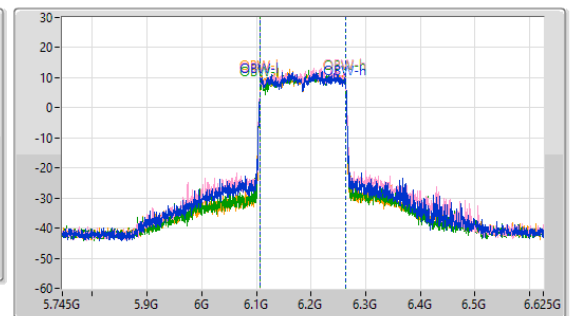
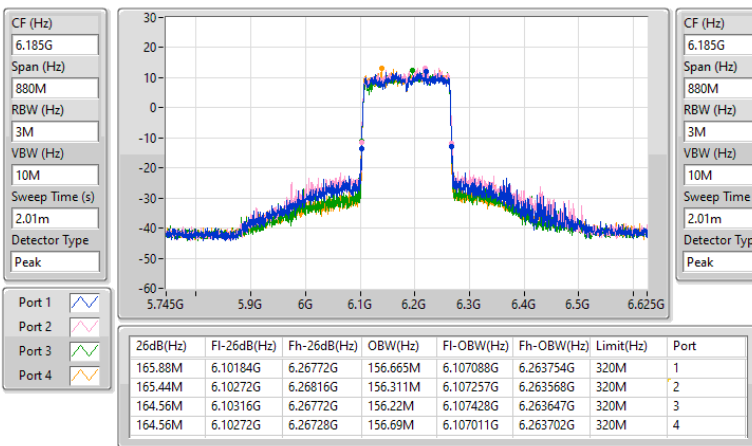


5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

EBW

6105MHz

06/08/2026

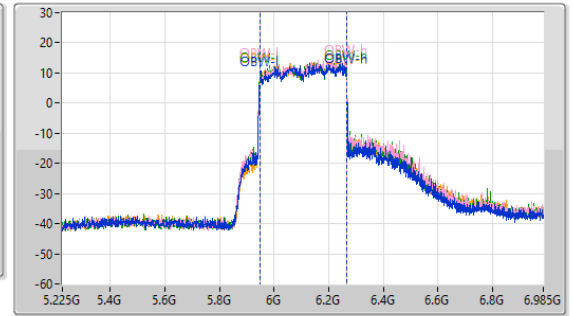
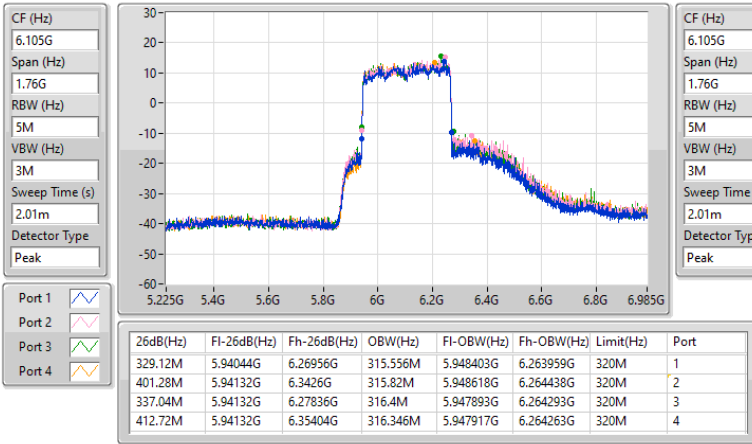


6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW



6515MHz

23/07/2026

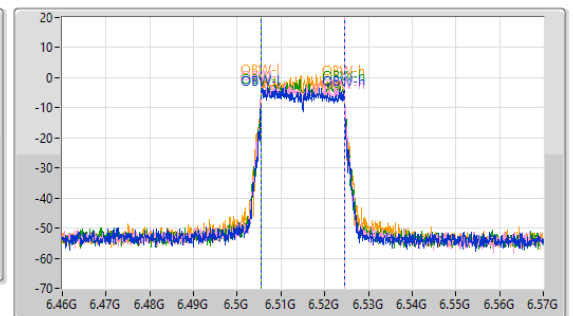
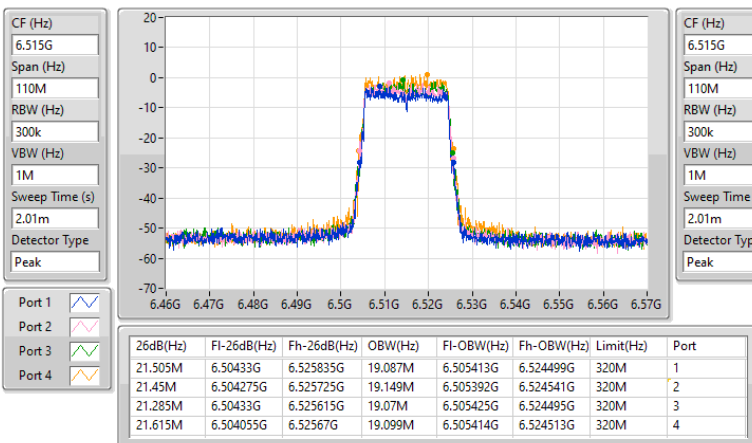


6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX
EBW
6525MHz

23/07/2026

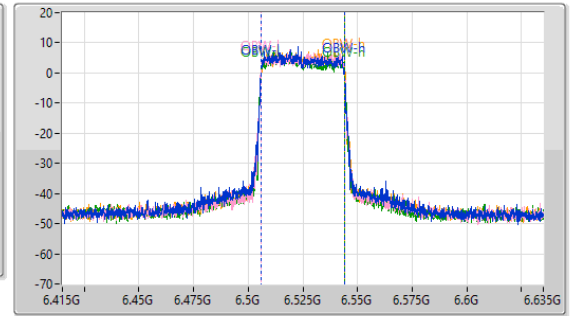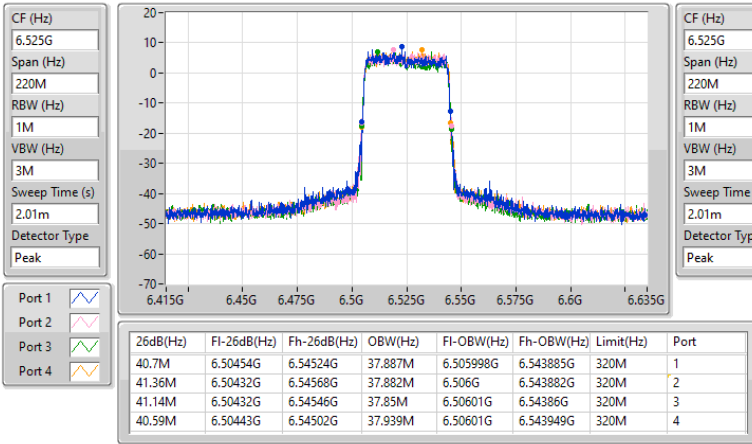
6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX
EBW
6545MHz

06/08/2026

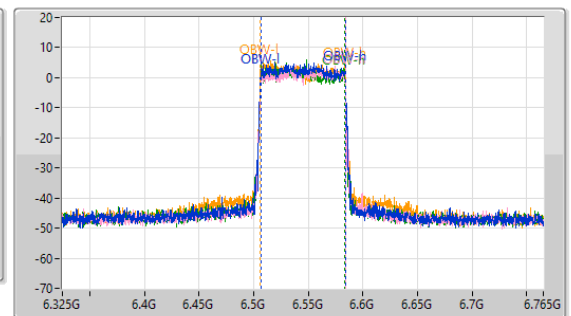
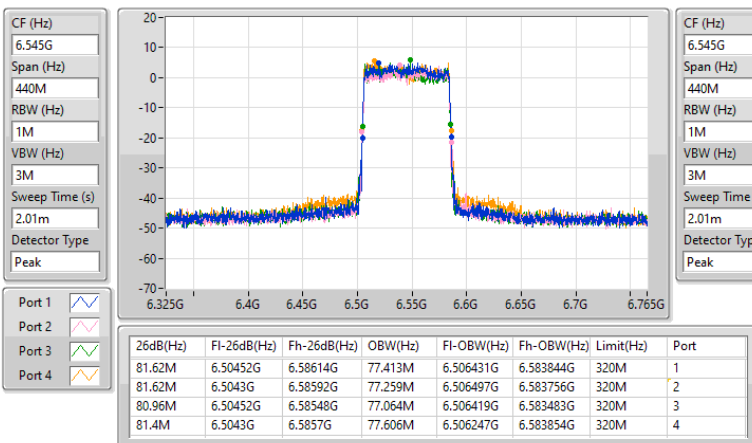


6.425-6.525GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

6505MHz

06/08/2026

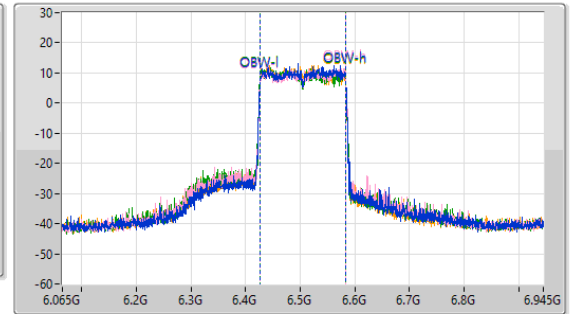
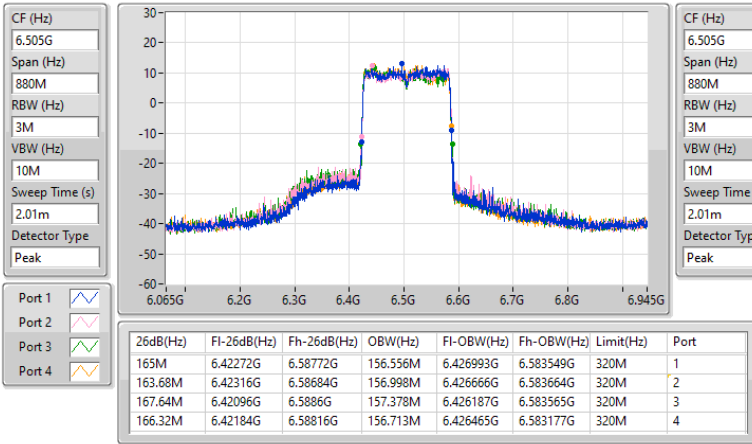


6.425-6.525GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

EBW

6425MHz

06/08/2026

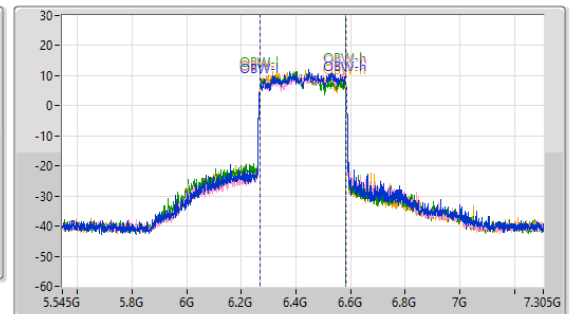
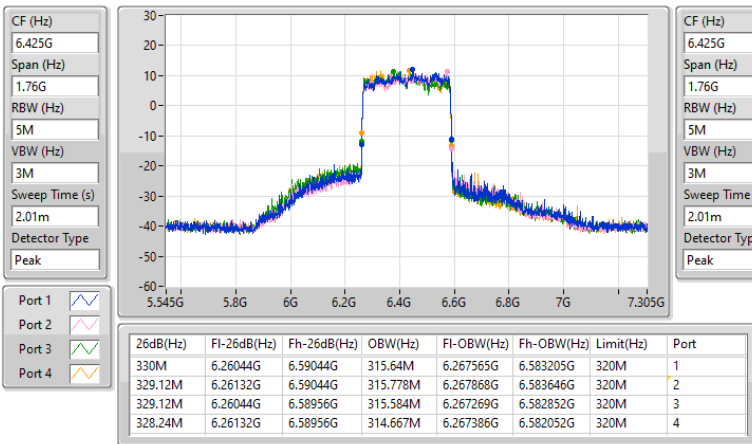


6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

6535MHz

23/07/2026

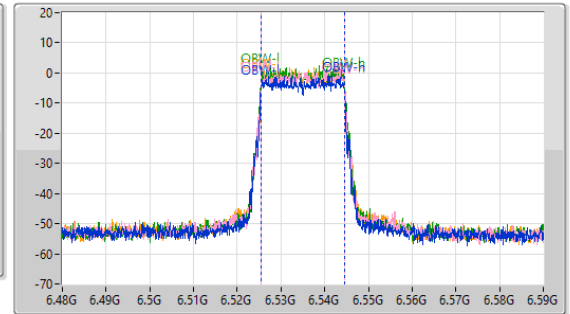
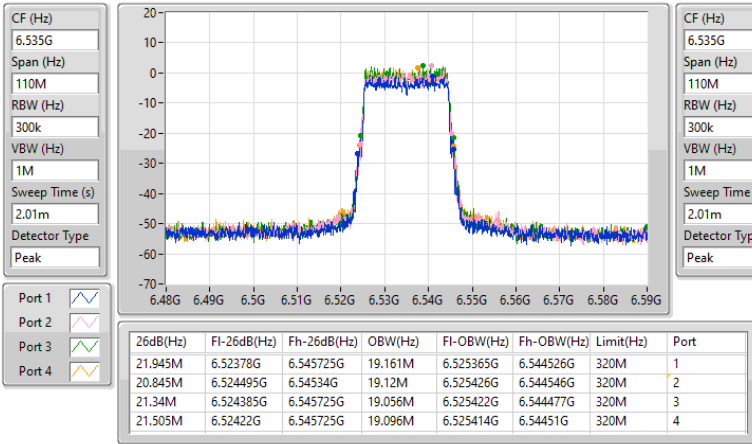


6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

6565MHz

23/07/2026

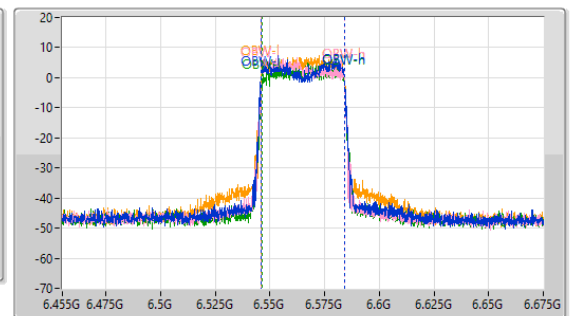
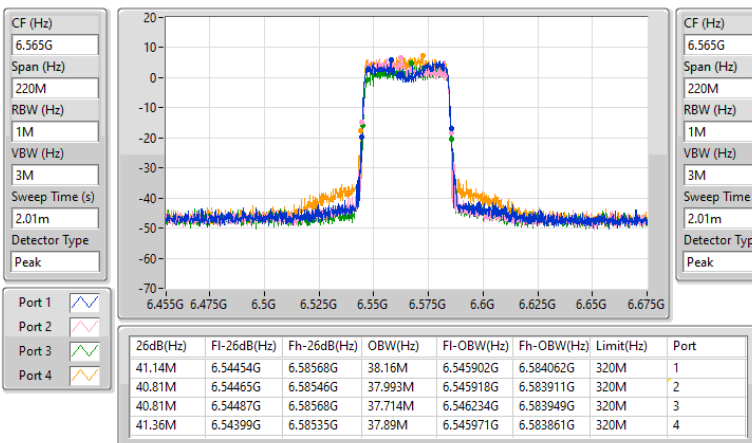


6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

6785MHz

06/08/2026

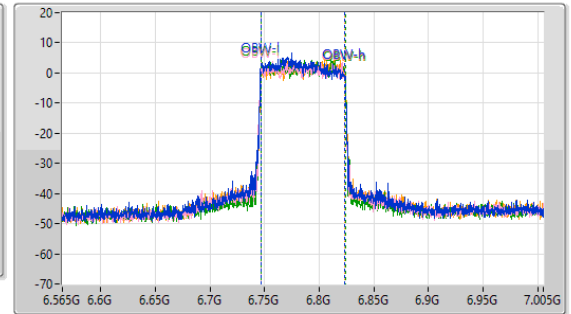
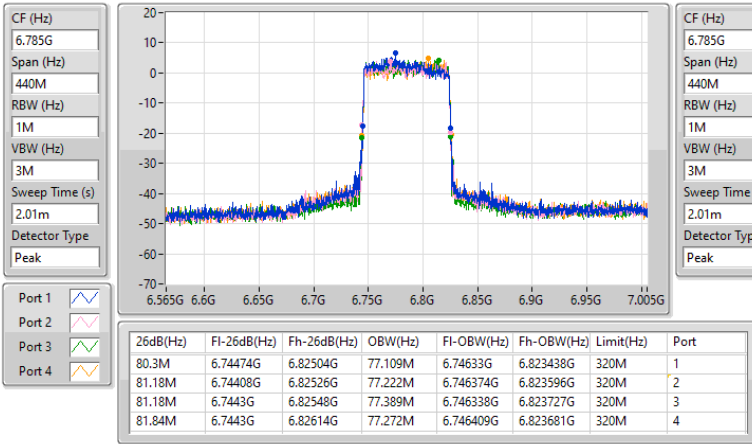


6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

6665MHz

01/07/2026

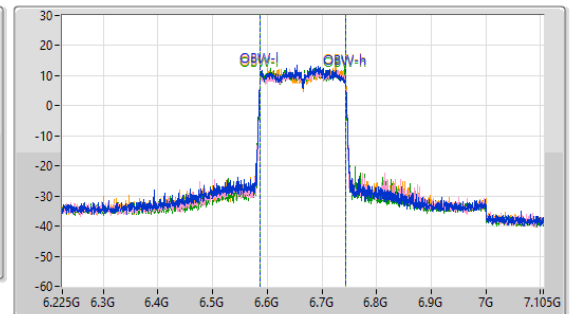
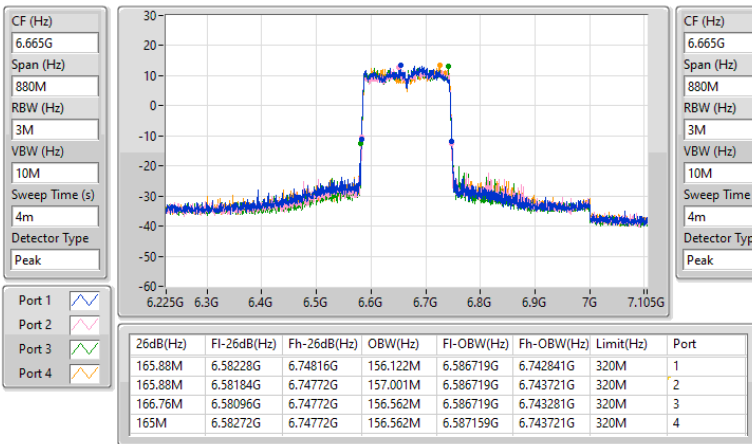


6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

EBW

6745MHz

06/08/2026

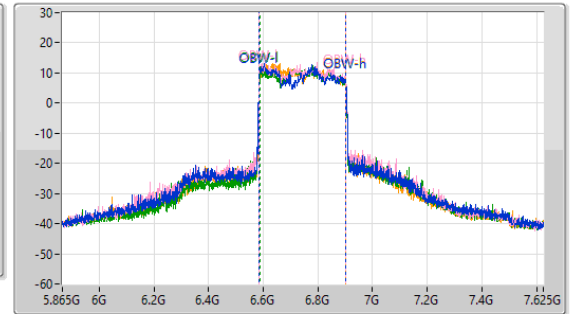
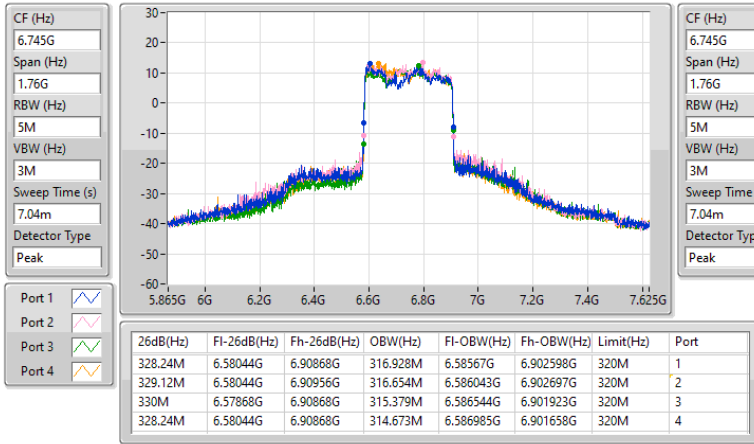


6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW


6995MHz

23/07/2026

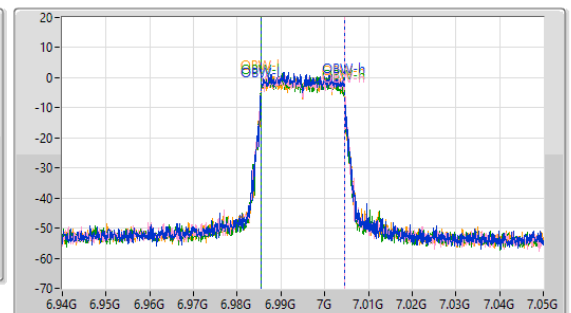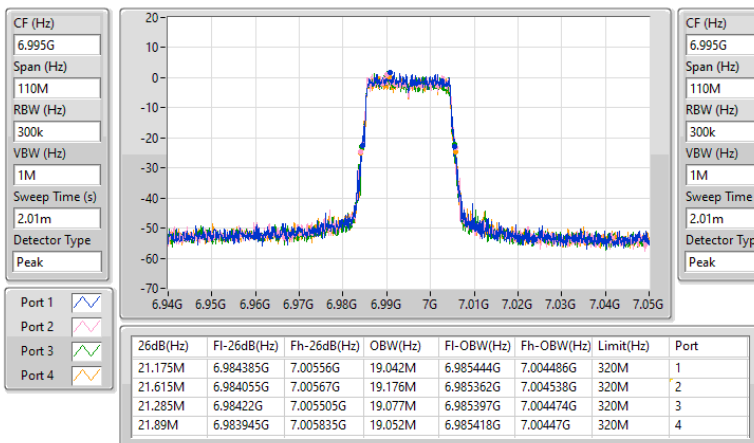


6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX
EBW
7085MHz

23/07/2026

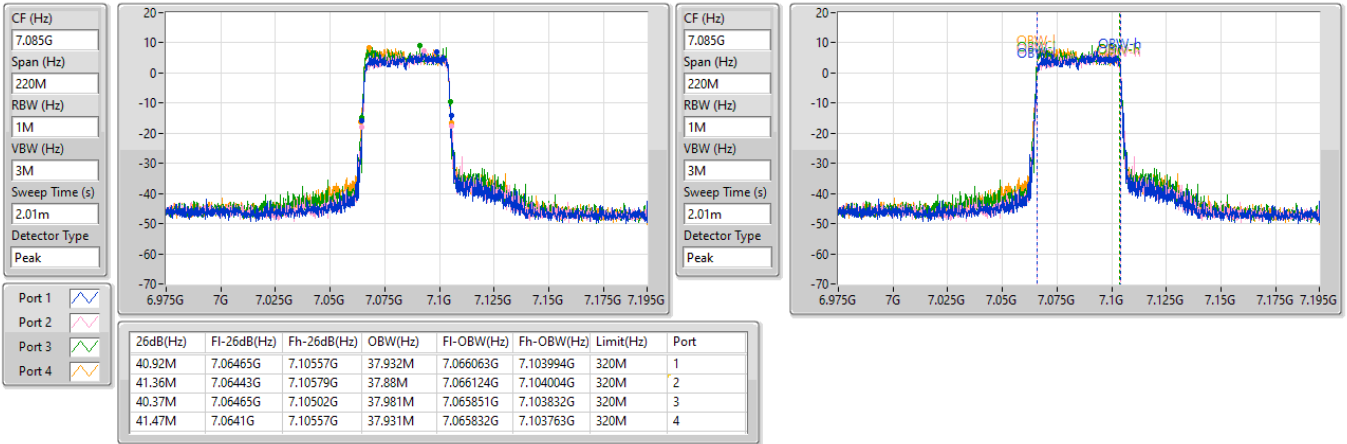
6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX
EBW
7025MHz

06/08/2026


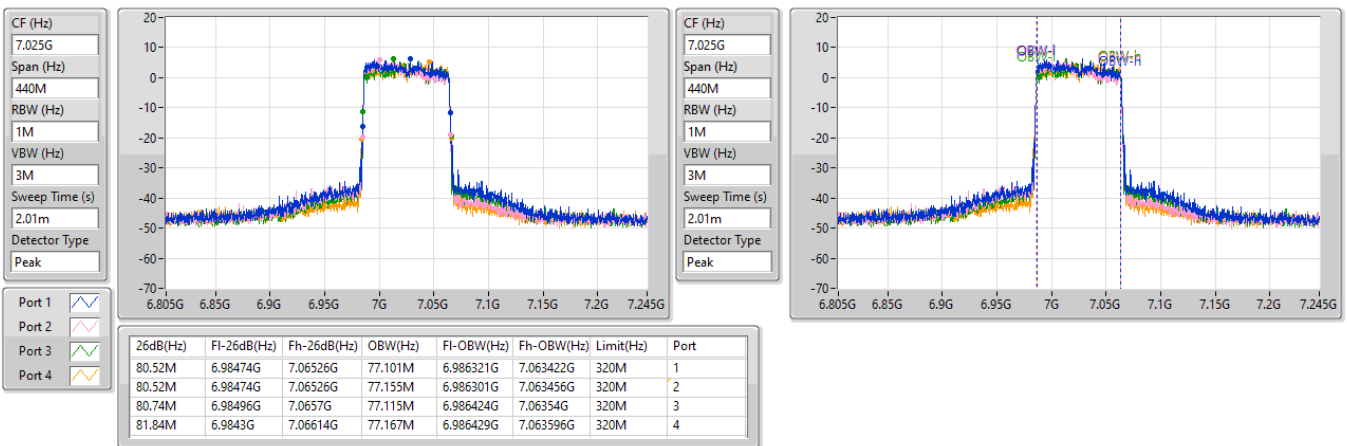


6.875-7.125GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

6985MHz

06/08/2026

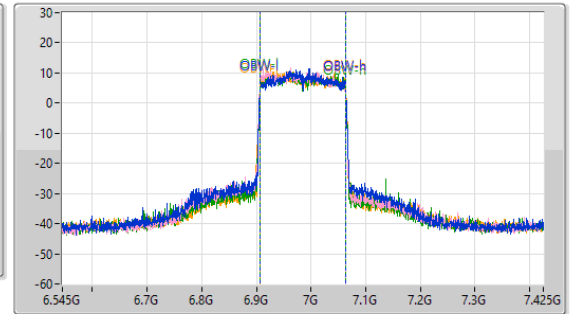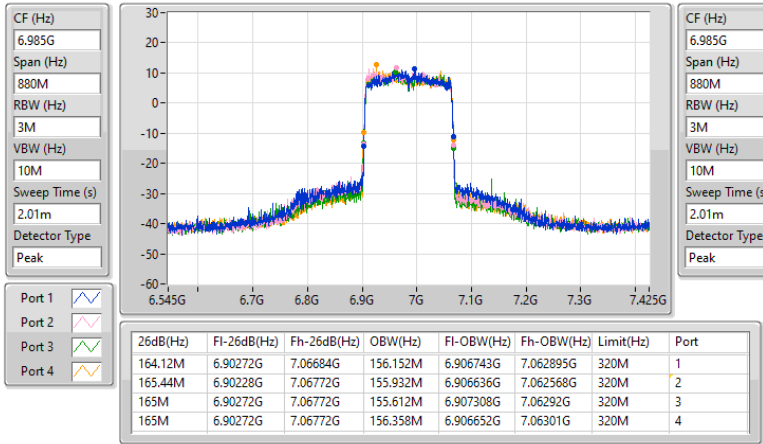

Summary

Mode	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	20.03	0.10069
802.11be EHT40-BF_Nss1,(MCS0)_4TX	21.62	0.14521
802.11be EHT80-BF_Nss1,(MCS0)_4TX	24.49	0.28119
802.11be EHT160-BF_Nss1,(MCS0)_4TX	26.55	0.45186
802.11be EHT320-BF_Nss1,(MCS0)_4TX	29.36	0.86298
6.425-6.525GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	19.29	0.08492
802.11be EHT40-BF_Nss1,(MCS0)_4TX	22.70	0.18621
802.11be EHT80-BF_Nss1,(MCS0)_4TX	23.28	0.21281
802.11be EHT160-BF_Nss1,(MCS0)_4TX	26.16	0.41305
802.11be EHT320-BF_Nss1,(MCS0)_4TX	28.43	0.69663
6.525-6.875GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	19.35	0.08610
802.11be EHT40-BF_Nss1,(MCS0)_4TX	20.80	0.12023
802.11be EHT80-BF_Nss1,(MCS0)_4TX	23.99	0.25061
802.11be EHT160-BF_Nss1,(MCS0)_4TX	27.06	0.50816
802.11be EHT320-BF_Nss1,(MCS0)_4TX	29.51	0.89331
6.875-7.125GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	20.02	0.10046
802.11be EHT40-BF_Nss1,(MCS0)_4TX	22.96	0.19770
802.11be EHT80-BF_Nss1,(MCS0)_4TX	23.94	0.24774
802.11be EHT160-BF_Nss1,(MCS0)_4TX	26.57	0.45394


Result

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	18.12	30.00
6195MHz	Pass	18.34	30.00
6415MHz	Pass	20.03	30.00
6435MHz	Pass	17.57	30.00
6475MHz	Pass	19.29	30.00
6515MHz	Pass	17.21	30.00
6535MHz	Pass	18.75	30.00
6695MHz	Pass	17.48	30.00
6875MHz	Pass	19.35	30.00
6895MHz	Pass	18.88	30.00
6995MHz	Pass	17.52	30.00
7095MHz	Pass	20.02	30.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	18.15	30.00
6205MHz	Pass	21.62	30.00
6405MHz	Pass	21.32	30.00
6445MHz	Pass	20.74	30.00
6485MHz	Pass	21.77	30.00
6525MHz	Pass	22.70	30.00
6565MHz	Pass	18.96	30.00
6685MHz	Pass	19.55	30.00
6885MHz	Pass	20.80	30.00
6925MHz	Pass	22.96	30.00
7005MHz	Pass	21.84	30.00
7085MHz	Pass	22.80	30.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	24.49	30.00
6225MHz	Pass	24.27	30.00
6385MHz	Pass	23.06	30.00
6465MHz	Pass	23.28	30.00
6545MHz	Pass	22.28	30.00
6625MHz	Pass	23.99	30.00
6705MHz	Pass	23.20	30.00
6785MHz	Pass	23.08	30.00
6865MHz	Pass	23.54	30.00
6945MHz	Pass	23.94	30.00
7025MHz	Pass	23.34	30.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	25.96	30.00
6185MHz	Pass	25.52	30.00
6345MHz	Pass	26.55	30.00
6505MHz	Pass	26.16	30.00
6665MHz	Pass	26.14	30.00
6825MHz	Pass	27.06	30.00
6985MHz	Pass	26.57	30.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	28.37	30.00
6265MHz	Pass	28.58	30.00
6425MHz	Pass	29.36	30.00
6585MHz	Pass	28.43	30.00
6745MHz	Pass	29.51	30.00
6905MHz	Pass	27.31	30.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.


16/07/2026

EIRP;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6415MHz;TX

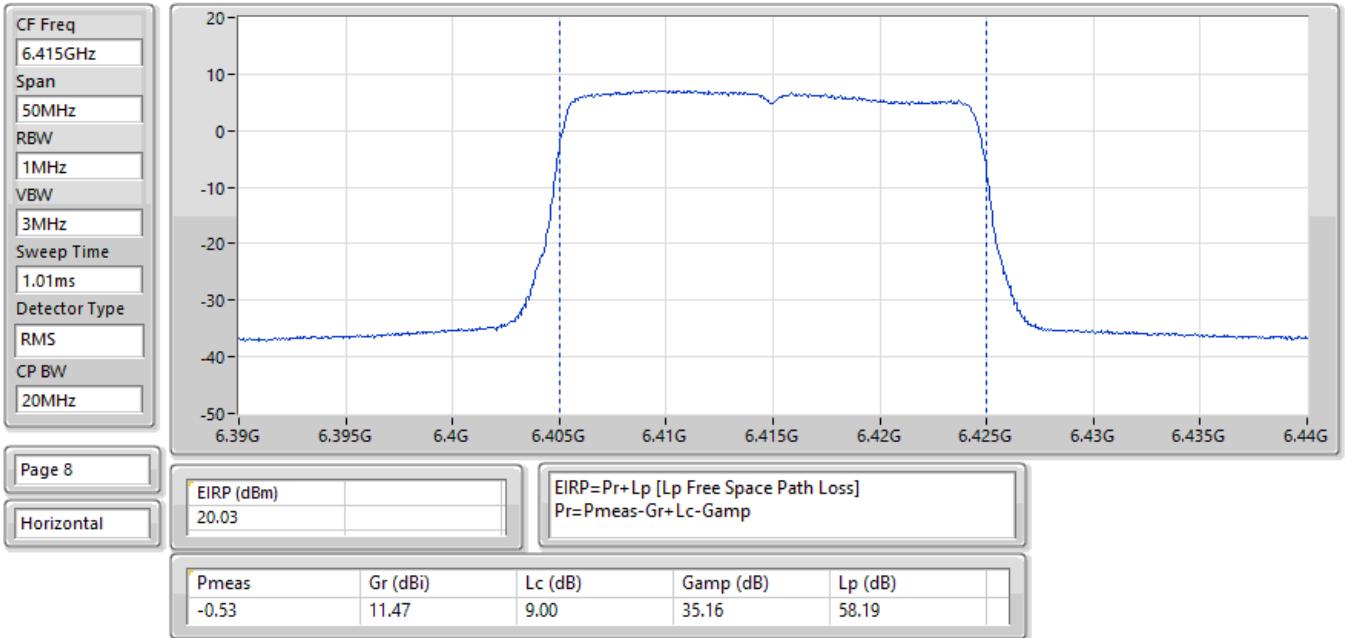

16/07/2026


EIRP;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

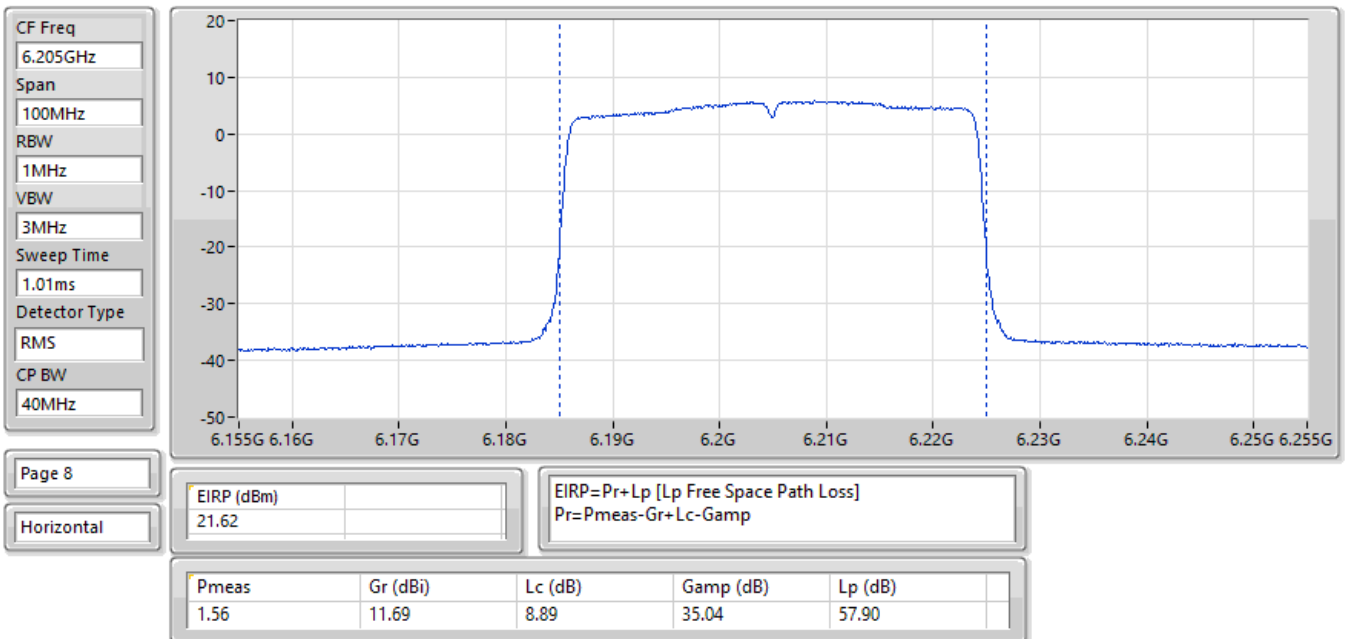

10/06/2026

EIRP;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:5985MHz;TX

CF Freq
5.985GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2ms
Detector Type
RMS
CP BW
80MHz

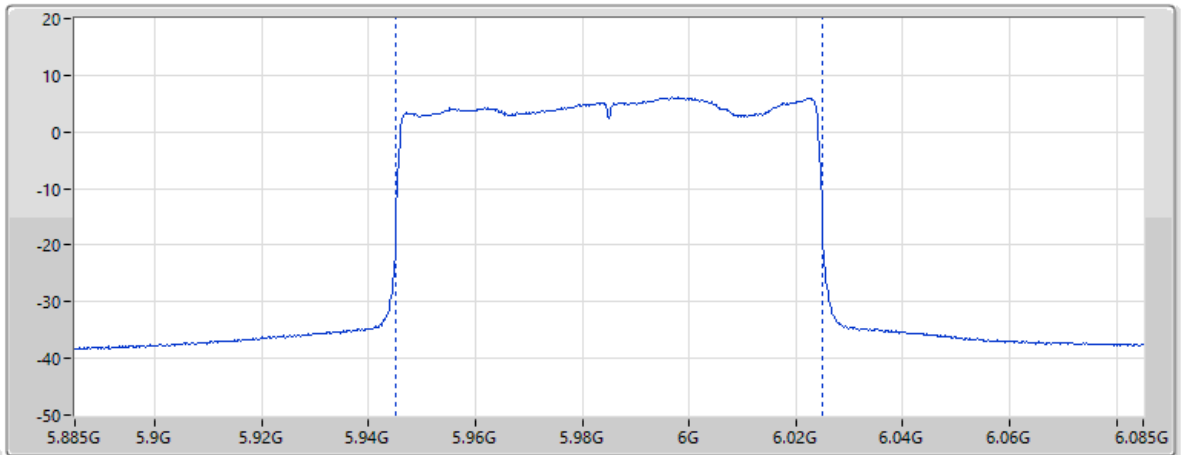


Page 8
Horizontal

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
24.49				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
4.56	11.44	8.72	34.93	57.58

11/06/2026

EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6345MHz;TX

CF Freq
6.345GHz
Span
400MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4ms
Detector Type
RMS
CP BW
160MHz

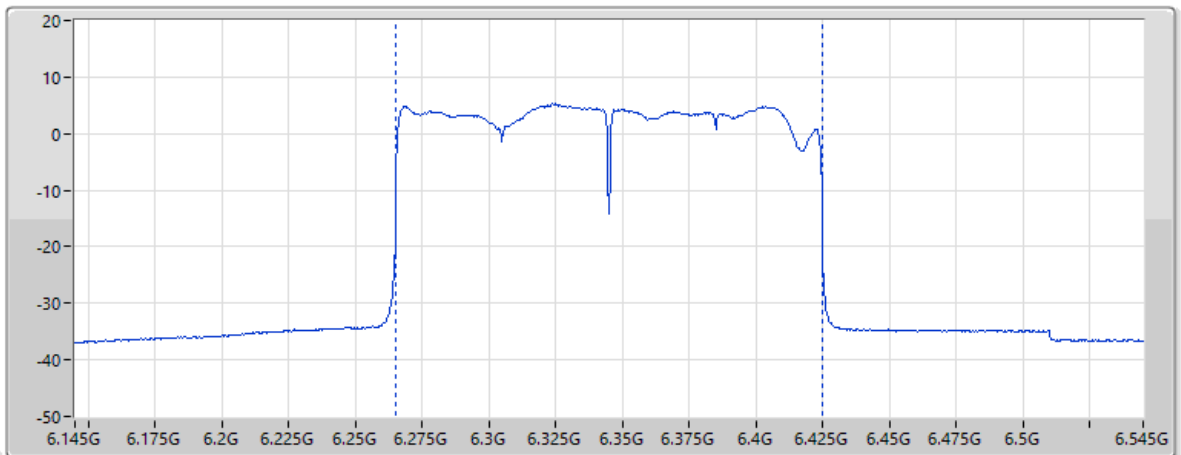


Page 8
Horizontal

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
26.55				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
6.12	11.50	8.96	35.12	58.09


30/06/2026

EIRP;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6425MHz;TX

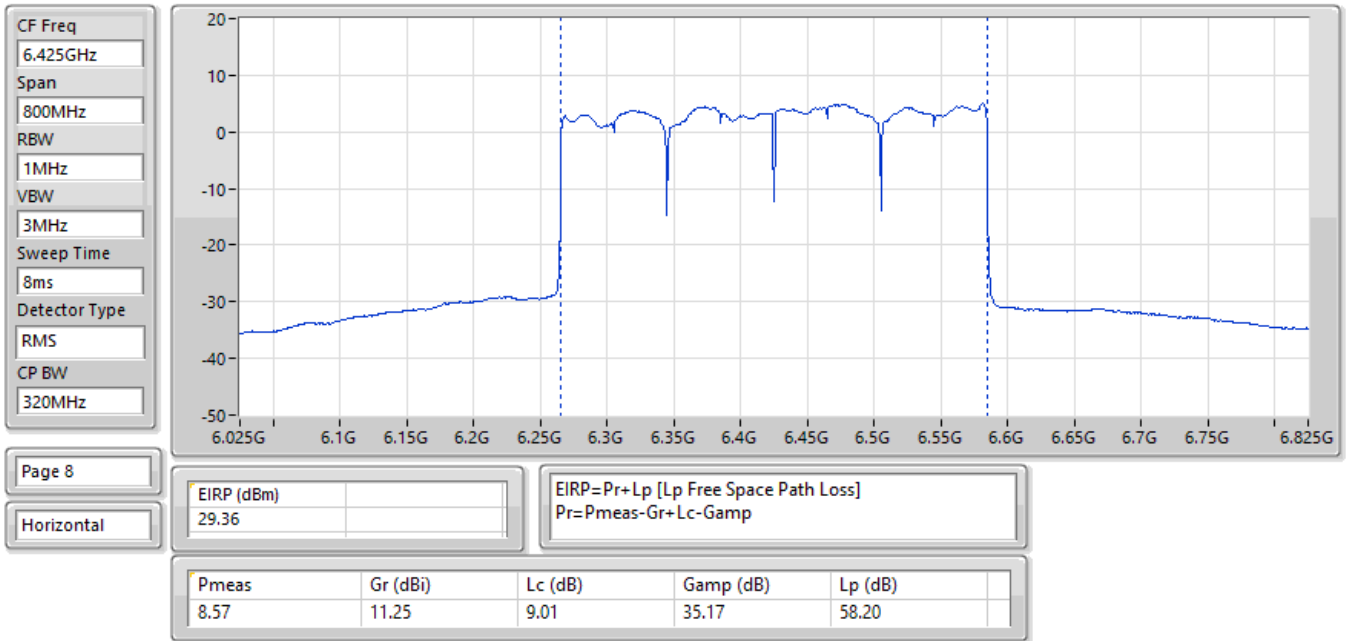


16/07/2026

EIRP;Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6475MHz;TX

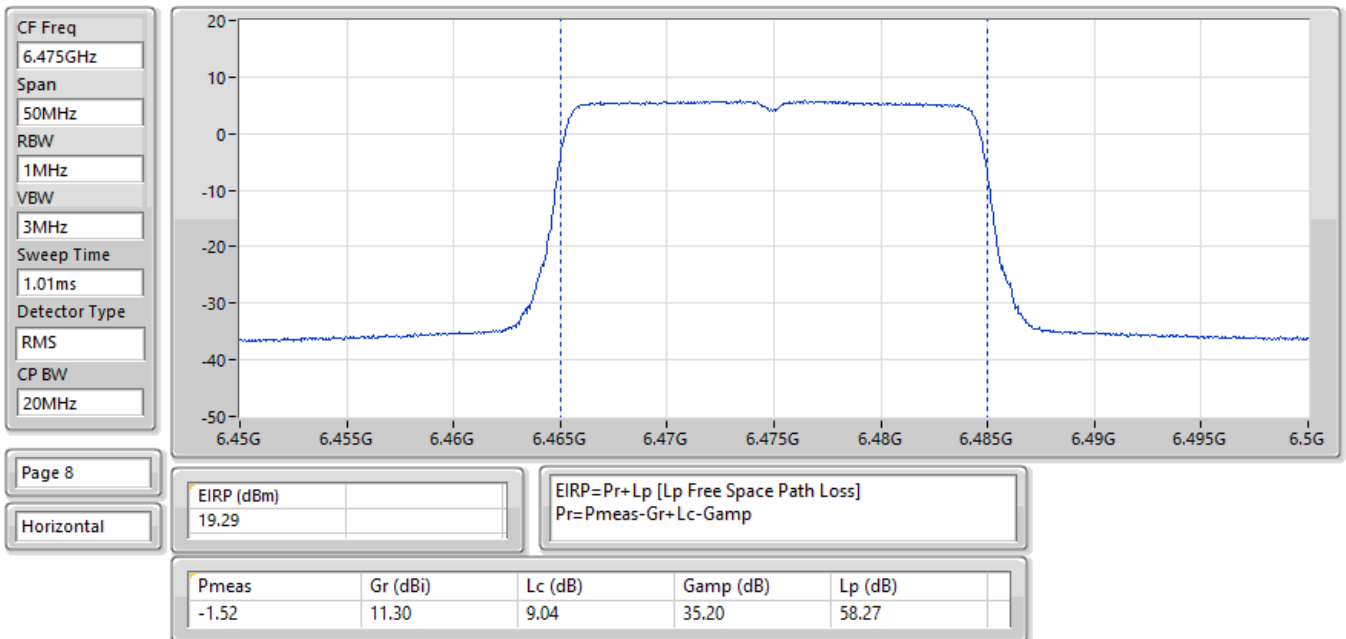


17/07/2026

EIRP:Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6525MHz;TX

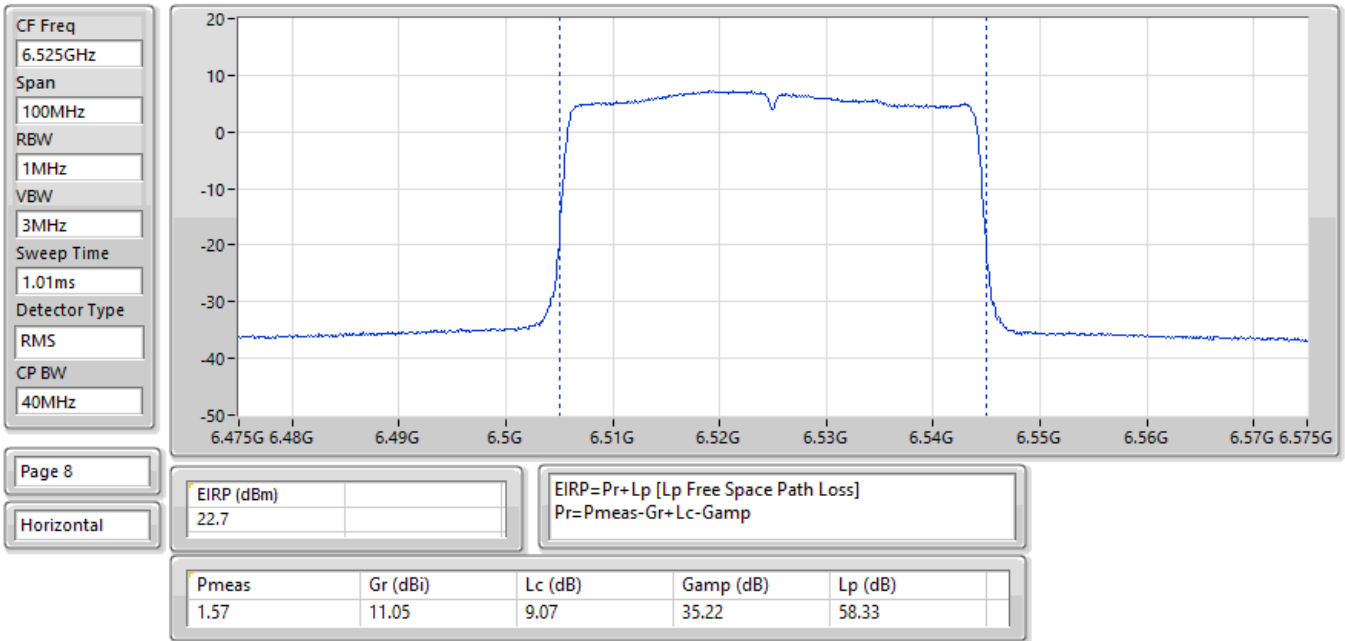


07/07/2026

EIRP:Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6465MHz;TX

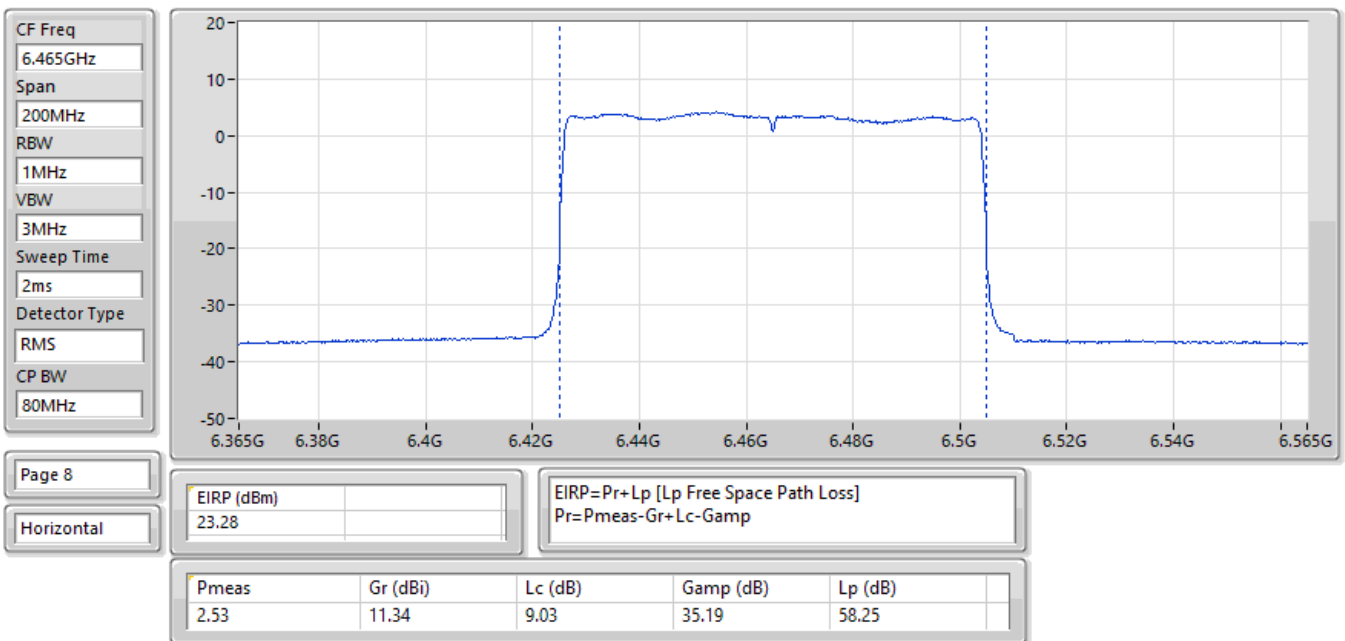


07/07/2026

EIRP;Band:6.4G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6505MHz;TX

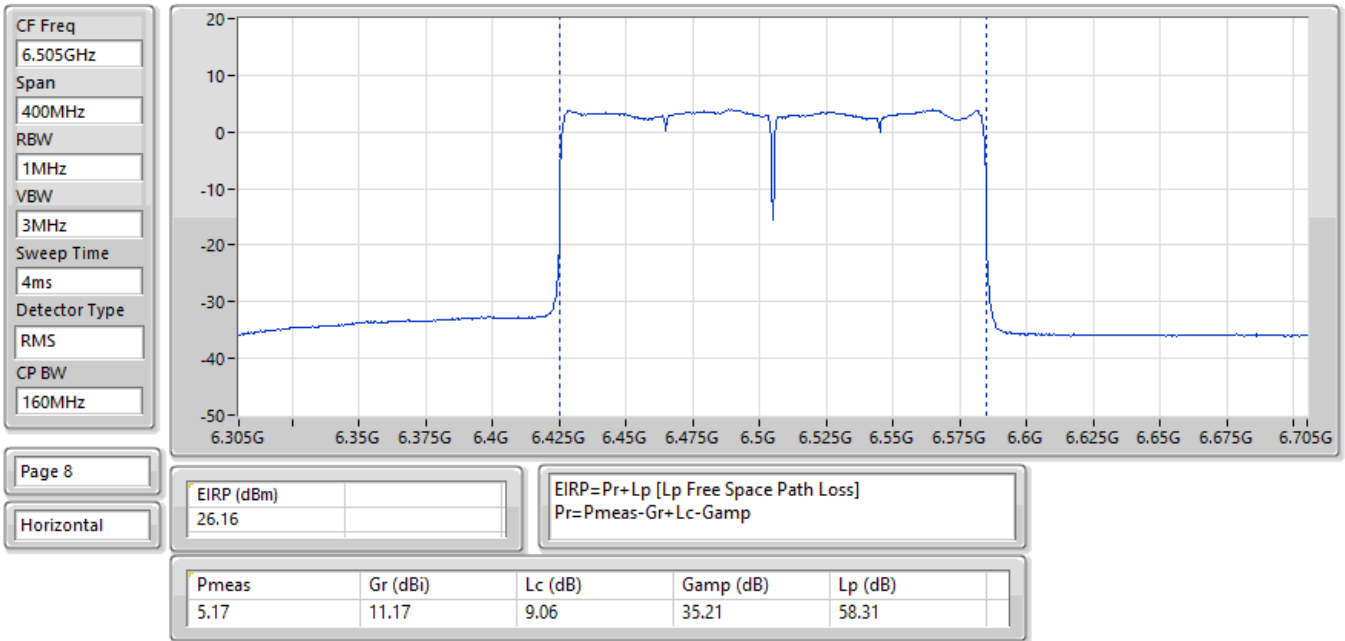


26/07/2026

EIRP;Band:6.4G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6585MHz;TX

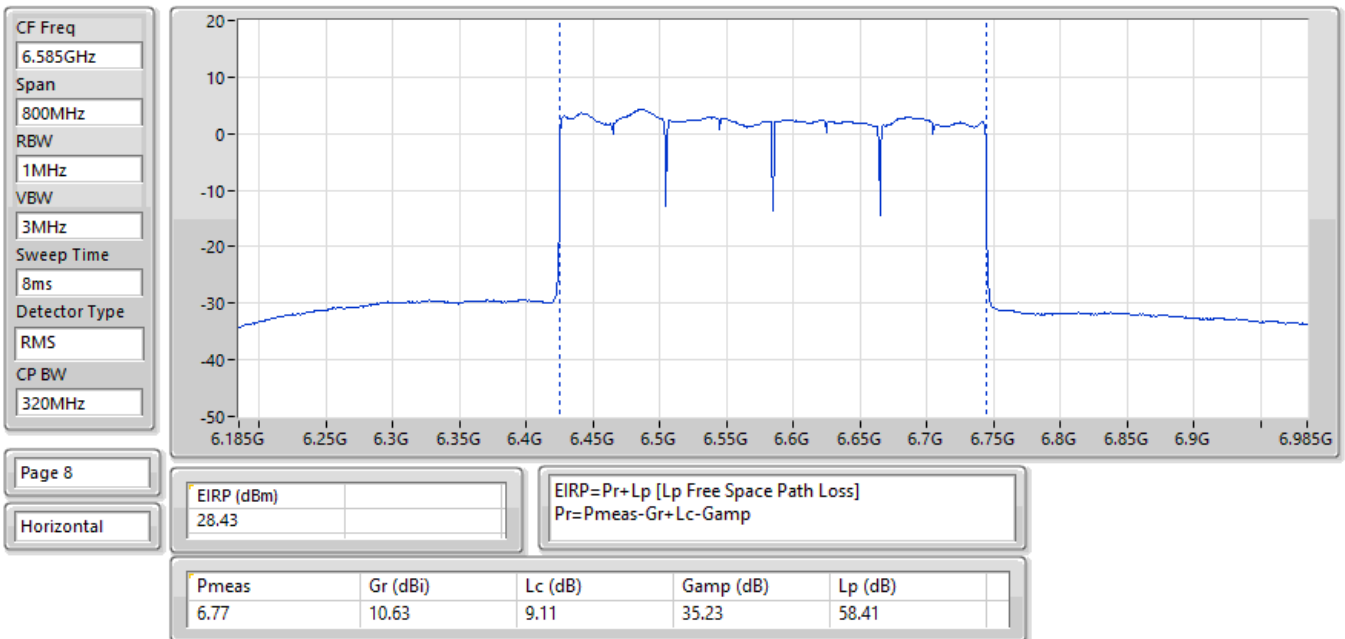


16/07/2026

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6875MHz;TX

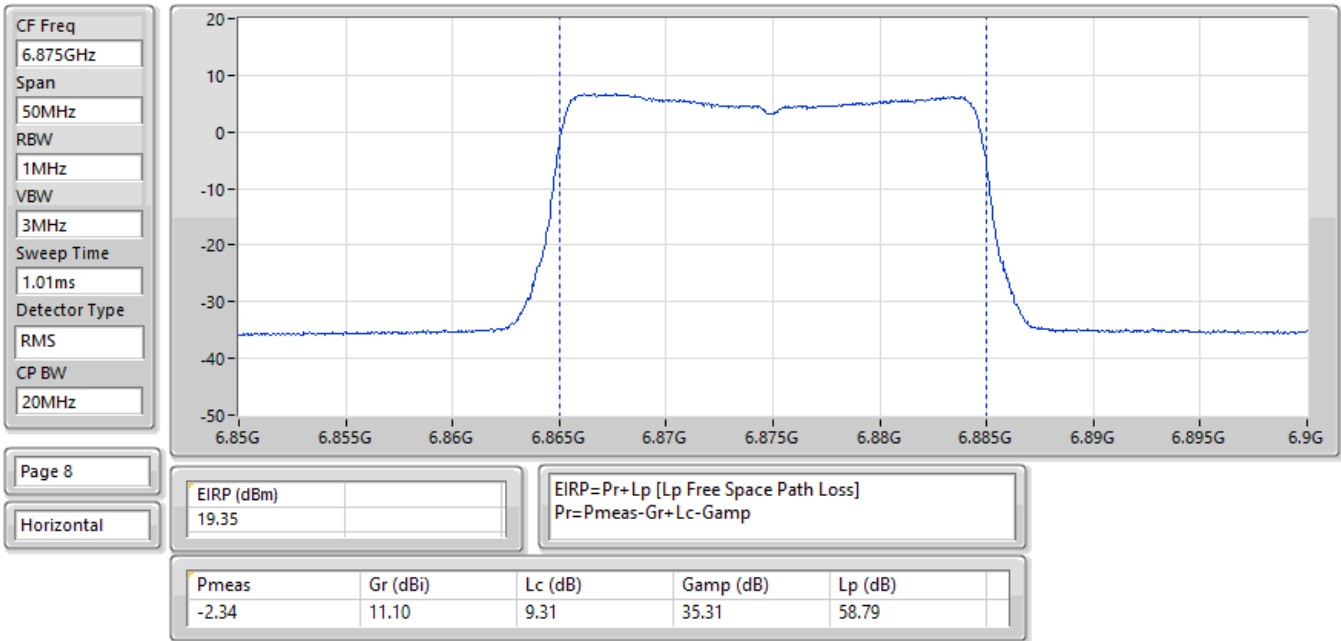

21/07/2026


EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6885MHz;TX

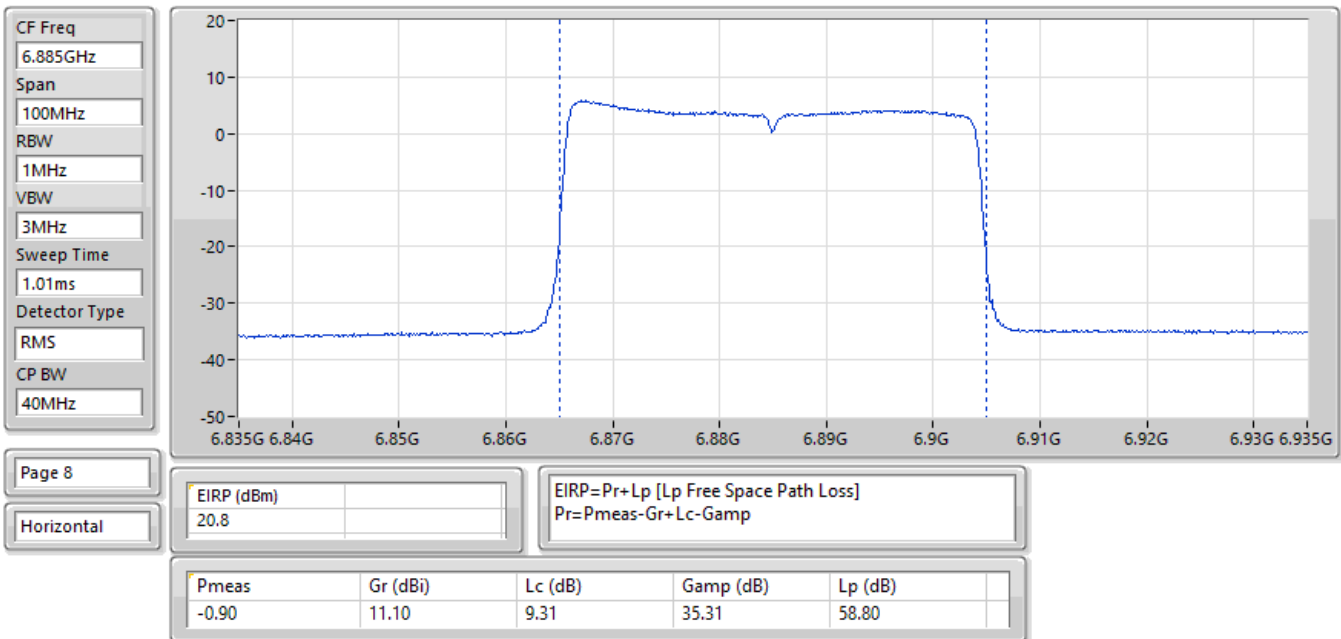

24/07/2026

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

CF Freq
6.625GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2ms
Detector Type
RMS
CP BW
80MHz

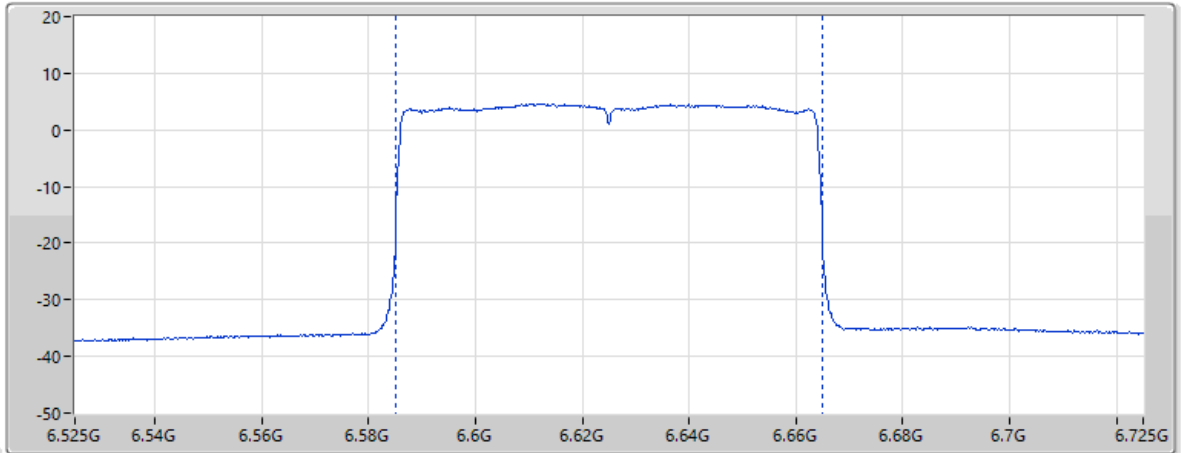


Page 8
Horizontal

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
23.99		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
2.22	10.60	9.14	35.24	58.47

17/06/2026

EIRP:Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6825MHz;TX

CF Freq
6.825GHz
Span
400MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4ms
Detector Type
RMS
CP BW
160MHz

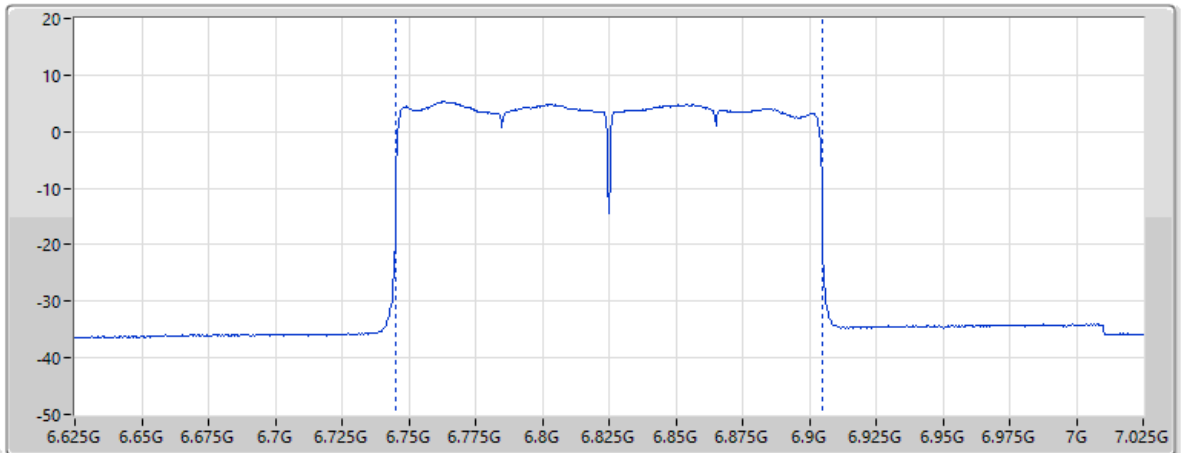


Page 7
Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
27.06		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
5.11	10.75	9.27	35.29	58.72


26/07/2026

EIRP;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6745MHz;TX

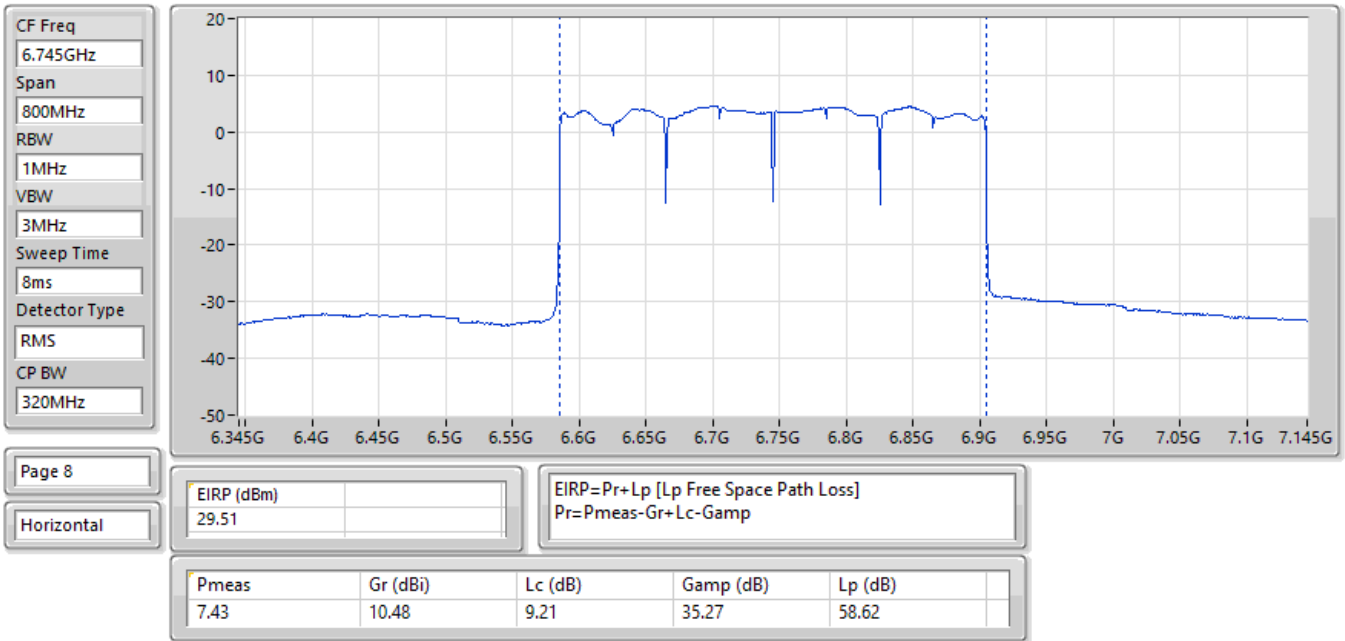


16/07/2026

EIRP;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7095MHz;TX

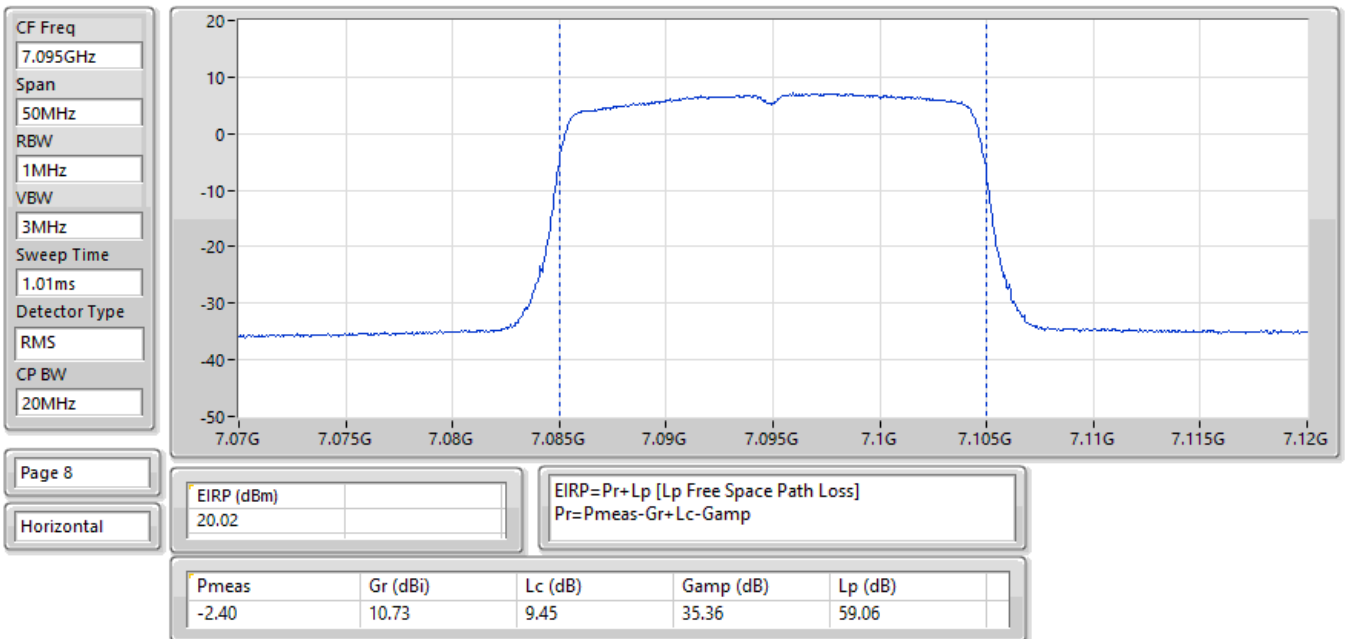


21/07/2026

EIRP;Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6925MHz;TX

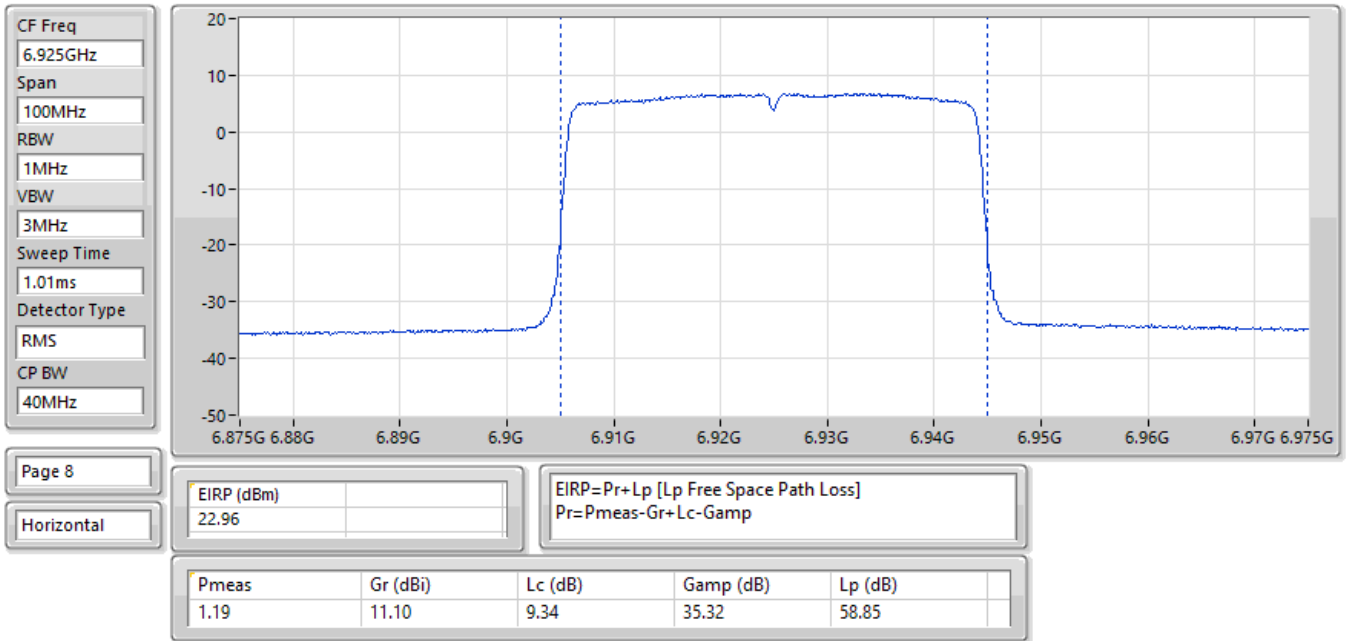


07/07/2026

EIRP;Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6945MHz;TX

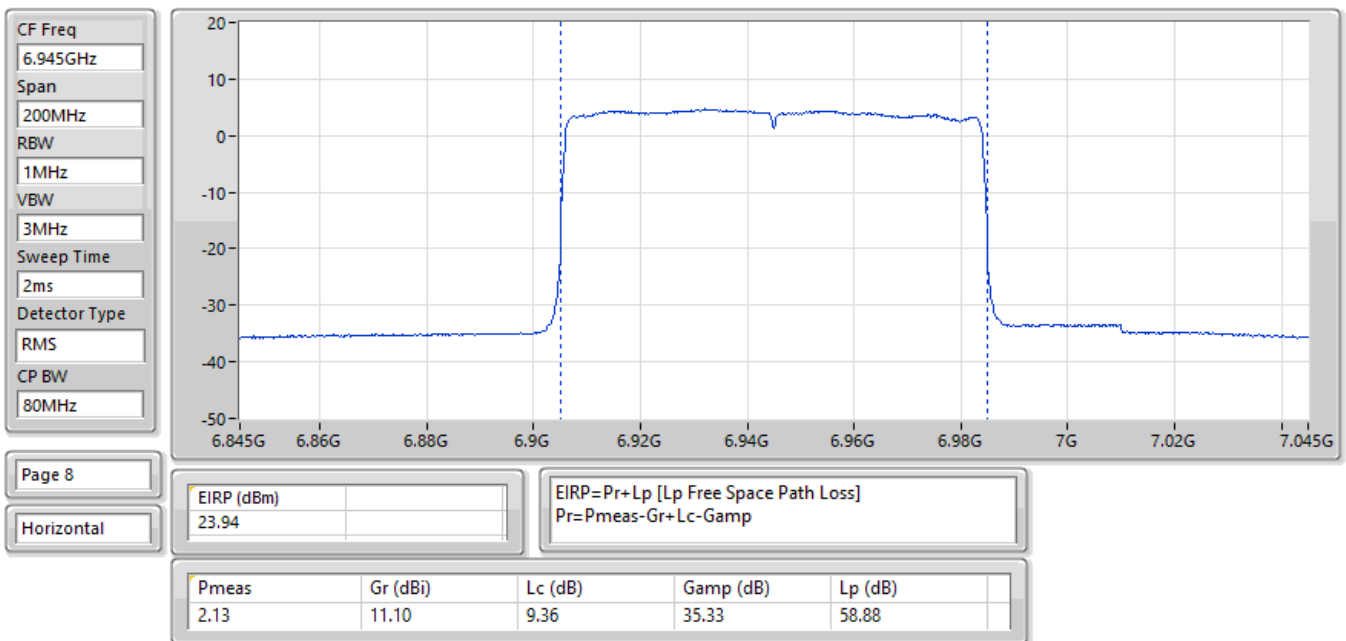

30/06/2026

EIRP;Band:7.0G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6985MHz;TX

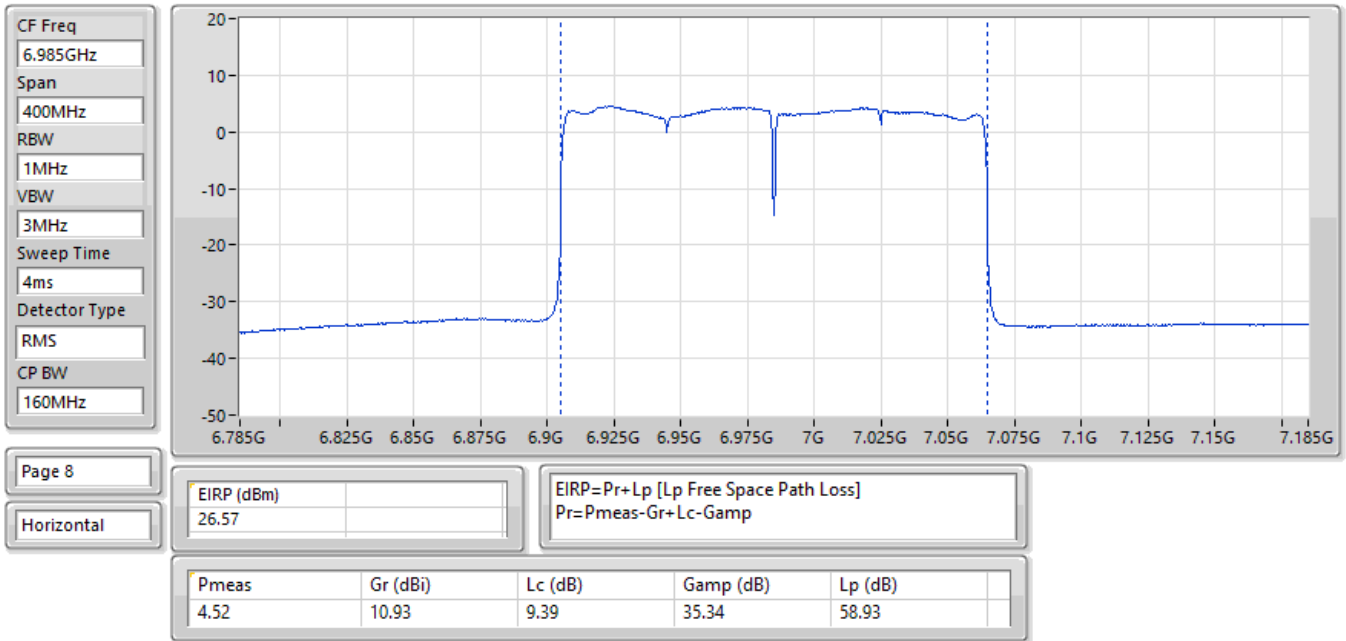

**Summary**

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX	3.97
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 8_4TX	4.77
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	4.73
6.525-6.875GHz	-
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 10_4TX	0.12
6.875-7.125GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX	2.80
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 4_4TX	3.32

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX	-	-	-
5985MHz	Pass	3.97	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX	-	-	-
7025MHz	Pass	2.80	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 8_4TX	-	-	-
6025MHz	Pass	4.77	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	-	-	-
6025MHz	Pass	4.21	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 4_4TX	-	-	-
6985MHz	Pass	3.32	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-
6985MHz	Pass	3.16	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX	-	-	-
6105MHz	Pass	3.49	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-
6105MHz	Pass	4.73	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 2_4TX	-	-	-
6105MHz	Pass	4.62	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 4_4TX	-	-	-
6905MHz	Pass	-2.29	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 2_4TX	-	-	-
6905MHz	Pass	-1.96	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 10_4TX	-	-	-
6905MHz	Pass	0.12	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

11/08/2026

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 MRU 4;Nant:4;Ch:5985MHz;TX

CF Freq
5.985GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.2ms

Detector Type
RMS

CP BW
80MHz

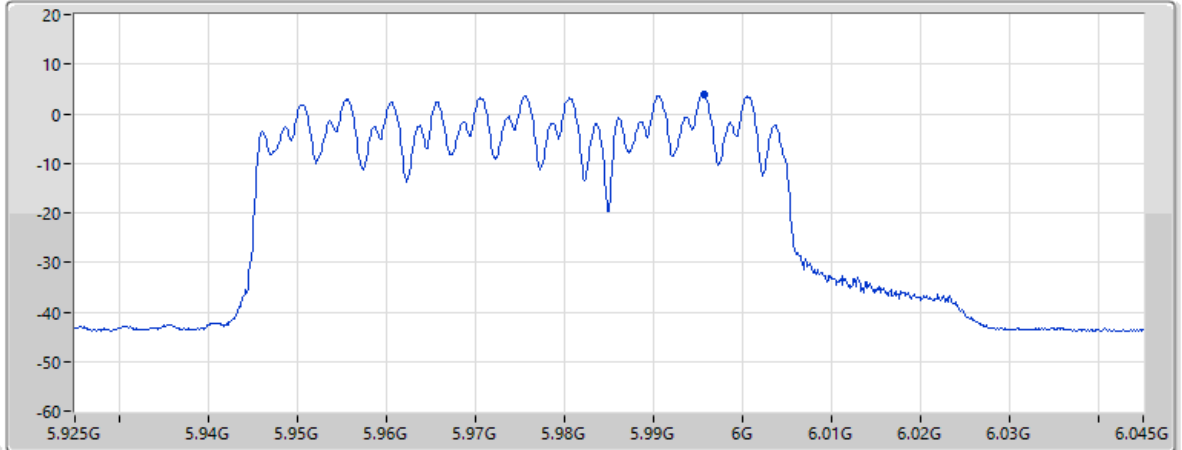

Page 6

Horizontal

EIRP PSD (dBm)

3.97

EIRP=Pr+Lp [Lp Free Space Path Loss]

Pr=Pmeas-Gr+Lc-Gamp

Pmeas

Gr (dBi)

Lc (dB)

Gamp (dB)

Lp (dB)

-15.96

11.47

8.73

34.93

57.60

11/08/2026

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484+RU242 MRU 8;Nant:4;Ch:6025MHz;TX

CF Freq
6.025GHz

Span
240MHz


RBW
1MHz

VBW
3MHz

Sweep Time
2.4ms

Detector Type
RMS

CP BW
160MHz

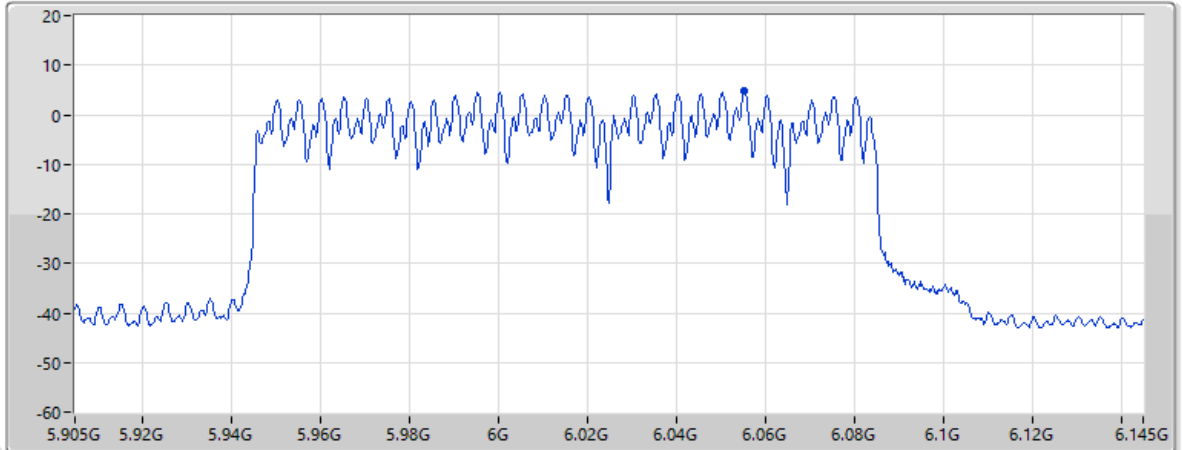

Page 6

Horizontal

EIRP PSD (dBm)

4.77

EIRP=Pr+Lp [Lp Free Space Path Loss]

Pr=Pmeas-Gr+Lc-Gamp

Pmeas

Gr (dBi)

Lc (dB)

Gamp (dB)

Lp (dB)

-15.03

11.70

8.77


34.96

57.69

12/08/2026

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),3xRU996 MRU 4;Nant:4;Ch:6105MHz;TX

CF Freq
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4.8ms
Detector Type
RMS
CP BW
320MHz

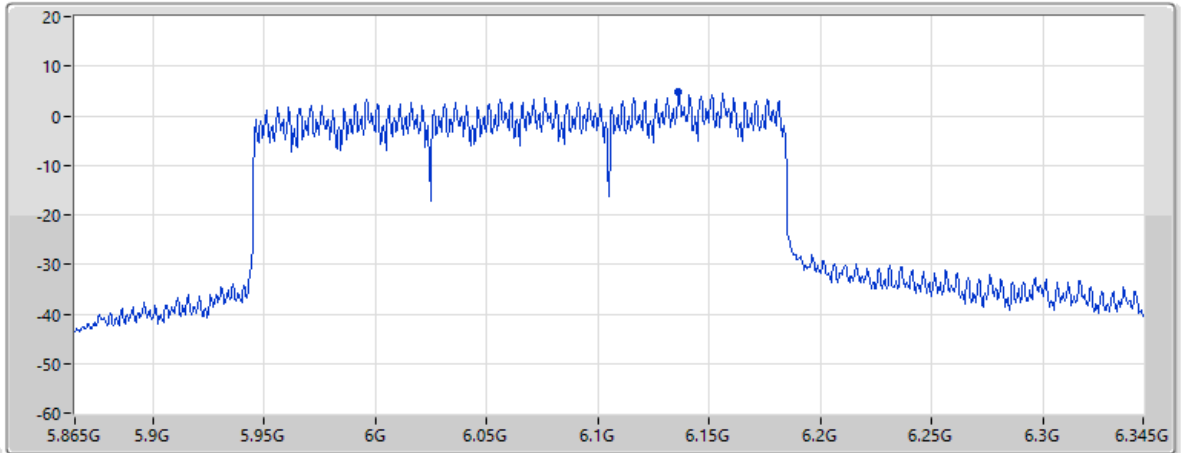


Page 6
Horizontal

EIRP PSD (dBm)	4.73	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.20	11.70	8.84	35.01	57.80

12/08/2026

EIRP PSD;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0),2xRU996+RU484 MRU 10;Nant:4;Ch:6905MHz;TX

CF Freq
6.905GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4.8ms
Detector Type
RMS
CP BW
320MHz

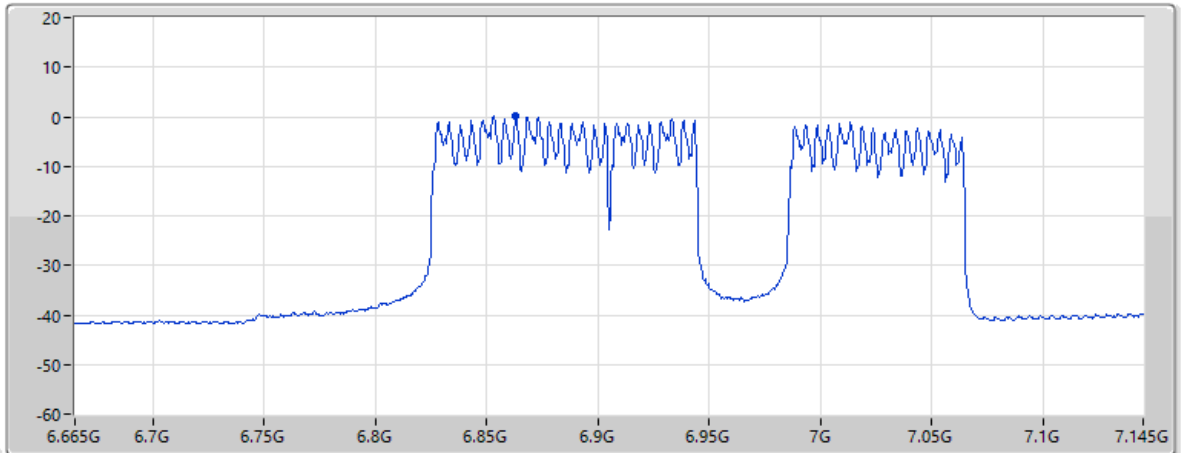

Page 6
Horizontal

EIRP PSD (dBm)	0.12	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-21.62	11.03	9.30	35.30	58.77

11/08/2026

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 MRU 1;Nant:4;Ch:7025MHz;TX

CF Freq
7.025GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.2ms

Detector Type
RMS

CP BW
80MHz

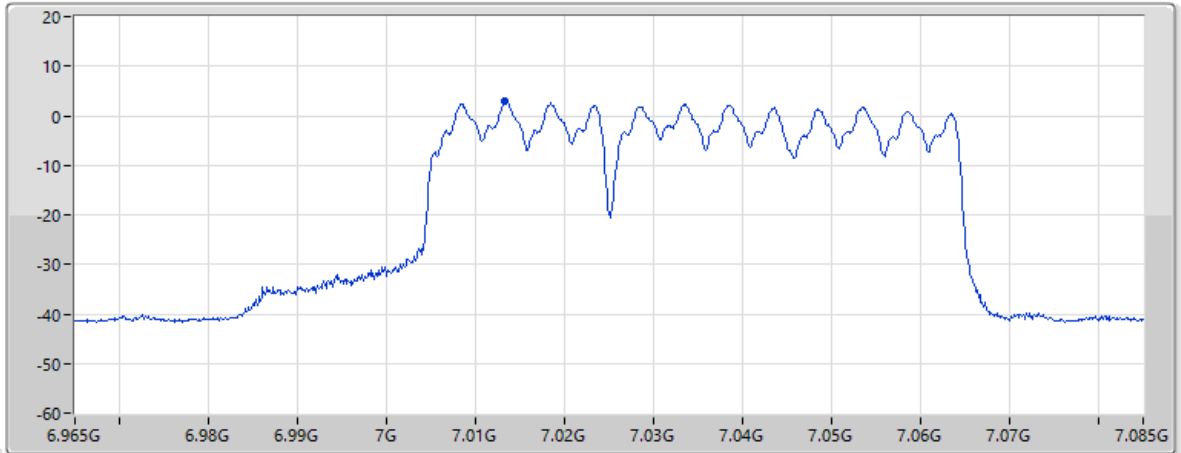

Page 6

Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
2.8				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.23	11.00	9.41	35.34	58.96

11/08/2026

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484+RU242 MRU 4;Nant:4;Ch:6985MHz;TX

CF Freq
6.985GHz

Span
240MHz


RBW
1MHz

VBW
3MHz

Sweep Time
2.4ms

Detector Type
RMS

CP BW
160MHz

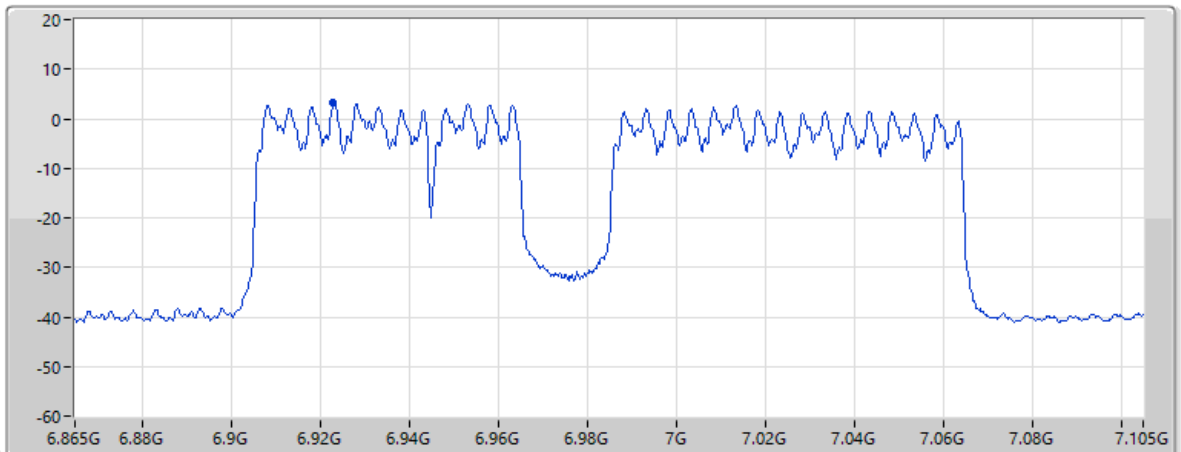

Page 6

Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
3.32				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.45	11.10	9.34	35.32	58.85



Summary

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.93
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.96
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.94
802.11be EHT160-BF_Nss1,(MCS0)_4TX	4.94
802.11be EHT320-BF_Nss1,(MCS0)_4TX	4.94
6.425-6.525GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.86
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.86
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.92
802.11be EHT160-BF_Nss1,(MCS0)_4TX	4.74
802.11be EHT320-BF_Nss1,(MCS0)_4TX	4.76
6.525-6.875GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.85
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.92
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.95
802.11be EHT160-BF_Nss1,(MCS0)_4TX	4.89
802.11be EHT320-BF_Nss1,(MCS0)_4TX	4.92
6.875-7.125GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.90
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.82
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.93
802.11be EHT160-BF_Nss1,(MCS0)_4TX	4.85

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result


Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	4.93	5.00
6195MHz	Pass	4.85	5.00
6415MHz	Pass	4.78	5.00
6435MHz	Pass	4.78	5.00
6475MHz	Pass	4.86	5.00
6515MHz	Pass	4.81	5.00
6535MHz	Pass	4.76	5.00
6695MHz	Pass	4.71	5.00
6875MHz	Pass	4.85	5.00
6895MHz	Pass	4.83	5.00
6995MHz	Pass	4.90	5.00
7095MHz	Pass	4.89	5.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	4.93	5.00
6205MHz	Pass	4.96	5.00
6405MHz	Pass	4.77	5.00
6445MHz	Pass	4.86	5.00
6485MHz	Pass	4.82	5.00
6525MHz	Pass	4.78	5.00
6565MHz	Pass	4.92	5.00
6685MHz	Pass	4.81	5.00
6885MHz	Pass	4.82	5.00
6925MHz	Pass	4.82	5.00
7005MHz	Pass	4.66	5.00
7085MHz	Pass	4.78	5.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	4.94	5.00
6225MHz	Pass	4.94	5.00
6385MHz	Pass	4.88	5.00
6465MHz	Pass	4.84	5.00
6545MHz	Pass	4.92	5.00
6625MHz	Pass	4.77	5.00
6705MHz	Pass	4.78	5.00
6785MHz	Pass	4.95	5.00
6865MHz	Pass	4.92	5.00
6945MHz	Pass	4.93	5.00
7025MHz	Pass	4.93	5.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	4.81	5.00
6185MHz	Pass	4.94	5.00
6345MHz	Pass	4.92	5.00
6505MHz	Pass	4.74	5.00
6665MHz	Pass	4.89	5.00
6825MHz	Pass	4.87	5.00
6985MHz	Pass	4.85	5.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	4.94	5.00
6265MHz	Pass	4.88	5.00
6425MHz	Pass	4.92	5.00
6585MHz	Pass	4.76	5.00
6745MHz	Pass	4.92	5.00
6905MHz	Pass	2.91	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

15/07/2026

EIRP PSD;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:5955MHz;TX

CF Freq
5.955GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
20MHz

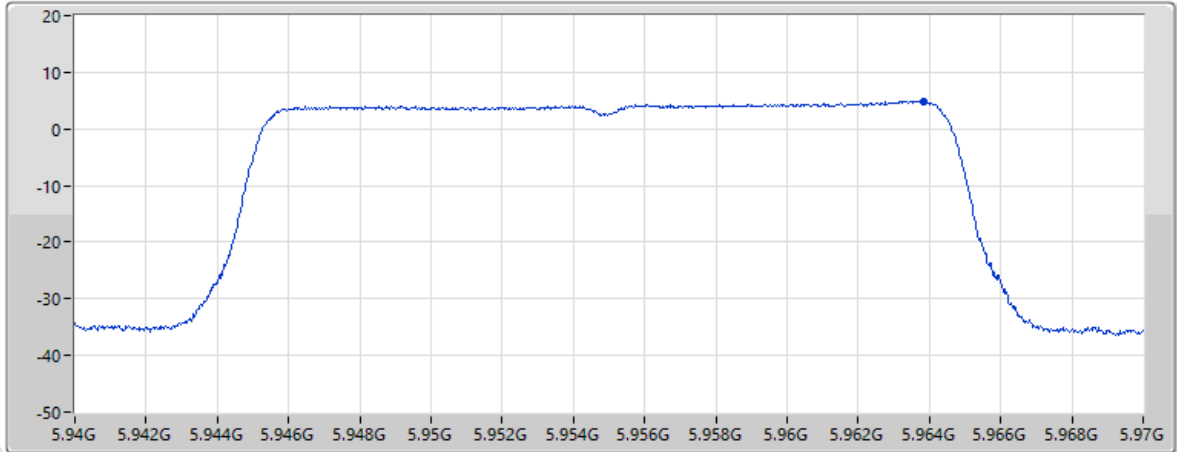


Page 6
Horizontal

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.93				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-14.90	11.50	8.72	34.94	57.55

16/07/2026

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

CF Freq
6.205GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
40MHz

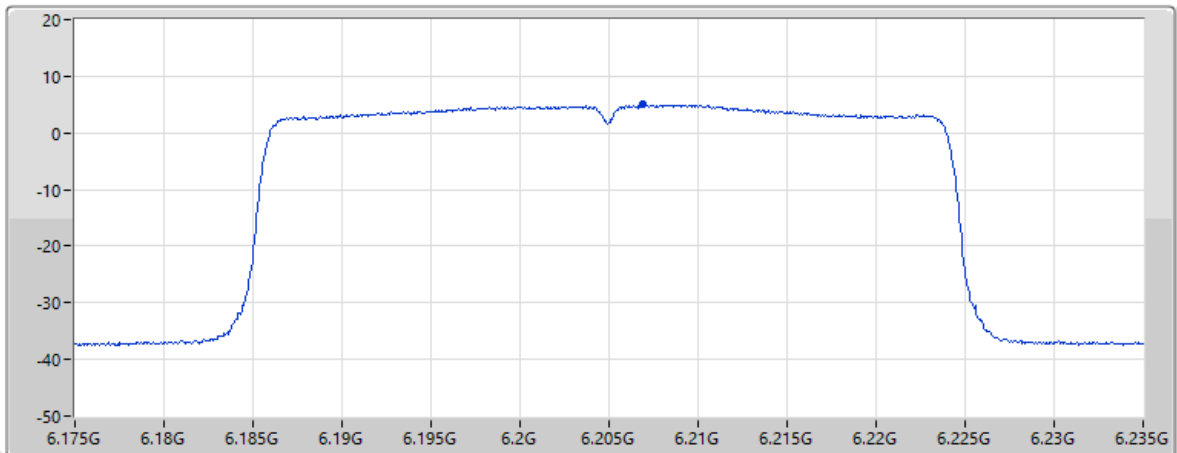


Page 6
Horizontal

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.96				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.09	11.69	8.89	35.05	57.90

10/06/2026

EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:5985MHz;TX

CF Freq
5.985GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS
CP BW
80MHz

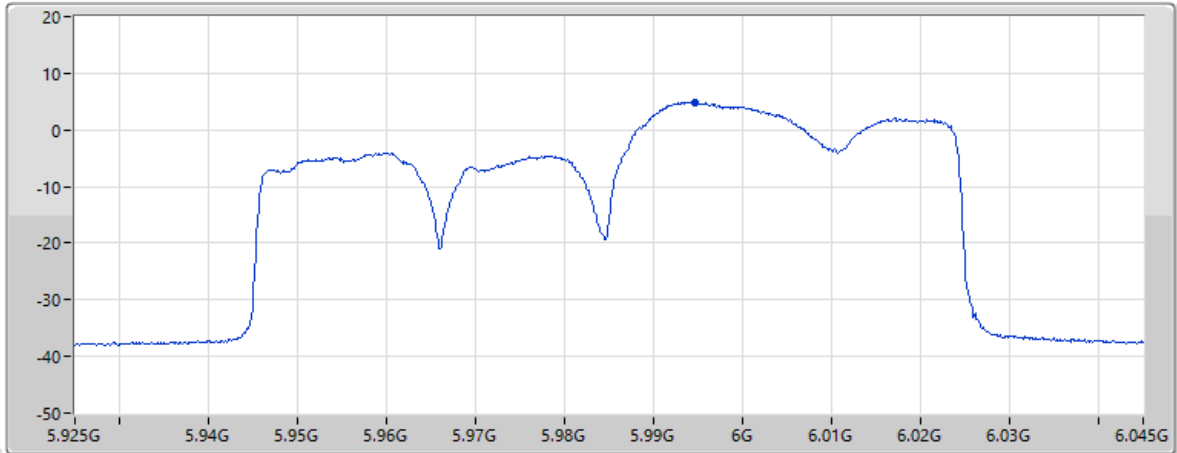


Page 6
Horizontal

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.94				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-14.98	11.48	8.73	34.93	57.60

07/07/2026

EIRP PSD;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6185MHz;TX

CF Freq
6.185GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS
CP BW
160MHz

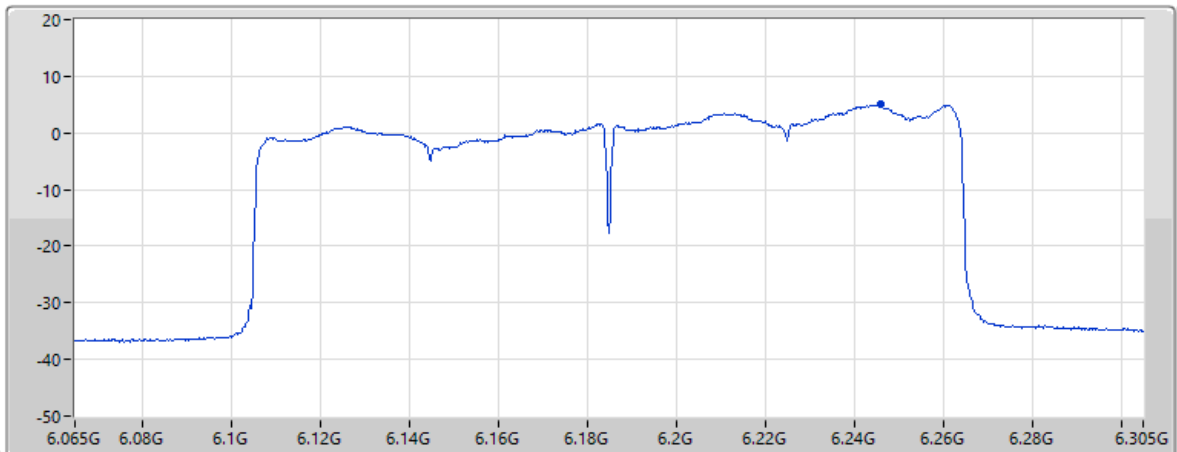


Page 6
Horizontal

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.94				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.24	11.61	8.91	35.07	57.95


07/07/2026

EIRP PSD;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6105MHz;TX

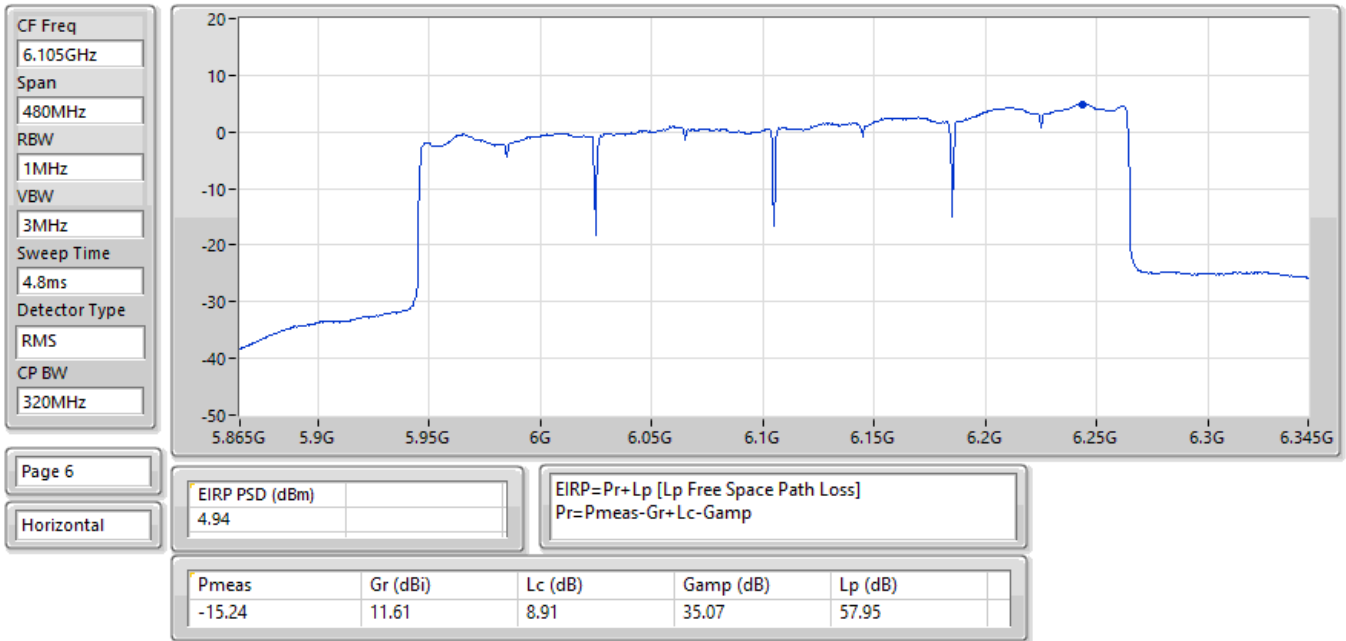

16/07/2026


EIRP PSD;Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6475MHz;TX

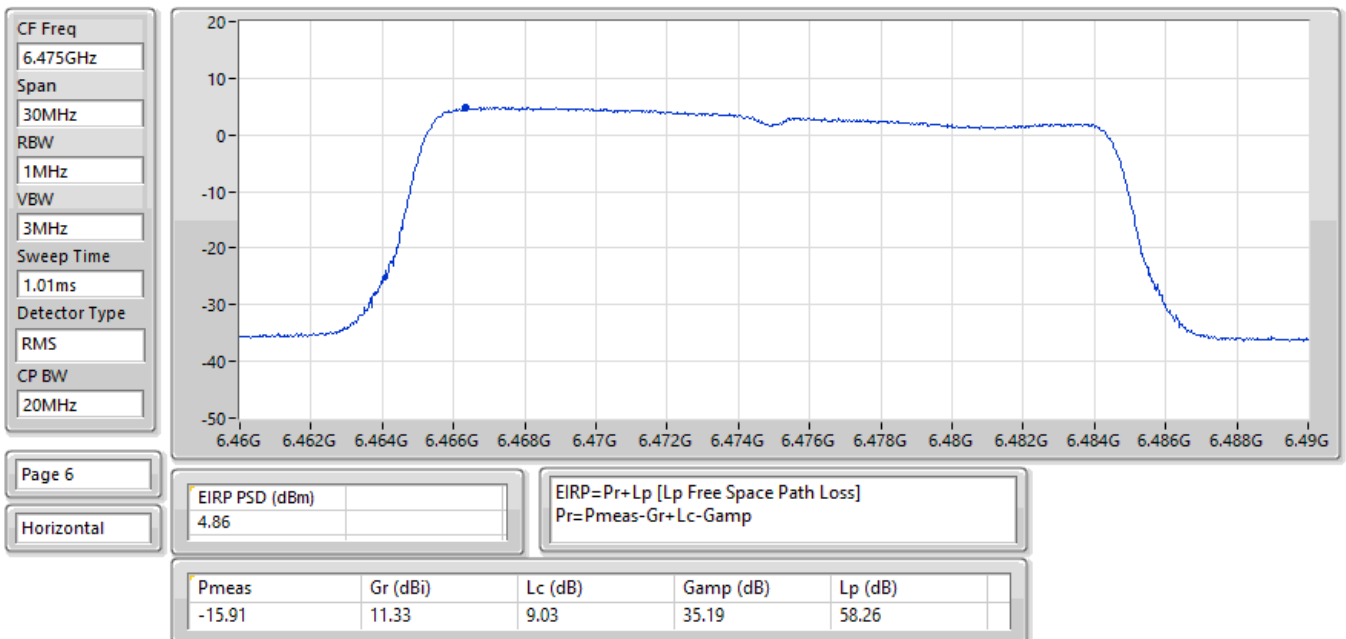

16/07/2026

EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6445MHz;TX

CF Freq
6.445GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
40MHz

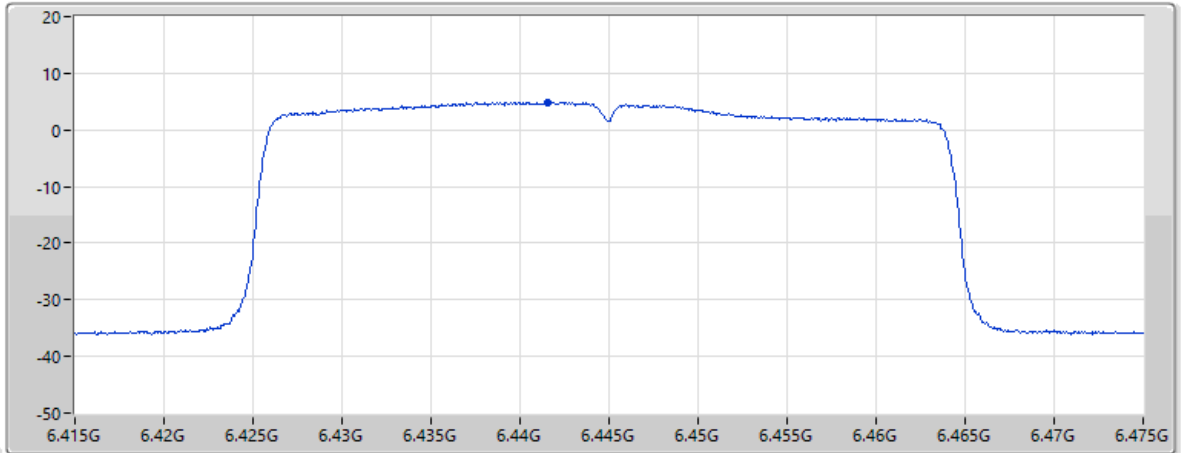


Page 6
Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.86				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.78	11.42	9.02	35.18	58.22

24/07/2026

EIRP PSD;Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6545MHz;TX

CF Freq
6.545GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS
CP BW
80MHz

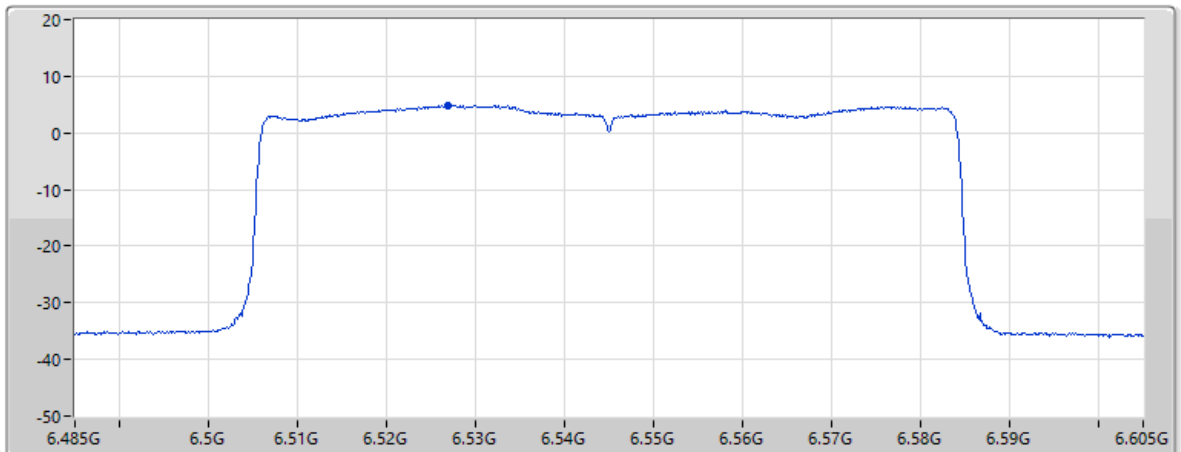


Page 6
Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.92				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.48	10.79	9.07	35.22	58.34


07/07/2026

EIRP PSD;Band:6.4G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6505MHz;TX

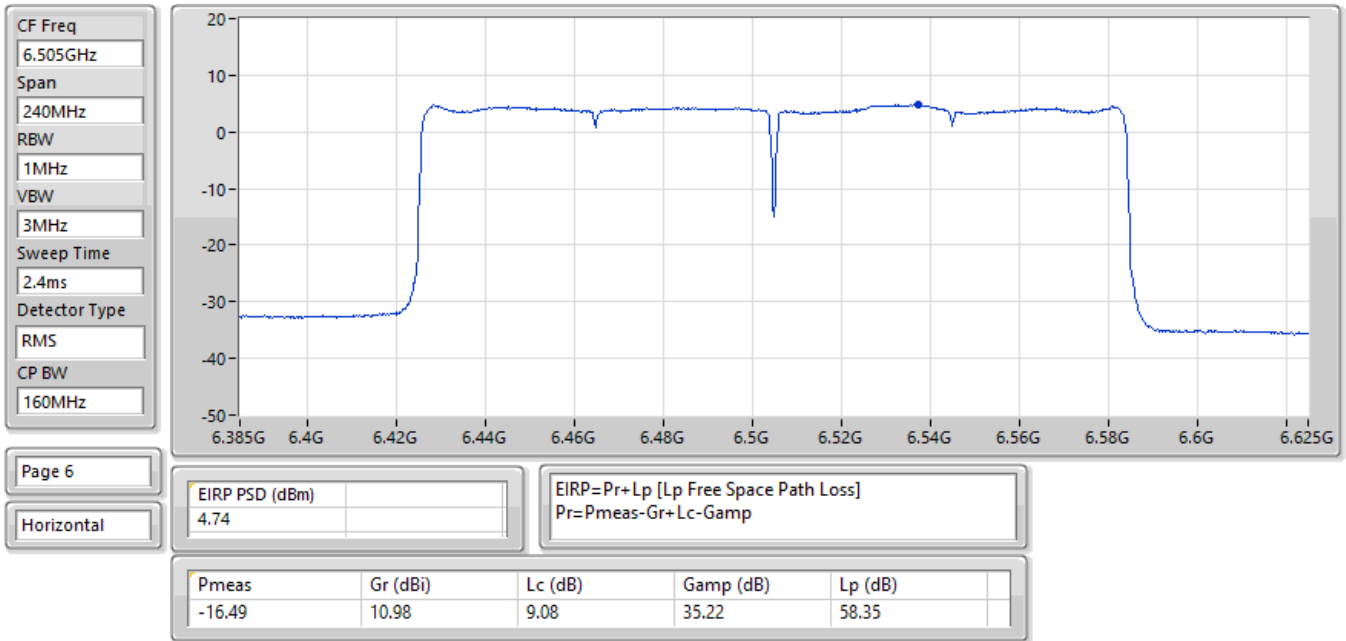

26/07/2026


EIRP PSD;Band:6.4G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6585MHz;TX

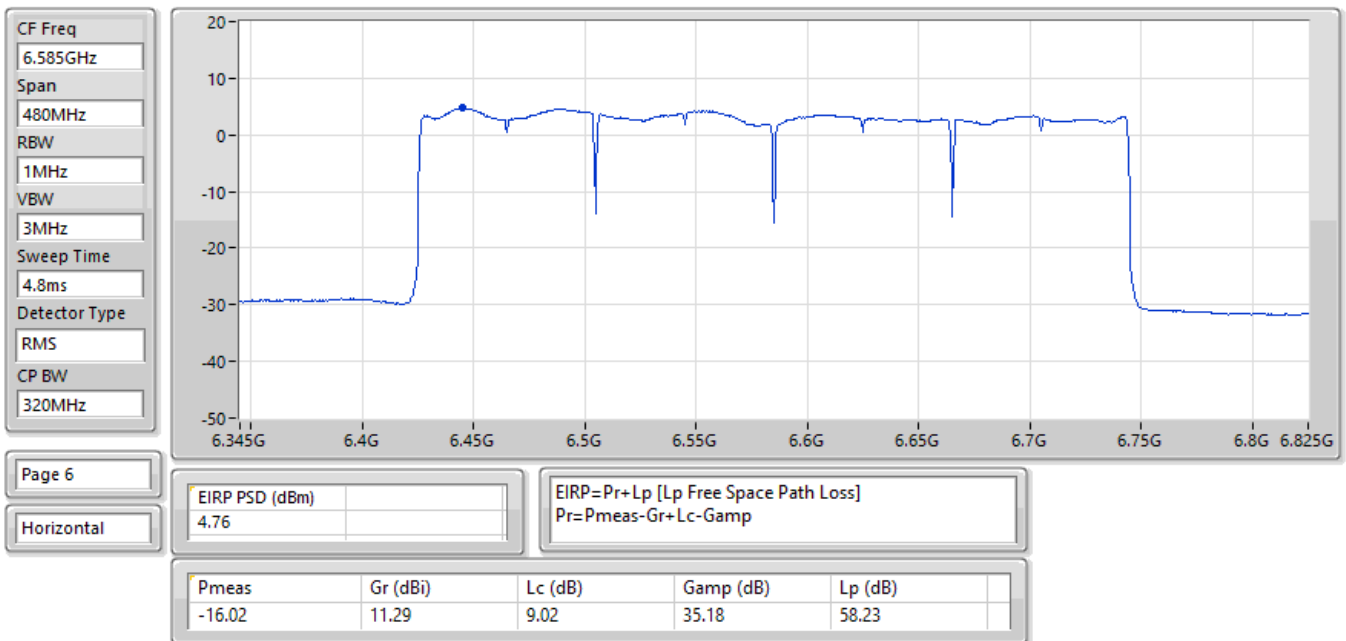

16/07/2026

EIRP PSD;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6875MHz;TX

CF Freq
6.875GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
20MHz

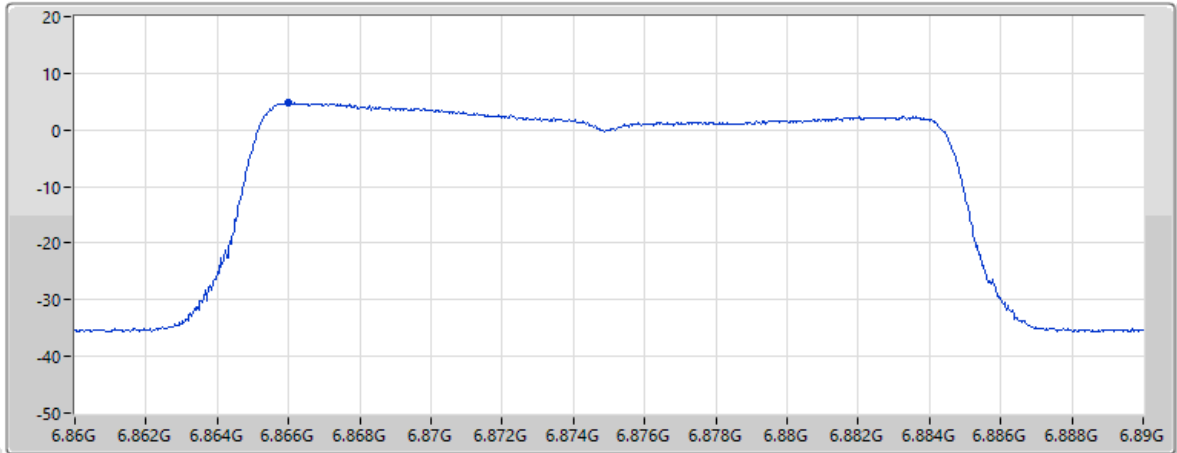


Page 6
Horizontal

EIRP PSD (dBm)	4.85	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.82	11.10	9.30	35.31	58.78

17/07/2026

EIRP PSD;Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

CF Freq
6.565GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
40MHz

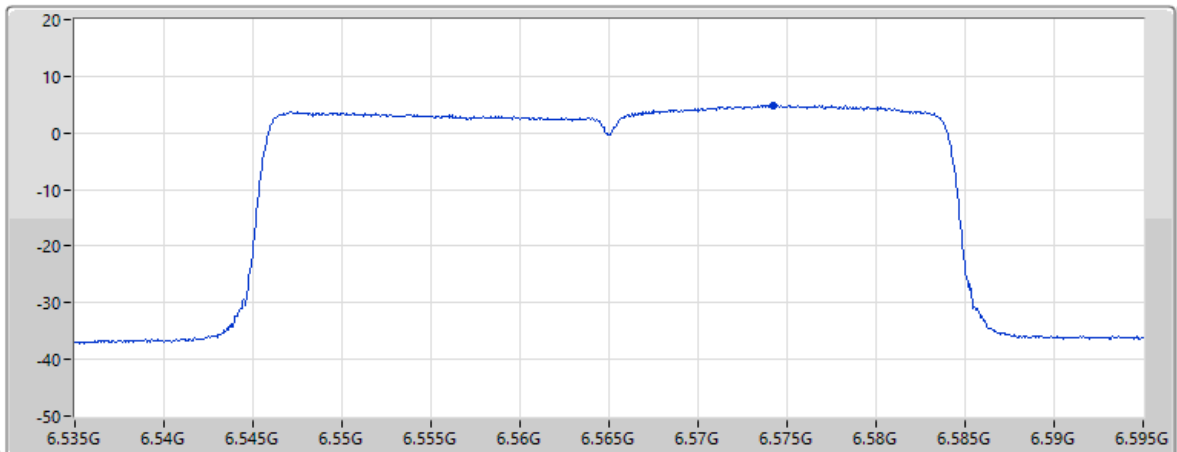


Page 6
Horizontal

EIRP PSD (dBm)	4.92	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-16.55	10.80	9.10	35.23	58.40


24/07/2026

EIRP PSD:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

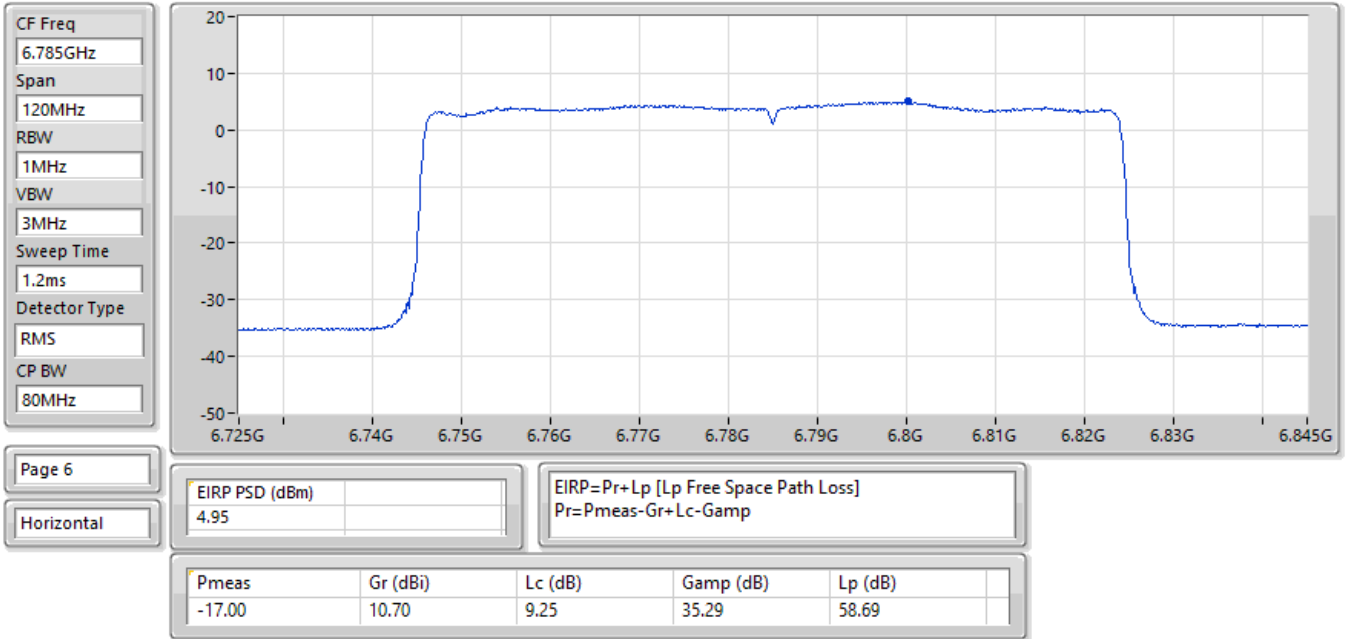


30/06/2026

EIRP PSD:Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

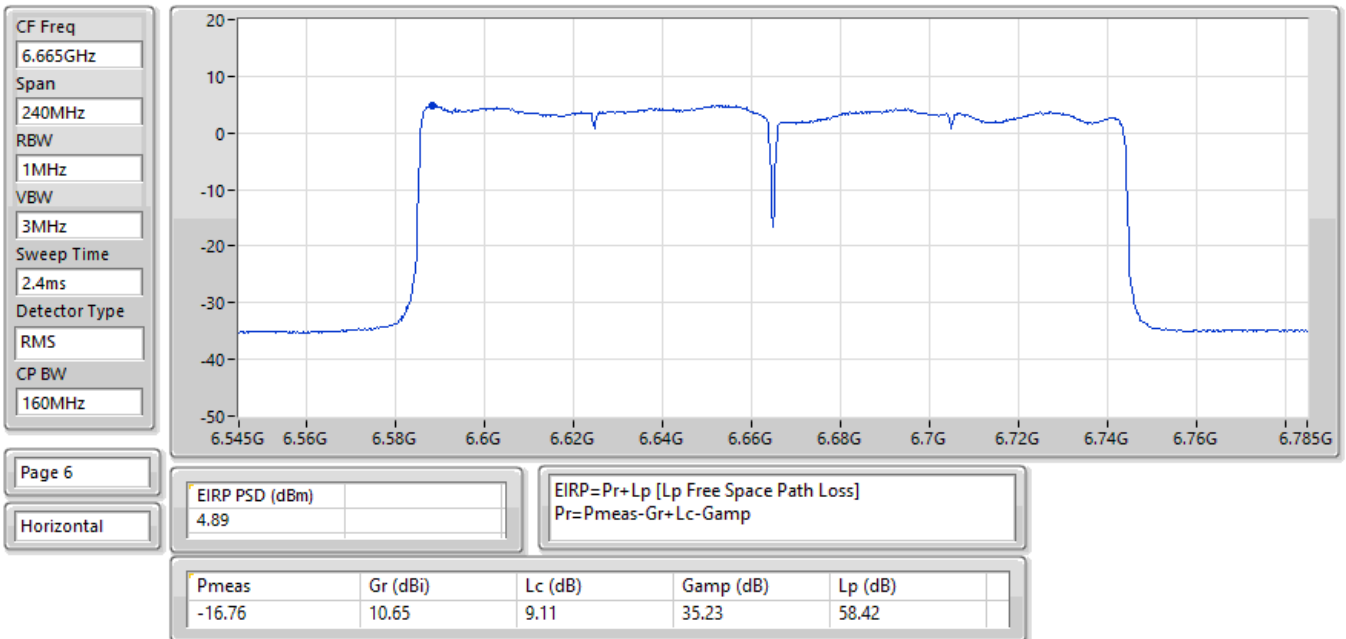


26/07/2026

EIRP PSD;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6745MHz;TX

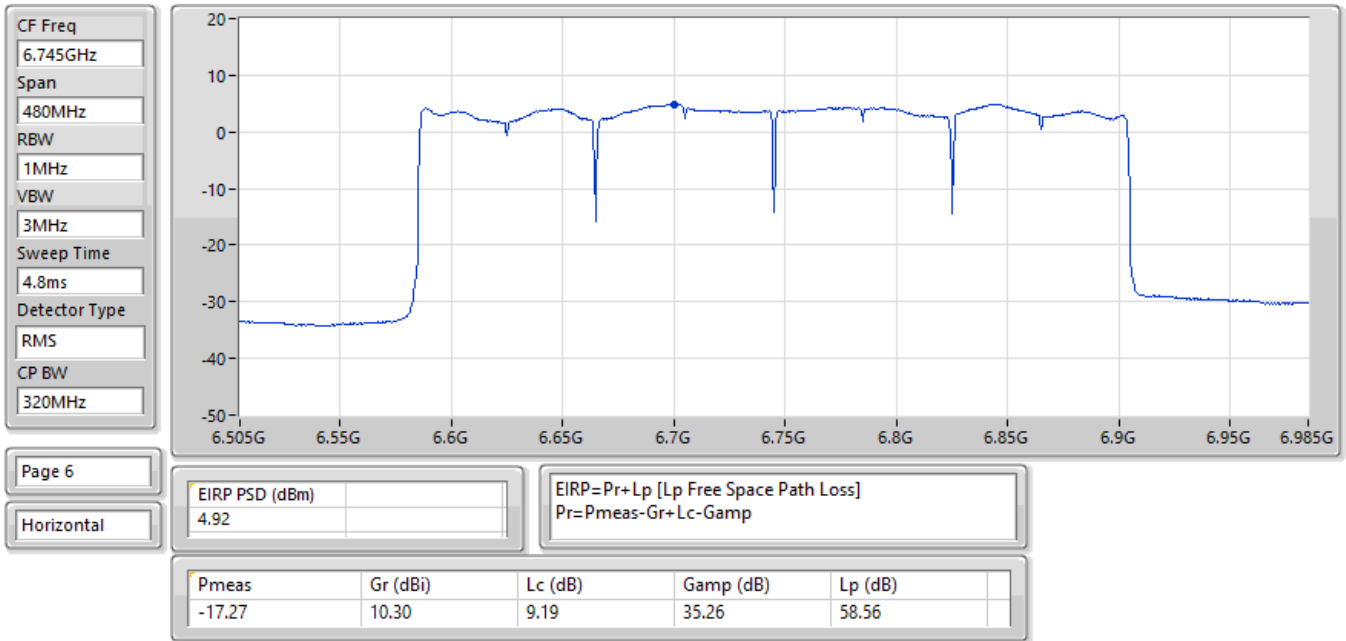


20/07/2026

EIRP PSD;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6995MHz;TX

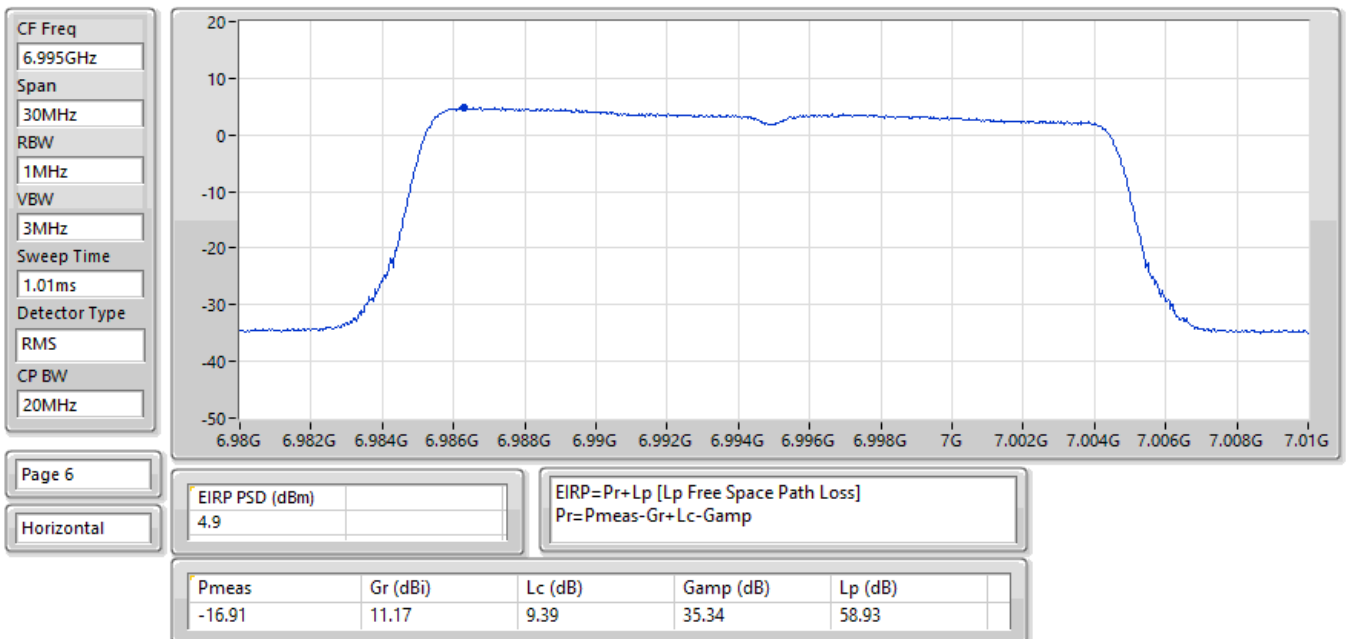


17/07/2026

EIRP PSD;Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6925MHz;TX

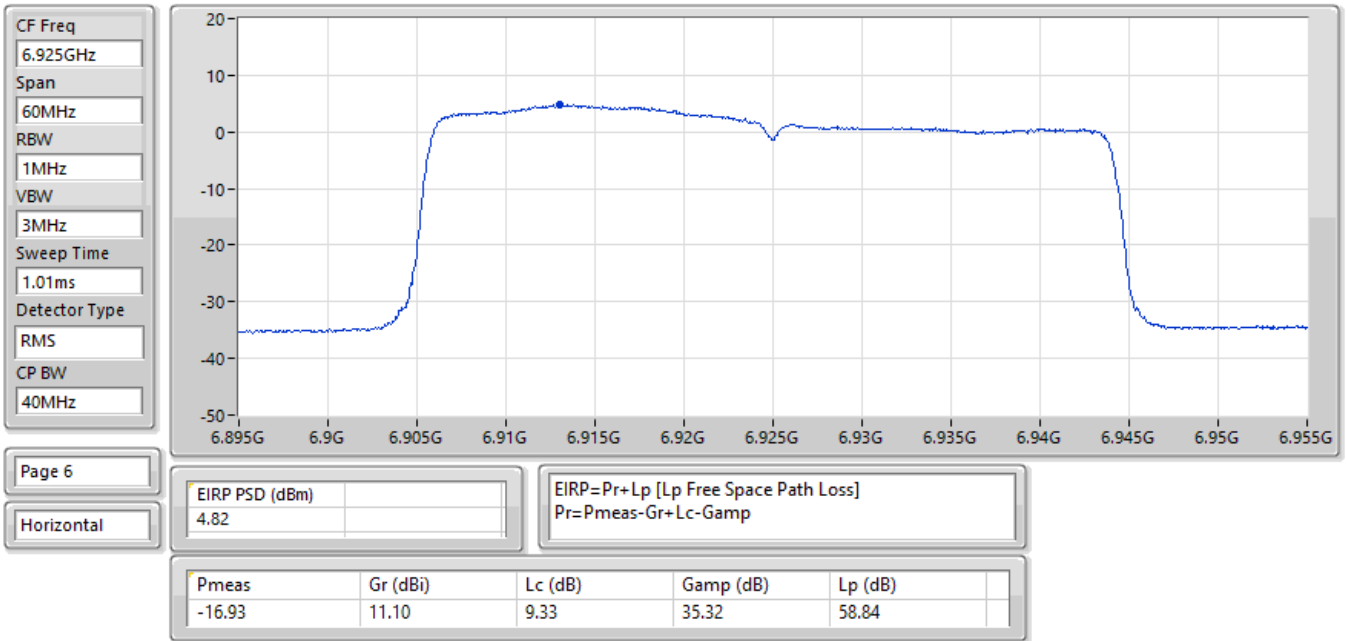


07/07/2026

EIRP PSD;Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6945MHz;TX

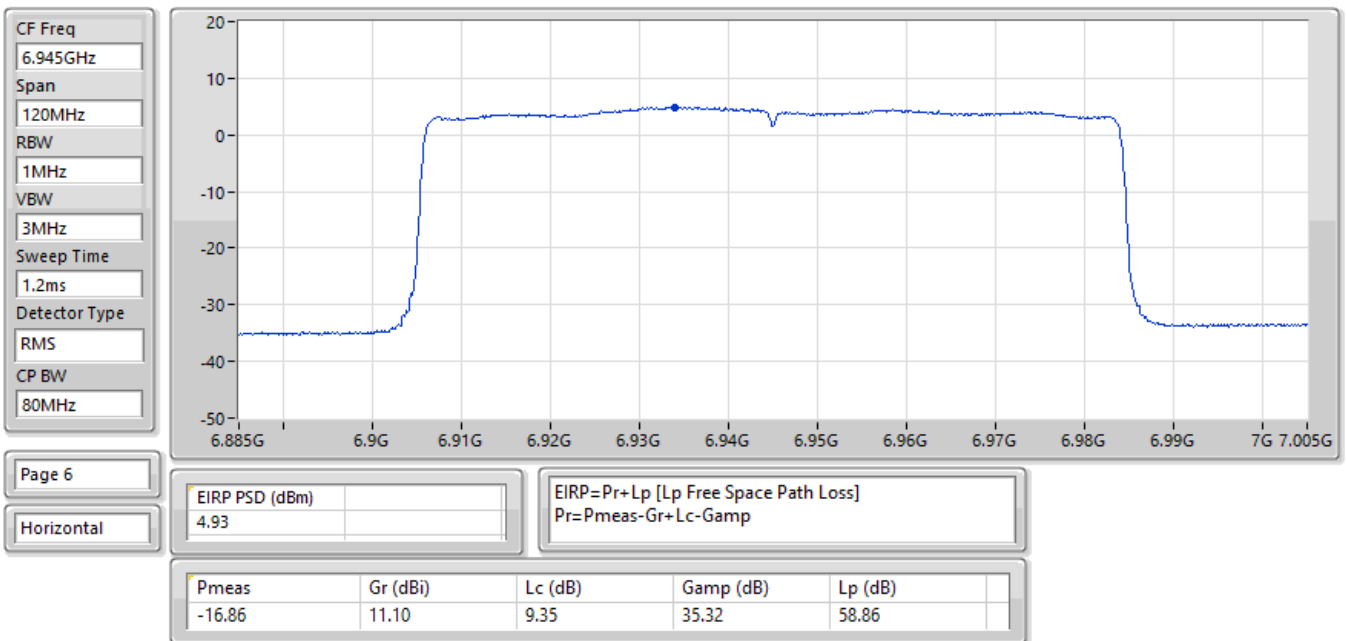

30/06/2026

EIRP PSD;Band:7.0G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6985MHz;TX

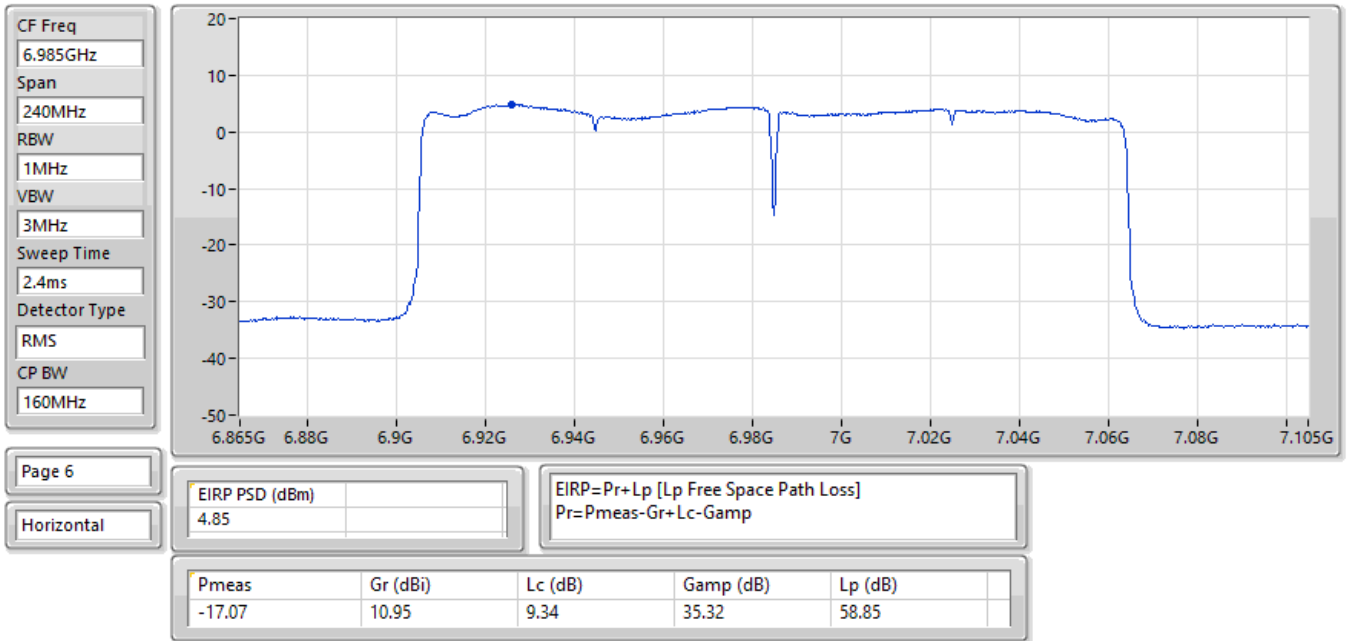

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX	Pass	5.995G	-2.62	6.1067G	-54.67	-42.62	-12.05	2
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 8_4TX	Pass	6.04899G	3.55	6.2694G	-42.35	-36.19	-6.16	1
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX	Pass	6.20937G	5.90	5.9402G	-23.23	-14.11	-9.12	1
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 4_4TX	Pass	6.76424G	-1.12	6.7402G	-26.62	-21.13	-5.49	4
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX	Pass	7.013G	-4.94	6.8651G	-52.90	-44.94	-7.96	1
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 4_4TX	Pass	6.92761G	1.66	6.7416G	-47.36	-37.74	-9.62	4

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.9979G	-2.53	6.1073G	-54.66	-42.53	-12.13	1
5985MHz	Pass	5.995G	-2.62	6.1067G	-54.67	-42.62	-12.05	2
5985MHz	Pass	5.9974G	-2.64	6.1068G	-55.11	-42.55	-12.56	3
5985MHz	Pass	5.9989G	-2.73	6.107G	-55.46	-42.70	-12.76	4
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-
7025MHz	Pass	7.013G	-4.94	6.8651G	-52.90	-44.94	-7.96	1
7025MHz	Pass	7.0147G	-5.82	6.9027G	-55.49	-45.82	-9.67	2
7025MHz	Pass	7.0124G	-5.44	6.9024G	-55.29	-45.44	-9.85	3
7025MHz	Pass	7.012G	-5.59	6.9025G	-55.08	-45.59	-9.49	4
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 8_4TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.04899G	3.55	6.2694G	-42.35	-36.19	-6.16	1
6025MHz	Pass	6.05059G	3.39	6.268G	-43.78	-36.05	-7.73	2
6025MHz	Pass	6.05179G	3.27	6.271G	-43.22	-36.32	-6.90	3
6025MHz	Pass	6.04819G	3.28	6.2678G	-46.76	-36.04	-10.72	4
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.08898G	3.47	6.2684G	-45.13	-36.12	-9.01	1
6025MHz	Pass	6.08938G	3.35	6.2694G	-46.04	-36.29	-9.75	2
6025MHz	Pass	6.08758G	3.04	6.2686G	-46.26	-36.20	-10.06	3
6025MHz	Pass	6.10098G	3.31	6.269G	-46.76	-36.18	-10.58	4
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 4_4TX	-	-	-	-	-	-	-	-
6985MHz	Pass	6.95981G	1.25	6.7398G	-48.57	-38.51	-10.06	1
6985MHz	Pass	6.92182G	1.83	6.7412G	-47.68	-37.73	-9.95	2
6985MHz	Pass	6.96241G	1.30	6.7408G	-48.49	-38.22	-10.27	3
6985MHz	Pass	6.92761G	1.66	6.7416G	-47.36	-37.74	-9.62	4
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-
6985MHz	Pass	6.91002G	1.32	6.7426G	-48.37	-38.03	-10.34	1
6985MHz	Pass	6.92122G	1.65	6.7418G	-48.20	-37.82	-10.38	2
6985MHz	Pass	6.92022G	1.10	6.741G	-48.85	-38.39	-10.46	3
6985MHz	Pass	6.90962G	1.55	6.7416G	-47.67	-37.85	-9.82	4
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.20937G	5.90	5.9402G	-23.23	-14.11	-9.12	1
6105MHz	Pass	6.20817G	6.45	6.5962G	-42.71	-33.37	-9.34	2
6105MHz	Pass	6.20977G	5.98	6.5998G	-43.90	-34.02	-9.88	3
6105MHz	Pass	6.21017G	5.84	6.6018G	-43.57	-34.16	-9.41	4
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.14819G	5.66	5.9402G	-23.68	-14.35	-9.33	1
6105MHz	Pass	6.14939G	6.16	6.5918G	-45.36	-33.34	-12.02	2
6105MHz	Pass	6.15019G	5.92	6.5998G	-46.25	-34.08	-12.17	3
6105MHz	Pass	6.15139G	5.85	6.5894G	-45.71	-33.38	-12.33	4
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.13739G	5.69	5.9402G	-23.77	-14.32	-9.45	1
6105MHz	Pass	6.15179G	5.95	6.5998G	-46.38	-34.05	-12.33	2
6105MHz	Pass	6.15299G	5.59	6.5934G	-46.62	-34.02	-12.60	3
6105MHz	Pass	6.14059G	5.96	6.5914G	-46.36	-33.41	-12.95	4
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 4_4TX	-	-	-	-	-	-	-	-
6905MHz	Pass	6.80502G	-1.48	6.417G	-49.72	-41.07	-8.65	1
6905MHz	Pass	6.80303G	-1.25	6.4062G	-50.64	-41.25	-9.39	2
6905MHz	Pass	6.80383G	-1.52	6.4118G	-50.59	-41.48	-9.11	3
6905MHz	Pass	6.76424G	-1.12	6.7402G	-26.62	-21.13	-5.49	4
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 2_4TX	-	-	-	-	-	-	-	-
6905MHz	Pass	6.80223G	-1.19	6.4114G	-50.78	-41.18	-9.60	1
6905MHz	Pass	6.80542G	-1.26	6.4118G	-51.40	-41.22	-10.18	2
6905MHz	Pass	6.80103G	-1.57	6.4114G	-51.60	-41.56	-10.04	3
6905MHz	Pass	6.80582G	-0.85	6.7402G	-26.93	-20.86	-6.07	4


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 10_4TX	-	-	-	-	-	-	-	-
6905MHz	Pass	6.86941G	1.40	6.4126G	-47.85	-38.51	-9.34	1
6905MHz	Pass	6.87021G	1.45	6.4182G	-48.09	-38.05	-10.04	2
6905MHz	Pass	6.87021G	1.24	6.4098G	-48.53	-38.76	-9.77	3
6905MHz	Pass	6.86941G	1.31	7.0698G	-27.86	-18.70	-9.16	4

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX

MASK

5985MHz_TX

07/08/2026

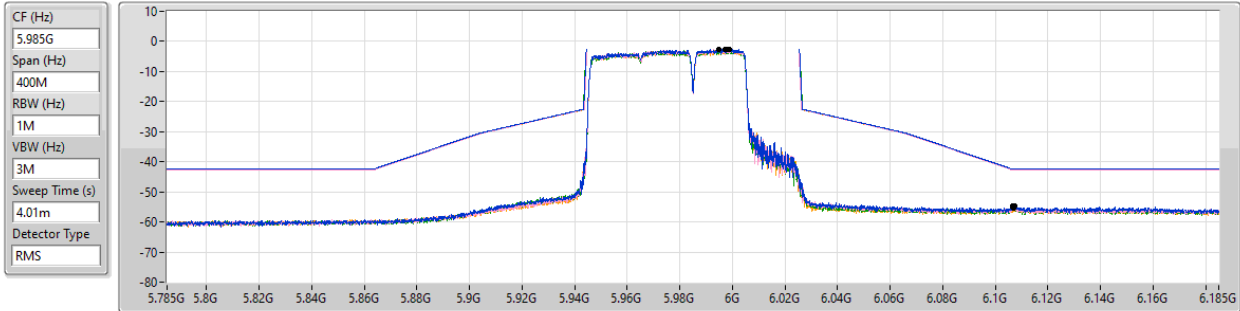


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.9979G	-2.53	6.1073G	-54.66	-42.53	-12.13	1
5.995G	-2.62	6.1067G	-54.67	-42.62	-12.05	2
5.9974G	-2.64	6.1068G	-55.11	-42.55	-12.56	3
5.9989G	-2.73	6.107G	-55.46	-42.70	-12.76	4

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX

MASK

7025MHz_TX

07/08/2026

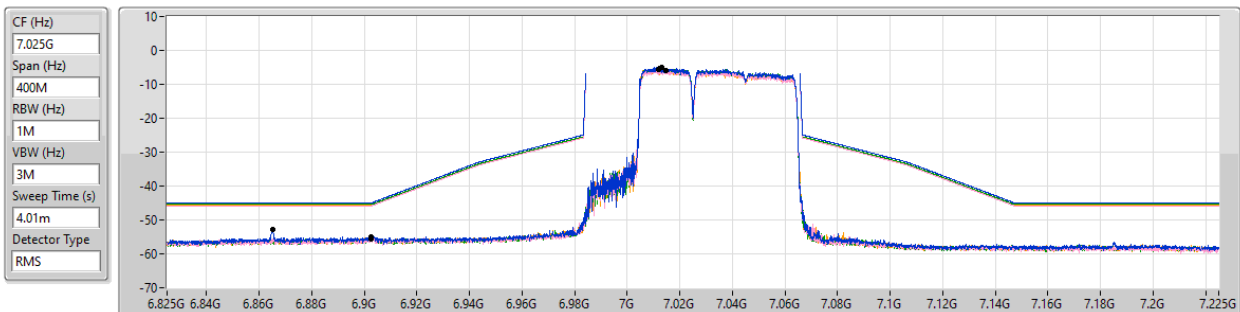

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
7.013G	-4.94	6.8651G	-52.90	-44.94	-7.96	1
7.0147G	-5.82	6.9027G	-55.49	-45.82	-9.67	2
7.0124G	-5.44	6.9024G	-55.29	-45.44	-9.85	3
7.012G	-5.59	6.9025G	-55.08	-45.59	-9.49	4

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 8_4TX

MASK

6025MHz_TX

13/08/2026

CF (Hz)
6.025G


Span (Hz)
800M

RBW (Hz)
3M

VBW (Hz)
10M

Sweep Time (s)
4.01m

Detector Type
RMS

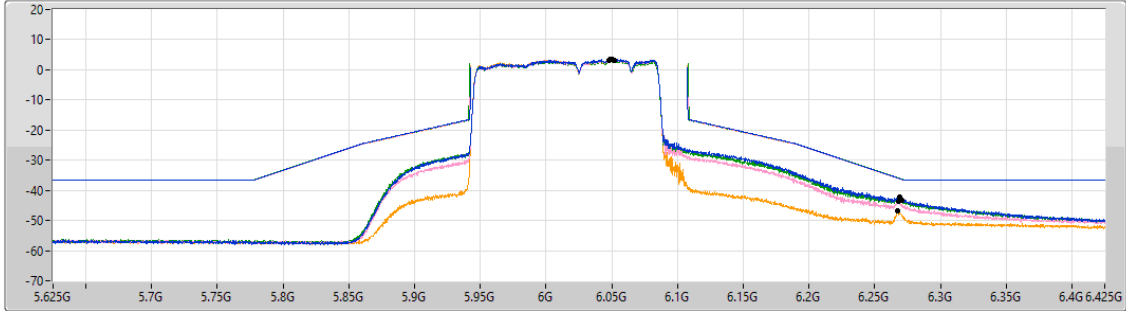

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.04899G	3.55	6.2694G	-42.35	-36.19	-6.16	1
6.05059G	3.39	6.268G	-43.78	-36.05	-7.73	2
6.05179G	3.27	6.271G	-43.22	-36.32	-6.90	3
6.04819G	3.28	6.2678G	-46.76	-36.04	-10.72	4

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

MASK

6025MHz_TX

07/08/2026

CF (Hz)
6.025G


Span (Hz)
800M

RBW (Hz)
3M

VBW (Hz)
10M

Sweep Time (s)
4.01m

Detector Type
RMS

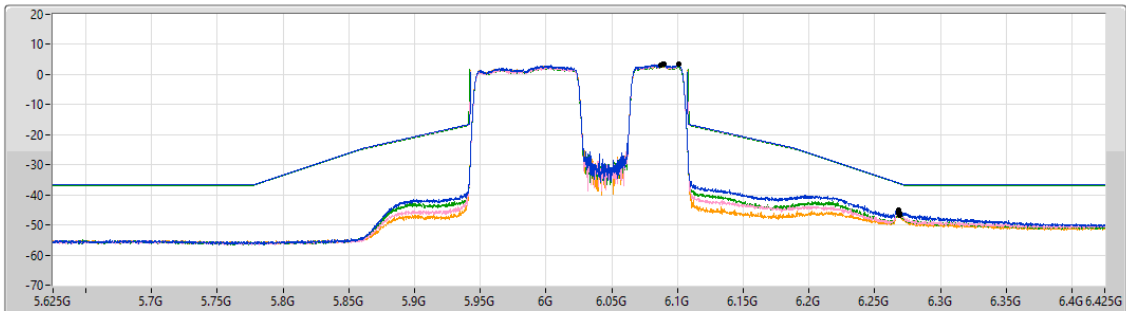


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.08898G	3.47	6.2684G	-45.13	-36.12	-9.01	1
6.08938G	3.35	6.2694G	-46.04	-36.29	-9.75	2
6.08758G	3.04	6.2686G	-46.26	-36.20	-10.06	3
6.10098G	3.31	6.269G	-46.76	-36.18	-10.58	4

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 4_4TX

MASK

6985MHz_TX

07/08/2026

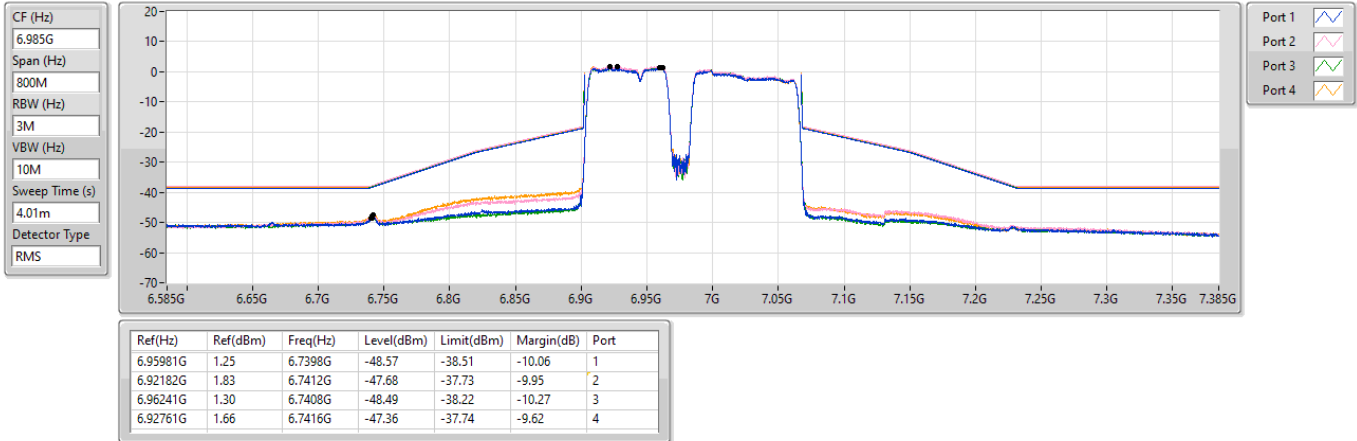


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX

MASK

6985MHz_TX

07/08/2026

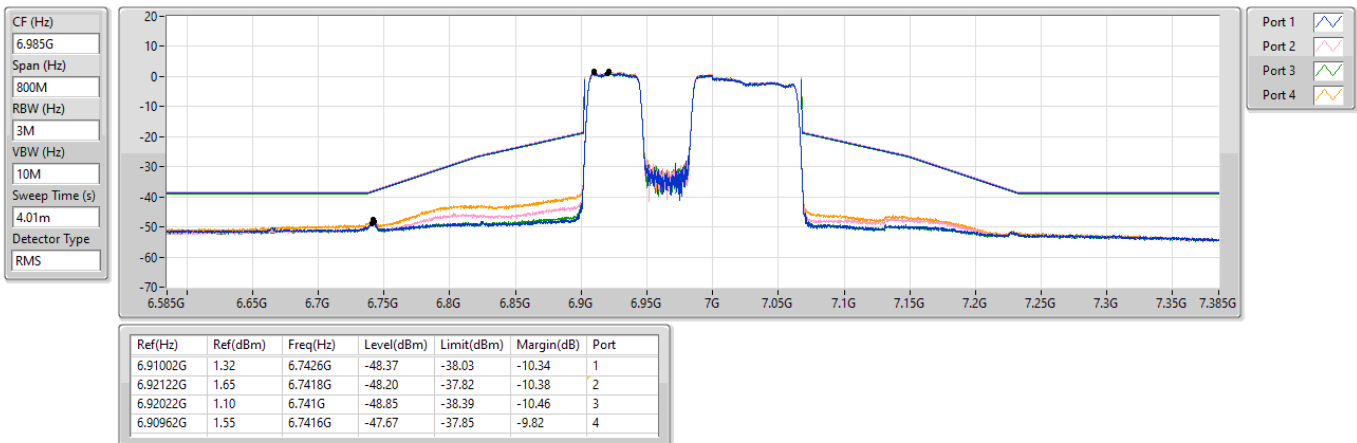


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX

MASK

6105MHz_TX

07/08/2026

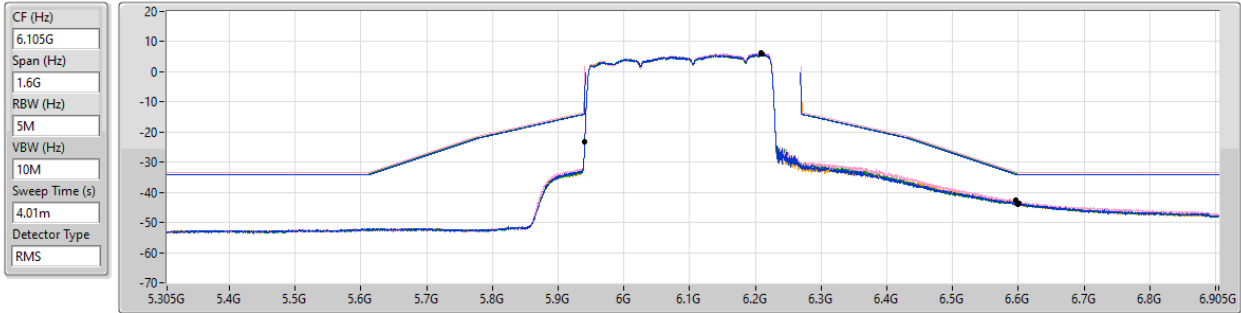


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.20937G	5.90	5.9402G	-23.23	-14.11	-9.12	1
6.20817G	6.45	6.5962G	-42.71	-33.37	-9.34	2
6.20977G	5.98	6.5998G	-43.90	-34.02	-9.88	3
6.21017G	5.84	6.6018G	-43.57	-34.16	-9.41	4

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX

MASK

6105MHz_TX

07/08/2026

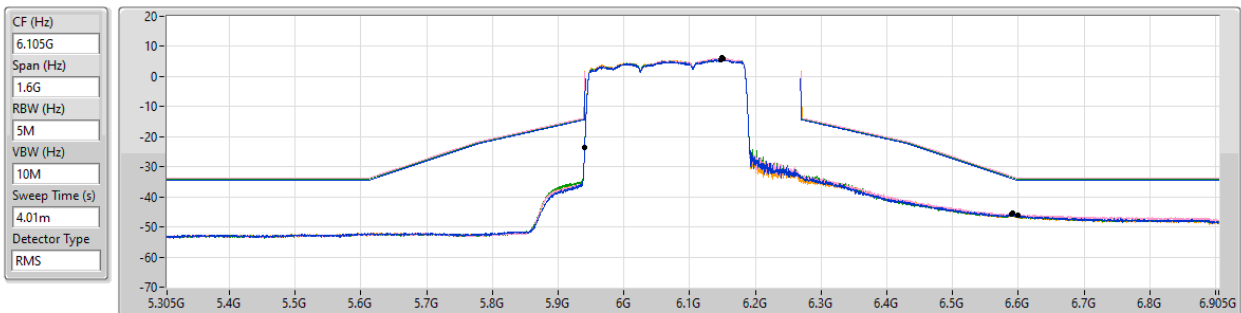


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.14819G	5.66	5.9402G	-23.68	-14.35	-9.33	1
6.14939G	6.16	6.5918G	-45.36	-33.34	-12.02	2
6.15019G	5.92	6.5998G	-46.25	-34.08	-12.17	3
6.15139G	5.85	6.5894G	-45.71	-33.38	-12.33	4

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 2_4TX

MASK

6105MHz_TX

07/08/2026

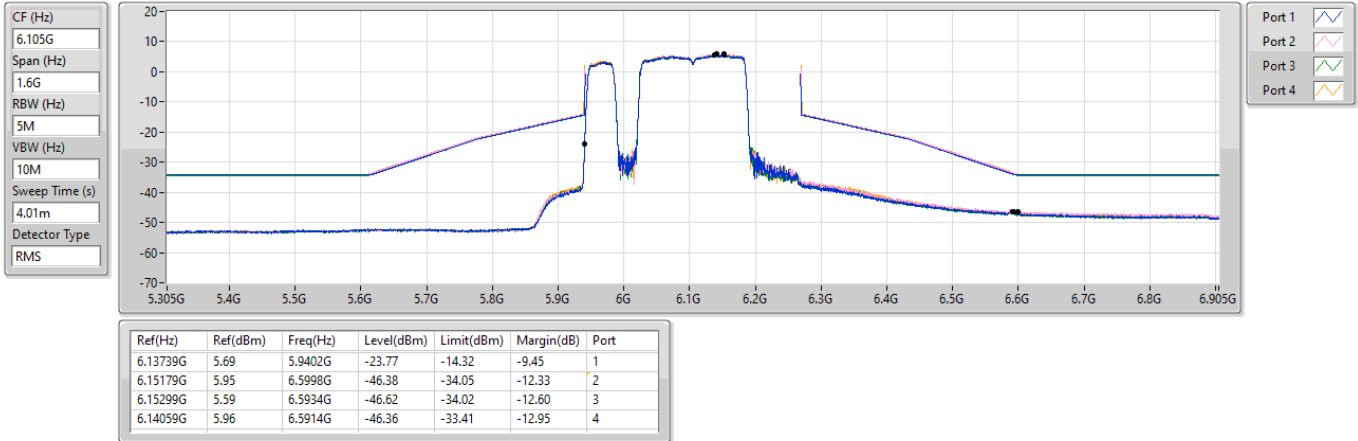


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 4_4TX

MASK

6905MHz_TX

13/08/2026

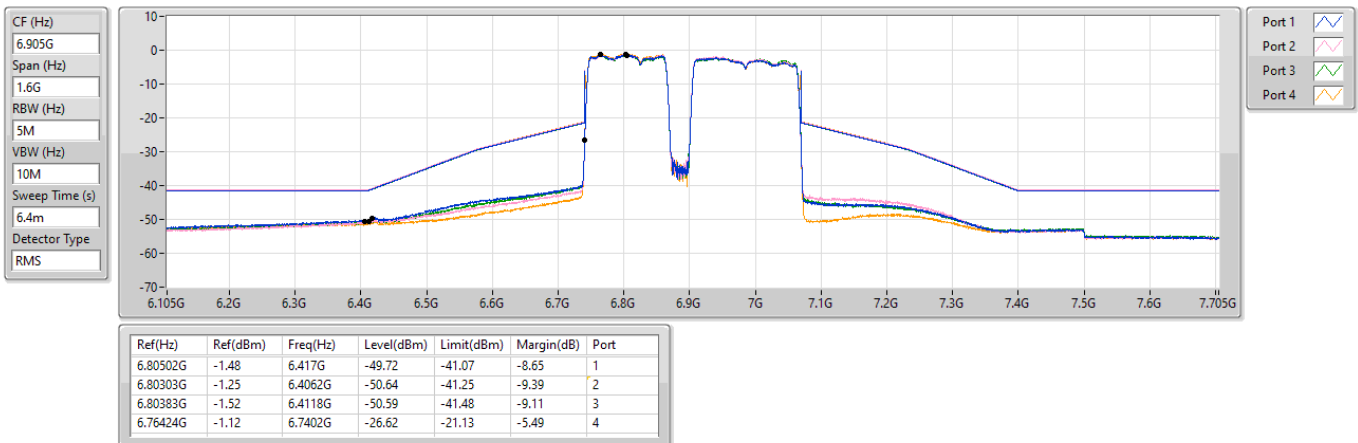

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 2_4TX

MASK

6905MHz_TX

13/08/2026

CF (Hz)
6.905G


Span (Hz)
1.6G

RBW (Hz)
5M

VBW (Hz)
10M

Sweep Time (s)
6.4m

Detector Type
RMS

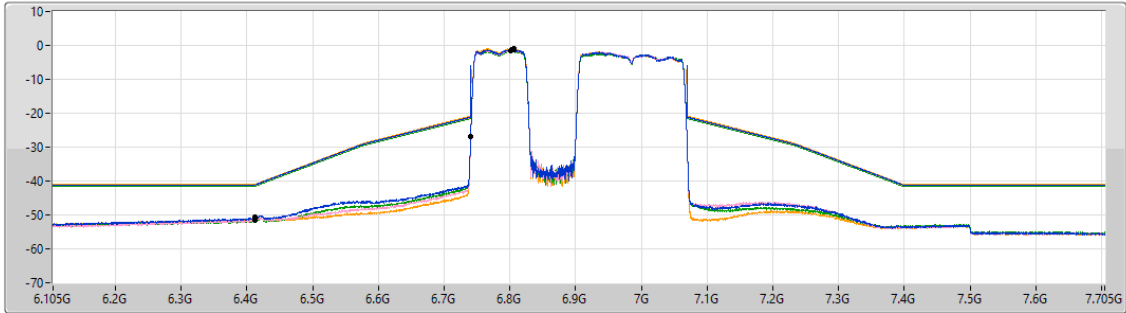

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.80223G	-1.19	6.4114G	-50.78	-41.18	-9.60	1
6.80542G	-1.26	6.4118G	-51.40	-41.22	-10.18	2
6.80103G	-1.57	6.4114G	-51.60	-41.56	-10.04	3
6.80582G	-0.85	6.7402G	-26.93	-20.86	-6.07	4

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 10_4TX

MASK

6905MHz_TX

08/08/2026

CF (Hz)
6.905G


Span (Hz)
1.6G

RBW (Hz)
5M

VBW (Hz)
10M

Sweep Time (s)
6.4m

Detector Type
RMS

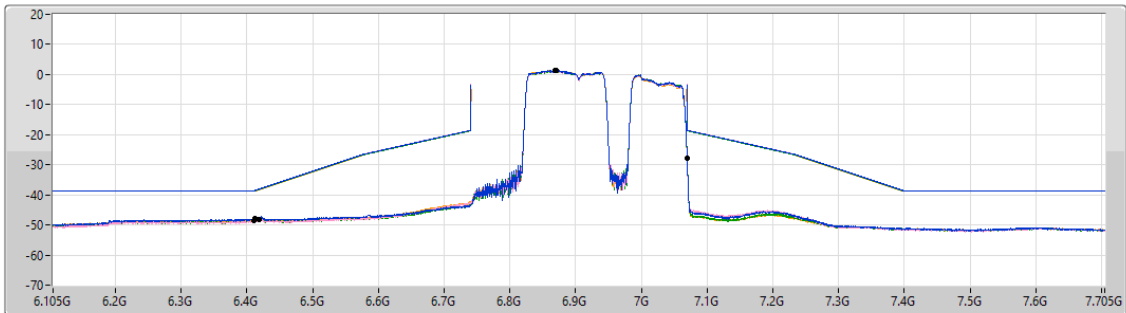

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.86941G	1.40	6.4126G	-47.85	-38.51	-9.34	1
6.87021G	1.45	6.4182G	-48.09	-38.05	-10.04	2
6.87021G	1.24	6.4098G	-48.53	-38.76	-9.77	3
6.86941G	1.31	7.0698G	-27.86	-18.70	-9.16	4

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	Pass	5.960149G	-8.22	5.98925G	-61.89	-48.22	-13.67	4
802.11be EHT40-BF_Nss1,(MCS0)_4TX	Pass	5.974398G	-5.19	6.02625G	-56.04	-45.11	-10.93	1
802.11be EHT80-BF_Nss1,(MCS0)_4TX	Pass	6.3954G	-3.88	6.5068G	-51.9	-43.88	-8.02	2
802.11be EHT160-BF_Nss1,(MCS0)_4TX	Pass	6.04899G	3.72	6.272G	-37.02	-36.28	-0.74	2
802.11be EHT320-BF_Nss1,(MCS0)_4TX	Pass	6.24776G	5.79	6.4538G	-26.36	-23.05	-3.31	3
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	Pass	6.518524G	-10.69	6.4668G	-62.58	-50.69	-11.89	1
802.11be EHT40-BF_Nss1,(MCS0)_4TX	Pass	6.450349G	-2.81	6.5063G	-54.92	-42.76	-12.16	2
802.11be EHT80-BF_Nss1,(MCS0)_4TX	Pass	6.4797G	-1.09	6.5866G	-50.56	-40.94	-9.62	4
802.11be EHT160-BF_Nss1,(MCS0)_4TX	Pass	6.56878G	2.27	6.3056G	-39.11	-30.97	-8.14	2
802.11be EHT320-BF_Nss1,(MCS0)_4TX	Pass	6.44464G	2.99	6.1746G	-34.09	-30.86	-3.23	3
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	Pass	6.527152G	-8.2	6.4961G	-61.63	-48.2	-13.43	1
802.11be EHT40-BF_Nss1,(MCS0)_4TX	Pass	6.698297G	-4.51	6.62345G	-56.05	-44.51	-11.54	3
802.11be EHT80-BF_Nss1,(MCS0)_4TX	Pass	6.6892G	-1.57	6.5833G	-49.61	-41.45	-8.16	2
802.11be EHT160-BF_Nss1,(MCS0)_4TX	Pass	6.72199G	3.11	6.4206G	-43.74	-36.44	-7.3	4
802.11be EHT320-BF_Nss1,(MCS0)_4TX	Pass	6.60264G	4.27	6.3298G	-35.73	-30.09	-5.64	1
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	Pass	6.898074G	-5.71	6.92545G	-58.01	-44.49	-13.52	4
802.11be EHT40-BF_Nss1,(MCS0)_4TX	Pass	6.928799G	0.56	6.9868G	-48.98	-39.44	-9.54	2
802.11be EHT80-BF_Nss1,(MCS0)_4TX	Pass	6.91601G	-1.33	6.8221G	-49.66	-41.33	-8.33	2
802.11be EHT160-BF_Nss1,(MCS0)_4TX	Pass	6.95941G	1.50	6.742G	-46.53	-38.03	-8.50	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.962573G	-6.55	5.99333G	-61.36	-46.55	-14.81	1
5955MHz	Pass	5.961698G	-7.52	5.9869G	-61.6	-47.52	-14.08	2
5955MHz	Pass	5.949426G	-6.95	5.99465G	-61.77	-46.95	-14.82	3
5955MHz	Pass	5.960149G	-8.22	5.98925G	-61.89	-48.22	-13.67	4
6195MHz	Pass	6.203923G	-5.39	6.164325G	-58.89	-43.97	-14.92	1
6195MHz	Pass	6.203523G	-6.16	6.22575G	-59.14	-45	-14.14	2
6195MHz	Pass	6.195825G	-5.04	6.225575G	-58.5	-43.08	-15.42	3
6195MHz	Pass	6.199724G	-6.97	6.225525G	-59.7	-45.48	-14.22	4
6415MHz	Pass	6.419074G	-6.61	6.449G	-61.13	-46.61	-14.52	1
6415MHz	Pass	6.410526G	-6.86	6.445525G	-59.79	-45.11	-14.68	2
6415MHz	Pass	6.416275G	-7.48	6.447825G	-61.92	-47.48	-14.44	3
6415MHz	Pass	6.421548G	-7.86	6.37905G	-61.56	-47.86	-13.7	4
6435MHz	Pass	6.437849G	-8.47	6.39995G	-61.8	-48.47	-13.33	1
6435MHz	Pass	6.43545G	-6.18	6.465675G	-59.19	-44.76	-14.43	2
6435MHz	Pass	6.430651G	-6.98	6.465625G	-59.98	-45.42	-14.56	3
6435MHz	Pass	6.432726G	-5.32	6.465575G	-58.31	-43.71	-14.6	4
6475MHz	Pass	6.477499G	-7.83	6.43885G	-61.57	-47.83	-13.74	1
6475MHz	Pass	6.471826G	-6.34	6.4443G	-59.04	-44.61	-14.43	2
6475MHz	Pass	6.469801G	-5.4	6.44435G	-58.39	-43.87	-14.52	3
6475MHz	Pass	6.477924G	-3.94	6.444175G	-57.11	-42.61	-14.5	4
6515MHz	Pass	6.518524G	-10.69	6.4668G	-62.58	-50.69	-11.89	1
6515MHz	Pass	6.51685G	-9.27	6.4705G	-61.94	-49.27	-12.67	2
6515MHz	Pass	6.512251G	-8.36	6.480175G	-62.13	-48.36	-13.77	3
6515MHz	Pass	6.510701G	-6.95	6.4817G	-61.31	-46.95	-14.36	4
6535MHz	Pass	6.527152G	-8.2	6.4961G	-61.63	-48.2	-13.43	1
6535MHz	Pass	6.542173G	-6.46	6.504275G	-59.92	-45.84	-14.08	2
6535MHz	Pass	6.540599G	-5.42	6.504325G	-58.28	-43.92	-14.36	3
6535MHz	Pass	6.531051G	-5.84	6.5657G	-59.4	-44.11	-15.29	4
6695MHz	Pass	6.696225G	-4.68	6.7255G	-58.2	-43.24	-14.96	1
6695MHz	Pass	6.690626G	-3.89	6.7278G	-60.24	-43.89	-16.35	2
6695MHz	Pass	6.702273G	-3.88	6.664325G	-57.08	-42.38	-14.7	3
6695MHz	Pass	6.699699G	-3.87	6.725675G	-56.81	-42.29	-14.52	4
6875MHz	Pass	6.87655G	-5.15	6.844225G	-58.23	-43.5	-14.73	1
6875MHz	Pass	6.882623G	-5.99	6.90795G	-59.9	-45.99	-13.91	2
6875MHz	Pass	6.865727G	-4.34	6.905675G	-57.77	-42.58	-15.19	3
6875MHz	Pass	6.8732G	-6.22	6.907275G	-60.76	-46.22	-14.54	4
6895MHz	Pass	6.886027G	-6.3	6.925775G	-58.36	-44.48	-13.88	1
6895MHz	Pass	6.898824G	-4.99	6.927475G	-59.41	-44.99	-14.42	2
6895MHz	Pass	6.886102G	-5.47	6.9256G	-57.77	-43.63	-14.14	3
6895MHz	Pass	6.898074G	-5.71	6.92545G	-58.01	-44.49	-13.52	4
6995MHz	Pass	6.989226G	-5.26	6.964325G	-58.48	-44.02	-14.46	1
6995MHz	Pass	6.990751G	-6.15	6.96255G	-60.88	-46.15	-14.73	2
6995MHz	Pass	6.991001G	-6.8	6.962925G	-61.3	-46.8	-14.5	3
6995MHz	Pass	6.992726G	-7.13	6.960725G	-61.27	-47.13	-14.14	4
7095MHz	Pass	7.100249G	-5.97	7.06435G	-59.04	-44.01	-15.03	1
7095MHz	Pass	7.089201G	-6.11	7.064475G	-58.89	-44.26	-14.63	2
7095MHz	Pass	7.088152G	-6.69	7.064275G	-59.51	-45.16	-14.35	3
7095MHz	Pass	7.086552G	-4.34	7.125625G	-58.04	-42.78	-15.26	4
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.974398G	-5.19	6.02625G	-56.04	-45.11	-10.93	1
5965MHz	Pass	5.979546G	-3.34	6.02645G	-55.72	-43.34	-12.38	2
5965MHz	Pass	5.978997G	-1.72	6.027G	-54.48	-41.72	-12.76	3
5965MHz	Pass	5.980246G	-3.04	6.02645G	-55.49	-42.98	-12.51	4
6205MHz	Pass	6.209849G	-2.29	6.2663G	-55.39	-42.24	-13.15	1



Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6205MHz	Pass	6.196852G	-3.64	6.26605G	-55.73	-43.64	-12.09	2
6205MHz	Pass	6.208399G	-2.06	6.26665G	-55.39	-42.06	-13.33	3
6205MHz	Pass	6.196302G	-3.63	6.26625G	-55.89	-43.63	-12.26	4
6405MHz	Pass	6.412048G	-2.44	6.4665G	-54.58	-42.44	-12.14	1
6405MHz	Pass	6.390954G	-2.93	6.4665G	-55.73	-42.81	-12.92	2
6405MHz	Pass	6.412598G	-2.08	6.4663G	-55.47	-42.03	-13.44	3
6405MHz	Pass	6.398152G	-2.98	6.46675G	-55.26	-42.98	-12.28	4
6445MHz	Pass	6.441101G	-2.92	6.50705G	-55.3	-42.92	-12.38	1
6445MHz	Pass	6.450349G	-2.81	6.5063G	-54.92	-42.76	-12.16	2
6445MHz	Pass	6.433453G	-2.33	6.50595G	-55.4	-42.33	-13.07	3
6445MHz	Pass	6.431853G	-2.29	6.50605G	-54.82	-42.29	-12.53	4
6485MHz	Pass	6.476952G	-1.97	6.42345G	-54.41	-41.97	-12.44	1
6485MHz	Pass	6.475502G	-3.46	6.42315G	-56.15	-43.46	-12.69	2
6485MHz	Pass	6.490299G	-2.94	6.4234G	-55.98	-42.88	-13.1	3
6485MHz	Pass	6.498897G	-2.36	6.42365G	-55.3	-42.36	-12.94	4
6525MHz	Pass	6.519851G	-1.25	6.463G	-54.12	-41.25	-12.87	1
6525MHz	Pass	6.509054G	-1.79	6.46325G	-54.57	-41.62	-12.95	2
6525MHz	Pass	6.516852G	-2.02	6.46305G	-54.89	-42.02	-12.87	3
6525MHz	Pass	6.535147G	-1.08	6.46355G	-54.03	-41.08	-12.95	4
6565MHz	Pass	6.578797G	-2.38	6.503G	-55.44	-42.38	-13.06	1
6565MHz	Pass	6.551153G	-2.31	6.503G	-55.48	-42.31	-13.17	2
6565MHz	Pass	6.582046G	-4.37	6.5036G	-56.26	-44.37	-11.89	3
6565MHz	Pass	6.571948G	-1.02	6.50305G	-54.6	-40.97	-13.63	4
6685MHz	Pass	6.693598G	-3.5	6.6234G	-55.36	-43.5	-11.86	1
6685MHz	Pass	6.691748G	-2.75	6.7465G	-54.67	-42.75	-11.92	2
6685MHz	Pass	6.698297G	-4.51	6.62345G	-56.05	-44.51	-11.54	3
6685MHz	Pass	6.674553G	-3.45	6.74645G	-55.2	-43.45	-11.75	4
6885MHz	Pass	6.889349G	-1.44	6.94625G	-53.9	-41.44	-12.46	1
6885MHz	Pass	6.899346G	-1	6.94625G	-53.01	-41	-12.01	2
6885MHz	Pass	6.868604G	0.45	6.94615G	-53.39	-39.55	-13.84	3
6885MHz	Pass	6.873653G	-0.91	6.9465G	-53.17	-40.91	-12.26	4
6925MHz	Pass	6.912403G	-0.01	6.98775G	-52.36	-40.01	-12.35	1
6925MHz	Pass	6.928799G	0.56	6.9868G	-48.98	-39.44	-9.54	2
6925MHz	Pass	6.940746G	1.01	6.9861G	-49.51	-38.99	-10.52	3
6925MHz	Pass	6.933248G	1.4	6.9863G	-50.71	-38.55	-12.16	4
7005MHz	Pass	6.992703G	0.01	6.9437G	-53.27	-39.94	-13.33	1
7005MHz	Pass	6.987504G	1.09	6.9432G	-51.45	-38.91	-12.54	2
7005MHz	Pass	7.012598G	-0.31	6.94385G	-53.61	-40.27	-13.34	3
7005MHz	Pass	7.001101G	0.62	6.9434G	-51.5	-39.22	-12.28	4
7085MHz	Pass	7.092048G	-1.34	7.02315G	-54.62	-41.34	-13.28	1
7085MHz	Pass	7.094698G	-1.54	7.02265G	-54.39	-41.54	-12.85	2
7085MHz	Pass	7.068304G	-0.09	7.02395G	-52.2	-40.09	-12.11	3
7085MHz	Pass	7.082701G	0.22	7.02295G	-53.4	-39.69	-13.71	4
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.01029G	-1.42	6.1073G	-50.90	-41.42	-9.48	1
5985MHz	Pass	5.9952G	-0.85	6.1061G	-50.59	-40.85	-9.74	2
5985MHz	Pass	6.0002G	-1.45	6.106G	-50.40	-41.45	-8.95	3
5985MHz	Pass	5.9908G	-1.54	6.1066G	-52.06	-41.54	-10.52	4
6225MHz	Pass	6.2368G	-3.89	6.3486G	-54.53	-43.89	-10.64	1
6225MHz	Pass	6.2378G	-3.63	6.3465G	-54.57	-43.55	-11.02	2
6225MHz	Pass	6.2413G	-3.41	6.3467G	-54.94	-43.41	-11.53	3
6225MHz	Pass	6.2377G	-3.08	6.3472G	-54.79	-43.08	-11.71	4
6385MHz	Pass	6.374G	-2.98	6.5079G	-51.08	-42.92	-8.16	1
6385MHz	Pass	6.3954G	-3.88	6.5068G	-51.9	-43.88	-8.02	2
6385MHz	Pass	6.3957G	-3.52	6.5063G	-51.67	-43.48	-8.19	3
6385MHz	Pass	6.3733G	-3.6	6.5151G	-52.26	-43.6	-8.66	4

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6465MHz	Pass	6.4512G	-1.78	6.3438G	-52.61	-41.78	-10.83	1
6465MHz	Pass	6.4504G	-1.74	6.3429G	-51.82	-41.74	-10.08	2
6465MHz	Pass	6.42691G	-2.23	6.5878G	-51.97	-42.23	-9.74	3
6465MHz	Pass	6.4797G	-1.09	6.5866G	-50.56	-40.94	-9.62	4
6545MHz	Pass	6.5328G	-3.57	6.3849G	-54.85	-43.57	-11.28	1
6545MHz	Pass	6.5588G	-5.07	6.4221G	-56.05	-45.07	-10.98	2
6545MHz	Pass	6.5472G	-4.58	6.4233G	-55.73	-44.58	-11.15	3
6545MHz	Pass	6.51401G	-2.97	6.4228G	-54.33	-42.97	-11.36	4
6625MHz	Pass	6.59931G	-3.06	6.5036G	-53.03	-43.06	-9.97	1
6625MHz	Pass	6.6103G	-2.45	6.5033G	-53.02	-42.43	-10.59	2
6625MHz	Pass	6.59391G	-2.75	6.5007G	-53.49	-42.75	-10.74	3
6625MHz	Pass	6.6305G	-1.40	6.5034G	-52.75	-41.40	-11.35	4
6705MHz	Pass	6.6977G	-1.08	6.5837G	-50.47	-41.08	-9.39	1
6705MHz	Pass	6.6892G	-1.57	6.5833G	-49.61	-41.45	-8.16	2
6705MHz	Pass	6.7185G	-2.16	6.583G	-51.05	-42.13	-8.92	3
6705MHz	Pass	6.73319G	-1.3	6.5831G	-49.8	-41.3	-8.5	4
6785MHz	Pass	6.7714G	-3.10	6.625G	-53.61	-43.10	-10.51	1
6785MHz	Pass	6.75701G	-5.07	6.9064G	-55.56	-44.96	-10.60	2
6785MHz	Pass	6.7877G	-4.89	6.9627G	-55.66	-44.89	-10.77	3
6785MHz	Pass	6.81359G	-4.19	6.6624G	-55.43	-44.14	-11.29	4
6865MHz	Pass	6.8707G	-6.14	6.7049G	-55.41	-46.14	-9.27	1
6865MHz	Pass	6.848G	-5.48	6.9865G	-55.07	-45.40	-9.67	2
6865MHz	Pass	6.83771G	-5.91	6.9873G	-55.88	-45.91	-9.97	3
6865MHz	Pass	6.8504G	-4.82	6.9874G	-55.30	-44.82	-10.48	4
6945MHz	Pass	6.9574G	-1.15	6.785G	-50.15	-41.15	-9.00	1
6945MHz	Pass	6.91601G	-1.33	6.8221G	-49.66	-41.33	-8.33	2
6945MHz	Pass	6.9539G	-1.77	6.8243G	-51.18	-41.55	-9.63	3
6945MHz	Pass	6.9348G	-0.96	6.823G	-49.90	-40.96	-8.94	4
7025MHz	Pass	6.99481G	-2.46	6.8649G	-51.97	-42.46	-9.51	1
7025MHz	Pass	7.0125G	-2.73	6.9018G	-53.93	-42.73	-11.20	2
7025MHz	Pass	7.0213G	-3.39	6.9028G	-54.43	-43.39	-11.04	3
7025MHz	Pass	7.0402G	-3.52	6.9035G	-54.04	-43.15	-10.89	4
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.04919G	3.49	6.2778G	-39.21	-36.51	-2.70	1
6025MHz	Pass	6.04899G	3.72	6.272G	-37.02	-36.28	-0.74	2
6025MHz	Pass	6.04719G	3.30	6.272G	-39.58	-36.63	-2.95	3
6025MHz	Pass	5.99801G	3.38	6.2708G	-43.04	-36.56	-6.48	4
6185MHz	Pass	6.2048G	2.20	5.943G	-45.02	-36.81	-8.21	1
6185MHz	Pass	6.20819G	3.00	6.431G	-45.02	-36.69	-8.33	2
6185MHz	Pass	6.24558G	2.50	5.9384G	-47.34	-37.46	-9.88	3
6185MHz	Pass	6.20879G	2.61	6.4272G	-45.12	-36.71	-8.41	4
6345MHz	Pass	6.37239G	1.05	6.5902G	-45.62	-38.52	-7.10	1
6345MHz	Pass	6.40598G	1.12	6.5922G	-46.85	-38.88	-7.97	2
6345MHz	Pass	6.37199G	0.41	6.5884G	-46.15	-39.18	-6.97	3
6345MHz	Pass	6.40379G	0.90	6.101G	-46.21	-38.50	-7.71	4
6505MHz	Pass	6.53459G	2.56	6.2616G	-46.33	-36.84	-9.49	1
6505MHz	Pass	6.56878G	2.27	6.3056G	-39.11	-30.97	-8.14	2
6505MHz	Pass	6.42922G	2.58	6.309G	-37.98	-29.48	-8.50	3
6505MHz	Pass	6.44482G	2.84	6.2554G	-46.73	-37.16	-9.57	4
6665MHz	Pass	6.69339G	3.47	6.4138G	-44.14	-36.53	-7.61	1
6665MHz	Pass	6.69359G	2.7	6.417G	-44.95	-37.18	-7.77	2
6665MHz	Pass	6.68899G	2.61	6.4104G	-46.01	-37.39	-8.62	3
6665MHz	Pass	6.72199G	3.11	6.4206G	-43.74	-36.44	-7.3	4
6825MHz	Pass	6.76721G	0.73	6.579G	-47.35	-39.05	-8.30	1
6825MHz	Pass	6.74882G	0.06	6.5812G	-48.44	-39.21	-9.23	2
6825MHz	Pass	6.74902G	0.06	6.5812G	-48.55	-39.59	-8.96	3


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6825MHz	Pass	6.80241G	0.59	6.5822G	-47.72	-38.92	-8.80	4
6985MHz	Pass	6.95941G	1.50	6.742G	-46.53	-38.03	-8.50	1
6985MHz	Pass	6.91922G	1.18	6.7416G	-47.44	-38.13	-9.31	2
6985MHz	Pass	6.95861G	1.63	6.742G	-47.20	-37.72	-9.48	3
6985MHz	Pass	6.92621G	1.61	6.7416G	-47.54	-37.79	-9.75	4
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.20737G	4.55	6.5926G	-38.45	-35.01	-3.44	1
6105MHz	Pass	6.20458G	5.58	6.4106G	-24.17	-18.59	-5.58	2
6105MHz	Pass	6.24776G	5.79	6.4538G	-26.36	-23.05	-3.31	3
6105MHz	Pass	6.20777G	5.33	6.419G	-25.08	-18.82	-6.26	4
6265MHz	Pass	6.36697G	2.47	6.7638G	-42.22	-37.53	-4.69	1
6265MHz	Pass	6.40936G	2.67	6.7614G	-41.85	-37.33	-4.52	2
6265MHz	Pass	6.36977G	2.29	6.7606G	-42.12	-37.71	-4.41	3
6265MHz	Pass	6.23421G	2.61	6.7658G	-42.61	-37.39	-5.22	4
6425MHz	Pass	6.53097G	2.90	6.9226G	-44.06	-37.10	-6.96	1
6425MHz	Pass	6.52338G	2.29	6.031G	-37.33	-30.44	-6.89	2
6425MHz	Pass	6.39021G	2.98	6.0142G	-37.01	-30.98	-6.03	3
6425MHz	Pass	6.37701G	2.66	6.0094G	-38.44	-31.73	-6.71	4
6585MHz	Pass	6.60619G	3.33	6.1798G	-34.97	-30.30	-4.67	1
6585MHz	Pass	6.60859G	3.43	6.1762G	-36.17	-30.46	-5.71	2
6585MHz	Pass	6.44464G	2.99	6.1746G	-34.09	-30.86	-3.23	3
6585MHz	Pass	6.62979G	3.47	6.1774G	-36.52	-30.25	-6.27	4
6745MHz	Pass	6.60264G	4.27	6.3298G	-35.73	-30.09	-5.64	1
6745MHz	Pass	6.60863G	4.19	6.2514G	-41.75	-35.80	-5.95	2
6745MHz	Pass	6.7262G	2.89	7.2402G	-43.68	-37.11	-6.57	3
6745MHz	Pass	6.63903G	4.30	6.2418G	-43.30	-35.70	-7.60	4
6905MHz	Pass	6.76663G	0.72	6.4042G	-46.50	-39.28	-7.22	1
6905MHz	Pass	6.75144G	1.13	6.4114G	-46.48	-38.77	-7.71	2
6905MHz	Pass	6.79623G	0.48	6.7398G	-25.82	-19.52	-6.30	3
6905MHz	Pass	6.80463G	1.78	6.4134G	-45.93	-38.16	-7.77	4

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

MASK

5955MHz_TX

23/07/2026

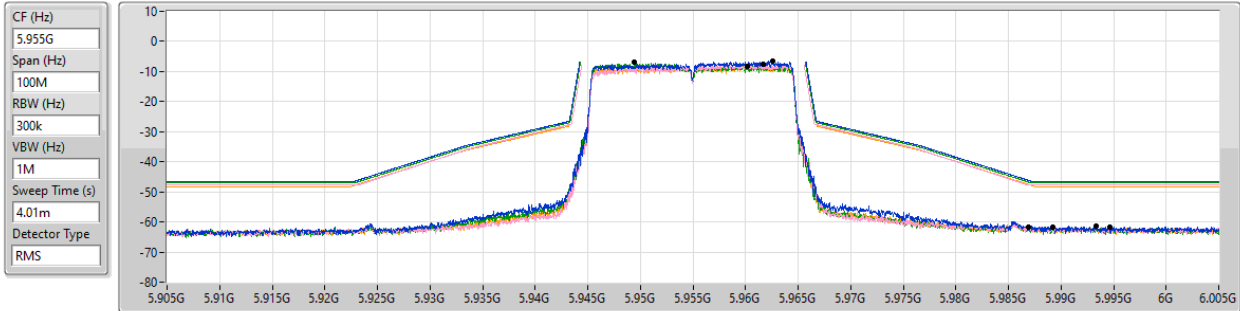


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.962573G	-6.55	5.9933G	-61.36	-46.55	-14.81	1
5.961698G	-7.52	5.9869G	-61.60	-47.52	-14.08	2
5.949426G	-6.95	5.99465G	-61.77	-46.95	-14.82	3
5.960149G	-8.22	5.98925G	-61.89	-48.22	-13.67	4

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

MASK

5965MHz_TX

23/07/2026

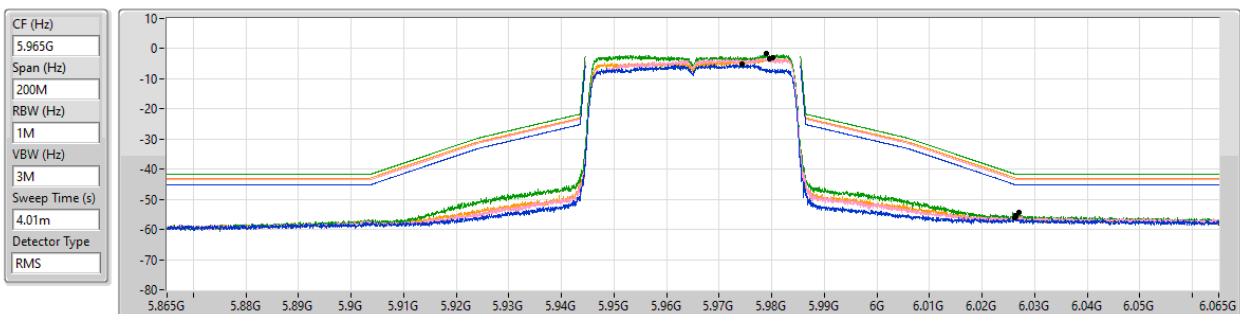

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.974398G	-5.19	6.02625G	-56.04	-45.11	-10.93	1
5.979546G	-3.34	6.02645G	-55.72	-43.34	-12.38	2
5.978997G	-1.72	6.027G	-54.48	-41.72	-12.76	3
5.980246G	-3.04	6.02645G	-55.49	-42.98	-12.51	4


5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

MASK

6385MHz_TX

01/07/2026

CF (Hz)
6.385G
Span (Hz)
400M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
4.01m
Detector Type
RMS

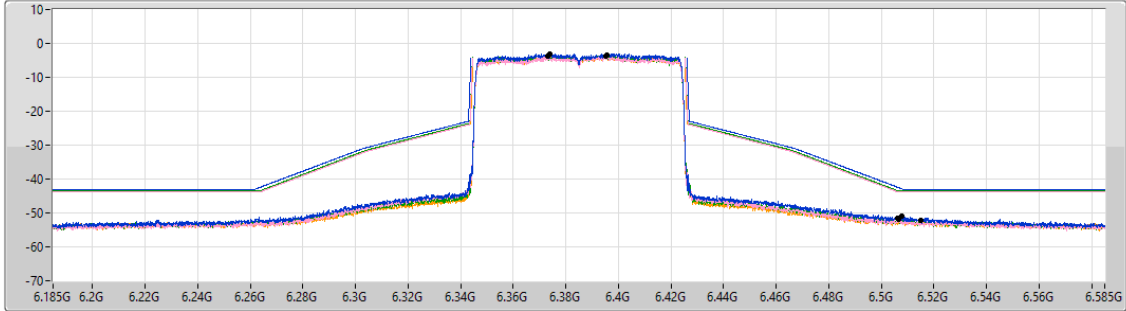

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.374G	-2.98	6.5079G	-51.08	-42.92	-8.16	1
6.3954G	-3.88	6.5068G	-51.90	-43.88	-8.02	2
6.3957G	-3.52	6.5063G	-51.67	-43.48	-8.19	3
6.3733G	-3.60	6.5151G	-52.26	-43.60	-8.66	4


5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

MASK

6025MHz_TX

06/08/2026

CF (Hz)
6.025G
Span (Hz)
800M
RBW (Hz)
3M
VBW (Hz)
10M
Sweep Time (s)
4.01m
Detector Type
RMS

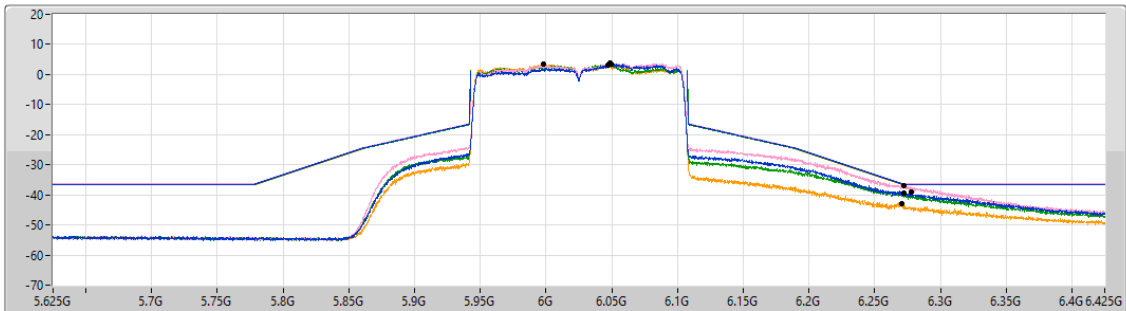

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.04919G	3.49	6.2778G	-39.21	-36.51	-2.70	1
6.04899G	3.72	6.272G	-37.02	-36.28	-0.74	2
6.04719G	3.30	6.272G	-39.58	-36.63	-2.95	3
5.99801G	3.38	6.2708G	-43.04	-36.56	-6.48	4


5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

MASK

6105MHz_TX

06/08/2026

CF (Hz)
6.105G
Span (Hz)
1.6G
RBW (Hz)
5M
VBW (Hz)
3M
Sweep Time (s)
4.01m
Detector Type
RMS

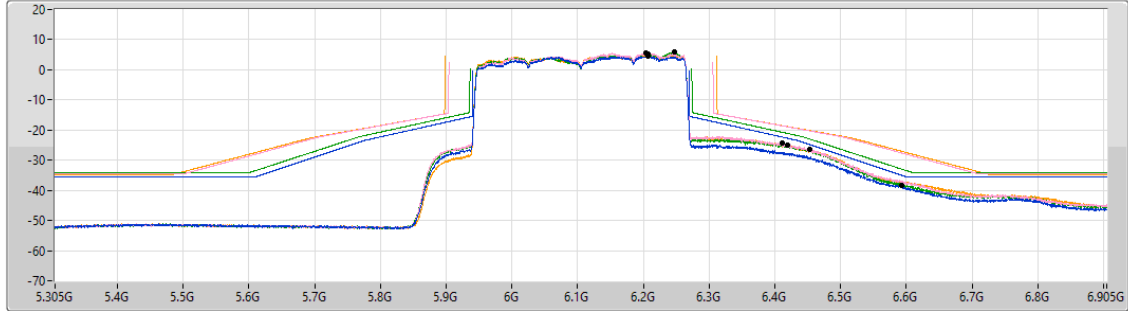

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.20737G	4.55	6.5926G	-38.45	-35.01	-3.44	1
6.20458G	5.58	6.4106G	-24.17	-18.59	-5.58	2
6.24776G	5.79	6.4538G	-26.36	-23.05	-3.31	3
6.20777G	5.33	6.419G	-25.08	-18.82	-6.26	4


6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

MASK

6515MHz_TX

23/07/2026

CF (Hz)
6.515G
Span (Hz)
100M
RBW (Hz)
300k
VBW (Hz)
1M
Sweep Time (s)
4.01m
Detector Type
RMS

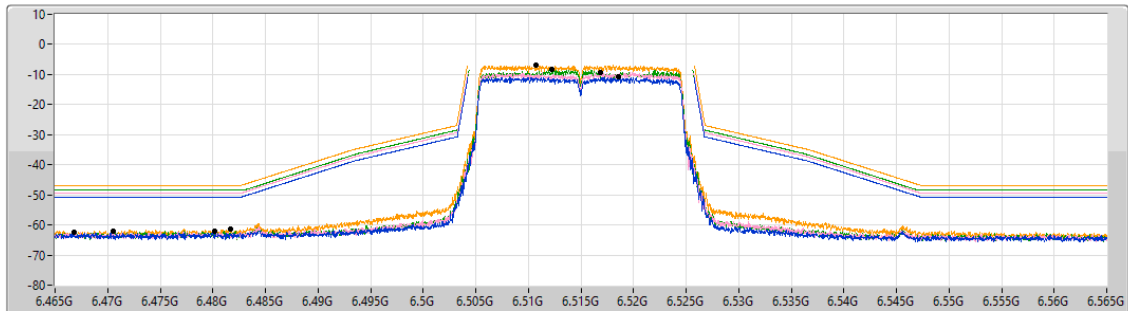

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.518524G	-10.69	6.4668G	-62.58	-50.69	-11.89	1
6.51685G	-9.27	6.4705G	-61.94	-49.27	-12.67	2
6.512251G	-8.36	6.480175G	-62.13	-48.36	-13.77	3
6.510701G	-6.95	6.4817G	-61.31	-46.95	-14.36	4

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

MASK

6445MHz_TX

23/07/2026

CF (Hz)
6.445G


Span (Hz)
200M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
4.01m

Detector Type
RMS

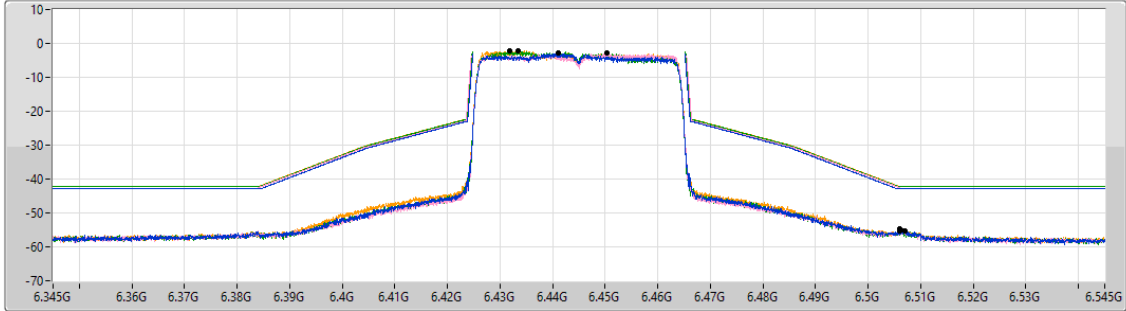

Port 1 

Port 2 

Port 3 

Port 4 

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.441101G	-2.92	6.50705G	-55.30	-42.92	-12.38	1
6.450349G	-2.81	6.5063G	-54.92	-42.76	-12.16	2
6.433453G	-2.33	6.50595G	-55.40	-42.33	-13.07	3
6.431853G	-2.29	6.50605G	-54.82	-42.29	-12.53	4

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

MASK

6465MHz_TX

06/08/2026

CF (Hz)
6.465G


Span (Hz)
400M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
4.01m

Detector Type
RMS

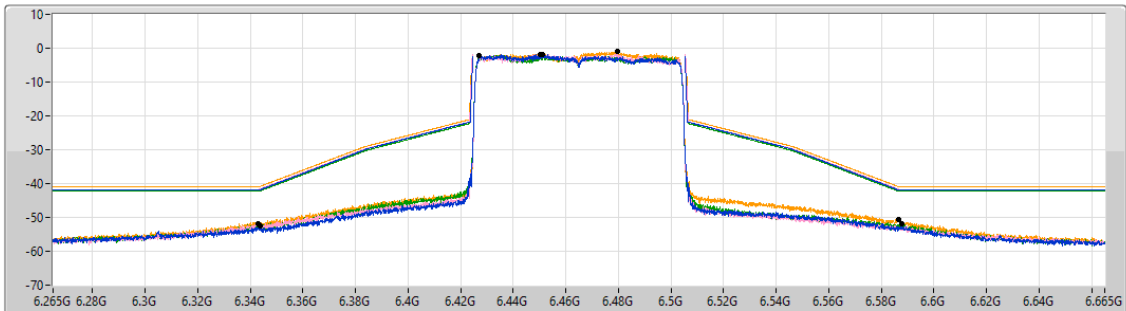

Port 1 

Port 2 

Port 3 

Port 4 

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.4512G	-1.78	6.3438G	-52.61	-41.78	-10.83	1
6.4504G	-1.74	6.3429G	-51.82	-41.74	-10.08	2
6.42691G	-2.23	6.5878G	-51.97	-42.23	-9.74	3
6.4797G	-1.09	6.5866G	-50.56	-40.94	-9.62	4

6.425-6.525GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

MASK

6505MHz_TX

06/08/2026

CF (Hz)
6.505G


Span (Hz)
800M

RBW (Hz)
3M

VBW (Hz)
10M

Sweep Time (s)
4.01m

Detector Type
RMS

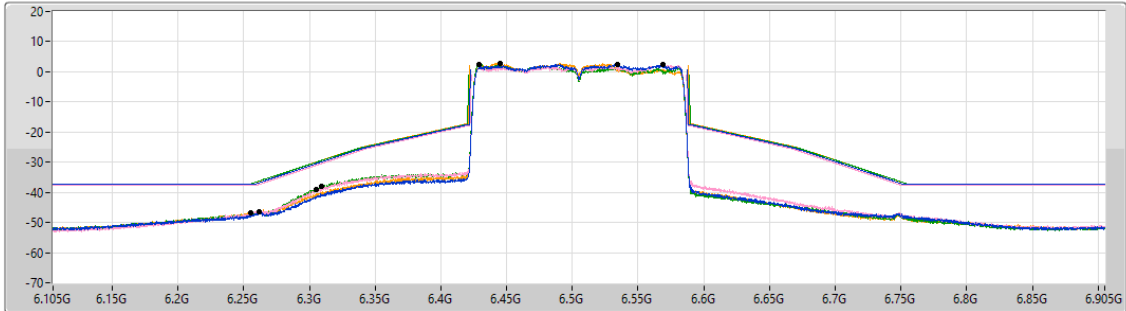

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.53459G	2.56	6.2616G	-46.33	-36.84	-9.49	1
6.56878G	2.27	6.3056G	-39.11	-30.97	-8.14	2
6.42922G	2.58	6.309G	-37.98	-29.48	-8.50	3
6.44482G	2.84	6.2554G	-46.73	-37.16	-9.57	4

6.425-6.525GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

MASK

6585MHz_TX

06/08/2026

CF (Hz)
6.585G


Span (Hz)
1.6G

RBW (Hz)
5M

VBW (Hz)
3M

Sweep Time (s)
4.01m

Detector Type
RMS

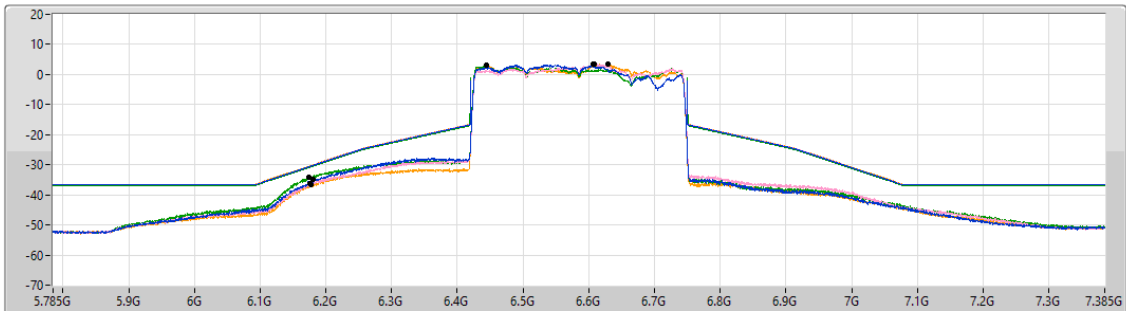


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.60619G	3.33	6.1798G	-34.97	-30.30	-4.67	1
6.60859G	3.43	6.1762G	-36.17	-30.46	-5.71	2
6.44464G	2.99	6.1746G	-34.09	-30.86	-3.23	3
6.62979G	3.47	6.1774G	-36.52	-30.25	-6.27	4

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

MASK

6535MHz_TX

23/07/2026

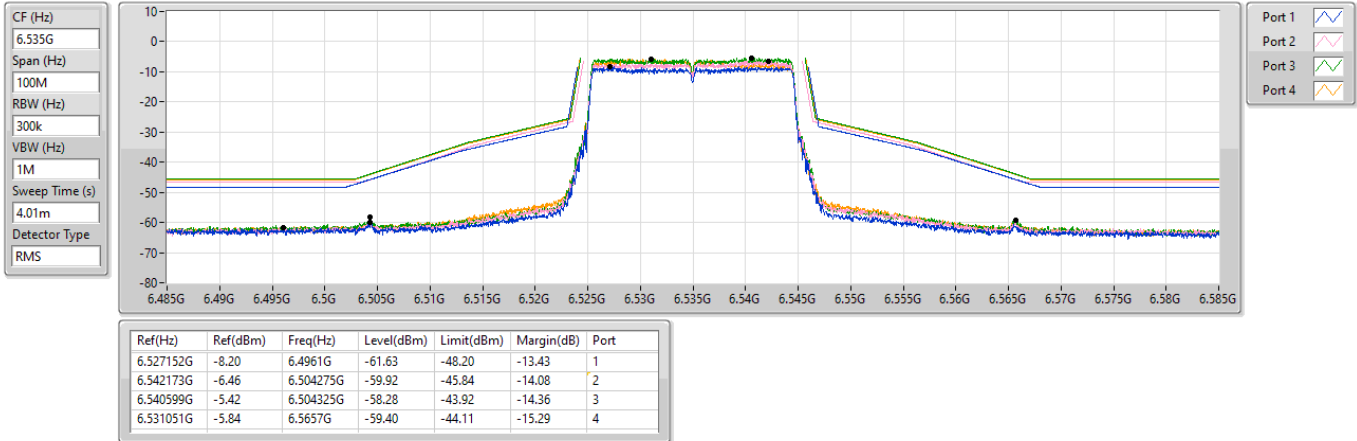


6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

MASK

6685MHz_TX

23/07/2026

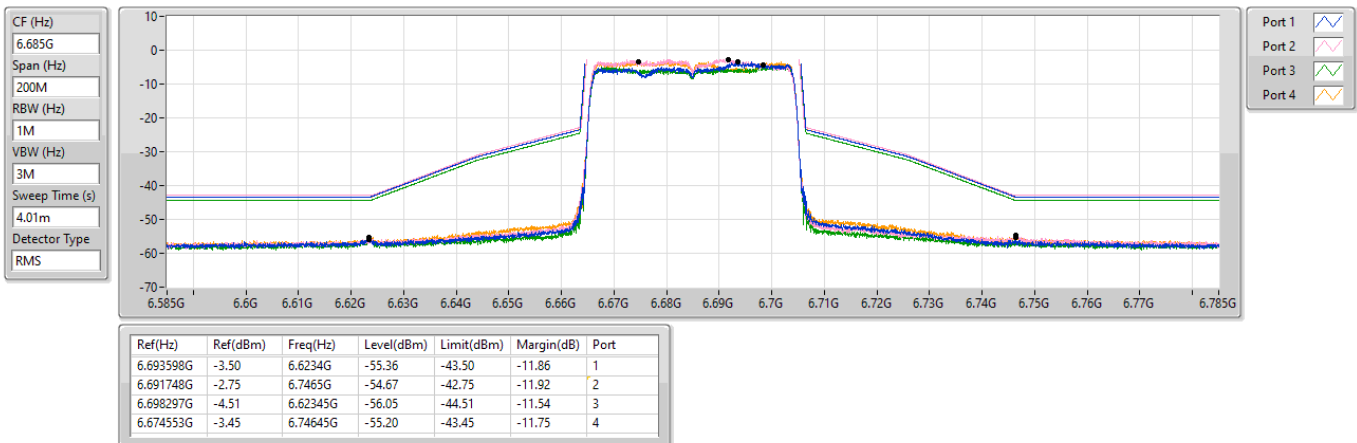

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

MASK

6705MHz_TX

01/07/2026

CF (Hz)
6.705G


Span (Hz)
400M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
4.01m

Detector Type
RMS

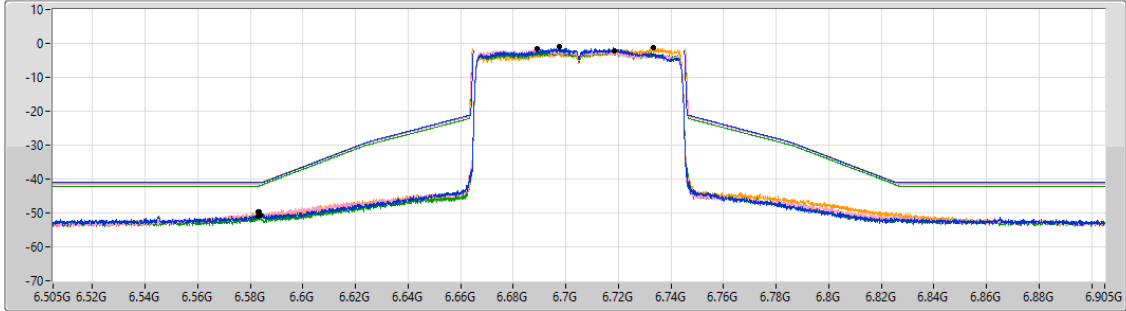

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.6977G	-1.08	6.5837G	-50.47	-41.08	-9.39	1
6.6892G	-1.57	6.5833G	-49.61	-41.45	-8.16	2
6.7185G	-2.16	6.583G	-51.05	-42.13	-8.92	3
6.73319G	-1.30	6.5831G	-49.80	-41.30	-8.50	4

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

MASK

6665MHz_TX

01/07/2026

CF (Hz)
6.665G


Span (Hz)
800M

RBW (Hz)
3M

VBW (Hz)
10M

Sweep Time (s)
4.01m

Detector Type
RMS

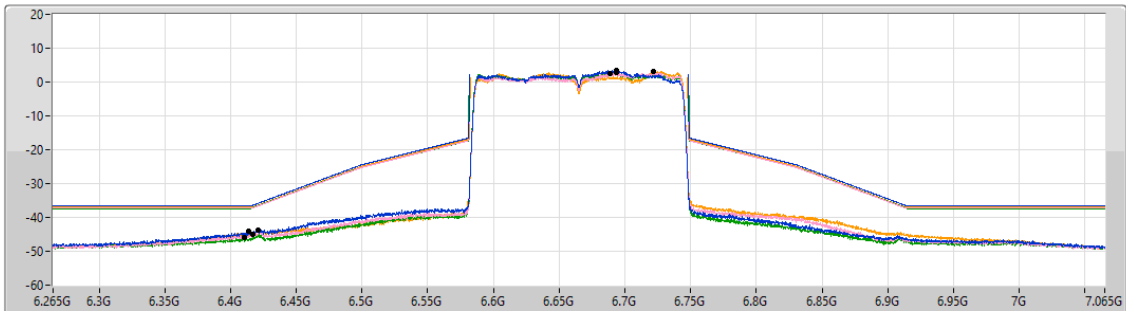


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.69339G	3.47	6.4138G	-44.14	-36.53	-7.61	1
6.69359G	2.70	6.417G	-44.95	-37.18	-7.77	2
6.68899G	2.61	6.4104G	-46.01	-37.39	-8.62	3
6.72199G	3.11	6.4206G	-43.74	-36.44	-7.30	4

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

MASK

6745MHz_TX

06/08/2026

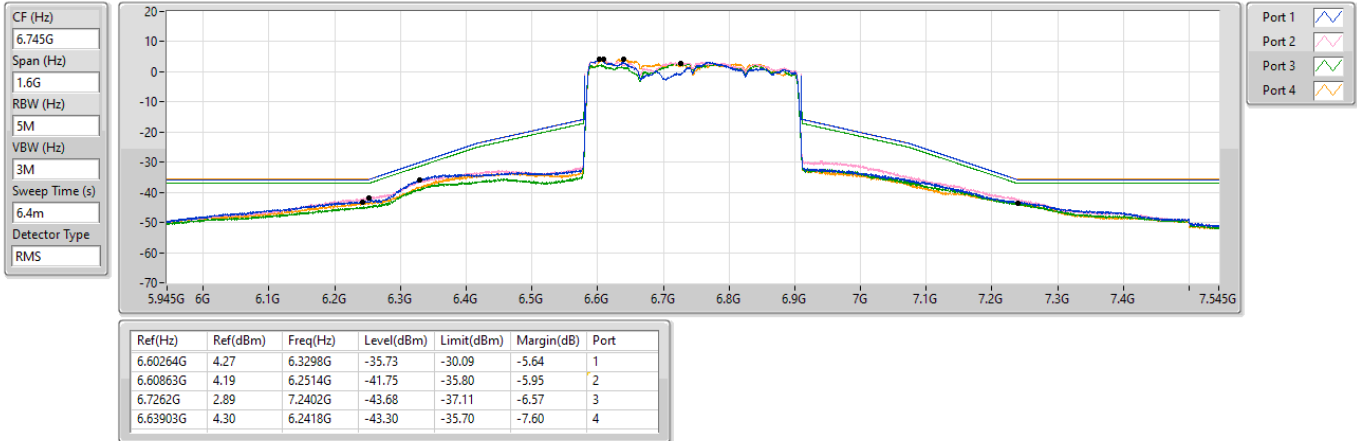


6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

MASK

6895MHz_TX

23/07/2026

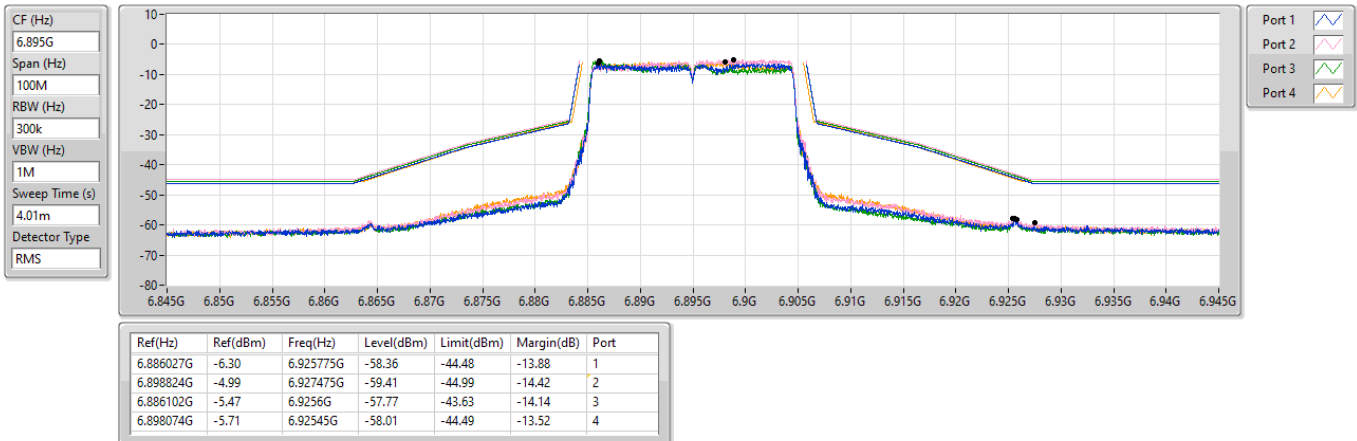


6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

MASK

6925MHz_TX

23/07/2026

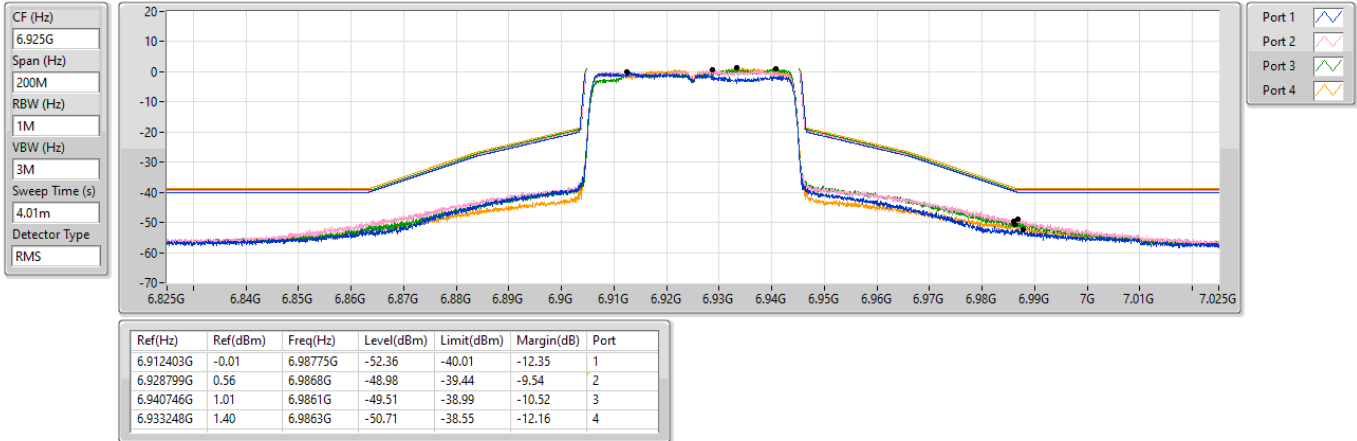


6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

MASK

6945MHz_TX

06/08/2026

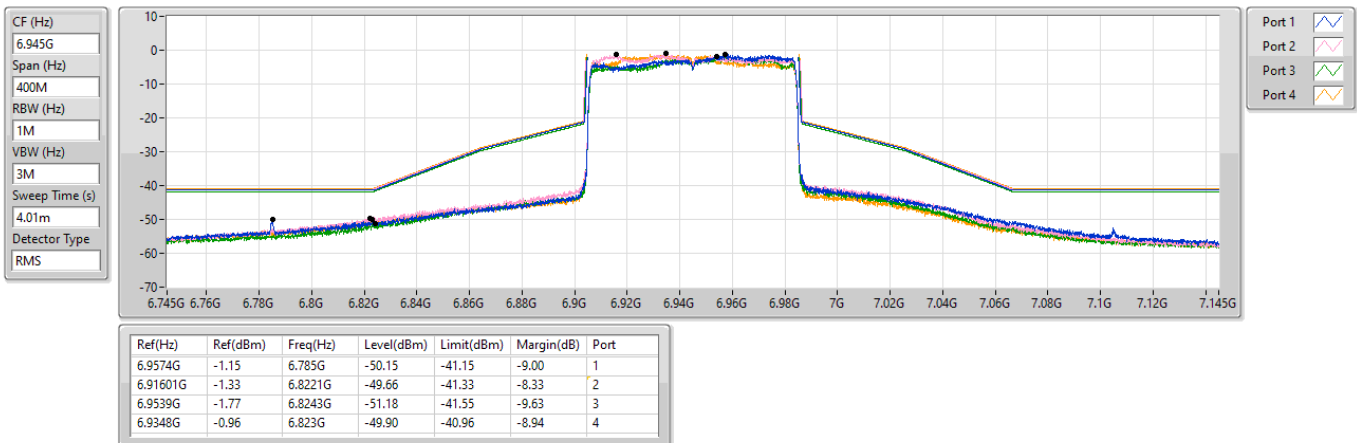


6.875-7.125GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

MASK

6985MHz_TX

06/08/2026

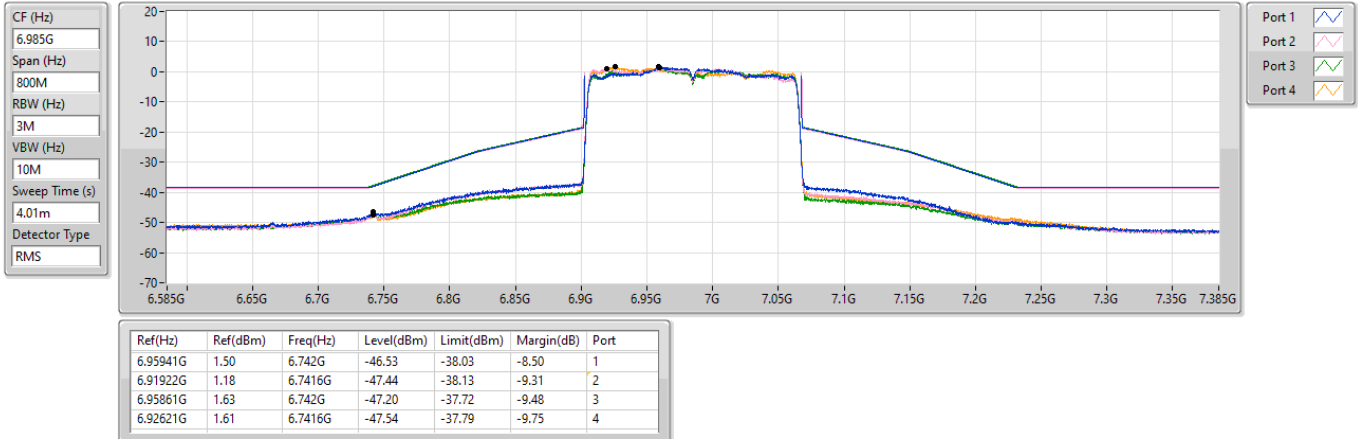

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX	Pass	AV	11.96668G	43.45	54.00	-10.55	3	Vertical	64	1.50
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	Pass	AV	12.047G	44.52	54.00	-9.48	3	Horizontal	230	1.50
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	Pass	AV	5.921G	60.94	68.20	-7.26	3	Horizontal	212	1.06
6.525-6.875GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 2_4TX	Pass	AV	7.253G	52.88	54.00	-1.12	3	Horizontal	316	1.15
6.875-7.125GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX	Pass	AV	7.1738G	53.33	68.20	-14.87	3	Horizontal	325	1.01
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	Pass	AV	7.134G	55.83	68.20	-12.37	3	Horizontal	321	1.07

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	AV	5.9175G	50.09	68.20	-18.11	3	Vertical	112	1.14
5985MHz	Pass	AV	5.9975G	88.57	Inf	-Inf	3	Vertical	112	1.14
5985MHz	Pass	PK	5.919G	61.60	88.20	-26.60	3	Vertical	112	1.14
5985MHz	Pass	PK	5.9975G	100.41	Inf	-Inf	3	Vertical	112	1.14
5985MHz	Pass	AV	5.925G	50.80	68.20	-17.40	3	Horizontal	257	1.02
5985MHz	Pass	AV	5.9955G	98.50	Inf	-Inf	3	Horizontal	257	1.02
5985MHz	Pass	PK	5.9155G	61.79	88.20	-26.41	3	Horizontal	257	1.02
5985MHz	Pass	PK	5.991G	109.59	Inf	-Inf	3	Horizontal	257	1.02
5985MHz	Pass	AV	11.9668G	43.45	54.00	-10.55	3	Vertical	64	1.50
5985MHz	Pass	PK	11.97508G	55.38	74.00	-18.62	3	Vertical	64	1.50
5985MHz	Pass	AV	11.97352G	43.17	54.00	-10.83	3	Horizontal	336	1.50
5985MHz	Pass	PK	11.97132G	55.29	74.00	-18.71	3	Horizontal	336	1.50
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
7025MHz	Pass	AV	7.013G	90.89	Inf	-Inf	3	Vertical	260	2.31
7025MHz	Pass	AV	7.1651G	53.32	68.20	-14.88	3	Vertical	260	2.31
7025MHz	Pass	PK	7.0082G	101.19	Inf	-Inf	3	Vertical	260	2.31
7025MHz	Pass	PK	7.1423G	64.33	88.20	-23.87	3	Vertical	260	2.31
7025MHz	Pass	AV	7.0136G	97.25	Inf	-Inf	3	Horizontal	325	1.01
7025MHz	Pass	AV	7.1738G	53.33	68.20	-14.87	3	Horizontal	325	1.01
7025MHz	Pass	PK	7.0283G	108.87	Inf	-Inf	3	Horizontal	325	1.01
7025MHz	Pass	PK	7.1741G	64.31	88.20	-23.89	3	Horizontal	325	1.01
7025MHz	Pass	AV	14.0586G	44.84	68.20	-23.36	3	Vertical	140	2.18
7025MHz	Pass	PK	14.04408G	56.54	88.20	-31.66	3	Vertical	140	2.18
7025MHz	Pass	AV	14.05892G	44.85	68.20	-23.35	3	Horizontal	237	1.55
7025MHz	Pass	PK	14.0498G	56.63	88.20	-31.57	3	Horizontal	237	1.55
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 8_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	AV	5.925G	52.20	68.20	-16.00	3	Vertical	224	1.01
6025MHz	Pass	AV	6.0555G	91.84	Inf	-Inf	3	Vertical	224	1.01
6025MHz	Pass	PK	5.908G	63.22	88.20	-24.98	3	Vertical	224	1.01
6025MHz	Pass	PK	6.0505G	102.68	Inf	-Inf	3	Vertical	224	1.01
6025MHz	Pass	AV	5.9155G	57.55	68.20	-10.65	3	Horizontal	256	1.00
6025MHz	Pass	AV	6.0505G	100.42	Inf	-Inf	3	Horizontal	256	1.00
6025MHz	Pass	PK	5.905G	68.82	88.20	-19.38	3	Horizontal	256	1.00
6025MHz	Pass	PK	6.0005G	110.92	Inf	-Inf	3	Horizontal	256	1.00
6025MHz	Pass	AV	12.04484G	44.10	54.00	-9.90	3	Vertical	8	1.50
6025MHz	Pass	PK	12.0566G	54.85	74.00	-19.15	3	Vertical	8	1.50
6025MHz	Pass	AV	12.04612G	44.24	54.00	-9.76	3	Horizontal	4	1.50
6025MHz	Pass	PK	12.04256G	55.07	74.00	-18.93	3	Horizontal	4	1.50
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	AV	5.911G	51.57	68.20	-16.63	3	Vertical	226	1.03
6025MHz	Pass	AV	6.1005G	92.40	Inf	-Inf	3	Vertical	226	1.03
6025MHz	Pass	PK	5.925G	63.94	88.20	-24.26	3	Vertical	226	1.03
6025MHz	Pass	PK	6.1G	102.63	Inf	-Inf	3	Vertical	226	1.03
6025MHz	Pass	AV	5.925G	57.34	68.20	-10.86	3	Horizontal	241	2.43
6025MHz	Pass	AV	6.1G	100.12	Inf	-Inf	3	Horizontal	241	2.43
6025MHz	Pass	PK	5.925G	74.44	88.20	-13.76	3	Horizontal	241	2.43
6025MHz	Pass	PK	6.01G	111.60	Inf	-Inf	3	Horizontal	241	2.43
6025MHz	Pass	AV	12.046G	44.14	54.00	-9.86	3	Vertical	236	2.80
6025MHz	Pass	PK	12.05804G	55.26	74.00	-18.74	3	Vertical	236	2.80
6025MHz	Pass	AV	12.047G	44.52	54.00	-9.48	3	Horizontal	230	1.50
6025MHz	Pass	PK	12.04712G	54.67	74.00	-19.33	3	Horizontal	230	1.50
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 4_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	AV	6.96G	89.69	Inf	-Inf	3	Vertical	189	1.44
6985MHz	Pass	AV	7.1775G	54.52	68.20	-13.68	3	Vertical	189	1.44
6985MHz	Pass	PK	6.9205G	99.77	Inf	-Inf	3	Vertical	189	1.44
6985MHz	Pass	PK	7.222G	64.84	88.20	-23.36	3	Vertical	189	1.44
6985MHz	Pass	AV	6.923G	98.51	Inf	-Inf	3	Horizontal	322	1.06
6985MHz	Pass	AV	7.1285G	55.70	68.20	-12.50	3	Horizontal	322	1.06
6985MHz	Pass	PK	6.9935G	109.56	Inf	-Inf	3	Horizontal	322	1.06
6985MHz	Pass	PK	7.139G	66.20	88.20	-22.00	3	Horizontal	322	1.06

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6985MHz	Pass	AV	13.96044G	45.72	68.20	-22.48	3	Vertical	25	1.50
6985MHz	Pass	PK	13.96068G	56.45	88.20	-31.75	3	Vertical	25	1.50
6985MHz	Pass	AV	13.96996G	45.44	68.20	-22.76	3	Horizontal	252	1.50
6985MHz	Pass	PK	13.97076G	56.28	88.20	-31.92	3	Horizontal	252	1.50
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX										
6985MHz	Pass	AV	6.92G	89.27	Inf	-Inf	3	Vertical	188	1.50
6985MHz	Pass	AV	7.227G	54.62	68.20	-13.58	3	Vertical	188	1.50
6985MHz	Pass	PK	6.92G	99.37	Inf	-Inf	3	Vertical	188	1.50
6985MHz	Pass	PK	7.1975G	65.10	88.20	-23.10	3	Vertical	188	1.50
6985MHz	Pass	AV	6.923G	98.15	Inf	-Inf	3	Horizontal	321	1.07
6985MHz	Pass	AV	7.134G	55.83	68.20	-12.37	3	Horizontal	321	1.07
6985MHz	Pass	PK	6.9935G	108.87	Inf	-Inf	3	Horizontal	321	1.07
6985MHz	Pass	PK	7.1515G	69.53	88.20	-18.67	3	Horizontal	321	1.07
6985MHz	Pass	AV	13.96988G	45.81	68.20	-22.39	3	Vertical	74	1.50
6985MHz	Pass	PK	13.9652G	56.22	88.20	-31.98	3	Vertical	74	1.50
6985MHz	Pass	AV	13.96368G	45.60	68.20	-22.60	3	Horizontal	211	2.82
6985MHz	Pass	PK	13.97992G	56.14	88.20	-32.06	3	Horizontal	211	2.82
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX										
6105MHz	Pass	AV	5.924G	54.06	68.20	-14.14	3	Vertical	229	1.01
6105MHz	Pass	AV	6.156G	93.53	Inf	-Inf	3	Vertical	229	1.01
6105MHz	Pass	PK	5.925G	63.15	88.20	-25.05	3	Vertical	229	1.01
6105MHz	Pass	PK	6.156G	102.69	Inf	-Inf	3	Vertical	229	1.01
6105MHz	Pass	AV	5.923G	57.22	68.20	-10.98	3	Horizontal	321	1.15
6105MHz	Pass	AV	6.212G	99.16	Inf	-Inf	3	Horizontal	321	1.15
6105MHz	Pass	PK	5.908G	66.51	88.20	-21.69	3	Horizontal	321	1.15
6105MHz	Pass	PK	6.189G	108.63	Inf	-Inf	3	Horizontal	321	1.15
6105MHz	Pass	AV	12.2072G	44.73	54.00	-9.27	3	Vertical	80	1.76
6105MHz	Pass	PK	12.20132G	54.77	74.00	-19.23	3	Vertical	80	1.76
6105MHz	Pass	AV	12.21512G	44.58	54.00	-9.42	3	Horizontal	69	1.50
6105MHz	Pass	PK	12.202G	54.89	74.00	-19.11	3	Horizontal	69	1.50
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX										
6105MHz	Pass	AV	5.905G	52.91	68.20	-15.29	3	Vertical	72	1.46
6105MHz	Pass	AV	6.14G	92.02	Inf	-Inf	3	Vertical	72	1.46
6105MHz	Pass	PK	5.924G	65.07	88.20	-23.13	3	Vertical	72	1.46
6105MHz	Pass	PK	6.14G	102.70	Inf	-Inf	3	Vertical	72	1.46
6105MHz	Pass	AV	5.921G	60.94	68.20	-7.26	3	Horizontal	212	1.06
6105MHz	Pass	AV	6.151G	100.65	Inf	-Inf	3	Horizontal	212	1.06
6105MHz	Pass	PK	5.901G	70.39	88.20	-17.81	3	Horizontal	212	1.06
6105MHz	Pass	PK	6.061G	110.60	Inf	-Inf	3	Horizontal	212	1.06
6105MHz	Pass	AV	12.2086G	44.78	54.00	-9.22	3	Vertical	125	1.50
6105MHz	Pass	PK	12.21072G	55.04	74.00	-18.96	3	Vertical	125	1.50
6105MHz	Pass	AV	12.2066G	44.53	54.00	-9.47	3	Horizontal	282	1.58
6105MHz	Pass	PK	12.20972G	54.76	74.00	-19.24	3	Horizontal	282	1.58
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 2_4TX										
6105MHz	Pass	AV	5.925G	51.59	68.20	-16.61	3	Vertical	230	1.01
6105MHz	Pass	AV	6.15G	93.22	Inf	-Inf	3	Vertical	230	1.01
6105MHz	Pass	PK	5.925G	61.27	88.20	-26.93	3	Vertical	230	1.01
6105MHz	Pass	PK	6.155G	103.17	Inf	-Inf	3	Vertical	230	1.01
6105MHz	Pass	AV	5.916G	56.03	68.20	-12.17	3	Horizontal	212	1.03
6105MHz	Pass	AV	6.141G	100.02	Inf	-Inf	3	Horizontal	212	1.03
6105MHz	Pass	PK	5.898G	67.78	88.20	-20.42	3	Horizontal	212	1.03
6105MHz	Pass	PK	6.141G	110.69	Inf	-Inf	3	Horizontal	212	1.03
6105MHz	Pass	AV	12.20036G	43.80	54.00	-10.20	3	Vertical	77	1.50
6105MHz	Pass	PK	12.2002G	54.31	74.00	-19.69	3	Vertical	77	1.50
6105MHz	Pass	AV	12.21608G	43.80	54.00	-10.20	3	Horizontal	129	1.50
6105MHz	Pass	PK	12.20456G	54.49	74.00	-19.51	3	Horizontal	129	1.50
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 4_4TX										
6905MHz	Pass	AV	6.763G	87.46	Inf	-Inf	3	Vertical	262	2.31
6905MHz	Pass	AV	7.302G	52.53	54.00	-1.47	3	Vertical	262	2.31
6905MHz	Pass	PK	6.763G	97.31	Inf	-Inf	3	Vertical	262	2.31
6905MHz	Pass	PK	7.383G	61.53	74.00	-12.47	3	Vertical	262	2.31
6905MHz	Pass	AV	6.851G	92.90	Inf	-Inf	3	Horizontal	322	1.34




RSE TX above 1GHz _Non-Beamforming_Multi-RU

Appendix E.3

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6905MHz	Pass	AV	7.264G	52.78	54.00	-1.22	3	Horizontal	322	1.34
6905MHz	Pass	PK	6.823G	102.70	Inf	-Inf	3	Horizontal	322	1.34
6905MHz	Pass	PK	7.273G	61.93	74.00	-12.07	3	Horizontal	322	1.34
6905MHz	Pass	AV	13.80944G	46.27	68.20	-21.93	3	Vertical	360	1.50
6905MHz	Pass	PK	13.81776G	55.96	88.20	-32.24	3	Vertical	360	1.50
6905MHz	Pass	AV	13.8026G	46.17	68.20	-22.03	3	Horizontal	5	1.21
6905MHz	Pass	PK	13.80308G	56.11	88.20	-32.09	3	Horizontal	5	1.21
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	AV	6.762G	87.16	Inf	-Inf	3	Vertical	259	2.58
6905MHz	Pass	AV	7.276G	52.72	54.00	-1.28	3	Vertical	259	2.58
6905MHz	Pass	PK	6.768G	96.53	Inf	-Inf	3	Vertical	259	2.58
6905MHz	Pass	PK	7.373G	62.01	74.00	-11.99	3	Vertical	259	2.58
6905MHz	Pass	AV	6.769G	93.53	Inf	-Inf	3	Horizontal	316	1.15
6905MHz	Pass	AV	7.253G	52.88	54.00	-1.12	3	Horizontal	316	1.15
6905MHz	Pass	PK	6.803G	103.16	Inf	-Inf	3	Horizontal	316	1.15
6905MHz	Pass	PK	7.312G	62.07	74.00	-11.93	3	Horizontal	316	1.15
6905MHz	Pass	AV	13.80172G	46.51	68.20	-21.69	3	Vertical	288	1.50
6905MHz	Pass	PK	13.81004G	56.25	88.20	-31.95	3	Vertical	288	1.50
6905MHz	Pass	AV	13.81948G	46.48	68.20	-21.72	3	Horizontal	151	1.14
6905MHz	Pass	PK	13.81096G	56.37	88.20	-31.83	3	Horizontal	151	1.14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 10_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	AV	6.858G	90.01	Inf	-Inf	3	Vertical	263	2.39
6905MHz	Pass	AV	7.305G	52.32	54.00	-1.68	3	Vertical	263	2.39
6905MHz	Pass	PK	6.863G	100.48	Inf	-Inf	3	Vertical	263	2.39
6905MHz	Pass	PK	7.301G	62.28	74.00	-11.72	3	Vertical	263	2.39
6905MHz	Pass	AV	6.857G	95.46	Inf	-Inf	3	Horizontal	322	1.18
6905MHz	Pass	AV	7.255G	52.45	54.00	-1.55	3	Horizontal	322	1.18
6905MHz	Pass	PK	6.939G	105.00	Inf	-Inf	3	Horizontal	322	1.18
6905MHz	Pass	PK	7.291G	62.88	74.00	-11.12	3	Horizontal	322	1.18
6905MHz	Pass	AV	13.8106G	45.49	68.20	-22.71	3	Vertical	108	2.72
6905MHz	Pass	PK	13.80004G	56.50	88.20	-31.70	3	Vertical	108	2.72
6905MHz	Pass	AV	13.80284G	45.34	68.20	-22.86	3	Horizontal	46	2.06
6905MHz	Pass	PK	13.80516G	56.82	88.20	-31.38	3	Horizontal	46	2.06


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX

5985MHz_TX

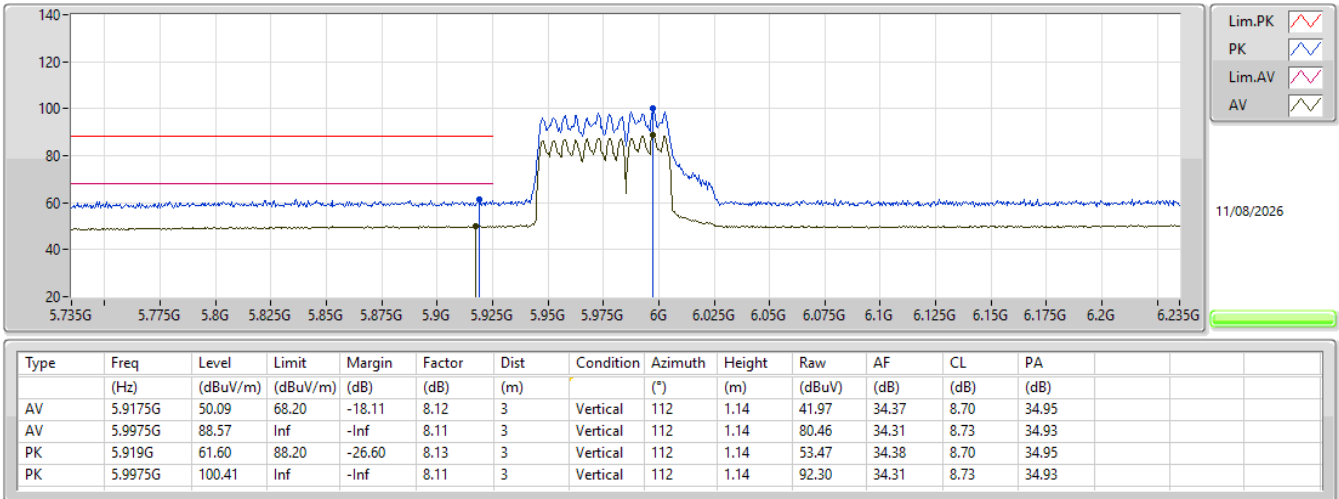


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX

5985MHz_TX

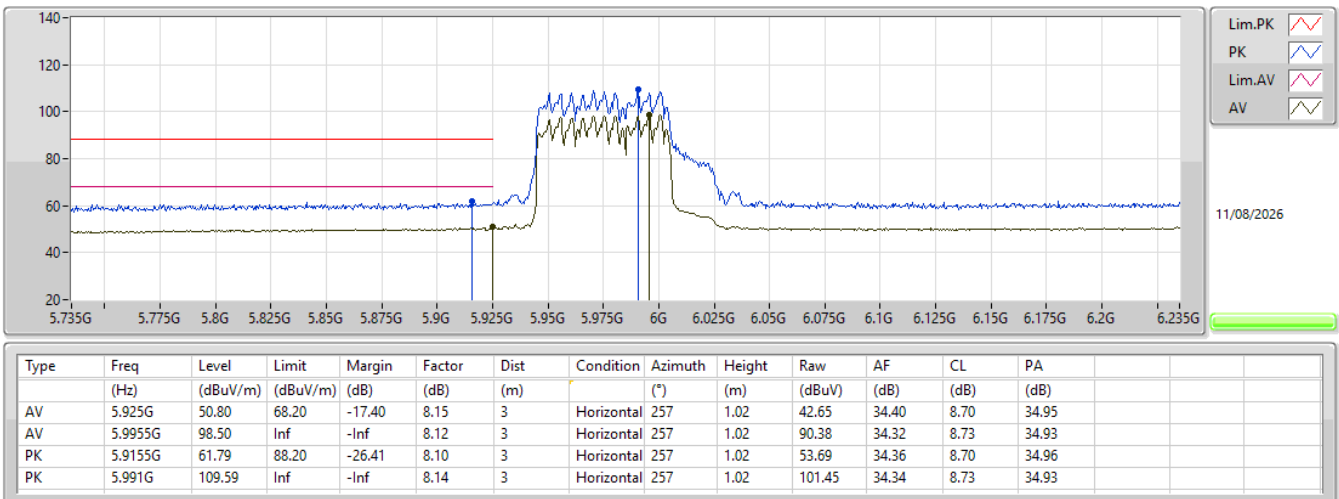


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX

5985MHz_TX

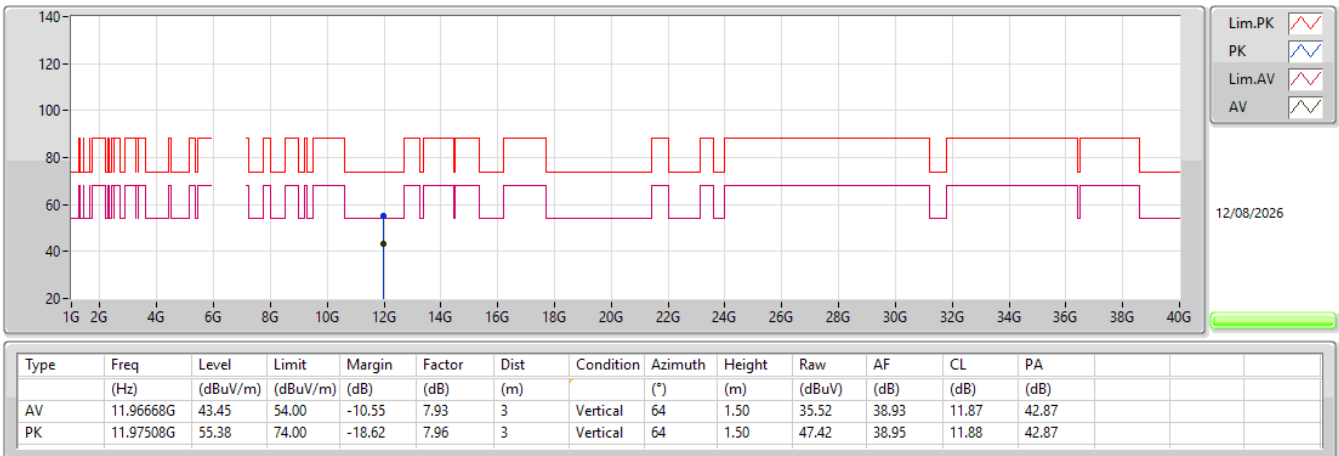


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX

5985MHz_TX

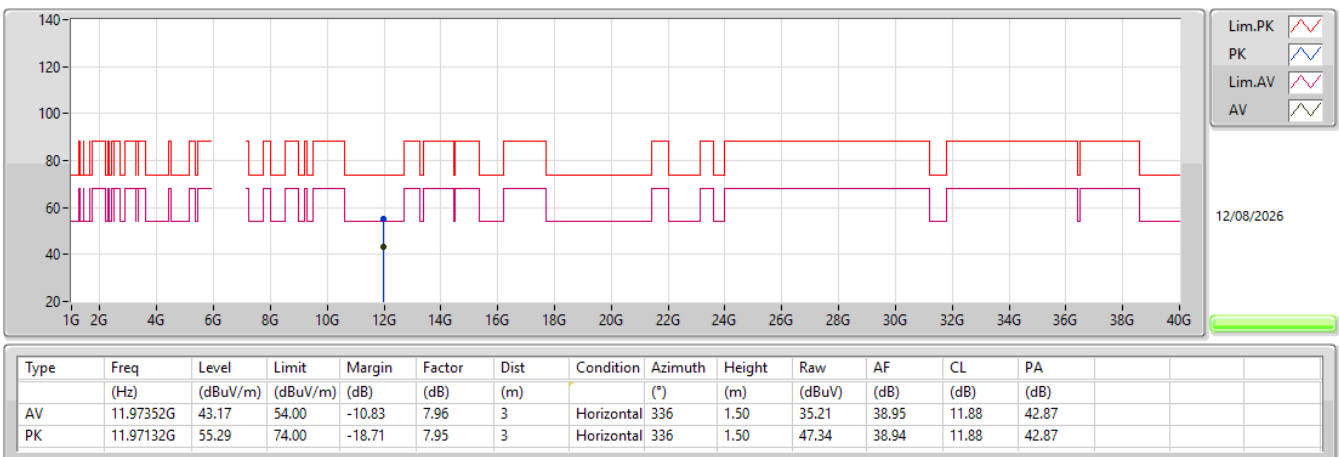


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

6025MHz_TX

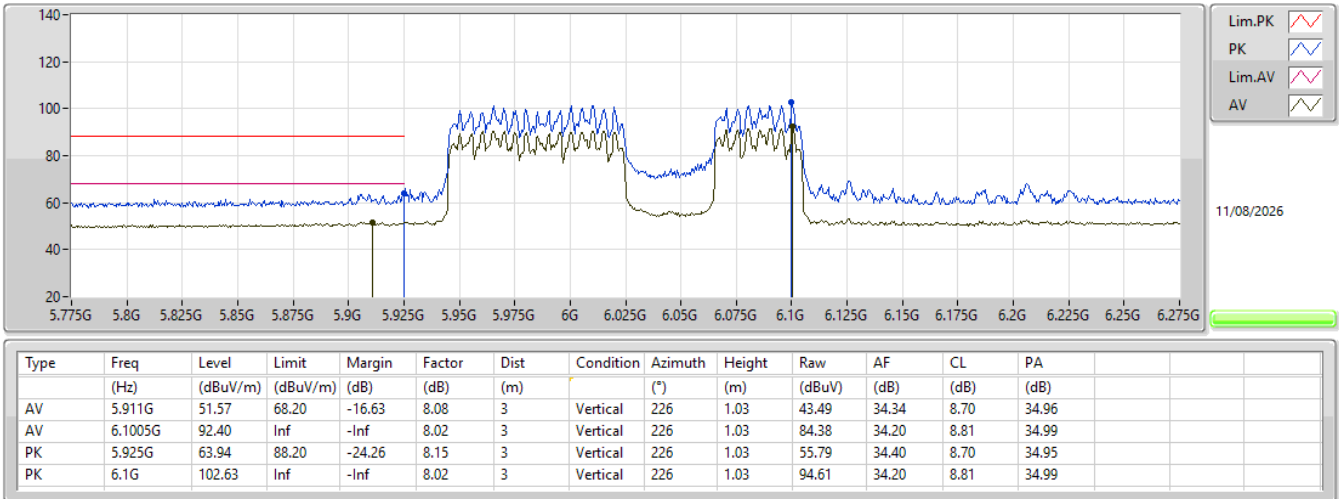


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

6025MHz_TX

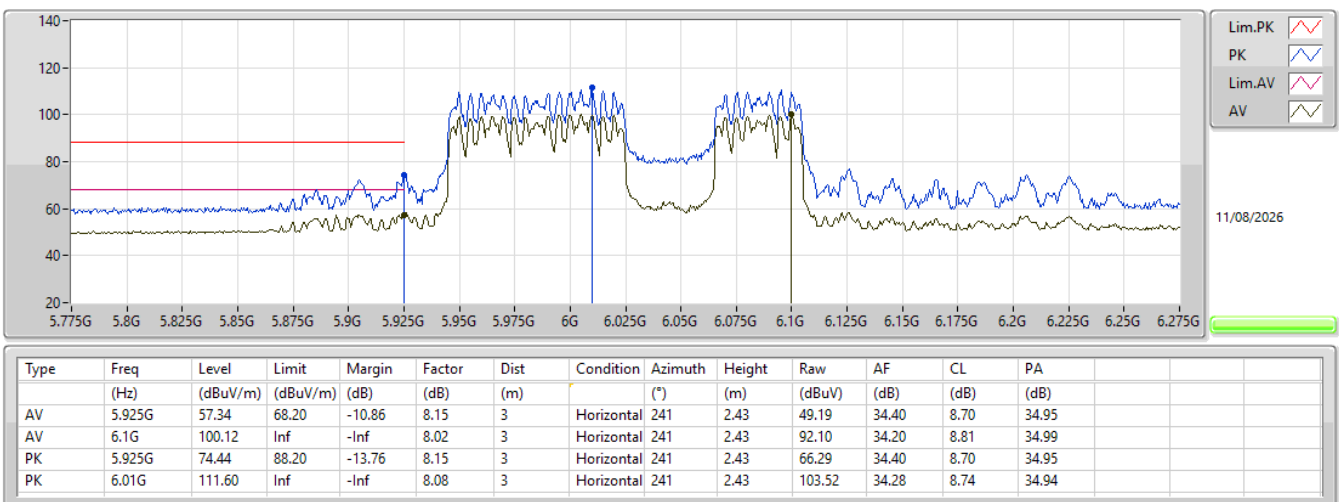


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

6025MHz_TX

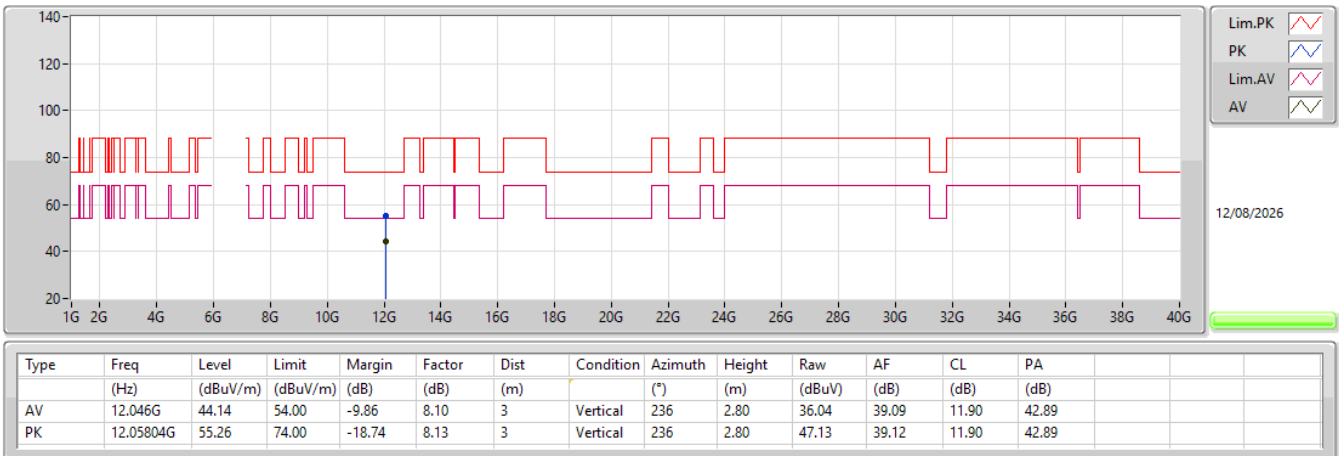


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

6025MHz_TX

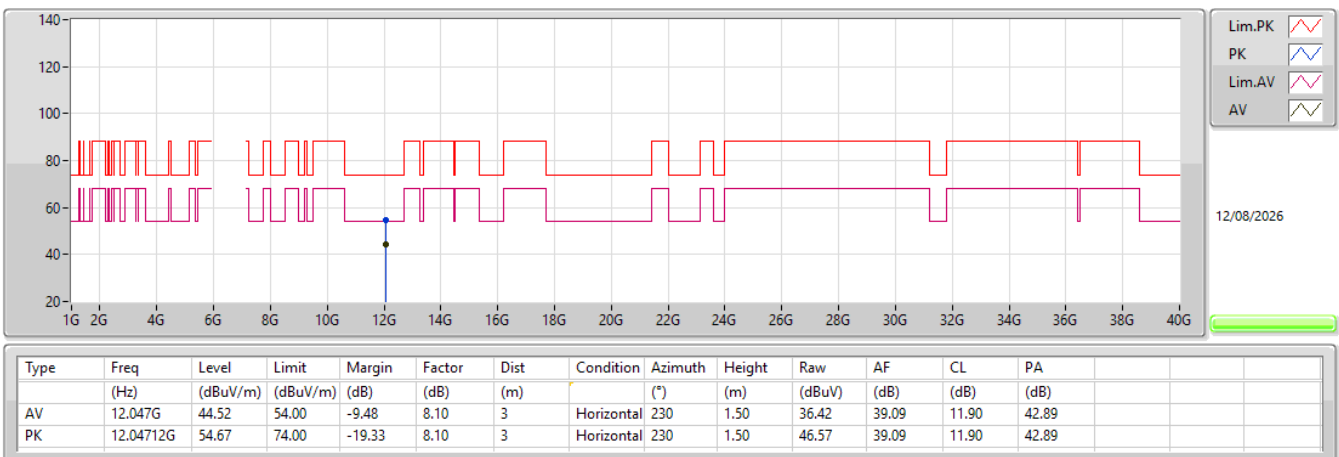


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX

6105MHz_TX

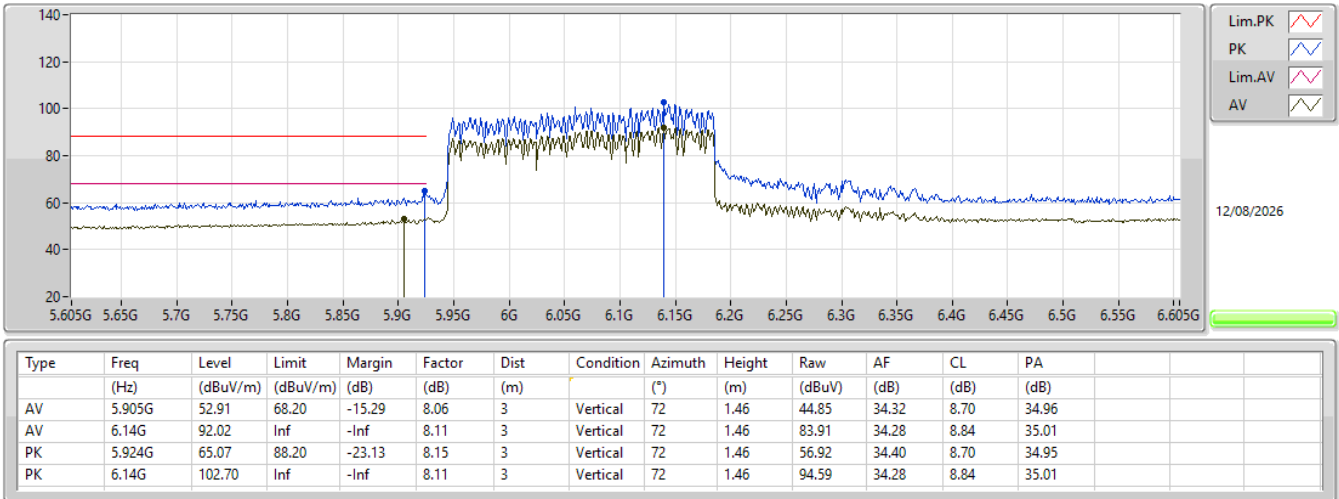


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX

6105MHz_TX

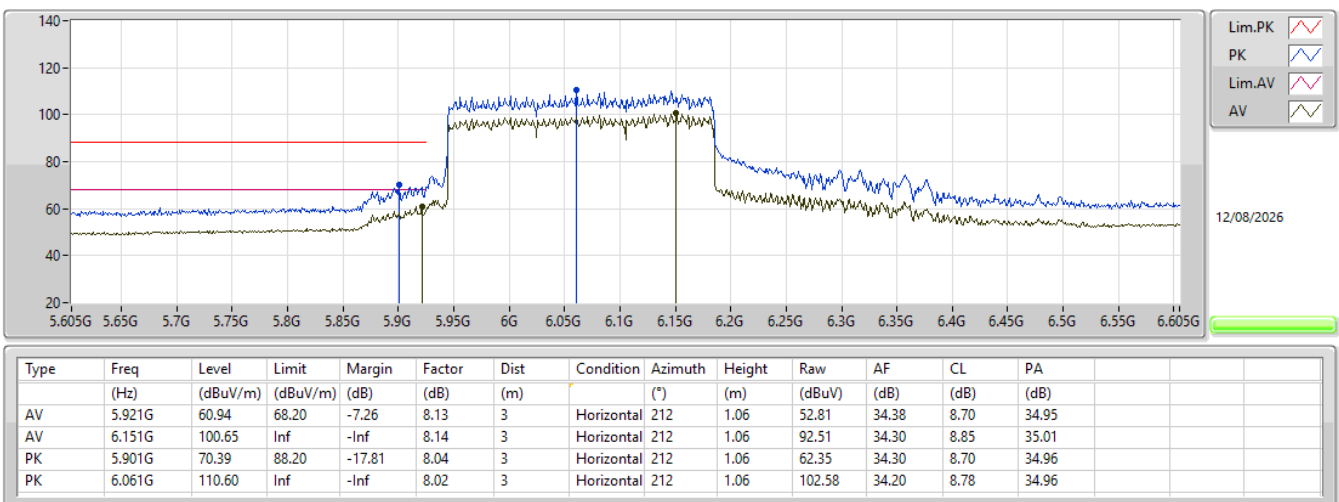


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX

6105MHz_TX

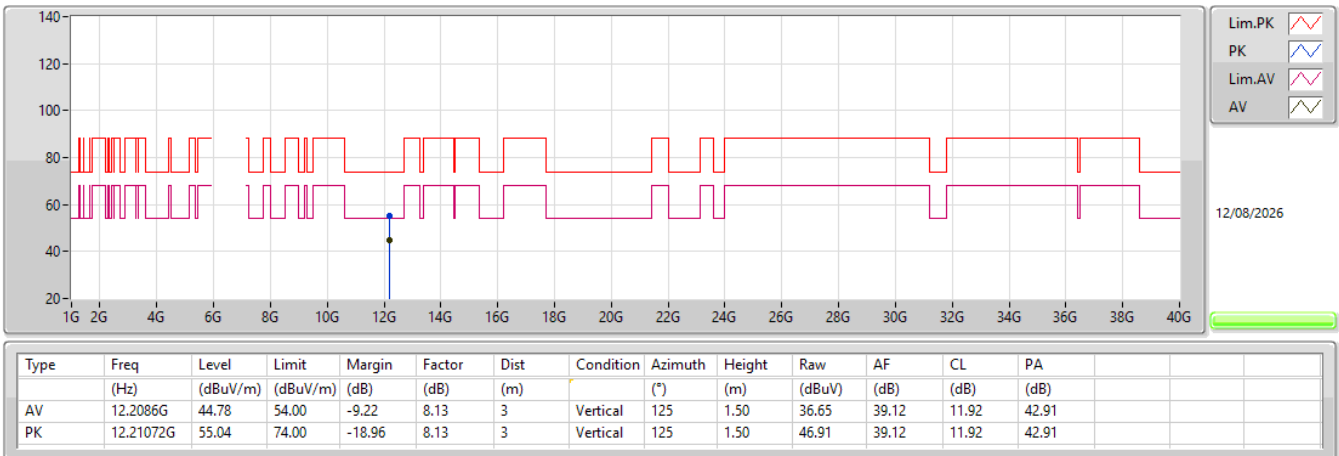


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX

6105MHz_TX

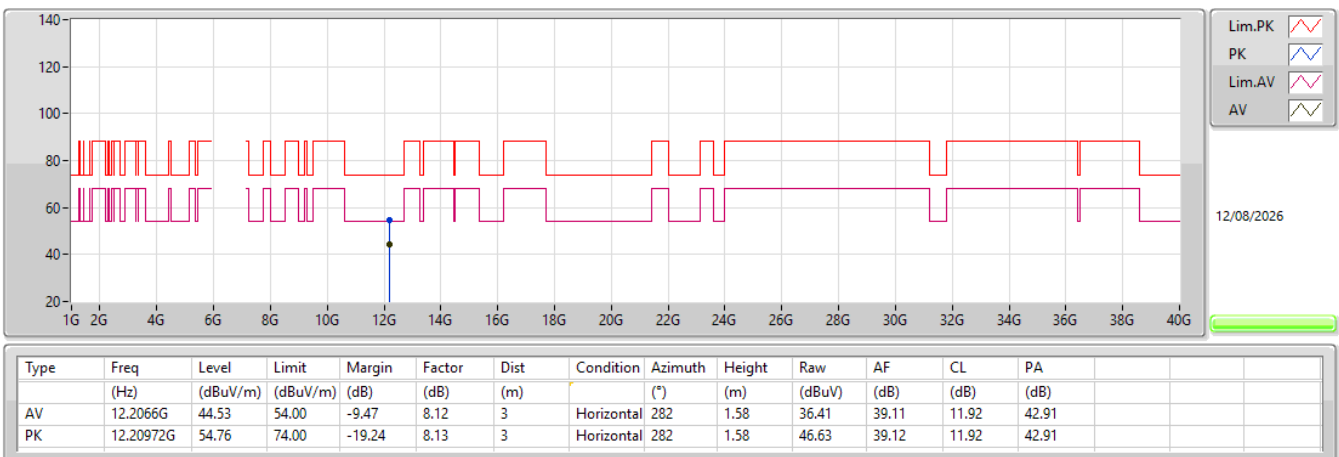


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 2_4TX

6905MHz_TX

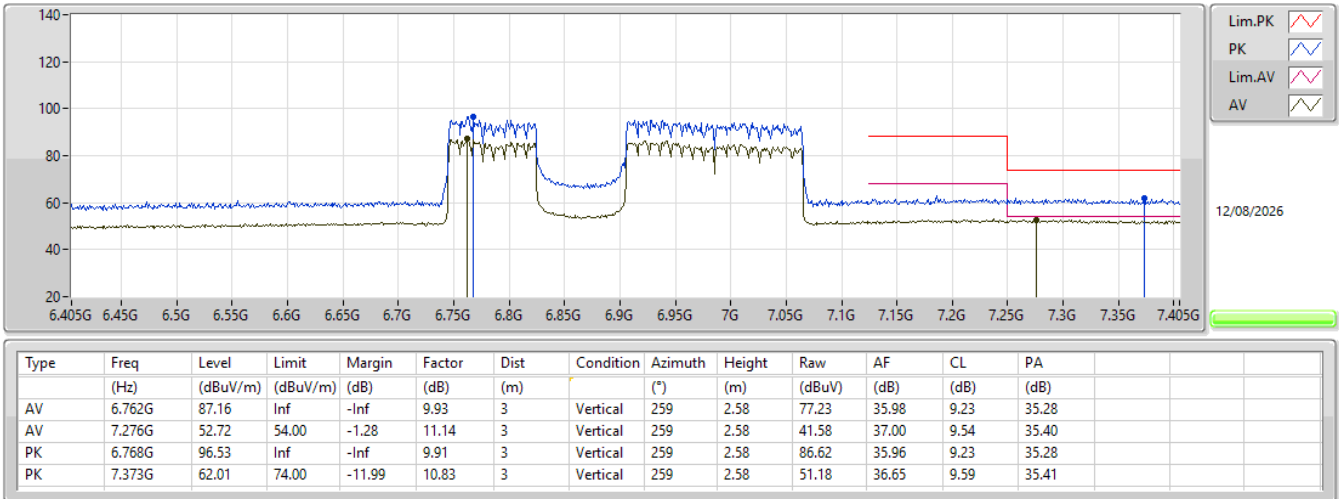


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 2_4TX

6905MHz_TX

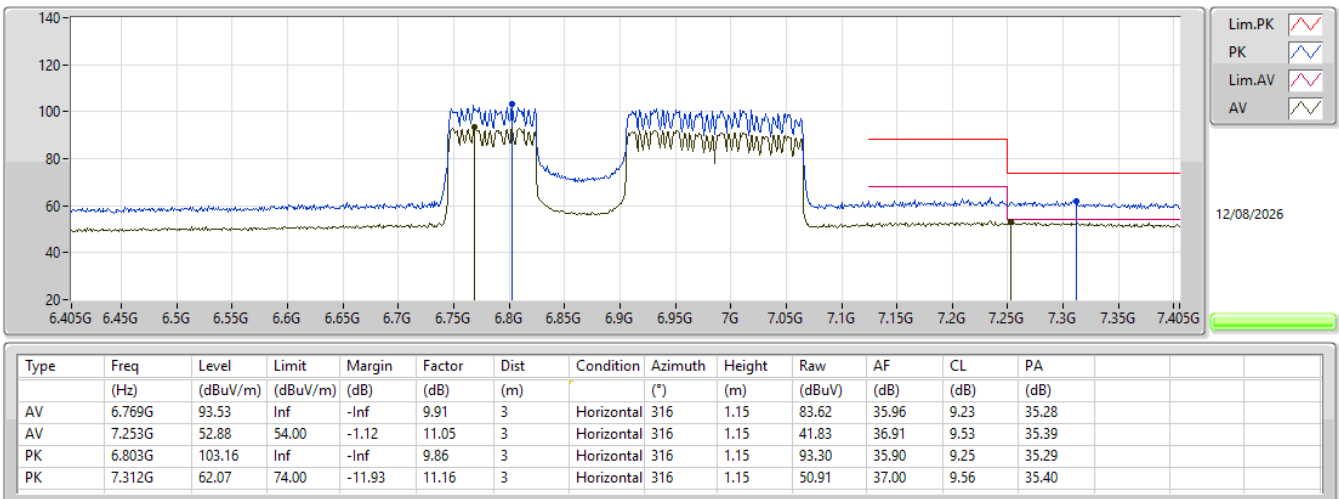


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 2_4TX

6905MHz_TX

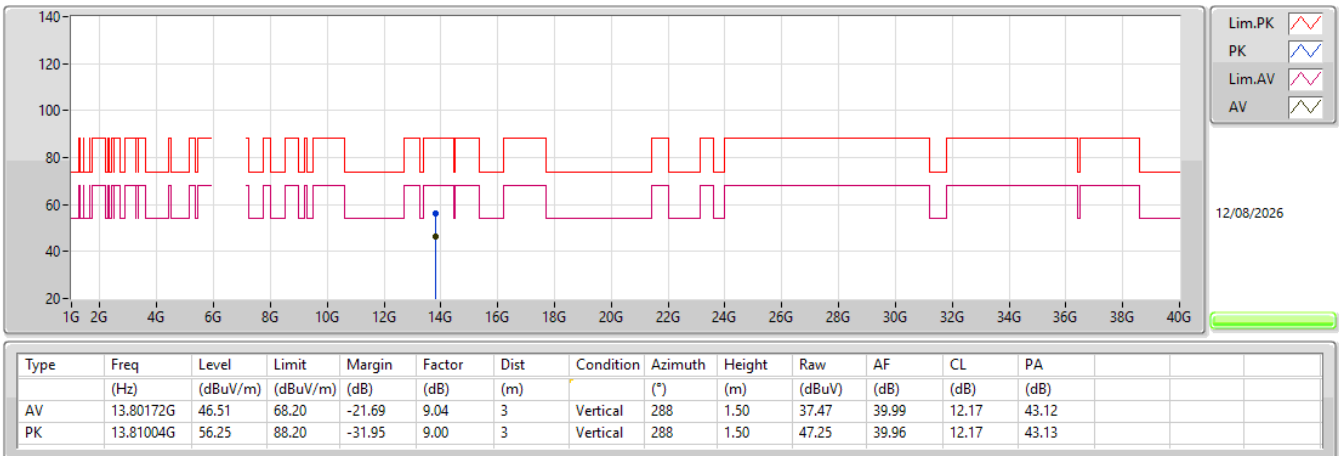


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 2_4TX

6905MHz_TX

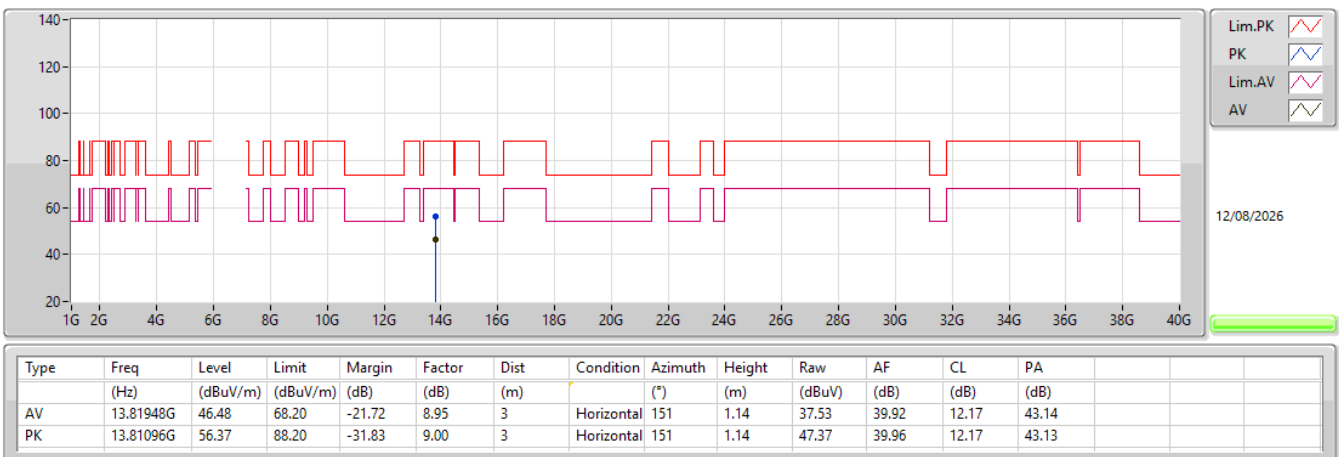

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX


7025MHz_TX

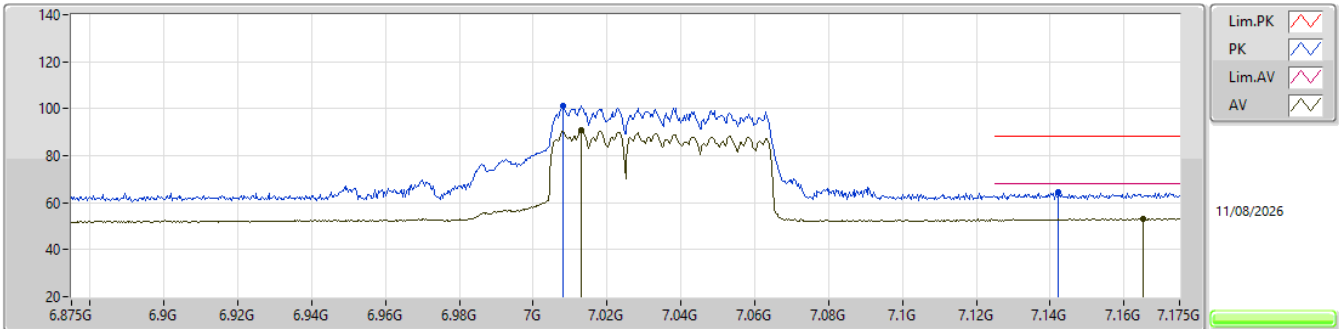

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	7.013G	90.89	Inf	-Inf	10.20	3	Vertical	260	2.31	80.69	36.13	9.41	35.34
AV	7.1651G	53.32	68.20	-14.88	10.94	3	Vertical	260	2.31	42.38	36.83	9.48	35.37
PK	7.0082G	101.19	Inf	-Inf	10.18	3	Vertical	260	2.31	91.01	36.12	9.40	35.34
PK	7.1423G	64.33	88.20	-23.87	10.85	3	Vertical	260	2.31	53.48	36.75	9.47	35.37

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX


7025MHz_TX

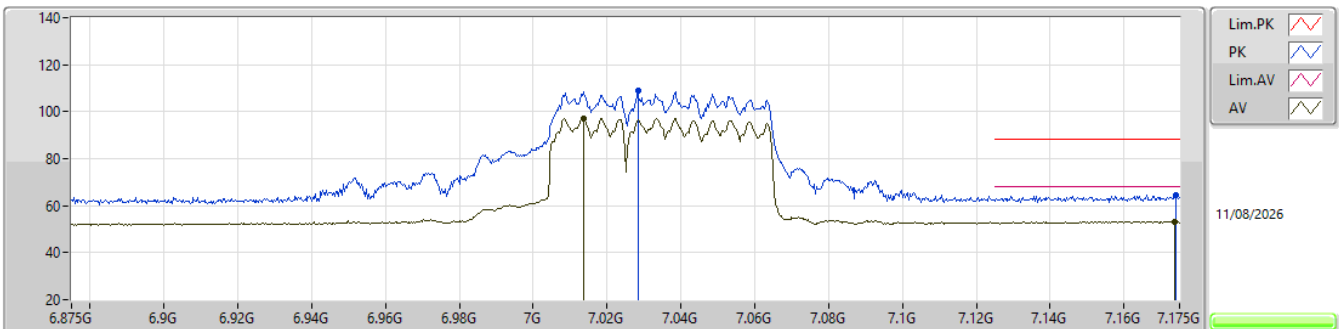

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	7.0136G	97.25	Inf	-Inf	10.20	3	Horizontal	325	1.01	87.05	36.13	9.41	35.34
AV	7.1738G	53.33	68.20	-14.87	10.97	3	Horizontal	325	1.01	42.36	36.85	9.49	35.37
PK	7.0283G	108.87	Inf	-Inf	10.22	3	Horizontal	325	1.01	98.65	36.16	9.41	35.35
PK	7.1741G	64.31	88.20	-23.89	10.97	3	Horizontal	325	1.01	53.34	36.85	9.49	35.37


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX

7025MHz_TX

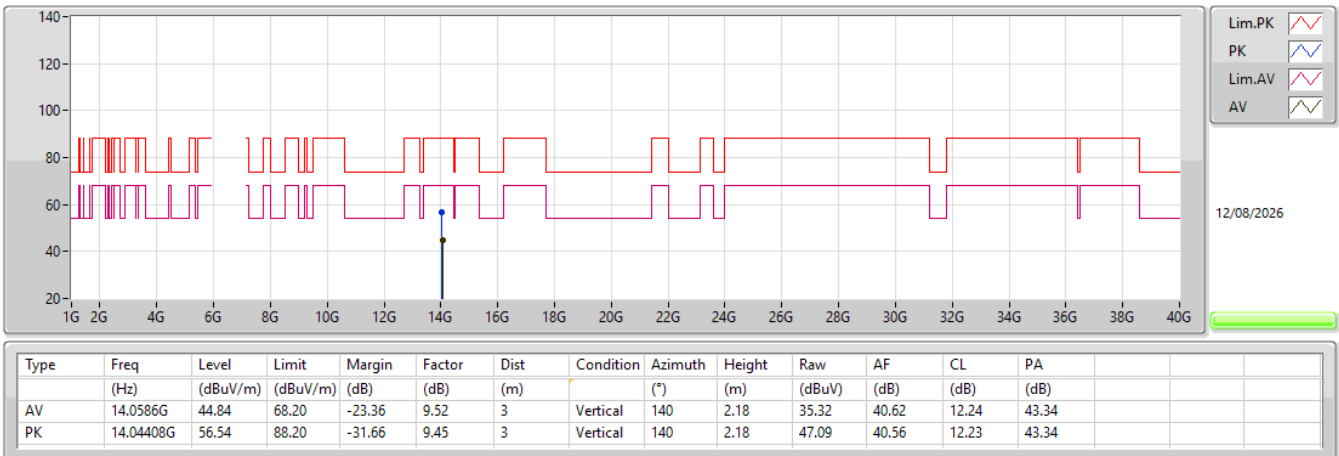


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX

7025MHz_TX

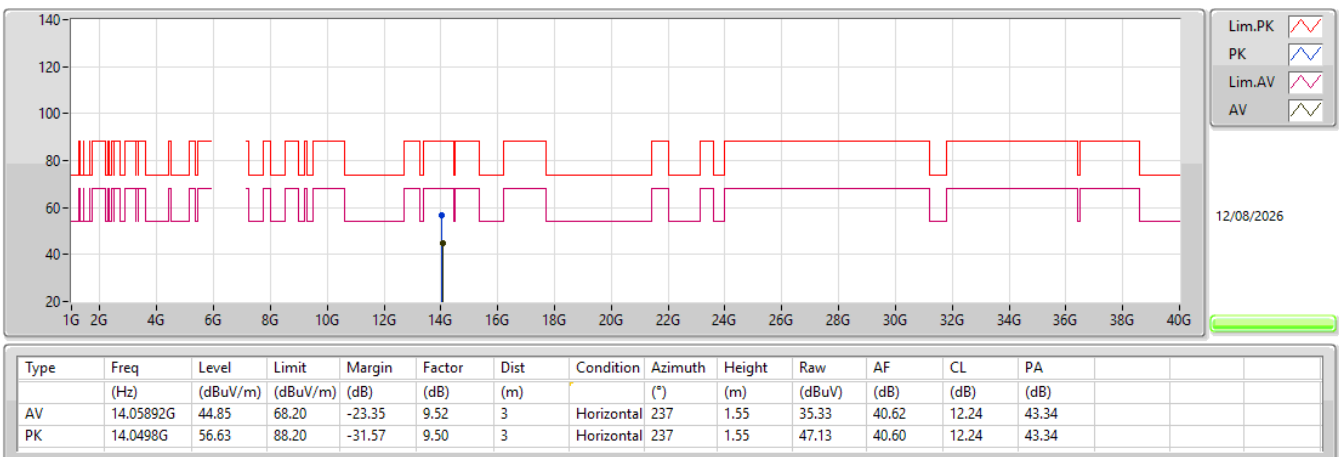


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU_2_4TX

6985MHz_TX

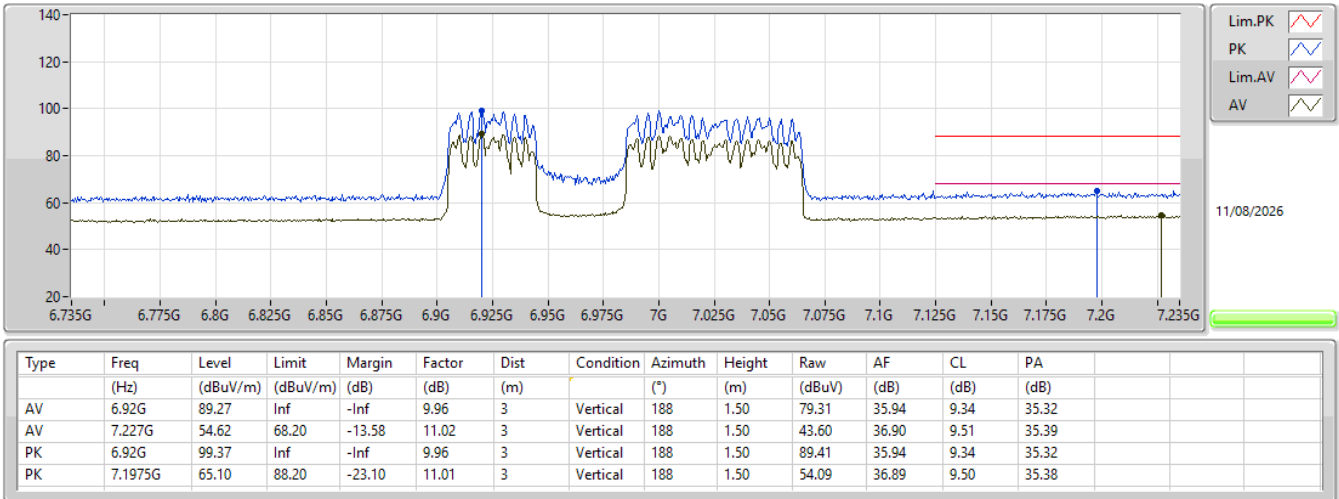


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU_2_4TX

6985MHz_TX

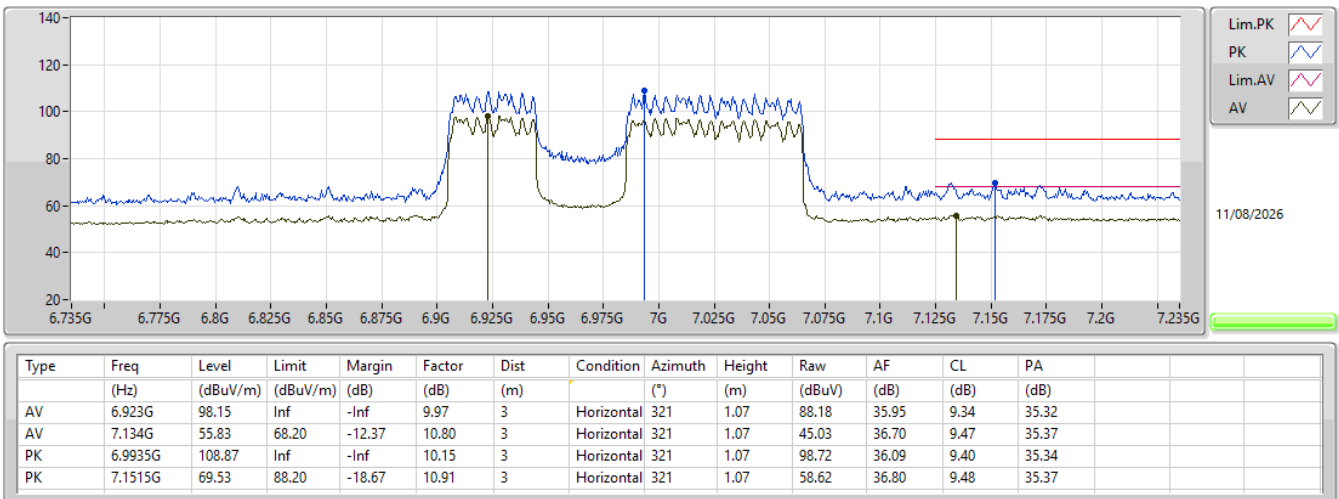


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX

6985MHz_TX

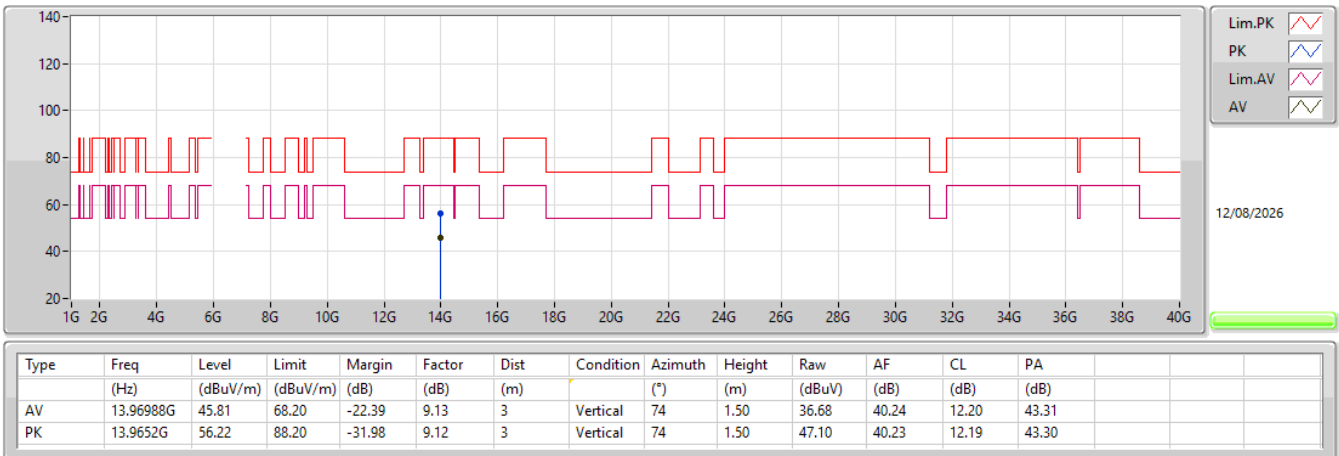

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX

6985MHz_TX

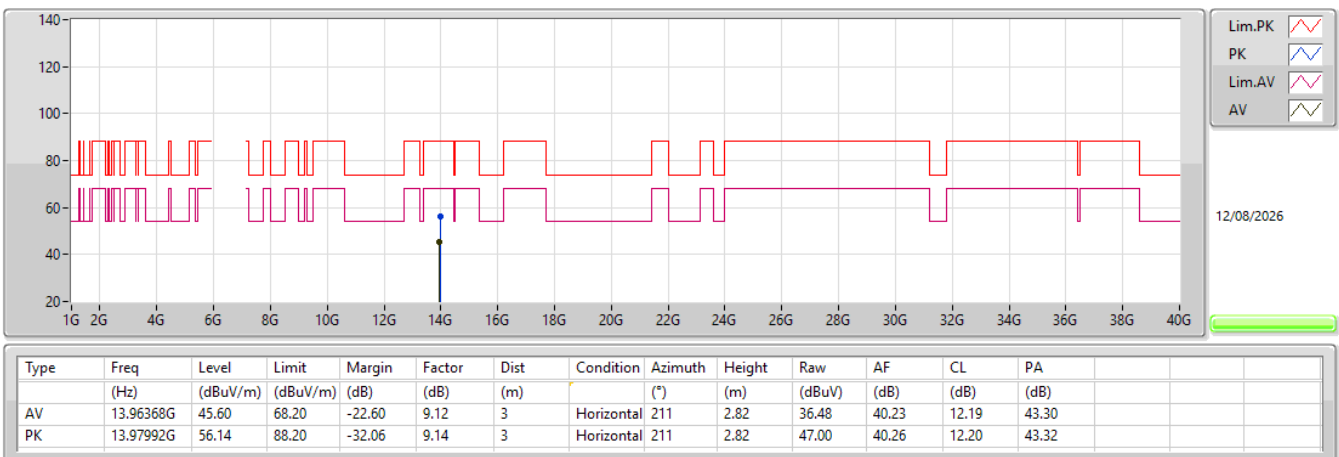



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6.525-6.875GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT320-BF_Nss1,(MCS0)_4TX	Pass	PK	47.46M	32.55	40.00	-7.45	3	Vertical	0	1.00

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	PK	47.46M	32.55	40.00	-7.45	3	Vertical	0	1.00
6905MHz	Pass	PK	99.84M	27.75	43.50	-15.75	3	Vertical	0	1.00
6905MHz	Pass	PK	159.98M	25.52	43.50	-17.98	3	Vertical	0	1.00
6905MHz	Pass	PK	348.16M	23.64	46.00	-22.36	3	Vertical	0	1.00
6905MHz	Pass	PK	392.78M	29.23	46.00	-16.77	3	Vertical	0	1.00
6905MHz	Pass	PK	520.82M	28.49	46.00	-17.51	3	Vertical	0	1.00
6905MHz	Pass	PK	30M	28.11	40.00	-11.89	3	Horizontal	360	1.00
6905MHz	Pass	PK	113.42M	27.95	43.50	-15.55	3	Horizontal	360	1.00
6905MHz	Pass	PK	154.16M	23.79	43.50	-19.71	3	Horizontal	360	1.00
6905MHz	Pass	PK	352.04M	31.64	46.00	-14.36	3	Horizontal	360	1.00
6905MHz	Pass	PK	394.72M	37.02	46.00	-8.98	3	Horizontal	360	1.00
6905MHz	Pass	PK	530.52M	32.24	46.00	-13.76	3	Horizontal	360	1.00


6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6905MHz_TX

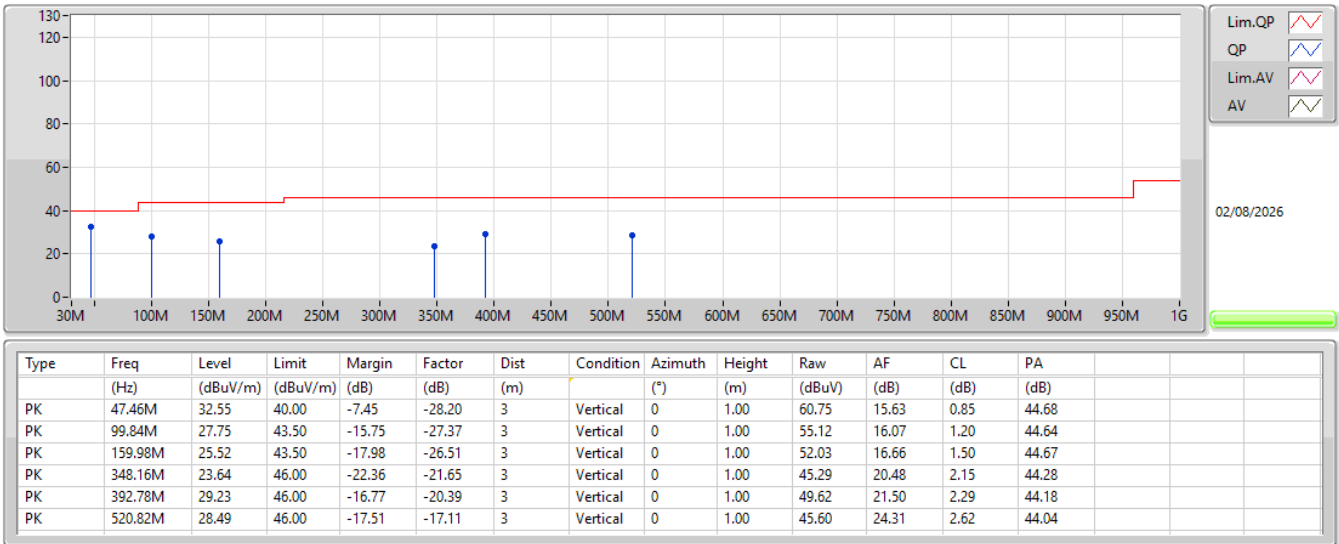

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6905MHz_TX

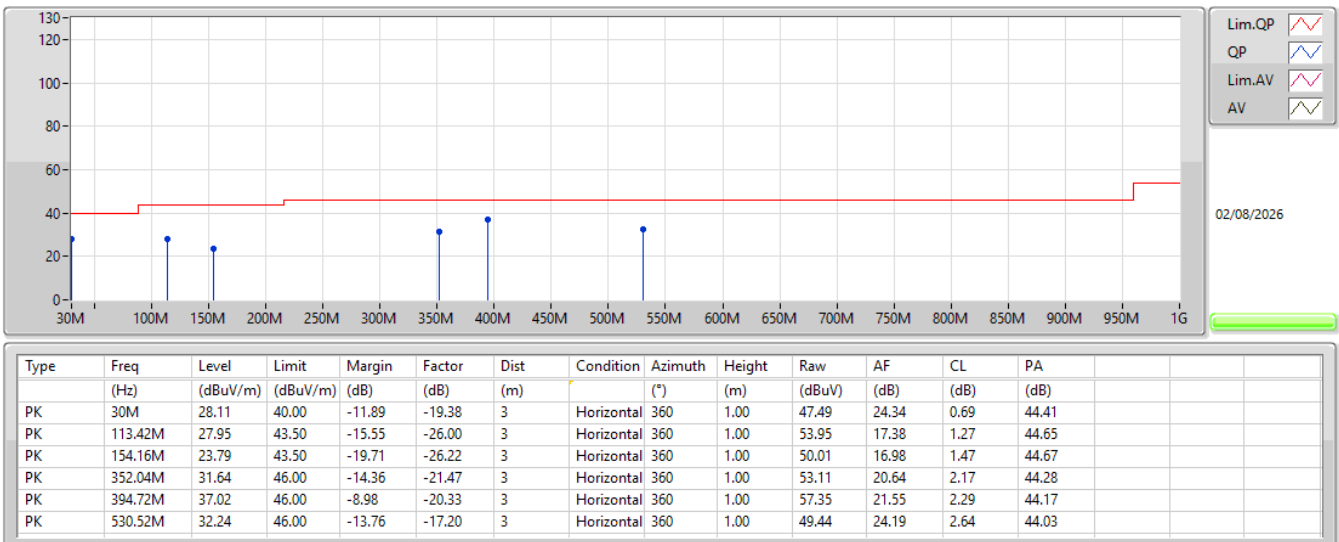

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	Pass	AV	11.9184G	42.82	54.00	-11.18	3	Horizontal	271	2.41
802.11be EHT40-BF_Nss1,(MCS0)_4TX	Pass	AV	11.931G	42.80	54.00	-11.20	3	Horizontal	352	1.50
802.11be EHT80-BF_Nss1,(MCS0)_4TX	Pass	AV	11.9716G	42.74	54.00	-11.26	3	Horizontal	95	1.66
802.11be EHT160-BF_Nss1,(MCS0)_4TX	Pass	AV	5.9245G	65.72	68.20	-2.48	3	Horizontal	193	1.50
802.11be EHT320-BF_Nss1,(MCS0)_4TX	Pass	AV	5.925G	61.73	68.20	-6.47	3	Horizontal	353	1.50
6.425-6.525GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	Pass	AV	12.95132G	44.00	68.20	-24.20	3	Vertical	47	1.50
802.11be EHT40-BF_Nss1,(MCS0)_4TX	Pass	AV	12.97168G	43.73	68.20	-24.47	3	Vertical	100	2.71
802.11be EHT80-BF_Nss1,(MCS0)_4TX	Pass	AV	13.09868G	43.67	68.20	-24.53	3	Horizontal	61	1.40
802.11be EHT160-BF_Nss1,(MCS0)_4TX	Pass	AV	13.01416G	43.67	68.20	-24.53	3	Vertical	31	2.24
802.11be EHT320-BF_Nss1,(MCS0)_4TX	Pass	AV	13.17268G	43.25	68.20	-24.95	3	Vertical	84	1.30
6.525-6.875GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	Pass	AV	13.3904G	48.34	54.00	-5.66	3	Vertical	307	1.93
802.11be EHT40-BF_Nss1,(MCS0)_4TX	Pass	AV	13.375G	43.51	54.00	-10.49	3	Vertical	204	1.50
802.11be EHT80-BF_Nss1,(MCS0)_4TX	Pass	AV	13.25964G	43.35	54.00	-10.65	3	Horizontal	256	1.43
802.11be EHT160-BF_Nss1,(MCS0)_4TX	Pass	AV	13.33884G	43.18	54.00	-10.82	3	Vertical	210	3.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	Pass	AV	7.262G	52.76	54.00	-1.24	3	Horizontal	209	1.39
6.875-7.125GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	Pass	AV	7.2042G	54.55	68.20	-13.65	3	Vertical	62	1.04
802.11be EHT40-BF_Nss1,(MCS0)_4TX	Pass	AV	7.1264G	54.37	68.20	-13.83	3	Horizontal	295	1.01
802.11be EHT80-BF_Nss1,(MCS0)_4TX	Pass	AV	7.1702G	54.00	68.20	-14.20	3	Horizontal	208	1.50
802.11be EHT160-BF_Nss1,(MCS0)_4TX	Pass	AV	7.125G	56.46	68.20	-11.74	3	Horizontal	217	1.07

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	AV	5.8296G	51.22	68.20	-16.98	3	Vertical	124	1.46
5955MHz	Pass	AV	5.9526G	90.64	Inf	-Inf	3	Vertical	124	1.46
5955MHz	Pass	PK	5.9172G	62.83	88.20	-25.37	3	Vertical	124	1.46
5955MHz	Pass	PK	5.9514G	102.05	Inf	-Inf	3	Vertical	124	1.46
5955MHz	Pass	AV	5.913G	52.21	68.20	-15.99	3	Horizontal	181	1.14
5955MHz	Pass	AV	5.964G	99.51	Inf	-Inf	3	Horizontal	181	1.14
5955MHz	Pass	PK	5.9214G	63.42	88.20	-24.78	3	Horizontal	181	1.14
5955MHz	Pass	PK	5.9598G	109.75	Inf	-Inf	3	Horizontal	181	1.14
5955MHz	Pass	AV	11.91784G	42.77	54.00	-11.23	3	Vertical	72	1.83
5955MHz	Pass	PK	11.91784G	54.87	74.00	-19.13	3	Vertical	72	1.83
5955MHz	Pass	AV	11.9184G	42.82	54.00	-11.18	3	Horizontal	271	2.41
5955MHz	Pass	PK	11.90476G	54.71	74.00	-19.29	3	Horizontal	271	2.41
6195MHz	Pass	AV	12.39612G	42.30	54.00	-11.70	3	Vertical	47	1.50
6195MHz	Pass	PK	12.38496G	54.80	74.00	-19.20	3	Vertical	47	1.50
6195MHz	Pass	AV	12.38804G	42.32	54.00	-11.68	3	Horizontal	303	1.50
6195MHz	Pass	PK	12.39444G	54.40	74.00	-19.60	3	Horizontal	303	1.50
6415MHz	Pass	AV	12.83552G	43.61	68.20	-24.59	3	Vertical	57	2.94
6415MHz	Pass	PK	12.82632G	55.65	88.20	-32.55	3	Vertical	57	2.94
6415MHz	Pass	AV	12.83672G	43.48	68.20	-24.72	3	Horizontal	238	1.50
6415MHz	Pass	PK	12.83276G	56.57	88.20	-31.63	3	Horizontal	238	1.50
6435MHz	Pass	AV	12.8724G	43.67	68.20	-24.53	3	Vertical	199	3.00
6435MHz	Pass	PK	12.86204G	55.94	88.20	-32.26	3	Vertical	199	3.00
6435MHz	Pass	AV	12.87348G	43.65	68.20	-24.55	3	Horizontal	327	2.92
6435MHz	Pass	PK	12.87064G	55.72	88.20	-32.48	3	Horizontal	327	2.92
6475MHz	Pass	AV	12.95132G	44.00	68.20	-24.20	3	Vertical	47	1.50
6475MHz	Pass	PK	12.95216G	56.39	88.20	-31.81	3	Vertical	47	1.50
6475MHz	Pass	AV	12.9516G	43.83	68.20	-24.37	3	Horizontal	0	1.28
6475MHz	Pass	PK	12.95268G	56.96	88.20	-31.24	3	Horizontal	0	1.28
6515MHz	Pass	AV	13.03304G	43.87	68.20	-24.33	3	Vertical	251	1.50
6515MHz	Pass	PK	13.03332G	56.38	88.20	-31.82	3	Vertical	251	1.50
6515MHz	Pass	AV	13.02788G	43.79	68.20	-24.41	3	Horizontal	244	1.50
6515MHz	Pass	PK	13.0376G	56.21	88.20	-31.99	3	Horizontal	244	1.50
6535MHz	Pass	AV	13.06636G	43.70	68.20	-24.50	3	Vertical	247	1.50
6535MHz	Pass	PK	13.0732G	55.72	88.20	-32.48	3	Vertical	247	1.50
6535MHz	Pass	AV	13.0724G	43.78	68.20	-24.42	3	Horizontal	285	2.59
6535MHz	Pass	PK	13.07204G	56.23	88.20	-31.97	3	Horizontal	285	2.59
6695MHz	Pass	AV	13.3904G	48.34	54.00	-5.66	3	Vertical	307	1.93
6695MHz	Pass	PK	13.3892G	61.08	74.00	-12.92	3	Vertical	307	1.93
6695MHz	Pass	AV	13.38892G	45.04	54.00	-8.96	3	Horizontal	342	2.89
6695MHz	Pass	PK	13.39312G	57.28	74.00	-16.72	3	Horizontal	342	2.89
6875MHz	Pass	AV	13.74392G	44.04	68.20	-24.16	3	Vertical	346	2.84
6875MHz	Pass	PK	13.74968G	56.94	88.20	-31.26	3	Vertical	346	2.84
6875MHz	Pass	AV	13.75196G	44.01	68.20	-24.19	3	Horizontal	343	1.50
6875MHz	Pass	PK	13.75604G	56.45	88.20	-31.75	3	Horizontal	343	1.50
6895MHz	Pass	AV	13.78156G	43.82	68.20	-24.38	3	Vertical	47	2.25
6895MHz	Pass	PK	13.78684G	56.08	88.20	-32.12	3	Vertical	47	2.25
6895MHz	Pass	AV	13.78036G	44.00	68.20	-24.20	3	Horizontal	135	1.22
6895MHz	Pass	PK	13.78584G	56.44	88.20	-31.76	3	Horizontal	135	1.22
6995MHz	Pass	AV	13.9944G	43.78	68.20	-24.42	3	Vertical	286	1.50
6995MHz	Pass	PK	13.9926G	56.35	88.20	-31.85	3	Vertical	286	1.50
6995MHz	Pass	AV	13.99248G	43.74	68.20	-24.46	3	Horizontal	34	1.72
6995MHz	Pass	PK	13.9872G	56.14	88.20	-32.06	3	Horizontal	34	1.72
7095MHz	Pass	AV	7.1028G	93.10	Inf	-Inf	3	Vertical	62	1.04
7095MHz	Pass	AV	7.2042G	54.55	68.20	-13.65	3	Vertical	62	1.04
7095MHz	Pass	PK	7.1034G	104.43	Inf	-Inf	3	Vertical	62	1.04
7095MHz	Pass	PK	7.2408G	65.38	88.20	-22.82	3	Vertical	62	1.04
7095MHz	Pass	AV	7.0902G	90.48	Inf	-Inf	3	Horizontal	190	1.14
7095MHz	Pass	AV	7.2192G	54.33	68.20	-13.87	3	Horizontal	190	1.14
7095MHz	Pass	PK	7.0896G	101.81	Inf	-Inf	3	Horizontal	190	1.14
7095MHz	Pass	PK	7.2402G	66.02	88.20	-22.18	3	Horizontal	190	1.14

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
7095MHz	Pass	AV	14.18964G	44.03	68.20	-24.17	3	Vertical	0	2.55
7095MHz	Pass	PK	14.18564G	56.48	88.20	-31.72	3	Vertical	0	2.55
7095MHz	Pass	AV	14.18512G	44.11	68.20	-24.09	3	Horizontal	314	1.50
7095MHz	Pass	PK	14.1984G	56.29	88.20	-31.91	3	Horizontal	314	1.50
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	AV	5.8324G	55.59	68.20	-12.61	3	Vertical	130	1.49
5965MHz	Pass	AV	5.9602G	87.99	Inf	-Inf	3	Vertical	130	1.49
5965MHz	Pass	PK	5.83G	63.64	88.20	-24.56	3	Vertical	130	1.49
5965MHz	Pass	PK	5.9746G	98.69	Inf	-Inf	3	Vertical	130	1.49
5965MHz	Pass	AV	5.8174G	51.72	68.20	-16.48	3	Horizontal	64	1.15
5965MHz	Pass	AV	5.9818G	97.41	Inf	-Inf	3	Horizontal	64	1.15
5965MHz	Pass	PK	5.92G	63.61	88.20	-24.59	3	Horizontal	64	1.15
5965MHz	Pass	PK	5.9812G	108.71	Inf	-Inf	3	Horizontal	64	1.15
5965MHz	Pass	AV	11.93468G	42.69	54.00	-11.31	3	Vertical	326	1.50
5965MHz	Pass	PK	11.92892G	55.49	74.00	-18.51	3	Vertical	326	1.50
5965MHz	Pass	AV	11.931G	42.80	54.00	-11.20	3	Horizontal	352	1.50
5965MHz	Pass	PK	11.93924G	55.34	74.00	-18.66	3	Horizontal	352	1.50
6205MHz	Pass	AV	12.41396G	41.82	54.00	-12.18	3	Vertical	172	1.50
6205MHz	Pass	PK	12.40856G	54.29	74.00	-19.71	3	Vertical	172	1.50
6205MHz	Pass	AV	12.41628G	41.85	54.00	-12.15	3	Horizontal	308	1.50
6205MHz	Pass	PK	12.40752G	54.35	74.00	-19.65	3	Horizontal	308	1.50
6405MHz	Pass	AV	12.81976G	43.17	68.20	-25.03	3	Vertical	340	1.58
6405MHz	Pass	PK	12.81444G	56.47	88.20	-31.73	3	Vertical	340	1.58
6405MHz	Pass	AV	12.81528G	43.14	68.20	-25.06	3	Horizontal	273	1.50
6405MHz	Pass	PK	12.81012G	55.36	88.20	-32.84	3	Horizontal	273	1.50
6445MHz	Pass	AV	12.88632G	43.42	68.20	-24.78	3	Vertical	320	2.31
6445MHz	Pass	PK	12.88972G	55.84	88.20	-32.36	3	Vertical	320	2.31
6445MHz	Pass	AV	12.89076G	43.41	68.20	-24.79	3	Horizontal	360	2.84
6445MHz	Pass	PK	12.89392G	56.23	88.20	-31.97	3	Horizontal	360	2.84
6485MHz	Pass	AV	12.97168G	43.73	68.20	-24.47	3	Vertical	100	2.71
6485MHz	Pass	PK	12.972G	56.20	88.20	-32.00	3	Vertical	100	2.71
6485MHz	Pass	AV	12.97032G	43.69	68.20	-24.51	3	Horizontal	330	1.50
6485MHz	Pass	PK	12.97008G	56.23	88.20	-31.97	3	Horizontal	330	1.50
6525MHz	Pass	AV	13.04712G	43.62	68.20	-24.58	3	Vertical	6	2.99
6525MHz	Pass	PK	13.0448G	56.19	88.20	-32.01	3	Vertical	6	2.99
6525MHz	Pass	AV	13.0424G	43.53	68.20	-24.67	3	Horizontal	106	1.50
6525MHz	Pass	PK	13.05396G	55.57	88.20	-32.63	3	Horizontal	106	1.50
6565MHz	Pass	AV	13.12596G	43.47	68.20	-24.73	3	Vertical	258	1.50
6565MHz	Pass	PK	13.12124G	55.35	88.20	-32.85	3	Vertical	258	1.50
6565MHz	Pass	AV	13.13736G	43.55	68.20	-24.65	3	Horizontal	109	1.50
6565MHz	Pass	PK	13.13444G	55.90	88.20	-32.30	3	Horizontal	109	1.50
6685MHz	Pass	AV	13.375G	43.51	54.00	-10.49	3	Vertical	204	1.50
6685MHz	Pass	PK	13.36756G	56.19	74.00	-17.81	3	Vertical	204	1.50
6685MHz	Pass	AV	13.37568G	43.50	54.00	-10.50	3	Horizontal	134	1.50
6685MHz	Pass	PK	13.37924G	56.25	74.00	-17.75	3	Horizontal	134	1.50
6885MHz	Pass	AV	13.76876G	44.61	68.20	-23.59	3	Vertical	307	2.00
6885MHz	Pass	PK	13.77144G	57.44	88.20	-30.76	3	Vertical	307	2.00
6885MHz	Pass	AV	13.762G	43.70	68.20	-24.50	3	Horizontal	198	1.50
6885MHz	Pass	PK	13.765G	55.96	88.20	-32.24	3	Horizontal	198	1.50
6925MHz	Pass	AV	13.85508G	43.53	68.20	-24.67	3	Vertical	194	1.51
6925MHz	Pass	PK	13.8442G	55.99	88.20	-32.21	3	Vertical	194	1.51
6925MHz	Pass	AV	13.85716G	43.57	68.20	-24.63	3	Horizontal	134	1.07
6925MHz	Pass	PK	13.85008G	55.94	88.20	-32.26	3	Horizontal	134	1.07
7005MHz	Pass	AV	14.00868G	43.86	68.20	-24.34	3	Vertical	159	1.50
7005MHz	Pass	PK	14.01624G	56.16	88.20	-32.04	3	Vertical	159	1.50
7005MHz	Pass	AV	14.01556G	43.93	68.20	-24.27	3	Horizontal	54	1.32
7005MHz	Pass	PK	14.01512G	56.67	88.20	-31.53	3	Horizontal	54	1.32
7085MHz	Pass	AV	7.079G	94.03	Inf	-Inf	3	Vertical	211	1.22
7085MHz	Pass	AV	7.2332G	54.11	68.20	-14.09	3	Vertical	211	1.22
7085MHz	Pass	PK	7.073G	104.72	Inf	-Inf	3	Vertical	211	1.22
7085MHz	Pass	PK	7.187G	65.98	88.20	-22.22	3	Vertical	211	1.22
7085MHz	Pass	AV	7.0718G	96.01	Inf	-Inf	3	Horizontal	295	1.01

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
7085MHz	Pass	AV	7.1264G	54.37	68.20	-13.83	3	Horizontal	295	1.01
7085MHz	Pass	PK	7.076G	113.18	Inf	-Inf	3	Horizontal	295	1.01
7085MHz	Pass	PK	7.2152G	66.23	88.20	-21.97	3	Horizontal	295	1.01
7085MHz	Pass	AV	14.17932G	43.68	68.20	-24.52	3	Vertical	210	1.10
7085MHz	Pass	PK	14.17312G	56.02	88.20	-32.18	3	Vertical	210	1.10
7085MHz	Pass	AV	14.179G	43.68	68.20	-24.52	3	Horizontal	126	1.50
7085MHz	Pass	PK	14.1774G	56.62	88.20	-31.58	3	Horizontal	126	1.50
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	AV	5.9245G	51.41	68.20	-16.79	3	Vertical	196	1.49
5985MHz	Pass	AV	5.994G	93.31	Inf	-Inf	3	Vertical	196	1.49
5985MHz	Pass	PK	5.9115G	63.67	88.20	-24.53	3	Vertical	196	1.49
5985MHz	Pass	PK	5.9945G	105.46	Inf	-Inf	3	Vertical	196	1.49
5985MHz	Pass	AV	5.921G	53.96	68.20	-14.24	3	Horizontal	222	1.27
5985MHz	Pass	AV	5.995G	99.77	Inf	-Inf	3	Horizontal	222	1.27
5985MHz	Pass	PK	5.92G	67.83	88.20	-20.37	3	Horizontal	222	1.27
5985MHz	Pass	PK	5.9945G	110.96	Inf	-Inf	3	Horizontal	222	1.27
5985MHz	Pass	AV	11.97328G	42.73	54.00	-11.27	3	Vertical	275	1.04
5985MHz	Pass	PK	11.97876G	54.93	74.00	-19.07	3	Vertical	275	1.04
5985MHz	Pass	AV	11.9716G	42.74	54.00	-11.26	3	Horizontal	95	1.66
5985MHz	Pass	PK	11.96344G	54.70	74.00	-19.30	3	Horizontal	95	1.66
6225MHz	Pass	AV	12.4598G	41.96	54.00	-12.04	3	Vertical	268	2.63
6225MHz	Pass	PK	12.45256G	53.24	74.00	-20.76	3	Vertical	268	2.63
6225MHz	Pass	AV	12.45988G	41.86	54.00	-12.14	3	Horizontal	359	1.90
6225MHz	Pass	PK	12.4494G	53.87	74.00	-20.13	3	Horizontal	359	1.90
6385MHz	Pass	AV	12.77652G	42.88	68.20	-25.32	3	Vertical	39	1.75
6385MHz	Pass	PK	12.76368G	54.43	88.20	-33.77	3	Vertical	39	1.75
6385MHz	Pass	AV	12.76628G	42.93	68.20	-25.27	3	Horizontal	24	2.95
6385MHz	Pass	PK	12.76756G	55.54	88.20	-32.66	3	Horizontal	24	2.95
6465MHz	Pass	AV	12.9296G	43.58	68.20	-24.62	3	Vertical	219	1.34
6465MHz	Pass	PK	12.93292G	54.82	88.20	-33.38	3	Vertical	219	1.34
6465MHz	Pass	AV	12.92816G	43.50	68.20	-24.70	3	Horizontal	51	1.56
6465MHz	Pass	PK	12.93652G	54.87	88.20	-33.33	3	Horizontal	51	1.56
6545MHz	Pass	AV	13.09136G	43.64	68.20	-24.56	3	Vertical	304	2.07
6545MHz	Pass	PK	13.08428G	56.09	88.20	-32.11	3	Vertical	304	2.07
6545MHz	Pass	AV	13.09868G	43.67	68.20	-24.53	3	Horizontal	61	1.40
6545MHz	Pass	PK	13.09876G	55.22	88.20	-32.98	3	Horizontal	61	1.40
6625MHz	Pass	AV	13.2588G	43.34	54.00	-10.66	3	Vertical	64	2.98
6625MHz	Pass	PK	13.24888G	55.96	88.20	-32.24	3	Vertical	64	2.98
6625MHz	Pass	AV	13.25964G	43.35	54.00	-10.65	3	Horizontal	256	1.43
6625MHz	Pass	PK	13.25528G	54.96	74.00	-19.04	3	Horizontal	256	1.43
6705MHz	Pass	AV	13.41284G	43.18	68.20	-25.02	3	Vertical	42	2.79
6705MHz	Pass	PK	13.4047G	55.36	88.20	-32.84	3	Vertical	42	2.79
6705MHz	Pass	AV	13.40136G	43.09	68.20	-25.11	3	Horizontal	360	1.50
6705MHz	Pass	PK	13.41394G	55.92	88.20	-32.28	3	Horizontal	360	1.50
6785MHz	Pass	AV	13.25908G	43.34	54.00	-10.66	3	Vertical	280	2.19
6785MHz	Pass	PK	13.25364G	55.24	74.00	-18.76	3	Vertical	280	2.19
6785MHz	Pass	AV	13.2586G	43.26	54.00	-10.74	3	Horizontal	55	2.91
6785MHz	Pass	PK	13.25296G	54.76	74.00	-19.24	3	Horizontal	55	2.91
6865MHz	Pass	AV	13.72964G	43.84	68.20	-24.36	3	Vertical	174	2.67
6865MHz	Pass	PK	13.72436G	55.43	88.20	-32.77	3	Vertical	174	2.67
6865MHz	Pass	AV	13.7302G	43.79	68.20	-24.41	3	Horizontal	28	1.02
6865MHz	Pass	PK	13.73512G	56.18	88.20	-32.02	3	Horizontal	28	1.02
6945MHz	Pass	AV	13.89972G	43.60	68.20	-24.60	3	Vertical	157	1.28
6945MHz	Pass	PK	13.89936G	55.40	88.20	-32.80	3	Vertical	157	1.28
6945MHz	Pass	AV	13.89956G	43.66	68.20	-24.54	3	Horizontal	65	1.73
6945MHz	Pass	PK	13.8982G	54.84	88.20	-33.36	3	Horizontal	65	1.73
7025MHz	Pass	AV	7.0148G	92.85	Inf	-Inf	3	Vertical	46	2.30
7025MHz	Pass	AV	7.1744G	53.86	68.20	-14.34	3	Vertical	46	2.30
7025MHz	Pass	PK	7.0172G	104.30	Inf	-Inf	3	Vertical	46	2.30
7025MHz	Pass	PK	7.172G	65.39	88.20	-22.81	3	Vertical	46	2.30
7025MHz	Pass	AV	7.0169G	99.50	Inf	-Inf	3	Horizontal	208	1.50
7025MHz	Pass	AV	7.1702G	54.00	68.20	-14.20	3	Horizontal	208	1.50