

NA502

Multiple RF Home Gateway



User Guide

Table of Contents

CHAPTER 1 INTRODUCTION	1
Package Contents	1
Features	1
LEDs	2
CHAPTER 2 INITIAL INSTALLATION	4
Requirements	4
Procedure	4
CHAPTER 3 CONFIGURATION	5
Configuration Program	5
APPENDIX A SPECIFICATIONS	6
Multiple RF Home Gateway	6
Regulatory Approvals	7

Copyright © 2015. All Rights Reserved.

Document Version: 1.0

All trademarks and trade names are the properties of their respective owners.

Chapter 1

Introduction



This Chapter provides an overview of the Multiple RF Home Gateway's features and capabilities.

Congratulations on the purchase of your new Multiple RF Home Gateway. The Multiple RF Home Gateway is a consumer electronic device, which is designed to bridge all appliances of your home, from IP cameras to sensors, and allow you to monitor and manage them over the Internet. Most of the devices can be paired with the gateway via a single button push.

Package Contents

The following items should be included:

- Multiple RF Home Gateway Unit x 1
- Power Adapter x 1

If any of the above items are damaged or missing, please contact your dealer immediately.


Features

- MT7621S processor with 128MB Flash and 128MB SDRAM
- One 10/100/1000 Ethernet port with RJ45 connector
- Front Panel LEDs
- Z-Wave Transceiver
- ZigBee Transceiver
- Bluetooth Transceiver
- USB 2.0 port
- Select button
- Reset button
- Sync button
- Power In connector
- Internal antenna for WiFi, ZigBee, Z-Wave and Bluetooth

LEDs

Top-mounted LEDs


The Multiple RF Home Gateway has 7 LEDs.

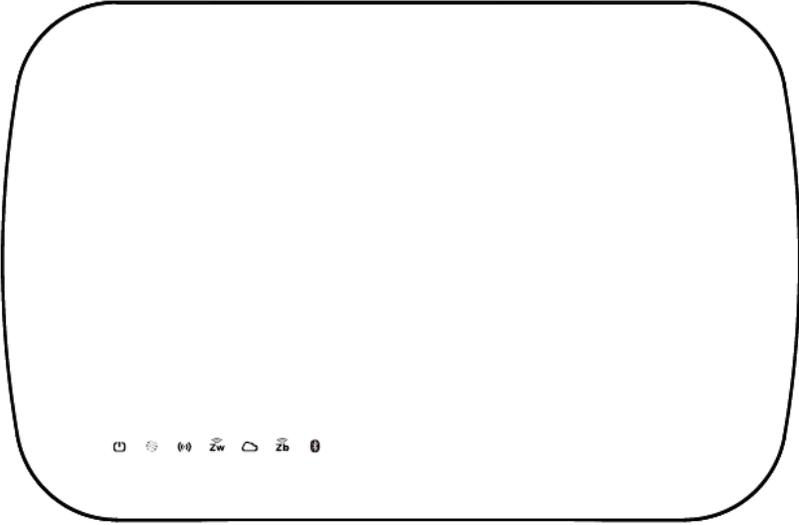

POWER (Green)	<ul style="list-style-type: none">• On - Power On/Normal Operation• Off - Power Off• Flashing - Rebooting.
Internet (Green)	<ul style="list-style-type: none">• On - Internet connection established.• Off - No active Internet connection.• Flashing - Data is being transmitted or received via the Internet connection.
WiFi (Green)	<ul style="list-style-type: none">• On - WPS mode is selected.• On (5 seconds) - WiFi connection is established.• Off - No WiFi connection available.• Flashing - Data is being transmitted or received via the Wireless connection.
Z-Wave (Green)	<ul style="list-style-type: none">• On - Z-Wave mode is selected.• On (5 seconds) - Z-Wave sensor added or synchronization is successful.• Off - Z-Wave module is in idle mode.• Flashing - Z-Wave module is in active mode.
Service (Green)	<ul style="list-style-type: none">• On - Cloud service is available and working properly.

	<ul style="list-style-type: none"> • Off - Cloud service is not available. • Flashing - Cloud service is not sending data properly.
ZigBee (Green)	<ul style="list-style-type: none"> • On - ZigBee mode is selected. • On (5 seconds) - ZigBee sensor added or synchronization is successful. • Off - ZigBee module is in idle mode. • Flashing - ZigBee module is in active mode.
Bluetooth (Green)	<ul style="list-style-type: none"> • On - Bluetooth mode is selected. • On (5 seconds) - Bluetooth sensor added or synchronization is successful. • Off - Bluetooth module is in idle mode. • Flashing - Bluetooth module is in active mode.

Rear/Side Panel



Power Port	Connect the supplied power adapter here.
ETHERNET Port	Use a standard LAN cable (RJ45 connector) to connect your PC to the port.
USB Port	The connector is USB host with support for mass storage device.
Select Button	<ul style="list-style-type: none"> • Push the <i>Select</i> button on the device to choose the desired RF mode (WiFi/Z-Wave/ZigBee/Bluetooth), and then the LED of the selected mode will be on. • Push the <i>Select</i> button for three seconds again to unselect the RF mode if needed.
Sync Button	<ul style="list-style-type: none"> • After selecting the RF mode, push the <i>Sync</i> button to synchronize the gateway and sensors. • Push the <i>Sync</i> button for three seconds again to stop the synchronization process if needed.
Reset	<p>This button has two (2) functions:</p> <ul style="list-style-type: none"> • Reboot. When pressed and released, the Multiple RF Home Gateway will reboot (restart). • Clear All Data. This button can also be used to clear ALL data and restore ALL settings to the factory default values. <p>To Clear All Date and restore the factory default values:</p> <ol style="list-style-type: none"> 1. Power On. 2. Keep holding the <i>Reset</i> Button down for 3 seconds. <p>Release the Reset Button. The Multiple RF Home Gateway is now using the factory default values.</p>

Chapter 2

Initial Installation


2

This Chapter covers the software installation of the Multiple RF Home Gateway.

Requirements

- Use a standard 10/100/1000 BaseT network (UTP) cable with RJ45 connector.

Procedure

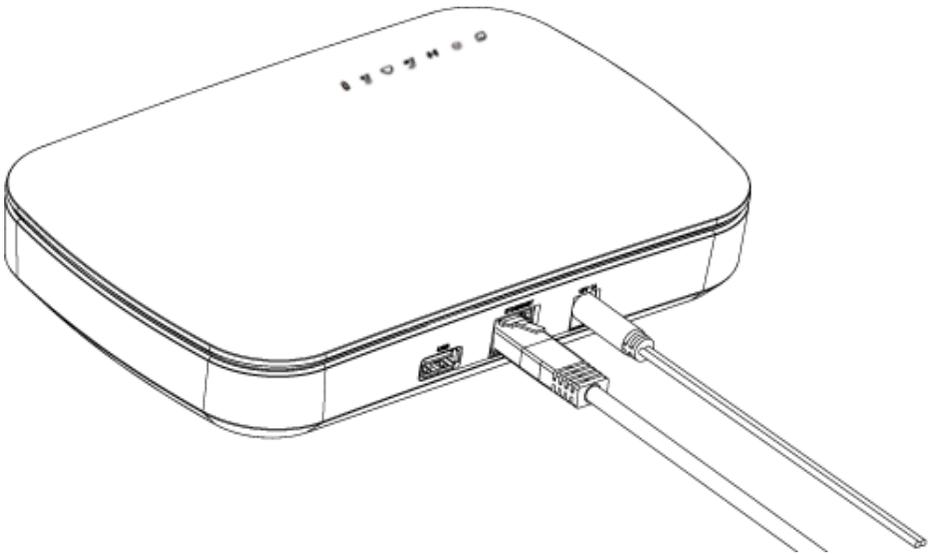

1. Choose an Installation Site

Select a suitable place to install the Multiple RF Home Gateway.

2. Connect LAN Cable

Use a standard LAN cable to connect the device to the Ethernet port on the Multiple RF Home Gateway.

4. Power Up

Connect the supplied power adapter to the Multiple RF Home Gateway. Use only the power adapter provided. Using a different one may cause hardware damage.

5. Check the LEDs

- The *Power* LED should be ON.
- The *Internet* LED should be ON (provided the PC is also ON.)

Chapter 3

Configuration



This Chapter provides Setup details of the System.

Configuration Program

The Multiple RF Home Gateway can offer customers with seamless communication between devices and clouds while at home or away. This gateway is designed to provide complete connectivity with all certified devices including cameras, security systems and ZigBee/Z-Wave/Bluetooth devices.

Preparation

Before attempting to configure the Multiple RF Home Gateway, please ensure that:

- Your PC can establish a physical connection to the Multiple RF Home Gateway. The PC and the Multiple RF Home Gateway must be directly connected (using the Hub port on the Multiple RF Home Gateway) or on the same LAN segment.
- The Multiple RF Home Gateway must be installed and powered ON.
- Choose the desired RF mode by using the *Select* button of the gateway, and then push the *Sync* button for pairing the gateway and sensors. Make sure that the gateway and added sensors are synchronized successfully before using.

Using your Web Browser

To establish a connection from your PC to the Multiple RF Home Gateway:

1. Start your WEB browser.
2. In the *Address* box, enter "HTTP://" and the IP Address of the Multiple RF Home Gateway, as in this example, which uses the Multiple RF Home Gateway's default IP Address:
`HTTP://192.168.0.1`
3. When prompted for the User name and Password, enter values as follows:
 - User name admin
 - Password admin

Appendix A

Specifications



Multiple RF Home Gateway

Model	Multiple RF Home Gateway
Dimensions	192mm(W) * 124mm(D) * 30mm(H)
Operating Temperature	0° C to 40° C
Buttons	3
Network Protocol:	TCP/IP
Network Interface:	1 * 10/100/1000BaseT (RJ45) LAN connection
LEDs	7
Power Adapter	12V, 1.5A

Regulatory Approvals

Federal Communication Commission Interference Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Operations in the 5.15-5.25GHz band are restricted to indoor usage only.

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Note: The country code selection is for non-US model only and is not available to all US model. Per FCC regulation, all WiFi product marketed in US must fixed to US operation channels only.

CE Approvals

The Multiple RF Home Gateway and the Ethernet Multiple RF Home Gateway meet the guidelines of the European Union and comply with the 99/5/EEC and RTTE 99/5EG directives, including the following standards:

- EN 60950-1
- EN301489 -1/-17
- EN300328 v1.8.1 (for 2.4G)

This is a Class B product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.