

Testing Tomorrow's Technology

Application

For

Equipment Authorization of Certification for an Intentional Radiator per Part 15, Subpart C, paragraphs 15.207, 15.209 and 15.247

And

**Verification
Per
Part 15, Subpart B, for Unintentional Radiators, section 15.101, 15.107 and 15.109**

And

Industry Canada RSS-Gen, Issue 4 and RSS-247, Issue 2

For the

Neptune Technology Group Inc.

Model: MRX920v4

FCC ID: P2SMRXV4

IC: 4171B-MRXV4

UST Project: 18-0010

Issue Date: February 2, 2018

Total Pages in This Report: 50

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**



Testing Tomorrow's Technology

I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: 

Title: Compliance Engineer – President

Date February 2, 2018



TESTING
NVLAP LAB CODE 200162-0

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com



Testing Tomorrow's Technology

MEASUREMENT TECHNICAL REPORT

COMPANY NAME: Neptune Technology Group Inc.

MODEL: MRX920v4

FCC ID: P2SMRXV4

IC: 4171B-MRXV4

DATE: February 2, 2018

This report concerns (check one): Original grant ☒
Class II change

Equipment type: 902-928 MHz ISM Radio

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes_____ No X

If yes, defer until: N/A
date

agrees to notify the Commission by N/A
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

US Tech
3505 Francis Circle
Alpharetta, GA 30004

Phone Number: (770) 740-0717
Fax Number: (770) 740-1508

Table of Contents

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
1	General Information	7
1.1	Purpose of this Report	7
1.2	Characterization of Test Sample	7
1.3	Product Description	7
1.4	Configuration of Tested System	8
1.5	Test Facility	8
1.6	Related Submittals	8
1.7	Test Results	9
2	Tests and Measurements	11
2.1	Test Equipment	11
2.2	Modifications to EUT Hardware	12
2.3	Number of Measurements for Intentional Radiators (Part 15.31(m))	12
2.4	Frequency Range of Radiated Measurements (Part 15.33)	13
2.4.1	Intentional Radiator	13
2.4.2	Unintentional Radiator	13
2.5	Measurement Detector Function and Bandwidth (CFR 15.35)	13
2.6	EUT Antenna Requirements (CFR 15.203)	14
2.7	Restricted Bands of Operation (Part 15.205)	17
2.8	Transmitter Duty Cycle (CFR 15.35 (c))	17
2.9	Intentional Radiator, Power Line Conducted Emissions (CFR 15.207)	20
2.10	Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d))	20
2.11	Band Edge Measurements – (CFR 15.247 (d))	27
2.12	Twenty dB Bandwidth (CFR 15.247 (a) (1))	32
2.13	Maximum Peak Conducted Output Power (CFR 15.247 (b) (2))	35
2.14	Number of Hopping Frequencies (CFR 15.247 (a)(1))	38
2.15	Frequency Separation (CRF 15.247(a)(1))	41
2.16	Average Time of Occupancy (CFR 15.247(f))	42
2.17	Unintentional and Intentional Radiator, Powerline Emissions (CFR 15.107/15.207)	43
2.18	Unintentional Radiator, Radiated Emissions (CFR 15.109)	43
2.20	Measurement Uncertainty	50
3	Conclusion	50

List of Figures

<u>Figures</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Block Diagram of Transmit Mode Test Configuration	15
Figure 2.	Block Diagram of Receive Mode Test Configuration	16
Figure 3.	Pulse Width	18
Figure 4.	Pulse Train (Duty Cycle)	19
Figure 5.	Antenna Conducted Emissions Low Channel, 30 MHz to 1 GHz	23
Figure 6.	Antenna Conducted Emissions Low Channel, 1 to 10 GHz	24
Figure 7.	Antenna Conducted Emissions High Channel, 30 MHz to 1 GHz	25
Figure 8.	Antenna Conducted Emissions High Channel, 1 to 10 GHz.....	26
Figure 9.	Band Edge Compliance, Low Channel Delta	28
Figure 10.	Band Edge Compliance, High Channel Delta.....	29
Figure 11.	Band Edge Compliance, Low Channel Delta – Channel Hopping	30
Figure 12.	Band Edge Compliance, High Channel Delta – Channel Hopping	31
Figure 13.	Twenty dB Bandwidth – Low Channel.....	33
Figure 14.	Twenty dB Bandwidth – High Channel.....	34
Figure 15.	Peak Antenna Conducted Output Power, Low Channel.....	36
Figure 16.	Peak Antenna Conducted Output Power, High Channel.....	37
Figure 17.	Hopping Channels 1 through 50.....	40
Figure 18.	Channel Separation	41

List of Tables

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1.	EUT and Peripherals	9
Table 2.	Details of I/O Cables Attached to EUT	10
Table 3.	Test Instruments.....	11
Table 4.	Number of Test Frequencies for Intentional Radiators	12
Table 5.	Allowed Antenna	14
Table 6.	Average Radiated Fundamental & Harmonic Emissions	21
Table 7.	Peak Radiated Fundamental & Harmonic Emissions	22
Table 8.	Twenty (20) dB Bandwidth	32
Table 9.	Peak Antenna Conducted Output Power per Part 15.247 (b) (2)	35
Table 10.	List of Hopping Channels	39
Table 11.	Part 15.109 Limits	43
Table 12.	Unintentional Radiator, Spurious Radiated Emissions (CFR 15.109) 30 MHz to 1000 MHz.....	44
Table 13.	Unintentional Radiator, Spurious Radiated Emissions (CFR 15.109).....	45
Table 14.	Part 15.209 Limits	46
Table 15.	Intentional Radiator, Spurious Radiated Emissions (CFR 15.209).....	47
Table 16.	Intentional Radiator, Spurious Radiated Emissions (CFR 15.209).....	48
Table 17.	Intentional Radiator, Spurious Radiated Emissions (CFR 15.209) 1 GHz to 25 GHz	49

List of Attachments

Agency Agreement
Application Forms
Letter of Confidentiality
Equipment Label(s)
Block Diagram(s)
Schematic(s)
Installation Manual

Test Configuration Photographs
Internal Photographs
External Photographs
Theory of Operation
RF Exposure
IC Cross Reference

1 General Information

1.1 Purpose of this Report

This report is prepared as a means of conveying test results and information concerning the suitability of this exact product for public distribution according to the FCC Rules and Regulations Part 15, Section 247 and Industry Canada RSS-247.

1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on January 29, 2018 in good operating condition.

1.3 Product Description

The Equipment Under Test (EUT) is the Neptune Technology Group Inc. Model MRX920v4. The EUT is a transceiver that is used in a motor vehicle to read wireless water meters. It operates within the 902 - 928 MHz ISM band. The equipment also contains a low-power Bluetooth Transceiver with modular certification, the Laird BT900-SA. The EUT is powered from the vehicle "cigarette lighter" or other indirect or direct connection to the 12V or 24V starting/charging/battery system in the motor vehicle in which it is operated.

The EUT employs a frequency hopping spread spectrum (FHSS) type of modulation and has 3 operating modes:

1. Unattended receive mode
2. Bluetooth-controlled mode
3. USB-controlled mode

Antenna: Laird 915 MHz monopole
Maximum Output Power: 21 dBm (Rated)

1.4 Configuration of Tested System

The Test Sample was tested per *ANSI C63.4:2014, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2014)* for FCC subpart A Digital equipment Verification requirements. Also, *ANSI C63.10:2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices* was used as a test procedure guide.

A list of the EUT and Peripherals is found in Table 1 below. Block diagrams of the tested system are shown in Figures 1 and 2. Test configuration photographs are provided in separate Appendices.

1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC. Its designation number is US5301. Additionally this site has been fully described and submitted to Industry Canada (IC), and has been approved under file number 9900A-1.

1.6 Related Submittals

The Equipment Under Test (EUT) is subject to the following FCC/IC authorizations:

- a) Certification under section 15.247/IC RSS-247 as a transmitter.
- b) Verification under 15.101/ICES-003 as a digital device and receiver.

The Verification requirement shares many common report elements with the Certification report. Therefore, though this report is mostly intended to provide data for the Certification process, the Verification authorization report for the EUT is included herein.

1.7 Test Results

In our opinion, and as indicated by the test results documented following, when tested in the configuration as described in this report, the EUT meets the applicable requirements of FCC and IC, including: FCC Parts 2.902, 15.101, 15.107, 15.109, 15.207, 15.209, 15.247, RSS GEN, and RSS-247.

Table 1. EUT and Peripherals

EUT MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC and IC ID	CABLES P/D
Neptune Technology Group, Inc.	MRX920v4	MRX400B10	FCC ID: P2SMRXV4 IC: 4171B-MRXV4	None

PERIPHERAL and MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC and IC ID	CABLES P/D
Laird 915 MHz Antenna	B8965C	3	--	12 ft S D
Dell Laptop Computer (Used only for receive mode unintentional emissions testing)				15 ft D
Optima Deep Cycle and Starting Battery	D34	--	--	8 ft U P

U= Unshielded S= Shielded
 P= Power D= Data

US Tech Test Report:
 Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 and IC RSS Certification
 18-0010
 February 2, 2018
 Neptune Technology Group Inc.
 MRX920v4

Table 2. Details of I/O Cables Attached to EUT

DESCRIPTION OF CABLE	DETAILS OF CABLE			CABLE LENGTH
Power Cable	Manufacturer and Part Number			8 ft
	Various			
	Shield Type	Shield Termination	Type of Backshell	
	N/A	N/A	N/A	
Antenna Cable (Reverse TNC)	Manufacturer and Part Number			12 ft
	Various			
	Shield Type	Shield Termination	Type of Backshell	
	CND	360	MS	
USB (Receive mode testing only)	Manufacturer and Part Number			15 ft
	Various			
	Shield Type	Shield Termination	Type of Backshell	
	CND	CND	PU	

Shield Type

N/A = None
 F = Foil
 B = Braided
 2B = Double Braided
 CND = Could Not Determine

Shield Termination

N/A = None
 360 = 360 Degrees
 P = Pigtail/Drain Wire
 CND = Could Not Determine
 MU = Metal Unshielded

Type of Backshell

N/A = Not Applicable
 PS = Plastic Shielded
 PU = Plastic Unshielded
 MS = Metal Shielded

2 Tests and Measurements

2.1 Test Equipment

The table below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are indicated.

Table 3. Test Instruments

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	CALIBRATION DUE DATE
SPECTRUM ANALYZER	E4407B	Agilent	US41442935	6/22/2018
PREAMP	8449B	HEWLETT-PACKARD	3008A00480	12/1/2018
PREAMP	8447D	HEWLETT-PACKARD	1937A02980	3/7/2018
LOOP ANTENNA	6502	EMCO	9810-3246	1/22/2020 2 yr
BICONICAL ANTENNA	3110B	EMCO	9307-1431	10/23/2019 2 yr
LOG PERIODIC ANTENNA	3146	EMCO	9110-3236	9/21/2019 2 yr
HORN ANTENNA	3115	EMCO	9107-3723	9/22/2018 2 yr

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

2.2 Modifications to EUT Hardware

No physical modifications were made by US Tech in order to bring the EUT into compliance with FCC Part 15, Subpart C Intentional Radiator Limits for the transmitter portion of the EUT or the Subpart B Unintentional Radiator Limits (Receiver and Digital Device) Requirements.

2.3 Number of Measurements for Intentional Radiators (Part 15.31(m))

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in Table 3 below.

Table 4. Number of Test Frequencies for Intentional Radiators

Frequency Range over which the device operates	Number of Frequencies	Location in the Range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near the top 1 near the bottom
Greater than 10 MHz	3	1 near top 1 near middle 1 near bottom

Because the EUT operates over a range of 8 MHz, 2 test frequencies were used 911.08 MHz and 919.08 MHz.

2.4 Frequency Range of Radiated Measurements (Part 15.33)

2.4.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10th harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

2.4.2 Unintentional Radiator

For the digital device, an unintentional radiator, the frequency range shall be 30 MHz to 1000 MHz, or to 5 times the highest internal clock frequency.

2.5 Measurement Detector Function and Bandwidth (CFR 15.35)

The radiated and conducted emissions limits shown herein are based on the following:

Detector Function and Associated Bandwidth

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e. 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the Quasi-peak device are used.

Corresponding Peak and Average Requirements

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz.

Pulsed Transmitter Averaging

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may be expressed logarithmically in dB.

NOTE: If the transmitter was programmed to transmit at >98% duty cycle, then, wherever applicable (where the detection mode was AVG) the duty cycle factor calculated will be applied.

2.6 EUT Antenna Requirements (CFR 15.203)

This equipment is not available to the general public and will only be installed by a professional installer working for an approved utility. The equipment therefore meets the intent of the above requirement. Only the antennas listed in Table 4 will be used with this module.

Table 5. Allowed Antenna

MANUFACTURER	TYPE OF ANTENNA	MODEL	GAIN dB _i	TYPE OF CONNECTOR
Laird	Monopole	B8965C	5.1	Reverse TNC

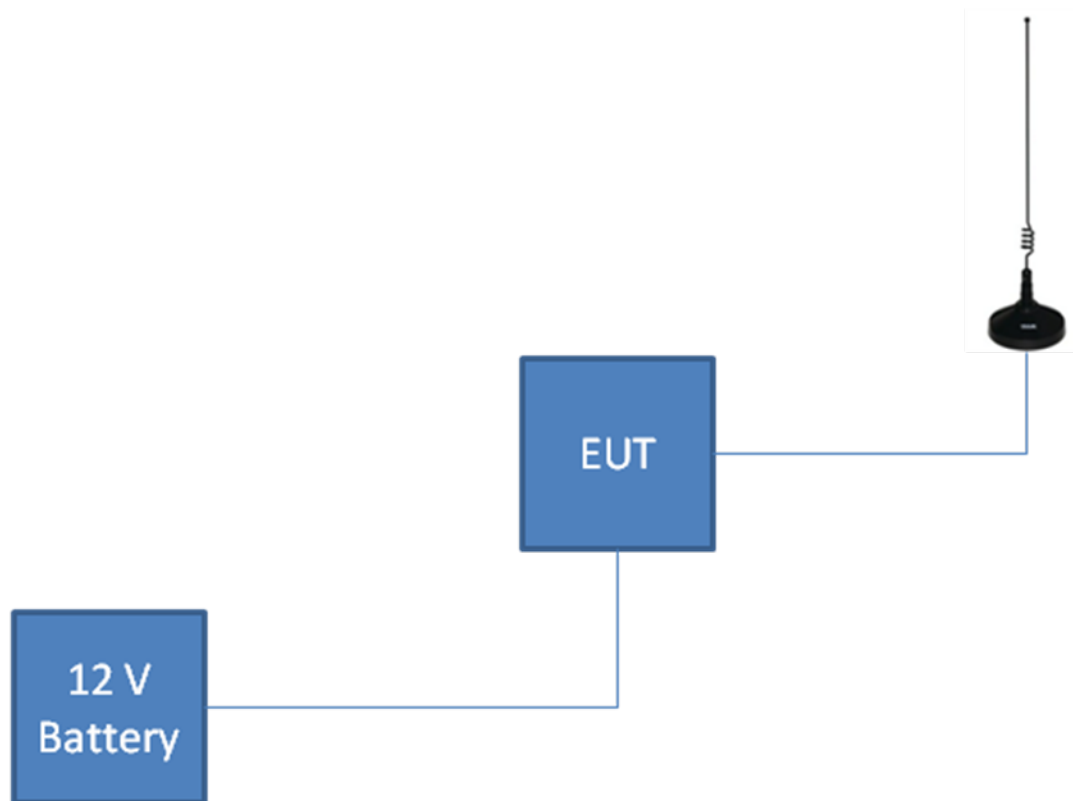


Figure 1. Block Diagram of Transmit Mode Test Configuration

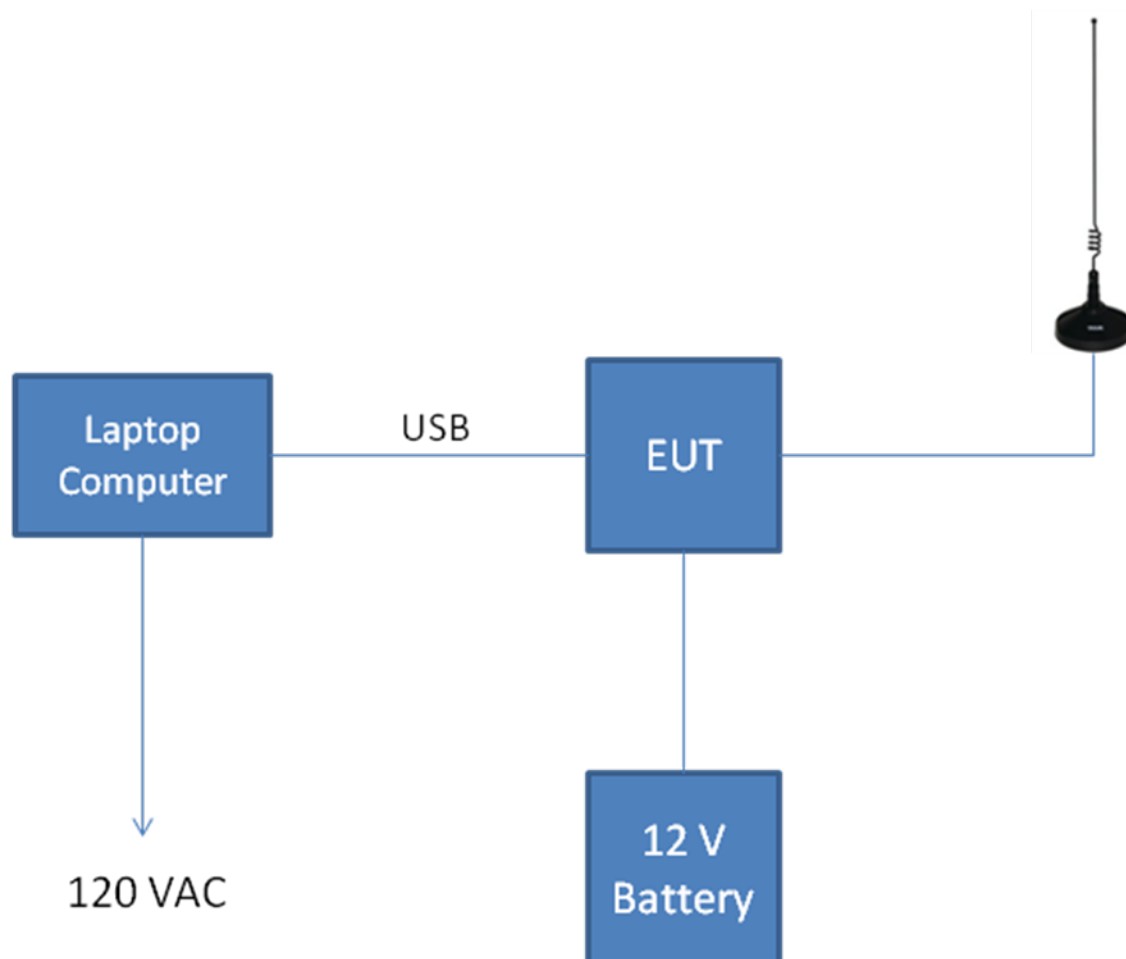


Figure 2. Block Diagram of Receive Mode Test Configuration

2.7 Restricted Bands of Operation (Part 15.205)

Only spurious emissions can fall in the frequency bands of CFR 15.205. The field strength of these spurious cannot exceed the limits of 15.209. Radiated harmonics and other spurious emissions are examined for this requirement. See paragraph 2.10 of the test report.

2.8 Transmitter Duty Cycle (CFR 15.35 (c))

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification.

In this case the EUT pulse train does not exceed 0.1 seconds; plots of the pulse train are provided below.

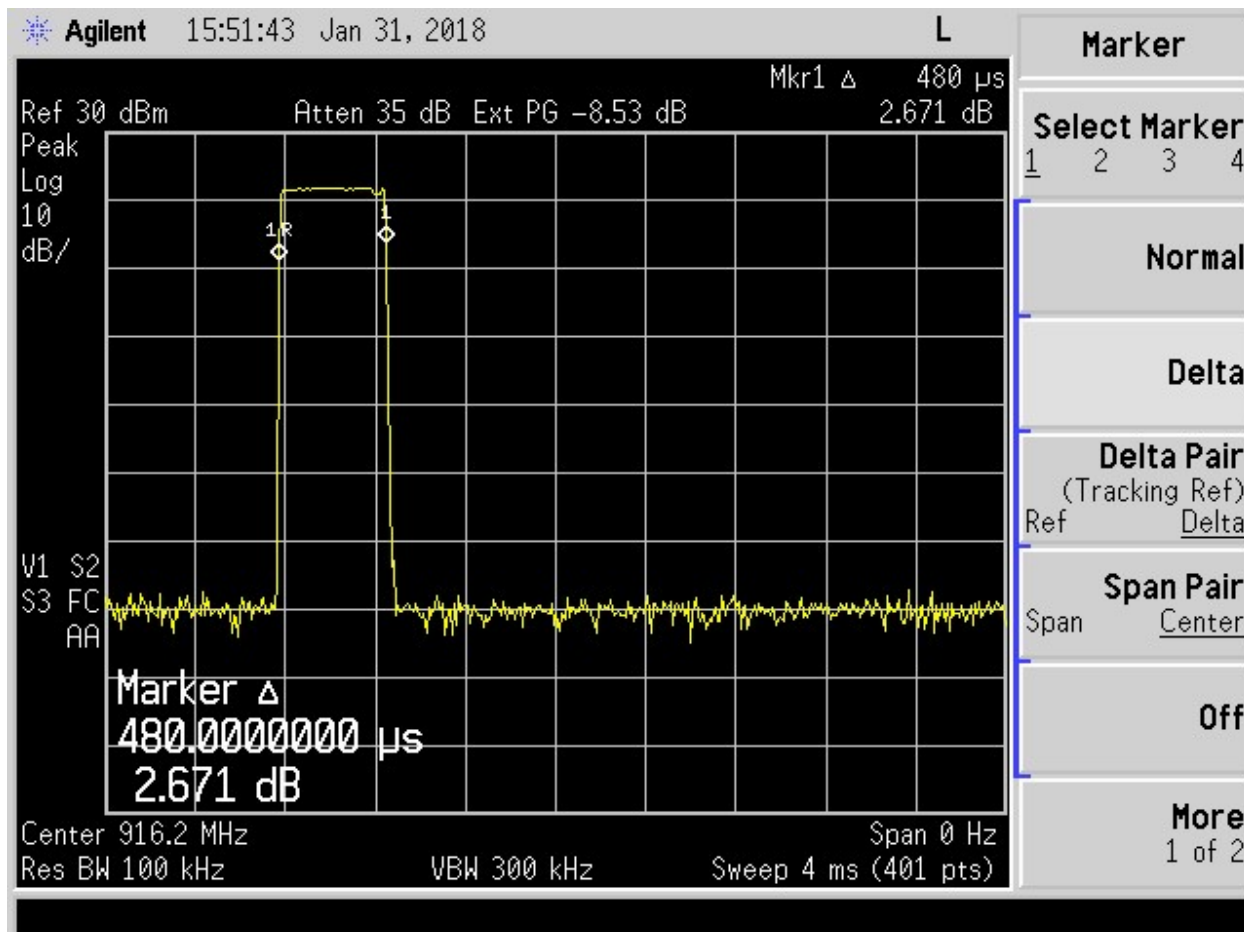


Figure 3. Pulse Width

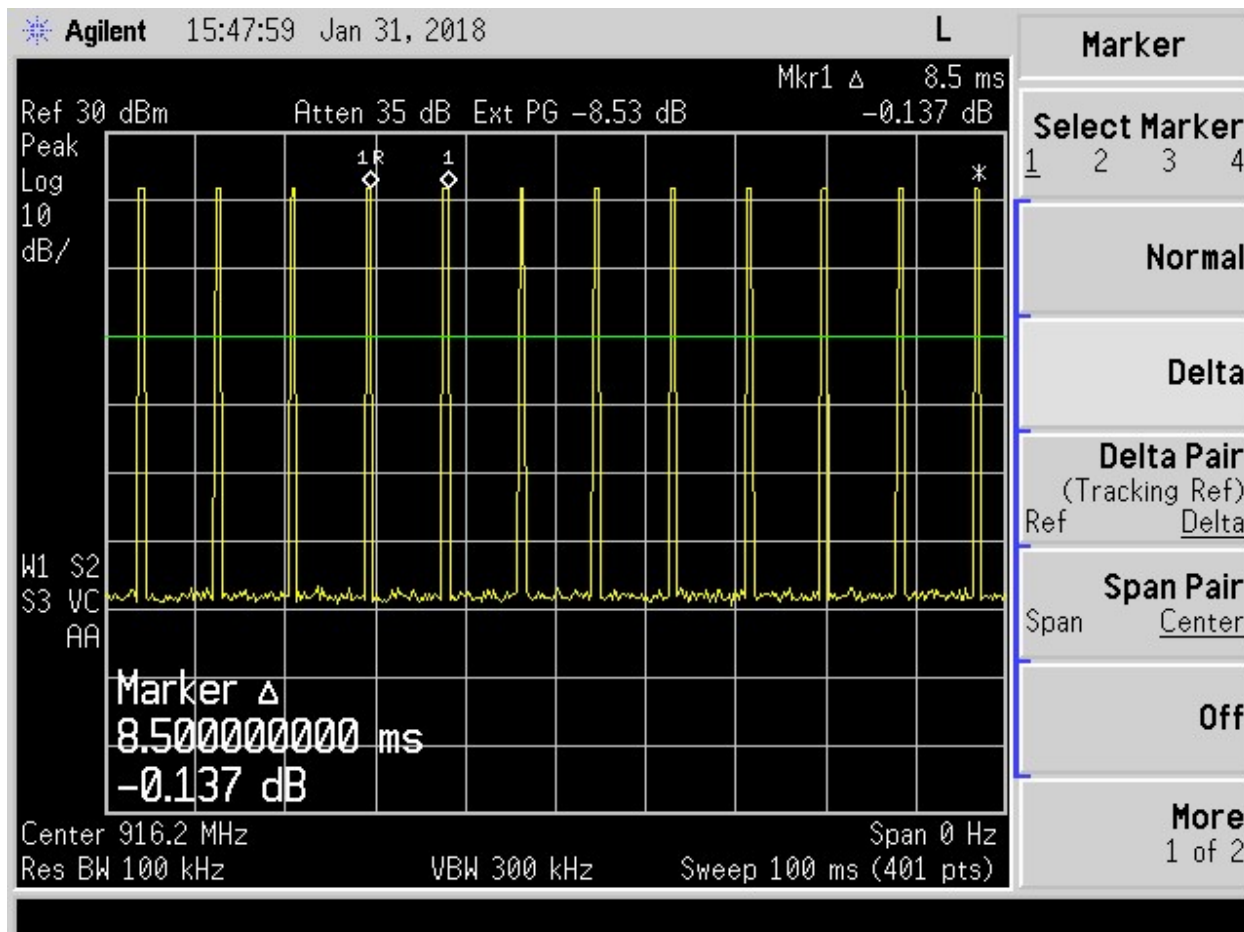


Figure 4. Pulse Train (Duty Cycle)

TX On time = 12 x 0.48 ms = 5.76 ms

Duty cycle = $20 \log (5.76 \text{ ms} / 100 \text{ ms}) = -24.79 \text{ dB}$ = duty cycle correction factor

Note: Duty cycle correction greater than -20 dB therefore -20 dB was used as the correction factor in this report.

2.9 Intentional Radiator, Power Line Conducted Emissions (CFR 15.207)

The EUT is intended to be powered by an automotive electrical system. Since the EUT is not powered from a public utility source, this test was not applicable. A 12 VDC deep cycle lead acid battery was used to power the EUT during testing.

2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d))

Radiated Spurious measurements: The EUT was placed into a continuous transmit mode of operation (>98% duty cycle) and tested per ANSI C63.10-2013. The EUT was tested in 3 orthogonal positions because the device is considered portable.

Radiated measurements were conducted between the frequency range of 9 kHz (or lowest frequency used/generated by the device) up to the tenth harmonic of the device (not greater than 40 GHz). In the band below 125 kHz, a resolution bandwidth (RBW) of 200 Hz was used. In the band from 125 kHz to 30 MHz, a RBW of 9 kHz was used; emissions below 1 GHz were tested with a RBW of 100/120 kHz and emissions above 1 GHz were tested with a RBW of 1 MHz. All video bandwidth settings were at least three times the RBW value.

The EUT was investigated per CFR 15.209, General requirements for unwanted spurious emissions. The conducted spurious method as described below was used to investigate all other emissions emanating from the antenna port.

Conducted Spurious measurements: The EUT was put into a continuous-transmit mode of operation (>98% duty cycle) and tested per ANSI C63.10-2013 for conducted out of band emissions emanating from the antenna port over the frequency range of 30 MHz or lowest operating clock frequency to ten times the highest operating clock frequency. A conducted scan was performed on the EUT to identify and record the spurious signals that were related to the transmitter.

US Tech Test Report:
 Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 and IC RSS Certification
 18-0010
 February 2, 2018
 Neptune Technology Group Inc.
 MRX920v4

Table 6. Average Radiated Fundamental & Harmonic Emissions


Test: FCC Part 15, Para 15.209, 15.247(d)				Client: Neptune Technology Group Inc.			
Project: 18-0010				Model: MRX920v4			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector Mode
Low Channel – AVERAGE							
911.09	95.21	23.61	118.82		3m./VERT		AVG
1822.00	56.83	-4.86	51.97	78.8	3.0m./VERT	26.8	AVG
2733.00	49.07	-1.16	47.91	54.0*	3.0m./HORZ	6.1	AVG
6378.00	49.60	3.26~	52.86	78.8	1.0m./VERT	26.0	AVG
7289.00	41.16	5.35~	46.51	54.0*	1.0m./VERT	7.5	AVG
High Channel – AVERAGE							
919.08	95.10	23.67	118.77		3m./VERT		AVG
1838.00	52.75	-4.86	47.89	78.8	3.0m./VERT	30.9	AVG
2757.00	49.65	-1.25	48.40	54.0*	3.0m./VERT	5.6	AVG
6433.00	46.51	3.31~	49.82	78.8	1.0m./VERT	29.0	AVG
7353.00	42.16	7.49~	49.65	54.0*	1.0m./HORZ	4.4	AVG

-
- (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 20 dB relaxation for peak measurements of CFR 15.35.
 - No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic.
 - (~) Measurements taken at 1 meter were extrapolated to 3 meters using a factor of (-9.5 dB).
 - The EUT was placed in its normal operating position and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98%. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 911.09 MHz:

Magnitude of Measured Frequency	95.21	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	23.61	dB/m
Corrected Result	118.82	dBuV/m

Test Date: January 30, 2018

Tested By
 Signature: 

Name: Bruce Arnold

US Tech Test Report:
 Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 and IC RSS Certification
 18-0010
 February 2, 2018
 Neptune Technology Group Inc.
 MRX920v4

Table 7. Peak Radiated Fundamental & Harmonic Emissions


Test: FCC Part 15, Para 15.209, 15.247(d)				Client: Neptune Technology Group Inc.			
Project: 18-0010				Model: MRX920v4			
Frequency (MHz)	Test Data (dBuv)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector Mode
Low Channel – PK							
911.10	95.93	23.61	119.54		3m./VERT		PK
1822.00	59.17	-4.86	54.31	99.5	3.0m./VERT	45.2	PK
2733.00	53.78	-1.16	52.62	74.0*	3.0m./HORZ	21.4	PK
6378.00	53.04	3.26~	56.30	99.5	1.0m./VERT	43.2	PK
7289.00	46.90	5.35~	52.25	74.0*	1.0m./VERT	21.7	PK
High Channel – PK							
919.09	96.40	23.67	120.07		3m./VERT		PK
1838.00	56.53	-4.86	51.67	100.1	3.0m./VERT	48.4	PK
2757.00	53.73	-1.25	52.48	74.0*	3.0m./VERT	21.5	PK
6433.00	51.07	3.31~	54.38	100.1	1.0m./VERT	45.7	PK
7353.00	48.04	7.49~	55.53	74.0*	1.0m./HORZ	18.5	PK

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 20 dB relaxation for peak measurements of CFR 15.35.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic.
3. (~) Measurements taken at 1 meter were extrapolated to 3 meters using a factor of (-9.5 dB).
4. The EUT was placed in its normal operating position and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98%. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 911.10 MHz:

Magnitude of Measured Frequency	95.93	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	23.61	dB/m
Corrected Result	119.54	dBuV/m

Test Date: January 30, 2018

Tested By
 Signature: 

Name: Bruce Arnold

Conducted Spurious Emissions:

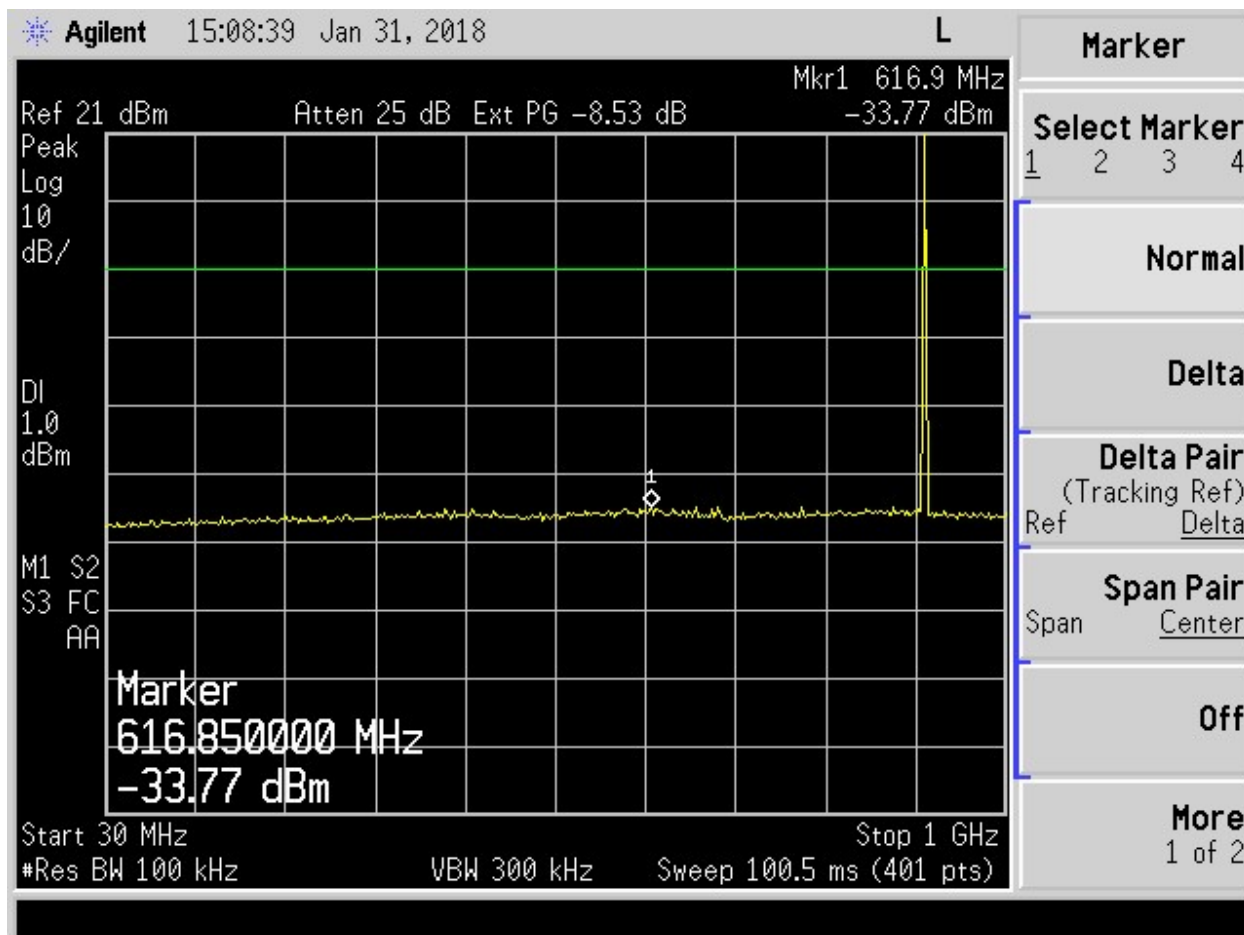


Figure 5. Antenna Conducted Emissions Low Channel, 30 MHz to 1 GHz

Note: Large emission seen is the fundamental emission.

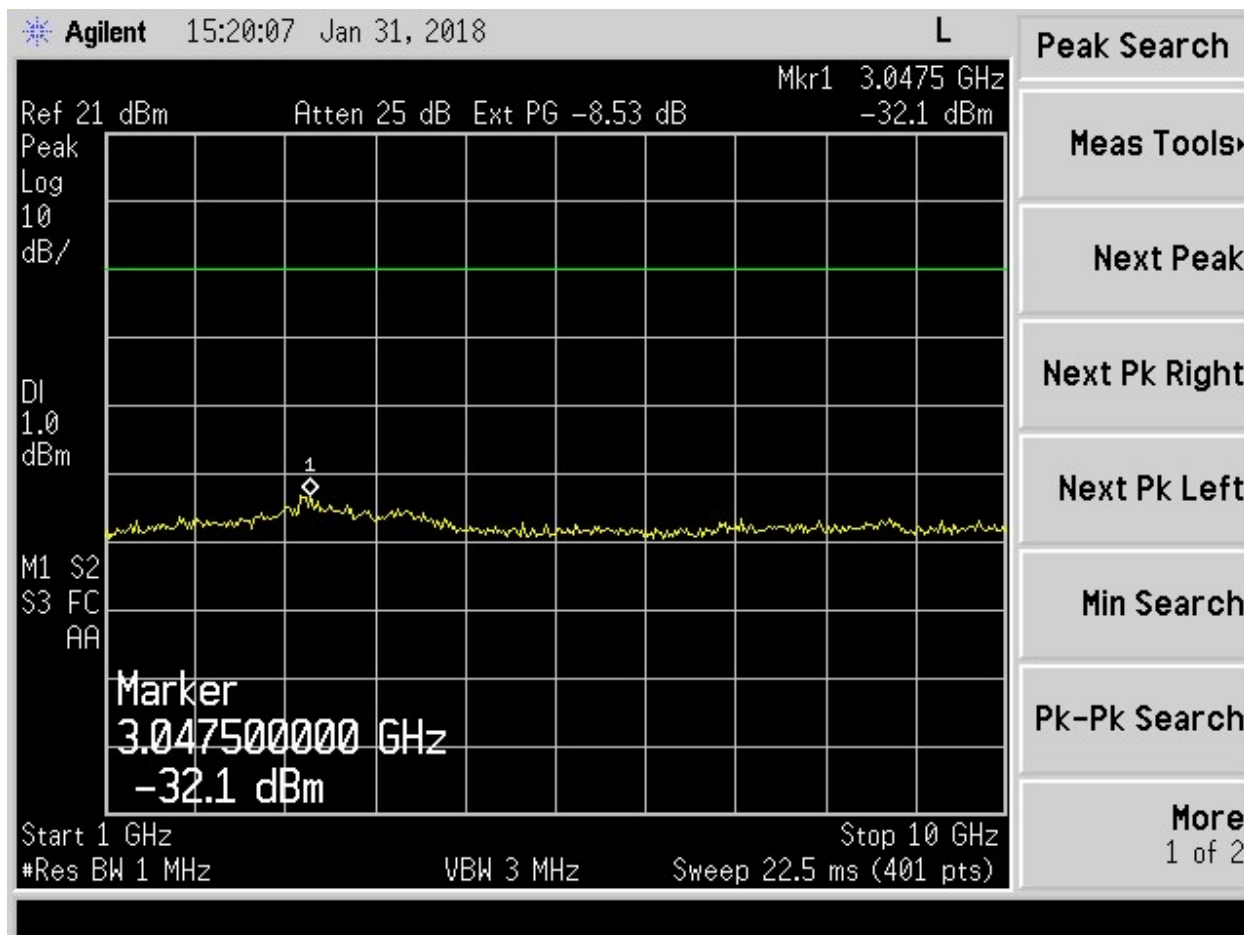


Figure 6. Antenna Conducted Emissions Low Channel, 1 to 10 GHz

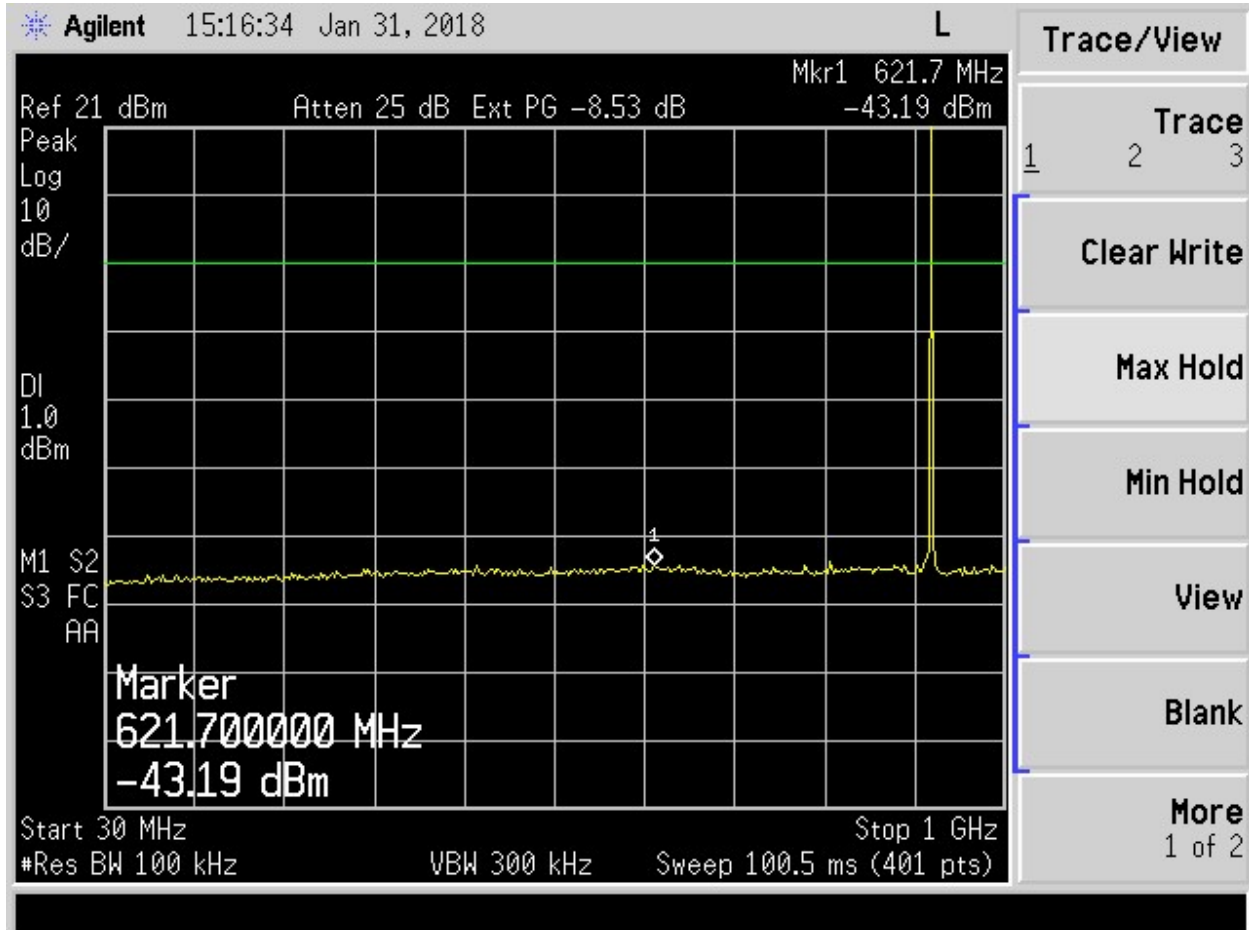


Figure 7. Antenna Conducted Emissions High Channel, 30 MHz to 1 GHz

Note: Large emission seen is the fundamental emission.

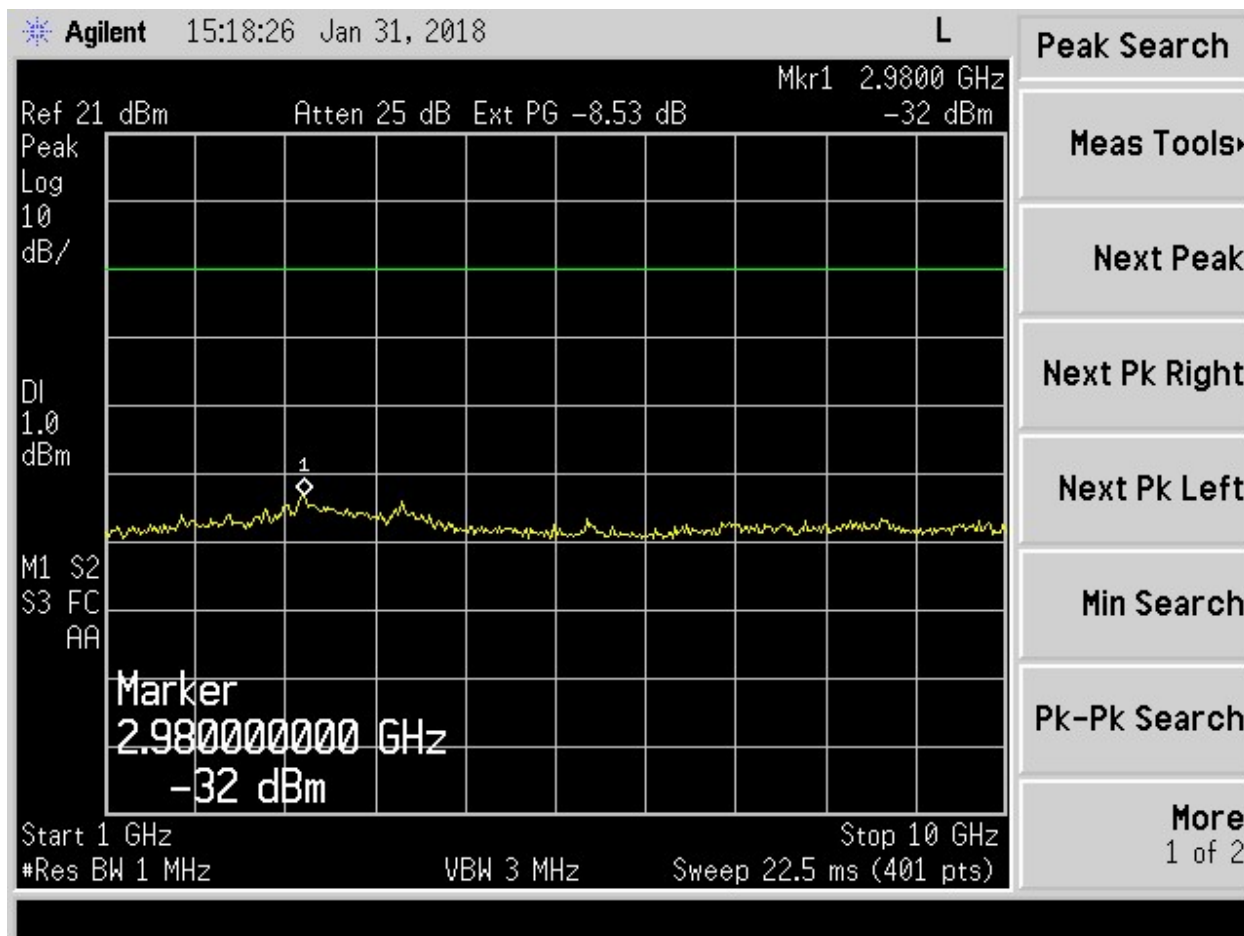


Figure 8. Antenna Conducted Emissions High Channel, 1 to 10 GHz

2.11 Band Edge Measurements – (CFR 15.247 (d))

Band Edge measurements are made, following the guidelines in ANSI 63.10-2013, with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Conducted measurements are performed to demonstrate compliance with the requirement of 15.247(d) that all emissions outside of the band edges be attenuated by at least 20 dB when compared to its highest in-band value (contained in a 100 kHz band).

To capture the band edge, set the Spectrum Analyzer frequency span large enough (usually around 2 MHz) to capture the peak level of the emission operating on the channel closest to the band edge as well as any modulation products falling outside of the authorized band of operation. Radiated measurements are performed with RBW = 100 kHz. The VBW is set $\geq$ RBW. See figure and calculations below for more detail.

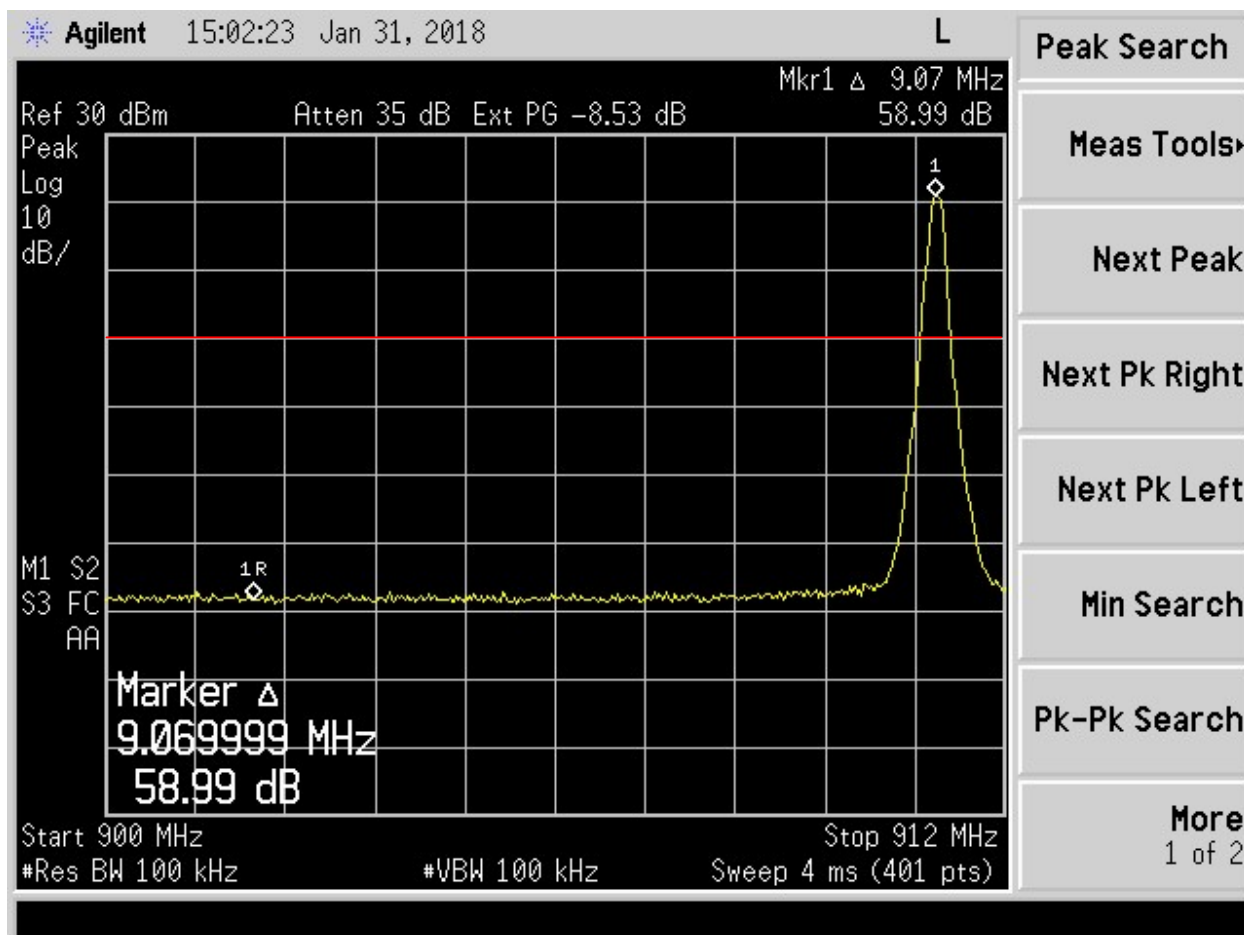


Figure 9. Band Edge Compliance, Low Channel Delta

Measured Delta (from Figure 11)	58.99	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	38.99	dB

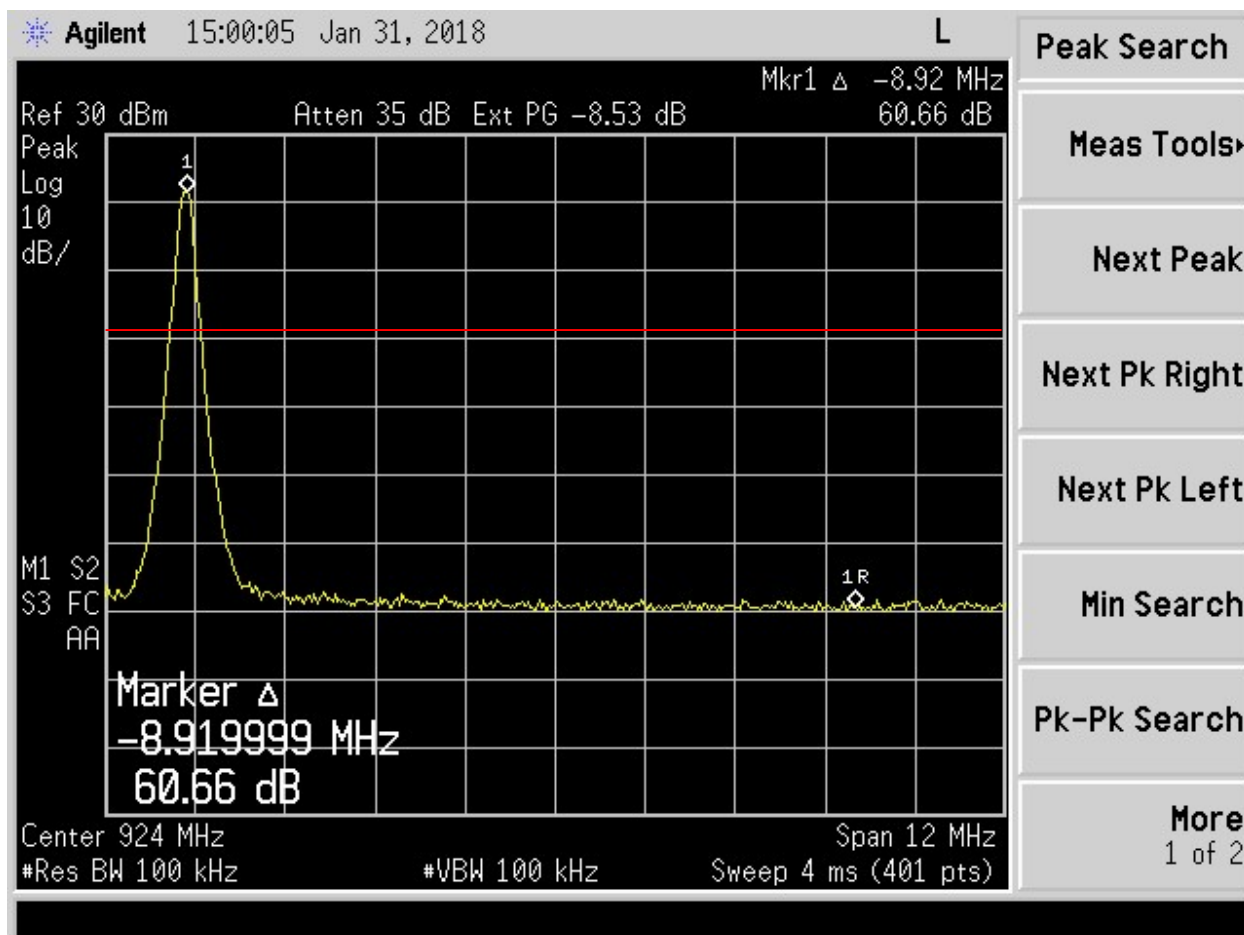


Figure 10. Band Edge Compliance, High Channel Delta

Measured Delta (from Figure 12)	60.66	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	40.66	dB

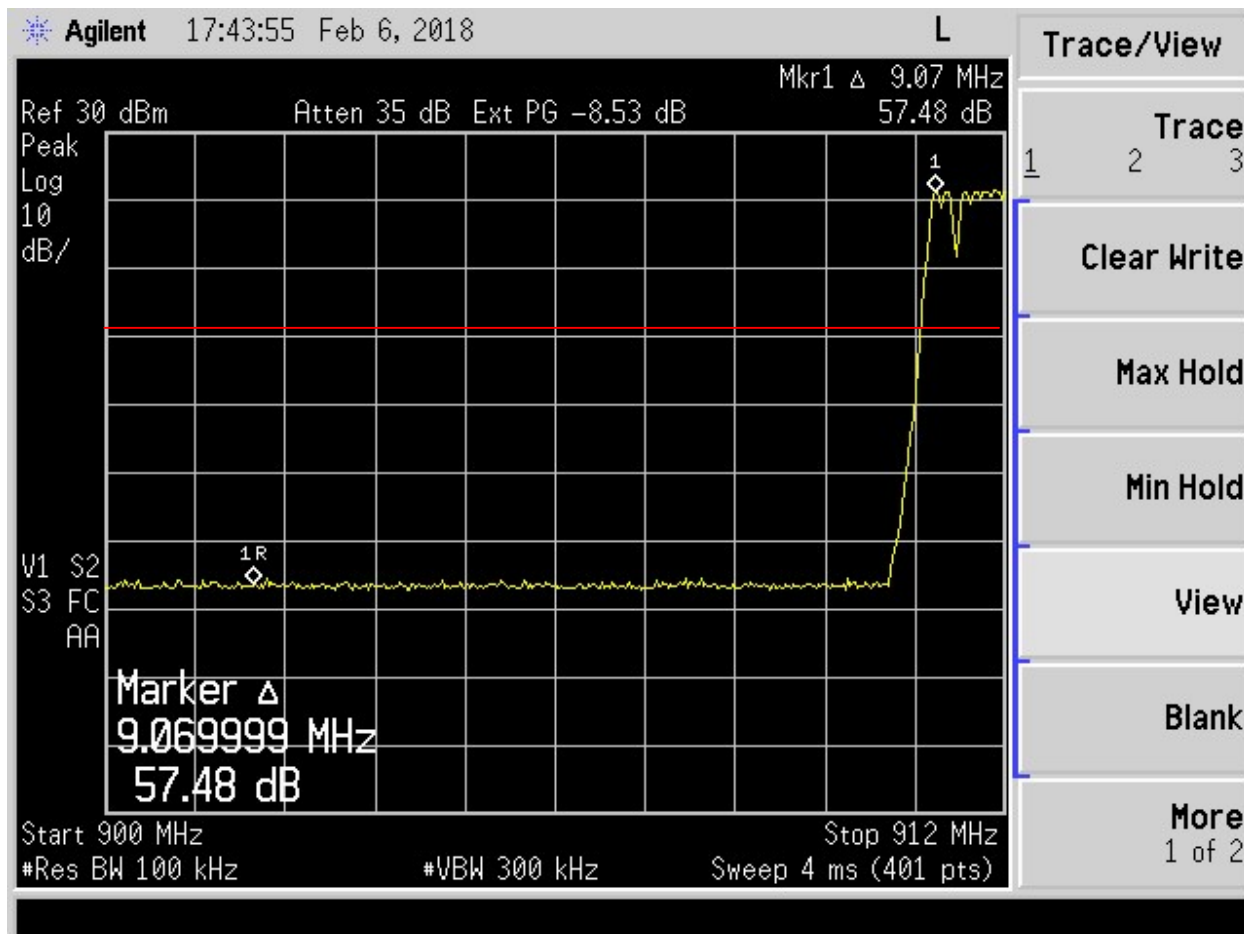


Figure 11. Band Edge Compliance, Low Channel Delta – Channel Hopping

Measured Delta (from Figure 12)	57.48	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	37.48	dB

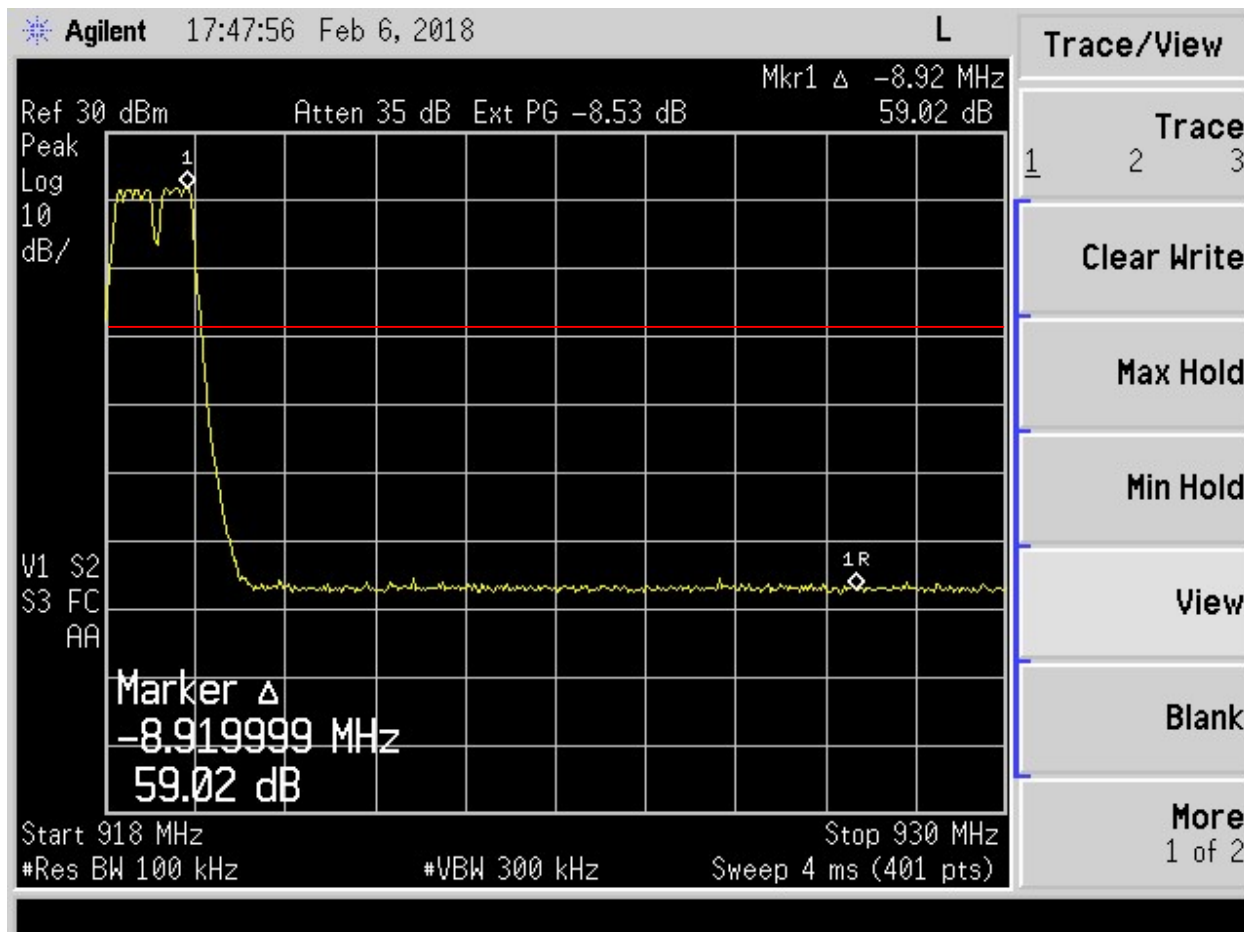


Figure 12. Band Edge Compliance, High Channel Delta – Channel Hopping

Measured Delta (from Figure 13)	59.02	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	39.02	dB

2.12 Twenty dB Bandwidth (CFR 15.247 (a) (1))


For frequency hopping systems operating in the 902-928 MHz band the maximum allowed 20 dB bandwidth is 500 kHz.

These measurements were performed while the EUT was in a constant transmit mode. A method similar to the marker delta method was used to capture the points. The RBW was set to 3 kHz and with the VBW $\geq$ RBW. The results of this test are given in Table and Figures following.

Table 8. Twenty (20) dB Bandwidth

Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	99% Occupied Bandwidth (kHz)
911.0810	72.23	500	67.45
919.0769	72.54	500	67.44

Test Date: January 31, 2018

Tested By
Signature: 

Name: Bruce Arnold

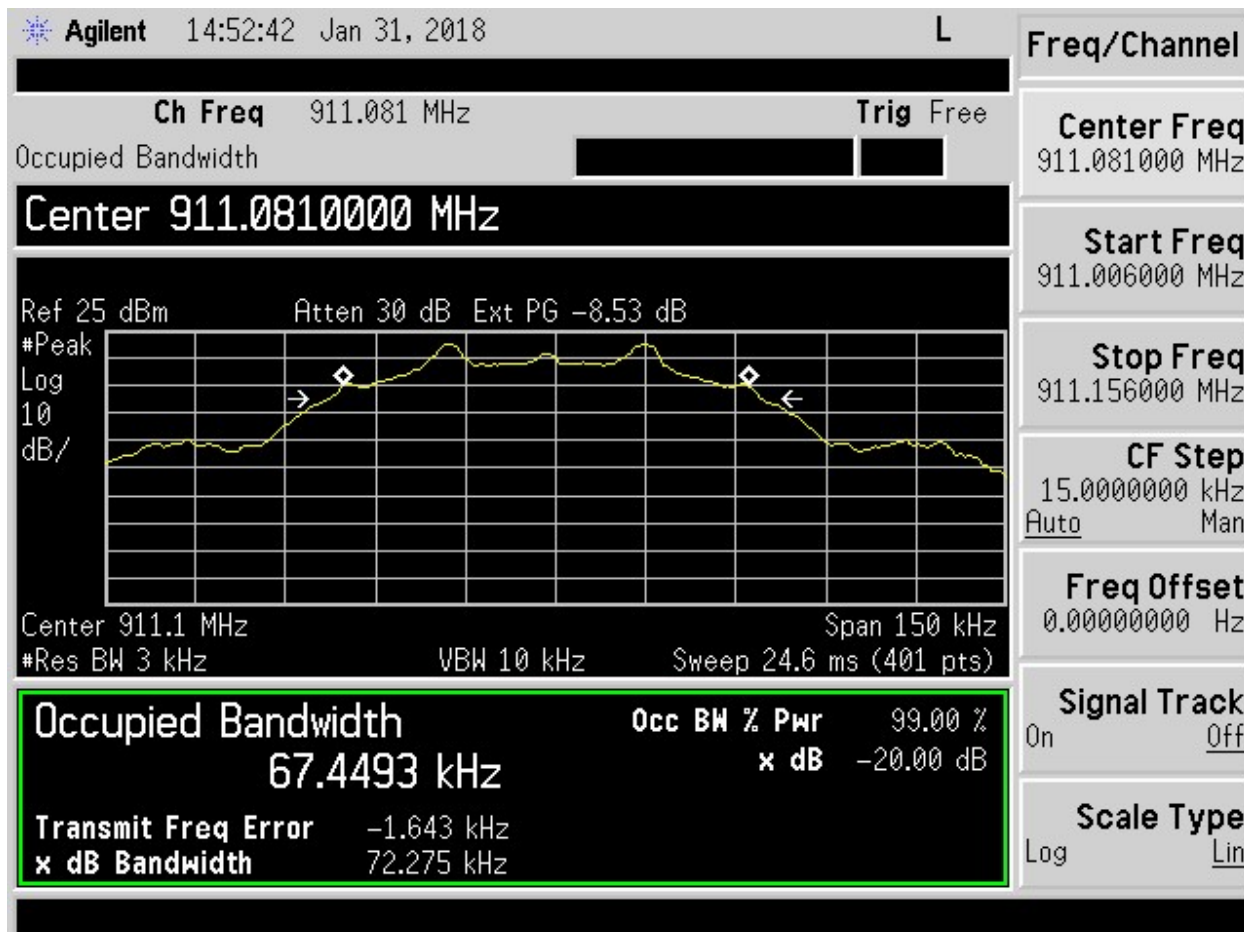


Figure 13. Twenty dB Bandwidth – Low Channel

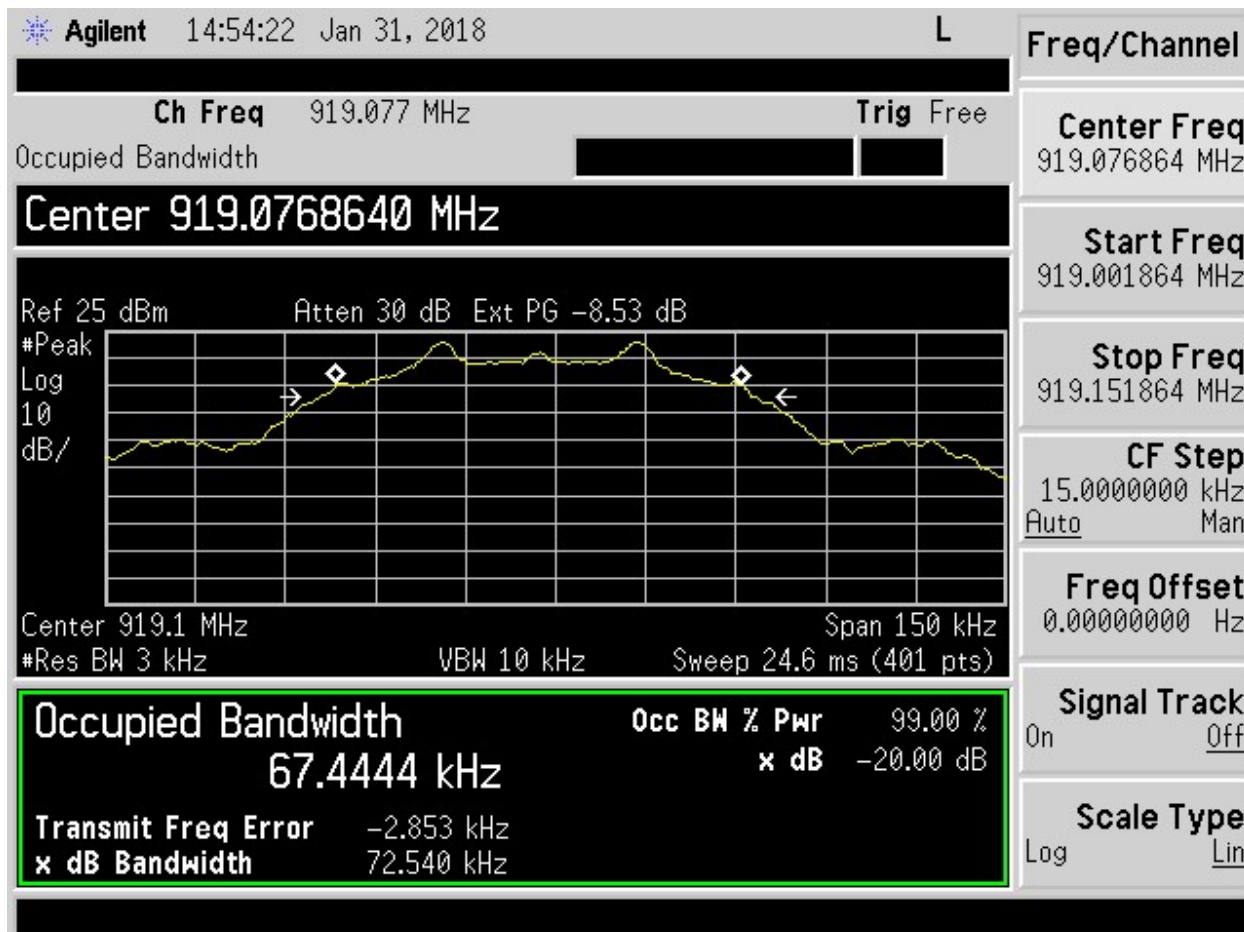


Figure 14. Twenty dB Bandwidth – High Channel

2.13 Maximum Peak Conducted Output Power (CFR 15.247 (b) (2))

For frequency hopping systems in the 902-928 MHz band with at least 50 hopping channels, the maximum peak conducted output power of the intentional radiator shall not exceed 1 watt. Systems with less than 50 hopping channels, but at least 25 hopping channels, the maximum peak conducted output power of the intentional radiator shall not exceed .25 watts. Since the EUT has 50 hopping channels, the maximum peak conducted output power shall not exceed 1 watt.


Peak power within the band 911.1 MHz to 919.1 MHz was measured per ANSI C63.10-2013 as an Antenna Conducted test with a spectrum analyzer. For these measurements the EUT antenna port was connected to a spectrum analyzer having a 50Ω input impedance. The setup losses were corrected by using a -8.53 dB offset in the analyzer measurements. Peak antenna conducted output power is tabulated in the table below.

Table 9. Peak Antenna Conducted Output Power per Part 15.247 (b) (2)

Frequency of Fundamental (MHz)	Raw Test Data dBm	Converted Data (mW)	FCC Limit (mW Maximum)
911.125	21.18	131.22	1000
919.100	21.71	148.25	1000

Test Date: January 31, 2018

Tested By

Signature: 

Name: Bruce Arnold

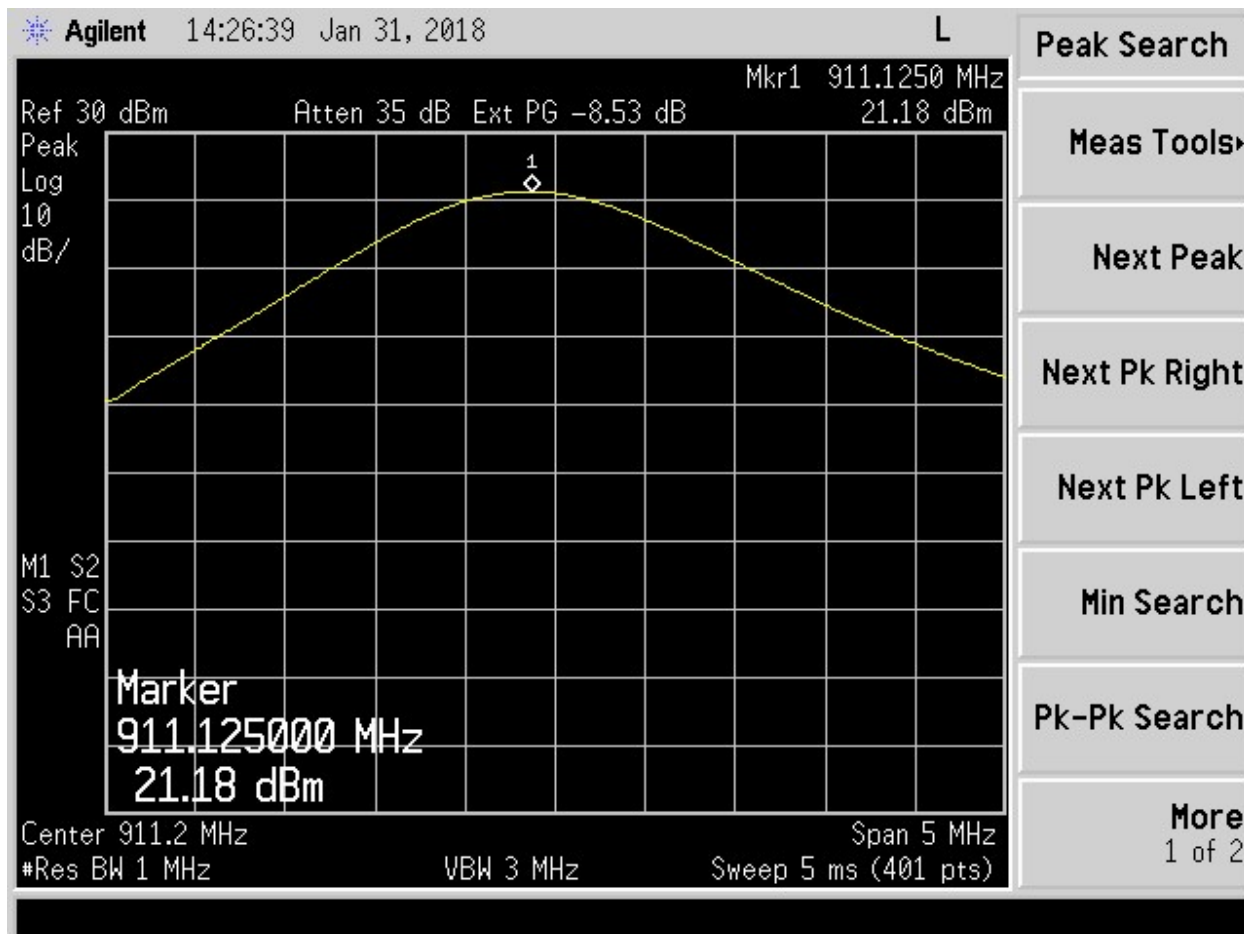


Figure 15. Peak Antenna Conducted Output Power, Low Channel

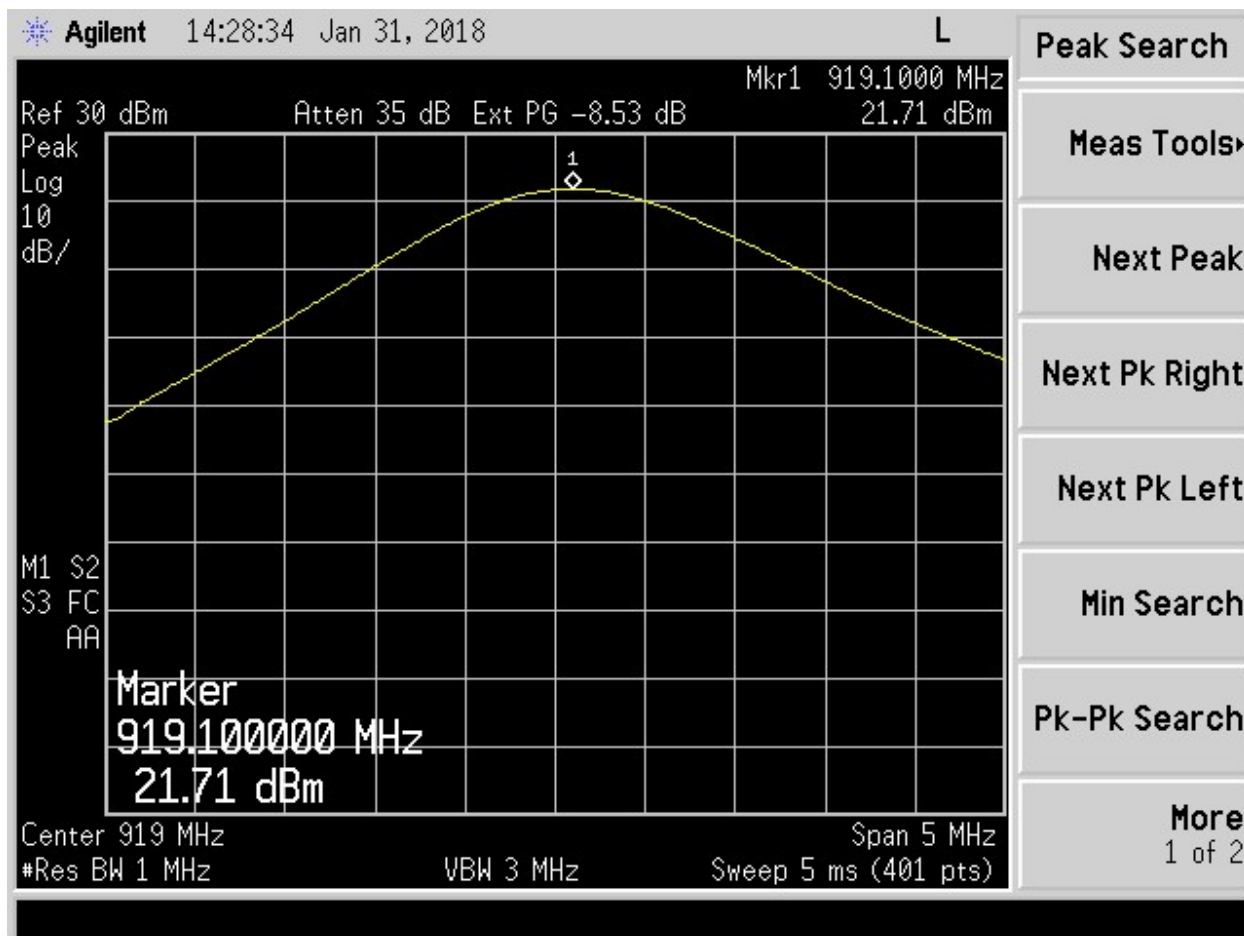


Figure 16. Peak Antenna Conducted Output Power, High Channel

2.14 Number of Hopping Frequencies (CFR 15.247 (a)(1))

Frequency hopping systems in the 902-928 MHz band shall have at least 50 hopping frequencies if the 20 dB bandwidth is less than 250 kHz. If the 20 dB bandwidth is 250 kHz or greater, then the system shall have at least 25 hopping frequencies. Since the EUT has a 20 dB bandwidth less than 250 kHz, then at least 50 hopping frequencies shall be used.

The test procedures outlined in ANSI C63.10-2013 were used to conduct measurements.

The table below lists all available channels. There are a total of 50 channels.

Table 10. List of Hopping Channels

Number of channels used	TX Hopping Sequence Order (1-50)	TX/RX RF Center Frequency (MHz)
1	1	911.081472
2	11	911.212544
3	21	911.343616
4	31	911.474688
5	41	911.60576
6	7	911.736832
7	17	911.867904
8	27	911.998976
9	37	912.130048
10	47	912.26112
11	3	912.392192
12	13	912.523264
13	23	912.654336
14	33	912.785408
15	43	912.91648
16	9	913.047552
17	19	913.178624
18	29	914.88256
19	39	915.013632
20	49	915.144704
21	5	915.275776
22	15	915.406848
23	25	915.53792
24	35	915.668992

25	45	915.800064
26	2	915.931136
27	12	916.062208
28	22	916.19328
29	32	916.324352
30	42	916.455424
31	8	916.586496
32	18	916.717568
33	28	916.84864
34	38	916.979712
35	48	917.110784
36	4	917.241856
37	14	917.372928
38	24	917.504
39	34	917.635072
40	44	917.766144
41	10	917.897216
42	20	918.028288
43	30	918.15936
44	40	918.290432
45	50	918.421504
46	6	918.552576
47	16	918.683648
48	26	918.81472
49	36	918.945792
50	46	919.076864

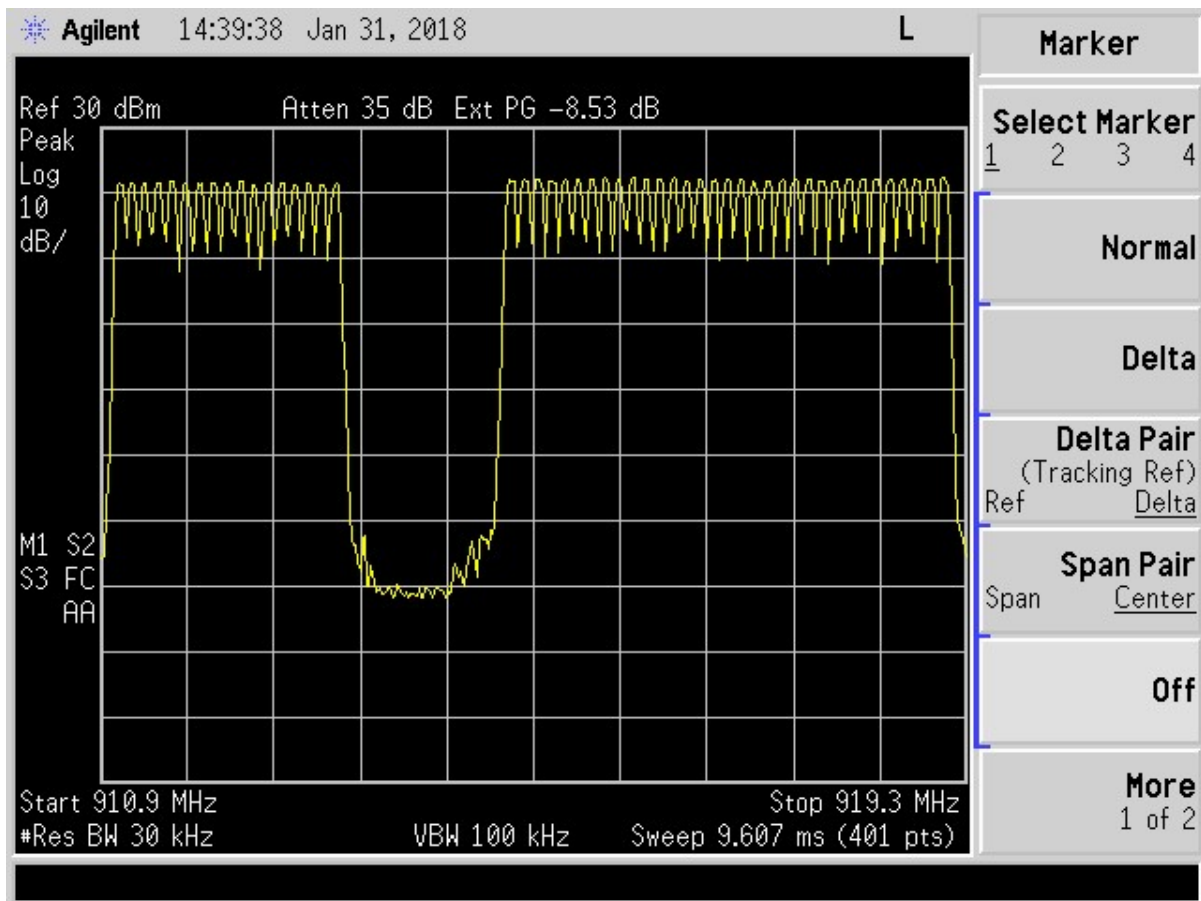


Figure 17. Hopping Channels 1 through 50

2.15 Frequency Separation (CRF 15.247(a)(1))

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. In this case, the 20 dB bandwidth of the Frequency hopping system is greater than 25 kHz, so the minimum requirement used was the 20 dB bandwidth, 72.5 kHz. Therefore the frequency separation must be greater than 72.5 kHz.

The EUT does meet the frequency separation requirement.

The test procedure outlined in ANSI C63.10-2013 was used to conduct measurements. The EUT hopping function was enabled during the testing.

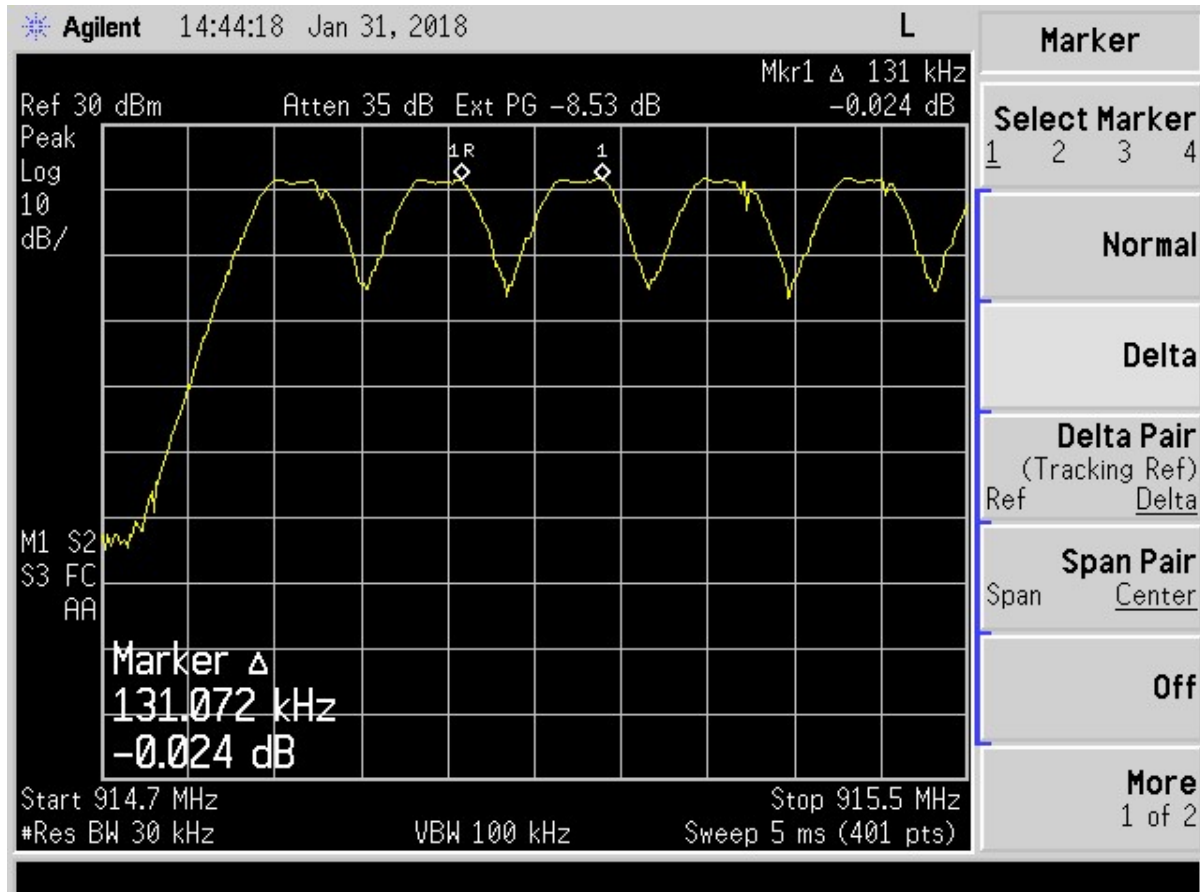


Figure 18. Channel Separation

Measured Delta (Figure 33 above)	131.1 kHz
-Limit (20 dB Bandwidth)	72.5 kHz
Margin	58.6 kHz

US Tech Test Report:
Report Number:
Issue Date:
Customer:
Models:

FCC Part 15 and IC RSS Certification
18-0010
February 2, 2018
Neptune Technology Group Inc.
MRX920v4

2.16 Average Time of Occupancy (CFR 15.247(f))

The customer considers this to be proprietary information. Please see the Theory of Operation exhibit section 6.1.4 and 6.1.5 for occupancy time details.

2.17 Unintentional and Intentional Radiator, Powerline Emissions (CFR 15.107/15.207)

The EUT was battery powered; therefore this test was not applicable.

2.18 Unintentional Radiator, Radiated Emissions (CFR 15.109)

Radiated emissions disturbance measurements were performed with all the transmitter turned OFF or in receive mode. This test data is presented below to show compliance to this part.

An instrument having both peak and quasi-peak detectors was used to perform the test over the frequency range of 30 MHz to five times the highest clock frequency. Measurements of the radiated emissions were made with the receiver antenna at a distance of 3 m from the boundary of the test unit.

The test antenna was varied from 1 m to 4 m in height while watching the analyzers' display for the maximum magnitude of the signal at the test frequency. The antenna polarization (horizontal or vertical) and test sample azimuth were varied during the measurements to find the maximum field strength readings to record.

The worst-case radiated emission in the range of 30 MHz to 25 GHz was 6.1 dB below the limit at 340.88 MHz. This signal is found in Table 10. All other radiated emissions were 9.6 dB or more below the limit.

Table 11. Part 15.109 Limits

Frequency (MHz)	Field strength (dBuV/m)	Measurement distance (meters)	Measurement distance correction factor
30-88	40	3	+0
88-216	43.5	3	+0
216-960	46.0	3	+0
Above 960	54.0	3	+0

Measurements are PK or QP unless the following: frequencies in the band 9-90kHz, 110-490kHz and above 1000 MHz are performed using PK or AVG detection.

NOTE: TESTING PERFORMED WITH BOTH 900 MHz and Bluetooth RADIO IN IDLE/RECEIVE MODE TO COVER CO-LOCATION AND SIMULTANEOUS BROADCASTING.

US Tech Test Report:
 Report Number:
 Issue Date:
 Customer:
 Models:

FCC Part 15 and IC RSS Certification
 18-0010
 February 2, 2018
 Neptune Technology Group Inc.
 MRX920v4

**Table 12. Unintentional Radiator, Spurious Radiated Emissions (CFR 15.109)
 30 MHz to 1000 MHz**

30 MHz to 1000 MHz with Class B Limits							
Test: Radiated Emissions				Client: Neptune Technology Group Inc.			
Project: 18-0010				Model: MRX920v4			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or QP
84.81	45.17	-18.04	27.13	40.0	3m./VERT	12.9	PK
88.56	48.32	-17.59	30.73	43.5	3m./VERT	12.8	PK
340.88	50.63	-10.77	39.86	46.0	3m./HORZ	6.1	QP
377.82	45.89	-10.26	35.63	46.0	3m./VERT	10.4	PK
991.15	46.72	-2.29	44.43	54.0	3m./HORZ	9.6	PK
991.18	45.66	-2.89	42.77	54.0	3m./VERT	11.2	PK

Tested from 30 MHz to 1 GHz


SAMPLE CALCULATION at 84.81 MHz:

Magnitude of Measured Frequency	45.17	dBuV
+ Cable Loss+Antenna Factor-Amp Gain	-18.04	dB
=Corrected Result	27.13	dBuV
Limit	40.00	dBuV
-Corrected Result	27.13	dBuV
Margin	12.87	dB

Test Date: January 31, 2018

Tested By

Signature:



Name: Bruce Arnold

NOTE: TESTING PERFORMED WITH BOTH 900 MHz and Bluetooth RADIO IN IDLE/RECEIVE MODE TO COVER CO-LOCATION AND SIMULTANEOUS BROADCASTING.

US Tech Test Report:
Report Number:
Issue Date:
Customer:
Models:

FCC Part 15 and IC RSS Certification
18-0010
February 2, 2018
Neptune Technology Group Inc.
MRX920v4

**Table 13. Unintentional Radiator, Spurious Radiated Emissions (CFR 15.109)
1 GHz to 10 GHz**

1 GHz to 25 GHz with Class B Limits							
Test: Radiated Emissions				Client: Neptune Technology Group Inc.			
Project: 18-0010				Model: MRX920v4			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	AVG Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
No emissions seen from 1 GHz to 25 GHz above the noise floor levels. This test was performed with the spectrum analyzer in Peak detection mode. The limits applied during testing were Part 15.109 limits as presented in the table above. The EUT was tested with both radios in idle/receive mode to cover the requirements of co-located radios and simultaneous operation.							

*Measurements taken above 6 GHz are performed at a distance of 1m (vs. 3m). This correction includes an additional factor of -9.5 dB to account for this change.

SAMPLE CALCULATION: N/A

Test Date: January 31, 2018

Tested By
Signature:  Name: Bruce Arnold

NOTE: TESTING PERFORMED WITH BOTH 900 MHz and Bluetooth RADIO OFF IN IDLE/RECEIVE MODE TO COVER CO-LOCATION AND SIMULTANEOUS BROADCASTING.

2.19 Intentional Radiator, Radiated Emissions (CFR 15.209)

Radiated emissions disturbance measurements were performed with both the 900 MHz FHSS transmitter and the 2.4 GHz Bluetooth transmitter circuits ON and transmitting (collocated, simultaneous broadcast). This test data is presented below to show compliance to this part.

An instrument having both peak and quasi-peak detectors was used to perform the test over the frequency range of 30 kHz to five times the highest clock frequency. Measurements of the radiated emissions were made with the receiver antenna at a distance of 3 m from the boundary of the test unit.

The test antenna was varied from 1 m to 4 m in height while watching the analyzers' display for the maximum magnitude of the signal at the test frequency. The antenna polarization (horizontal or vertical) and test sample azimuth were varied during the measurements to find the maximum field strength readings to record.

The worst-case radiated emission in the range of 30 MHz to 25 GHz was 3.5 dB below the limit at 340.84 MHz. This signal is found in Table 13. All other radiated emissions were 9.3 dB or more below the limit.

Test limits and detections used:

Table 14. Part 15.209 Limits

Frequency (MHz)	Field strength (dBuV/m)	Measurement distance (meters)	Measurement distance correction factor
0.009-0.490	$20 \cdot \log(2400/F(\text{kHz}))$	300	+80
0.490-1.705	$20 \cdot \log(24000/F(\text{kHz}))$	30	+40
1.705-30.0	29.5	30	+40
30-88	40	3	+0
88-216	43.5	3	+0
216-960	46.0	3	+0
Above 960	54.0	3	+0

Measurements are PK or QP unless the following: frequencies in the band 9-90kHz, 110-490kHz and above 1000 MHz are performed using PK or AVG detection.

NOTE: TESTING PERFORMED WITH BOTH 900 MHz and Bluetooth RADIO ON AND ACTIVE TO COVER CO-LOCATION AND SIMULTANEOUS BROADCASTING.

US Tech Test Report:
Report Number:
Issue Date:
Customer:
Models:

FCC Part 15 and IC RSS Certification
18-0010
February 2, 2018
Neptune Technology Group Inc.
MRX920v4

**Table 15. Intentional Radiator, Spurious Radiated Emissions (CFR 15.209)
9 kHz to 30 MHz**

9 kHz to 30 MHz							
Test: Radiated Emissions				Client: Neptune Technology Group Inc.			
Project: 18-0010				Model: MRX920v4			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or QP
No emissions seen at 9kHz to 30 MHz above the noise floor levels. The evaluation was performed with the spectrum analyzer in Peak detection mode. The limits applied during testing were Part 15.209 limits as presented in the table above. The EUT was tested with both radios ON and active to cover the requirements of co-located radios and simultaneous operation.							

Tested from 30 kHz to 30 MHz

SAMPLE CALCULATION: N/A

Test Date: February 1, 2018

Tested By

Signature: 

Name: Bruce Arnold

NOTE: TESTING PERFORMED WITH BOTH 900 MHz and Bluetooth RADIO ON AND ACTIVE TO COVER CO-LOCATION AND SIMULTANEOUS BROADCASTING.

US Tech Test Report:
 Report Number:
 Issue Date:
 Customer:
 Models:

FCC Part 15 and IC RSS Certification
 18-0010
 February 2, 2018
 Neptune Technology Group Inc.
 MRX920v4

**Table 16. Intentional Radiator, Spurious Radiated Emissions (CFR 15.209)
 30 MHz to 1000 MHz**

30 MHz to 1000 MHz with Class B Limits							
Test: Radiated Emissions				Client: Neptune Technology Group Inc.			
Project: 18-0010				Model: MRX920v4			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or QP
86.70	41.87	-18.07	23.80	40.0	3m./VERT	16.2	PK
88.56	48.74	-17.76	30.98	43.5	3m./VERT	12.5	PK
340.84	53.61	-11.08	42.53	46.0	3m./HORZ	3.5	QP
383.40	47.54	-10.81	36.73	46.0	3m./VERT	9.3	PK
991.10	45.09	-3.56	41.53	54.0	3m./VERT	12.5	PK
991.20	47.40	-2.96	44.44	54.0	3m./HORZ	9.6	PK


Tested from 30 MHz to 1 GHz

SAMPLE CALCULATION at 86.7 MHz:

Magnitude of Measured Frequency	41.87	dBuV
+ Cable Loss+Antenna Factor-Amp Gain	-18.07	dB
=Corrected Result	23.80	dBuV
Limit	40.00	dBuV
-Corrected Result	23.80	dBuV
Margin	16.20	dB

Test Date: January 31, 2018

Tested By

Signature: 

Name: Bruce Arnold

NOTE: TESTING PERFORMED WITH BOTH 900 MHz and Bluetooth RADIO ON AND ACTIVE TO COVER CO-LOCATION AND SIMULTANEOUS BROADCASTING.

US Tech Test Report:
Report Number:
Issue Date:
Customer:
Models:

FCC Part 15 and IC RSS Certification
18-0010
February 2, 2018
Neptune Technology Group Inc.
MRX920v4

Table 17. Intentional Radiator, Spurious Radiated Emissions (CFR 15.209) 1 GHz to 25 GHz


1 GHz to 25 GHz with Class B Limits							
Test: Radiated Emissions				Client: Neptune Technology Group Inc.			
Project: 18-0010				Model: MRX920v4			
Frequency (MHz)	Test Data (dBuv)	AF+CA-AMP (dB/m)	Results (dBUV/m)	AVG Limits (dBUV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
No emissions seen from 1 GHz to 25 GHz above the noise floor levels except for fundamental and harmonic emissions which are evaluated in Table 6 & 7 above. This test was performed with the spectrum analyzer in Peak detection mode. The limits applied during testing were Part 15.209 limits as presented in the table above. The EUT was tested with both radios ON and active to cover the requirements of co-located radios and simultaneous operation.							

*Measurements taken above 6 GHz are performed at a distance of 1m (vs. 3m). This correction includes an additional factor of -9.5 dB to account for this change.

SAMPLE CALCULATION: N/A

Test Date: January 31, 2018

Tested By

Signature: 

Name: Bruce Arnold

NOTE: TESTING PERFORMED WITH BOTH 900 MHz and Bluetooth RADIO ON AND ACTIVE TO COVER CO-LOCATION AND SIMULTANEOUS BROADCASTING.

2.20 Measurement Uncertainty

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4-2. A coverage factor of $k=2$ was used to give a level of confidence of approximately 95%.

Conducted Emissions Measurement Uncertainty

Measurement Uncertainty (within a 95% confidence level) for this test is ± 2.78 dB.

This test was not performed. The EUT is battery operated.

Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is ± 5.39 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is ± 5.18 dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is ± 5.21 dB.

3 Conclusion

Based on the test measurements performed in this test report. The EUT is deemed to have meet all the applicable requirements.