




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	4/1/2005 11:27:07 AM	DUT Battery Model/No:	
Filename:	lftlt1175thcksc_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Wherify	Relative Permittivity:	41.43
Relative Humidity:	50%	Conductivity:	0.903
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-19.00 mm
DUT Position:	Left touch	Max SAR Z-axis Location:	-136.20 mm
Antenna Configuration:	integral	Max E Field:	32.92 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.916 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.592 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.399 W/kg
Type of Modulation:		SAR End:	0.396 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.03 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

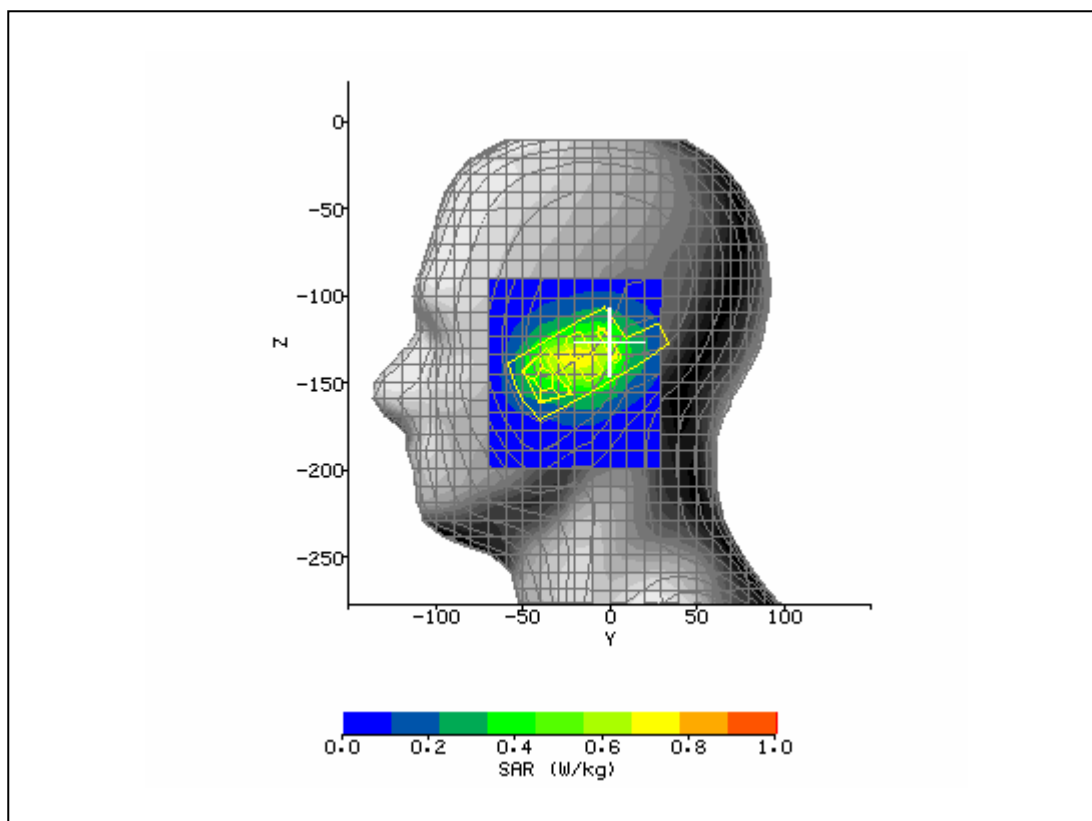


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	4/1/2005 11:57:46 AM	DUT Battery Model/No:	
Filename:	lefttch190_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Wherify	Relative Permittivity:	41.43
Relative Humidity:	50%	Conductivity:	0.903
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-6.00 mm
DUT Position:	Left tilt	Max SAR Z-axis Location:	-131.80 mm
Antenna Configuration:	integral	Max E Field:	24.65 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.509 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.355 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.268 W/kg
Type of Modulation:		SAR End:	0.268 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

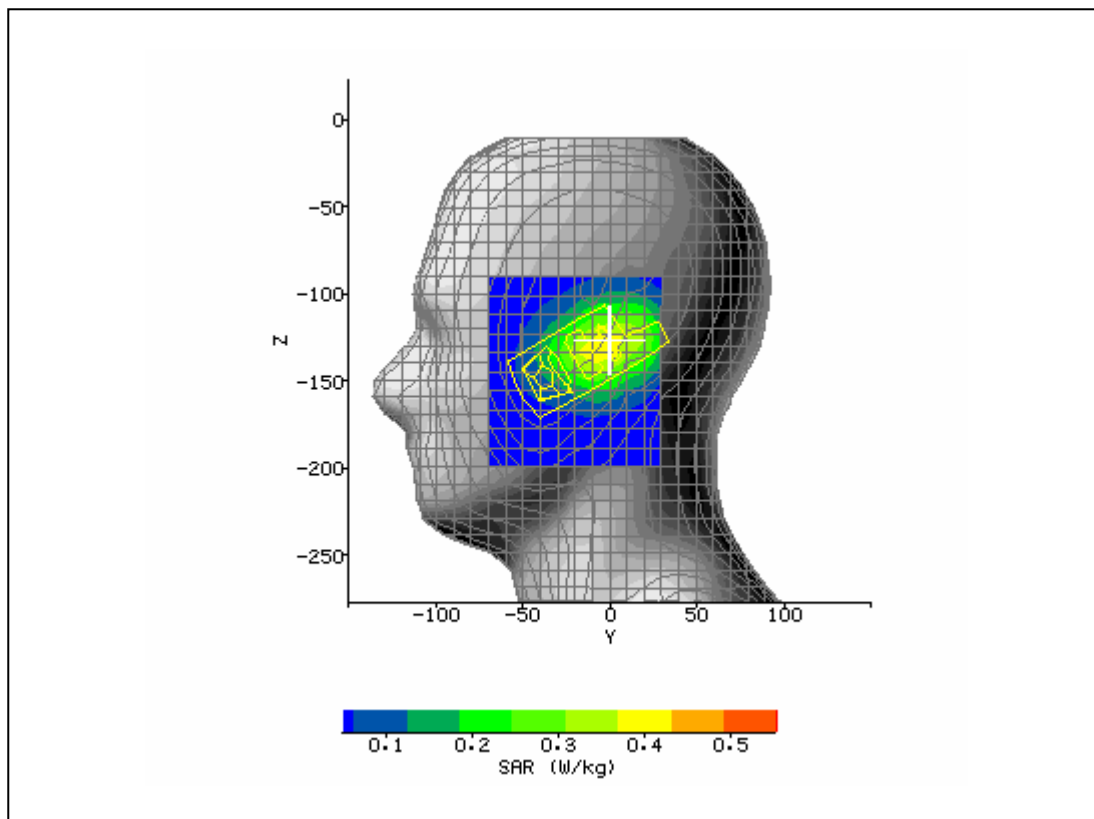


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	4/1/2005 12:33:39 PM	DUT Battery Model/No:	
Filename:	lefttlt190_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Wherify	Relative Permittivity:	41.43
Relative Humidity:	50%	Conductivity:	0.903
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	14.00 mm
DUT Position:	Right touch	Max SAR Z-axis Location:	-126.30 mm
Antenna Configuration:	integral	Max E Field:	35.15 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.937 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.612 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.424 W/kg
Type of Modulation:		SAR End:	0.424 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

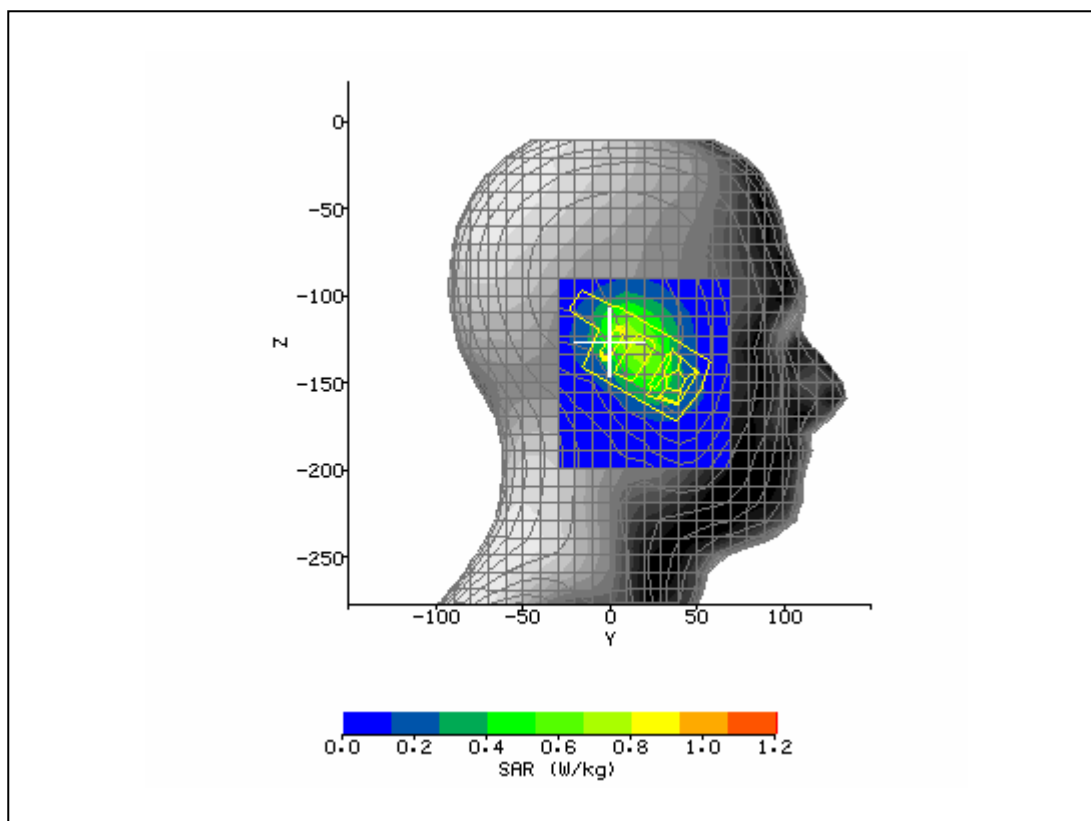


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	4/1/2005 1:35:35 PM	DUT Battery Model/No:	
Filename:	righttlt190_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Wherify	Relative Permittivity:	41.43
Relative Humidity:	50%	Conductivity:	0.903
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	6.00 mm
DUT Position:	Right tilt	Max SAR Z-axis Location:	-118.60 mm
Antenna Configuration:	integral	Max E Field:	32.63 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.787 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.465 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.321 W/kg
Type of Modulation:		SAR End:	0.321 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

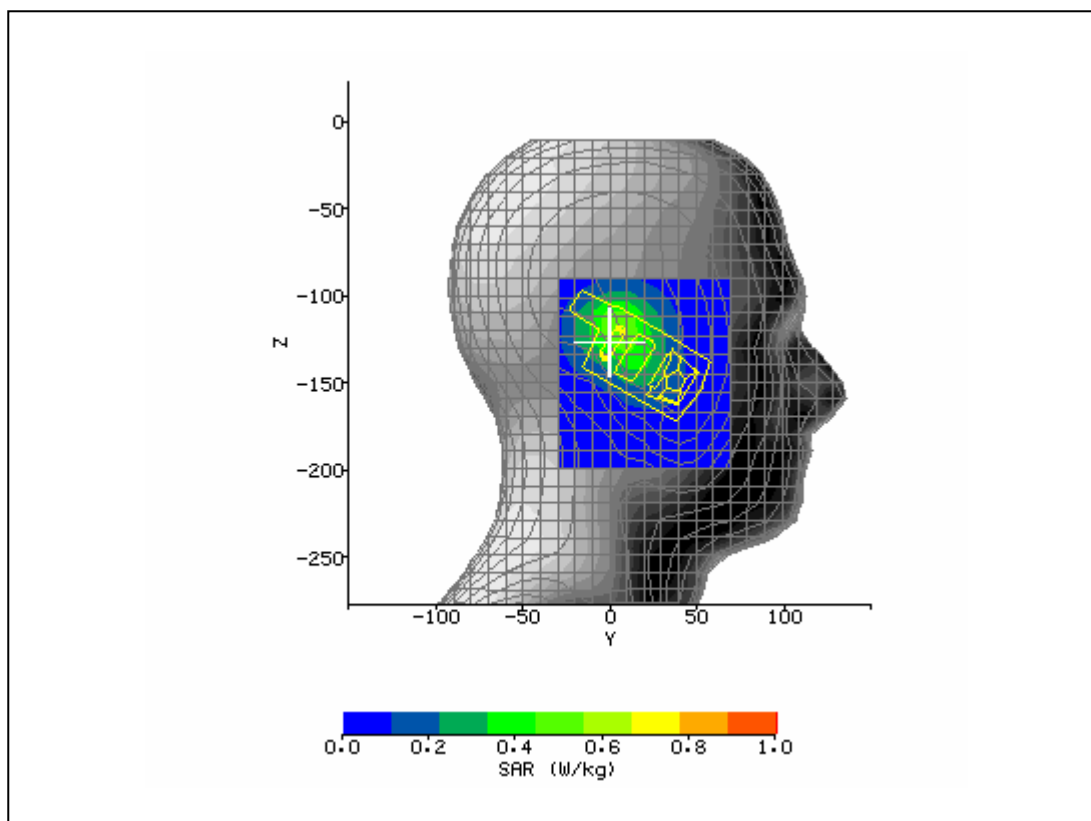


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	4/1/2005 2:08:48 PM	DUT Battery Model/No:	
Filename:	righttlt190_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Wherify	Relative Permittivity:	41.68
Relative Humidity:	50%	Conductivity:	0.892
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	19.00 mm
DUT Position:	Right touch	Max SAR Z-axis Location:	-131.80 mm
Antenna Configuration:	integral	Max E Field:	35.46 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.926 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.591 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.398 W/kg
Type of Modulation:		SAR End:	0.404 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.06 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

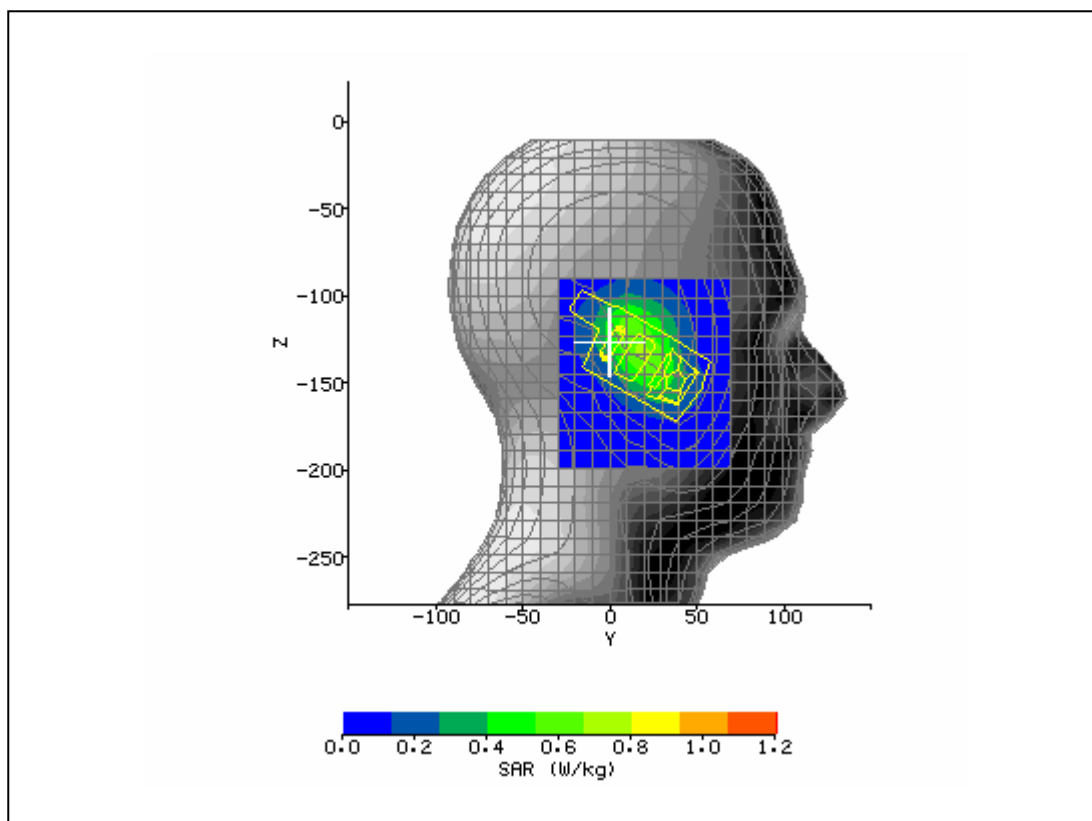


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	4/1/2005 2:41:48 PM	DUT Battery Model/No:	
Filename:	righttch128_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Wherify	Relative Permittivity:	41.27
Relative Humidity:	50%	Conductivity:	0.917
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	17.00 mm
DUT Position:	Right touch	Max SAR Z-axis Location:	-129.60 mm
Antenna Configuration:	integral	Max E Field:	34.23 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.895 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.605 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.385 W/kg
Type of Modulation:		SAR End:	0.387 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.02 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

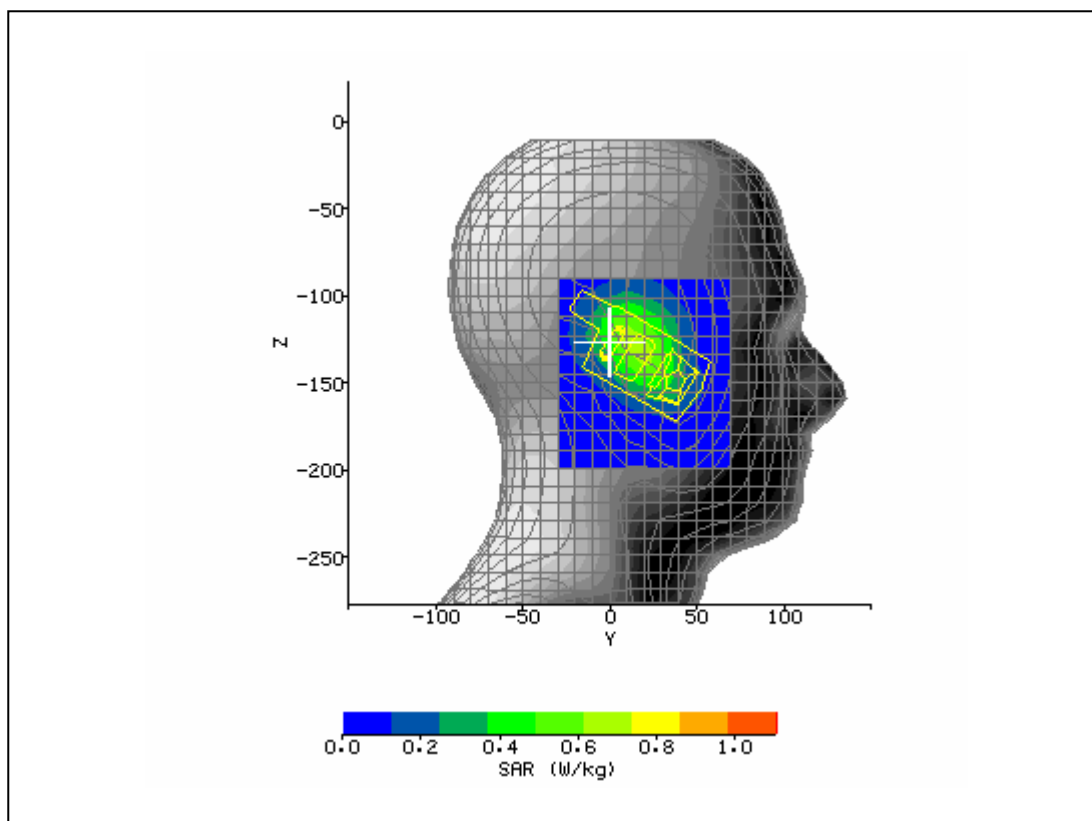


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	4/1/2005 4:38:12 PM	DUT Battery Model/No:	
Filename:	128_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Wherify	Relative Permittivity:	56.23
Relative Humidity:	50%	Conductivity:	0.988
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	8.00 mm
DUT Position:	body 1.5cm	Max SAR Z-axis Location:	-148.30 mm
Antenna Configuration:	integral	Max E Field:	20.28 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.354 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.246 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.157 W/kg
Type of Modulation:		SAR End:	0.158 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.03 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

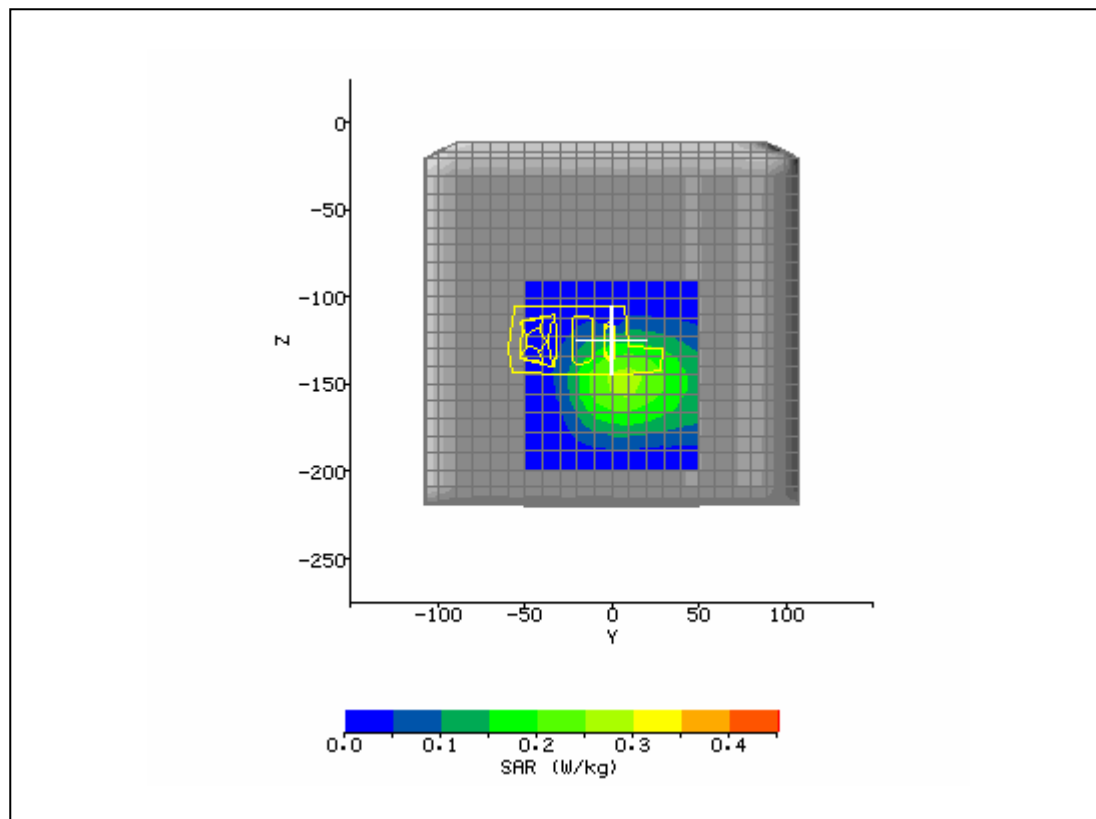


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	4/1/2005 4:05:08 PM	DUT Battery Model/No:	
Filename:	251_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Wherify	Relative Permittivity:	56.61
Relative Humidity:	50%	Conductivity:	0.985
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	8.00 mm
DUT Position:	body 1.5cm	Max SAR Z-axis Location:	-149.40 mm
Antenna Configuration:	integral	Max E Field:	19.87 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.342 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.237 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.161 W/kg
Type of Modulation:		SAR End:	0.162 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.03 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

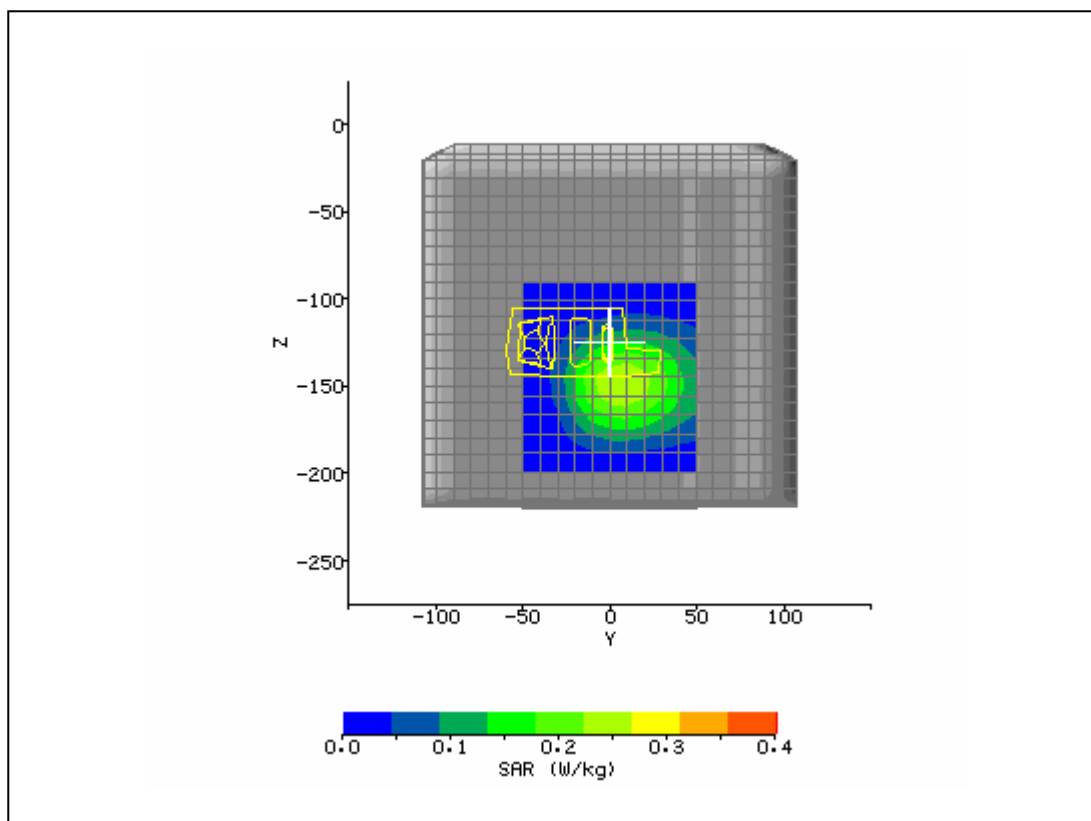


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	4/1/2005 3:32:22 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Wherify	Relative Permittivity:	56.02
Relative Humidity:	50%	Conductivity:	0.994
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	4.00 mm
DUT Position:	body 1.5cm	Max SAR Z-axis Location:	-149.40 mm
Antenna Configuration:	integral	Max E Field:	18.16 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.289 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.199 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.123 W/kg
Type of Modulation:		SAR End:	0.125 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.05 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

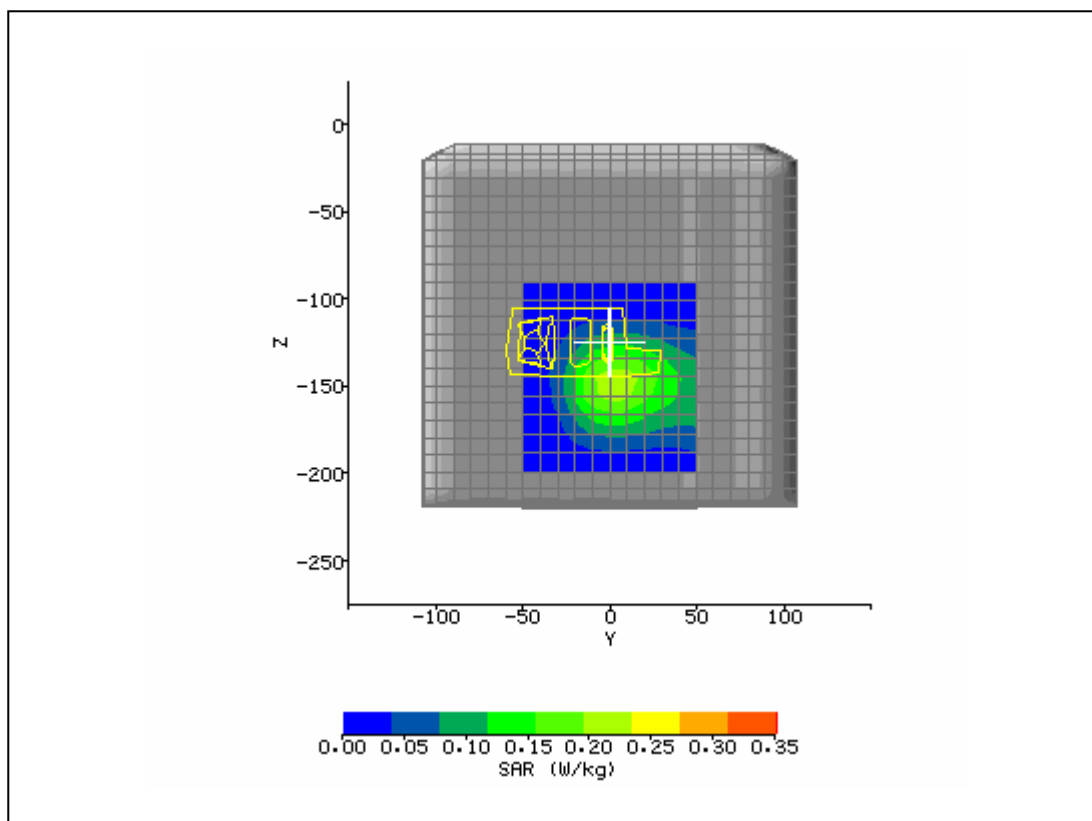


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/30/2005 2:28:49 PM	DUT Battery Model/No:	
Filename:	lefttch1175SC_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify	Relative Permittivity:	38.49
Relative Humidity:	50%	Conductivity:	1.415
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-25.00 mm
DUT Position:	Left touch	Max SAR Z-axis Location:	-137.30 mm
Antenna Configuration:	integral	Max E Field:	18.59 V/m
Test Frequency:	1880MHz	SAR 1g:	0.483 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.302 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.231 W/kg
Type of Modulation:		SAR End:	0.231 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

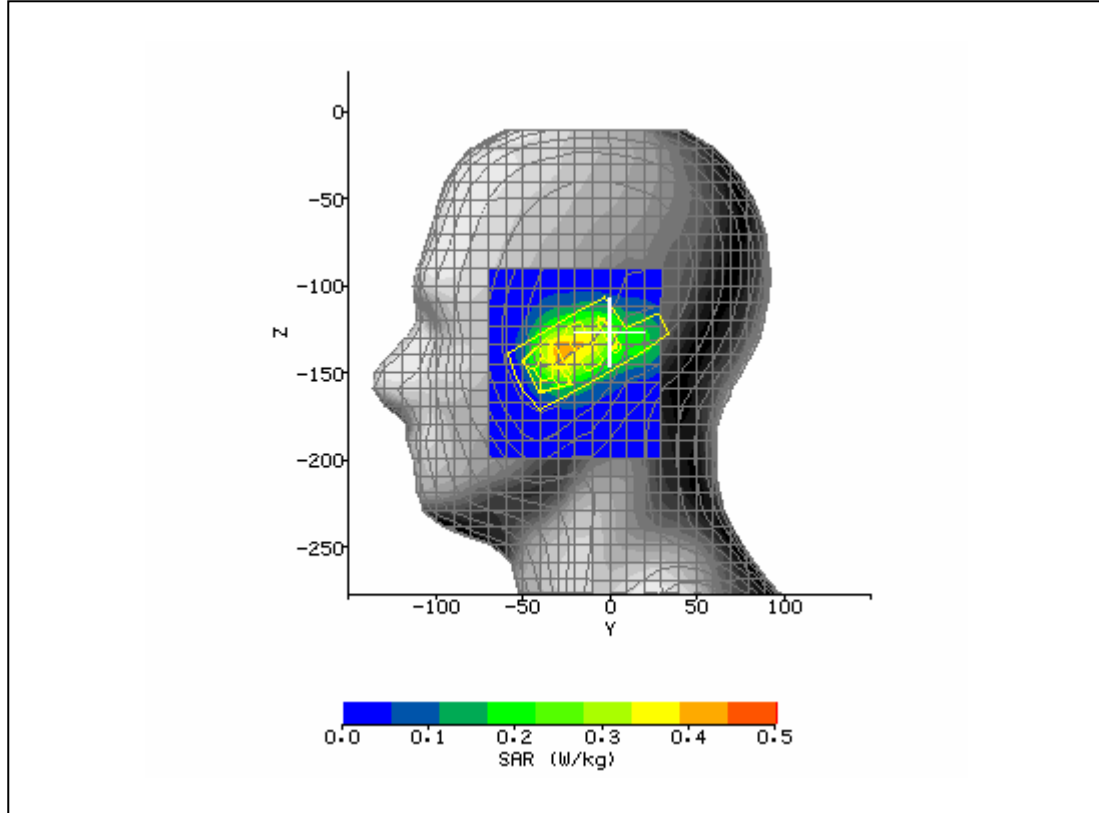


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/30/2005 4:20:34 PM	DUT Battery Model/No:	
Filename:	lefttch661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify	Relative Permittivity:	38.49
Relative Humidity:	50%	Conductivity:	1.415
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-1.00 mm
DUT Position:	Left tilt	Max SAR Z-axis Location:	-128.50 mm
Antenna Configuration:	integral	Max E Field:	19.05 V/m
Test Frequency:	1880MHz	SAR 1g:	0.436 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.269 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.178 W/kg
Type of Modulation:		SAR End:	0.178 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

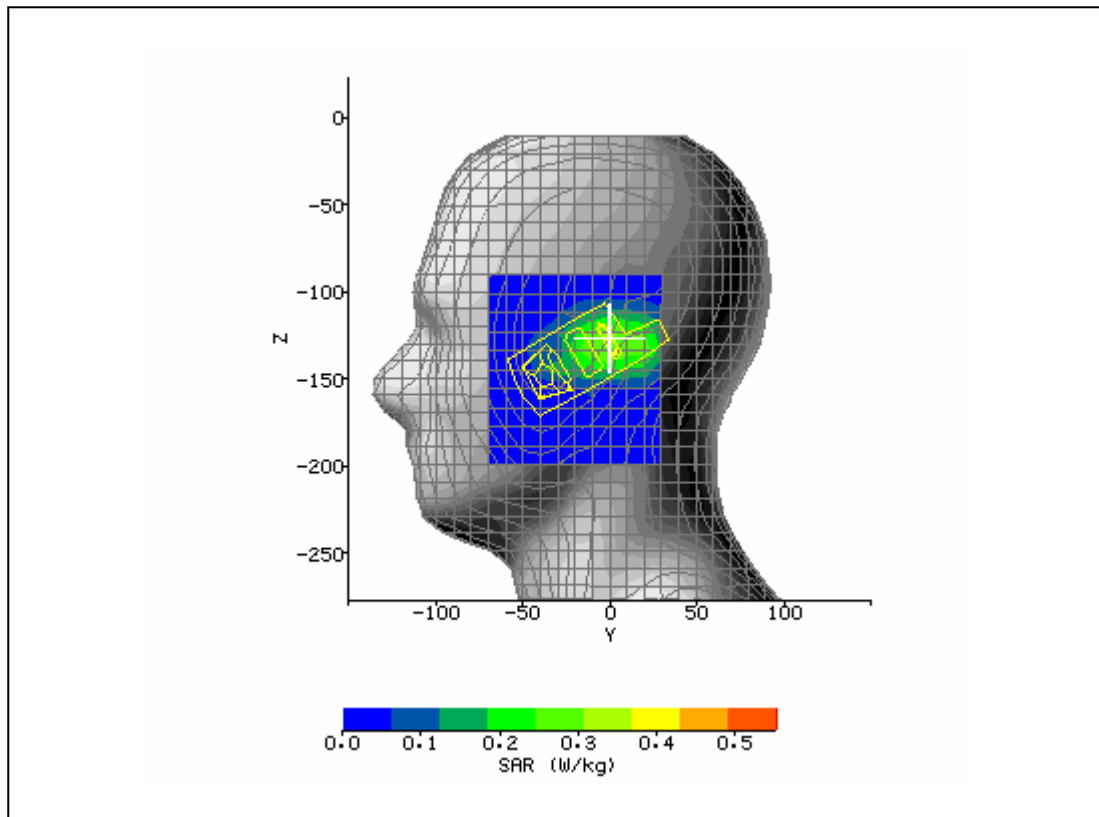


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/30/2005 4:57:23 PM	DUT Battery Model/No:	
Filename:	lefttlt661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify	Relative Permittivity:	38.49
Relative Humidity:	50%	Conductivity:	1.415
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	3.00 mm
DUT Position:	right touch	Max SAR Z-axis Location:	-113.10 mm
Antenna Configuration:	integral	Max E Field:	22.58 V/m
Test Frequency:	1880MHz	SAR 1g:	0.598 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.316 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.164 W/kg
Type of Modulation:		SAR End:	0.164 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

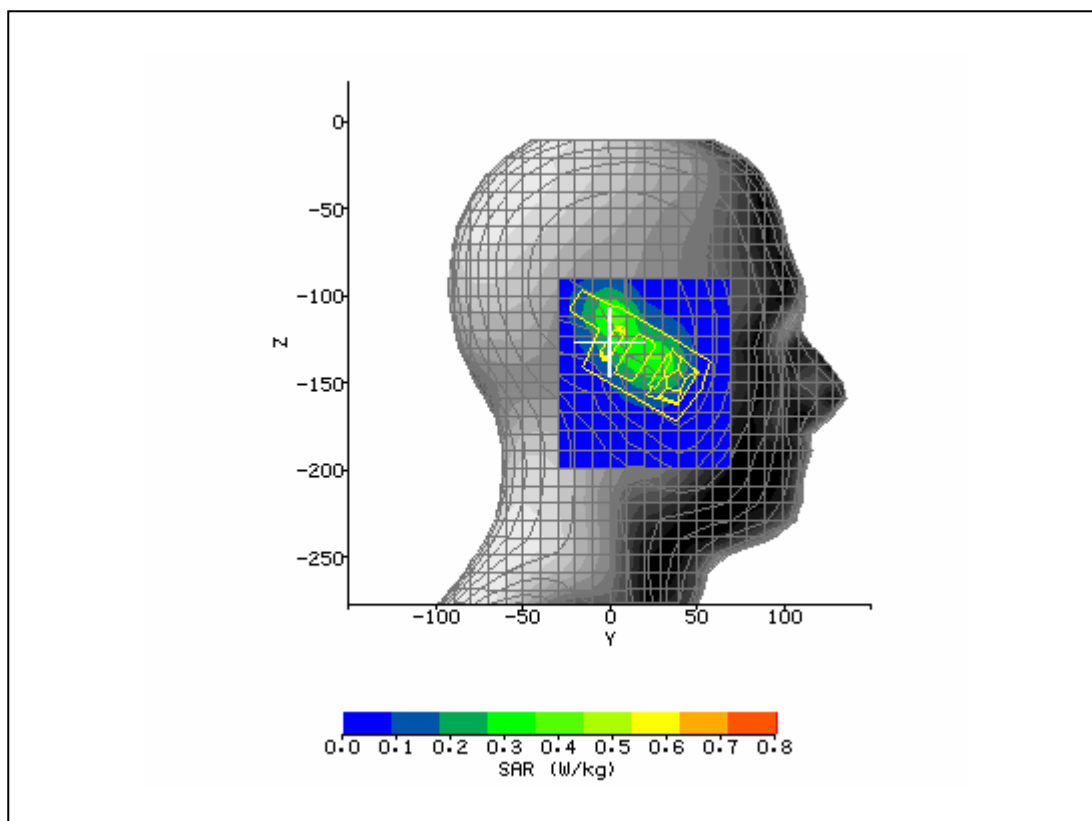


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/30/2005 5:25:58 PM	DUT Battery Model/No:	
Filename:	righttch661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify	Relative Permittivity:	38.49
Relative Humidity:	50%	Conductivity:	1.415
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	5.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-114.20 mm
Antenna Configuration:	integral	Max E Field:	26.72 V/m
Test Frequency:	1880MHz	SAR 1g:	0.835 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.423 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.254 W/kg
Type of Modulation:		SAR End:	0.249 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.07 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

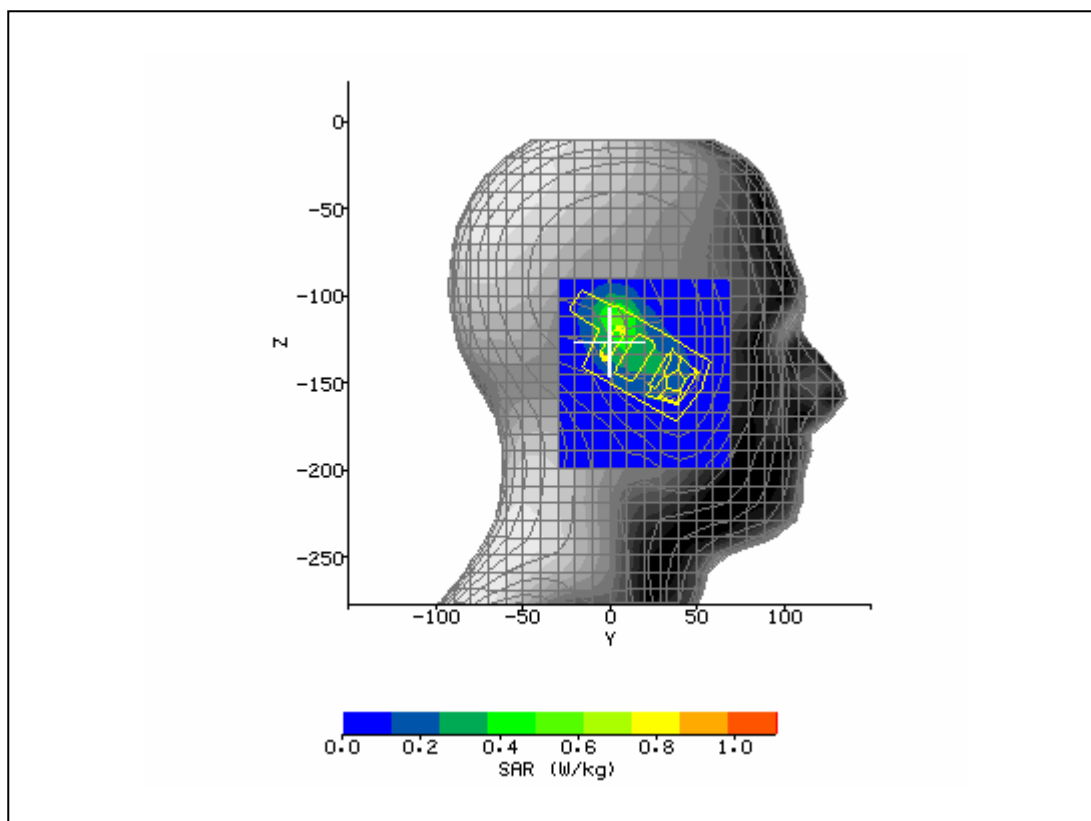


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/31/2005 12:50:50 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify	Relative Permittivity:	38.62
Relative Humidity:	50%	Conductivity:	1.361
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	0.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-115.30 mm
Antenna Configuration:	integral	Max E Field:	28.71 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.923 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.467 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.249 W/kg
Type of Modulation:		SAR End:	0.249 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

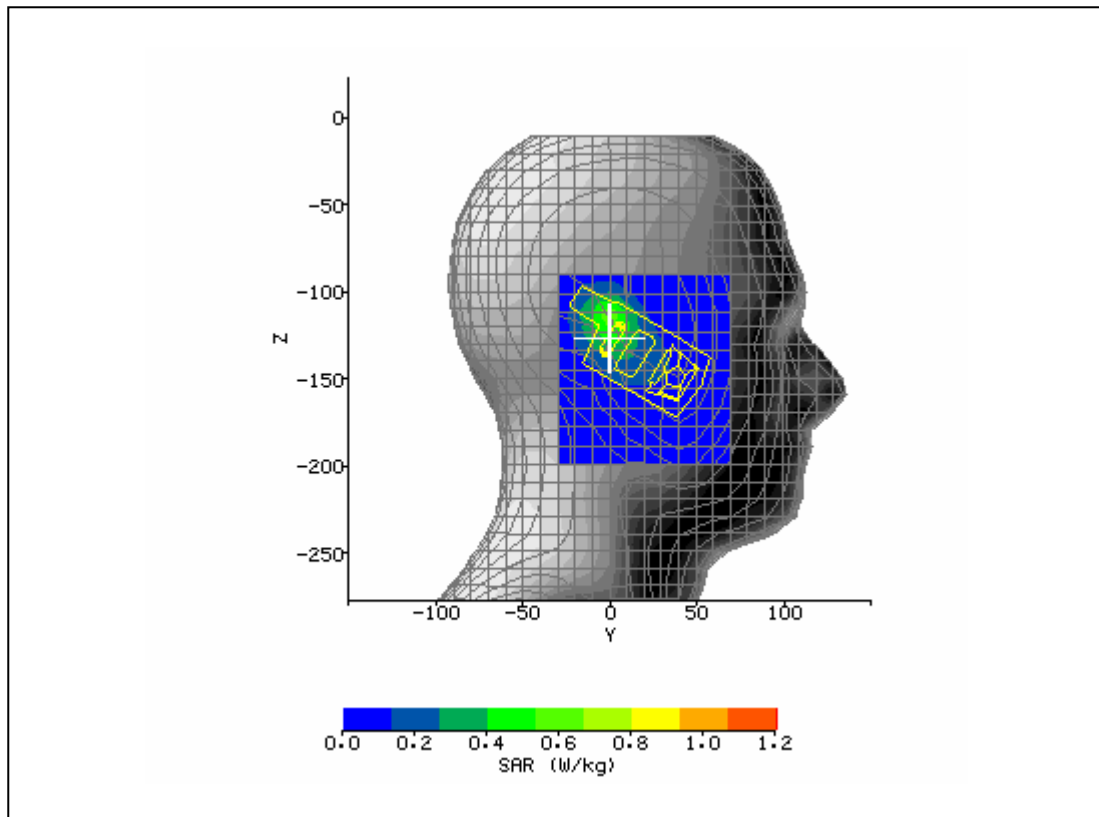


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/31/2005 3:00:50 PM	DUT Battery Model/No:	
Filename:	righttlt512_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify	Relative Permittivity:	38.41
Relative Humidity:	50%	Conductivity:	1.423
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	0.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-114.20 mm
Antenna Configuration:	integral	Max E Field:	24.27 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.721 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.360 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.200 W/kg
Type of Modulation:		SAR End:	0.201 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.03 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

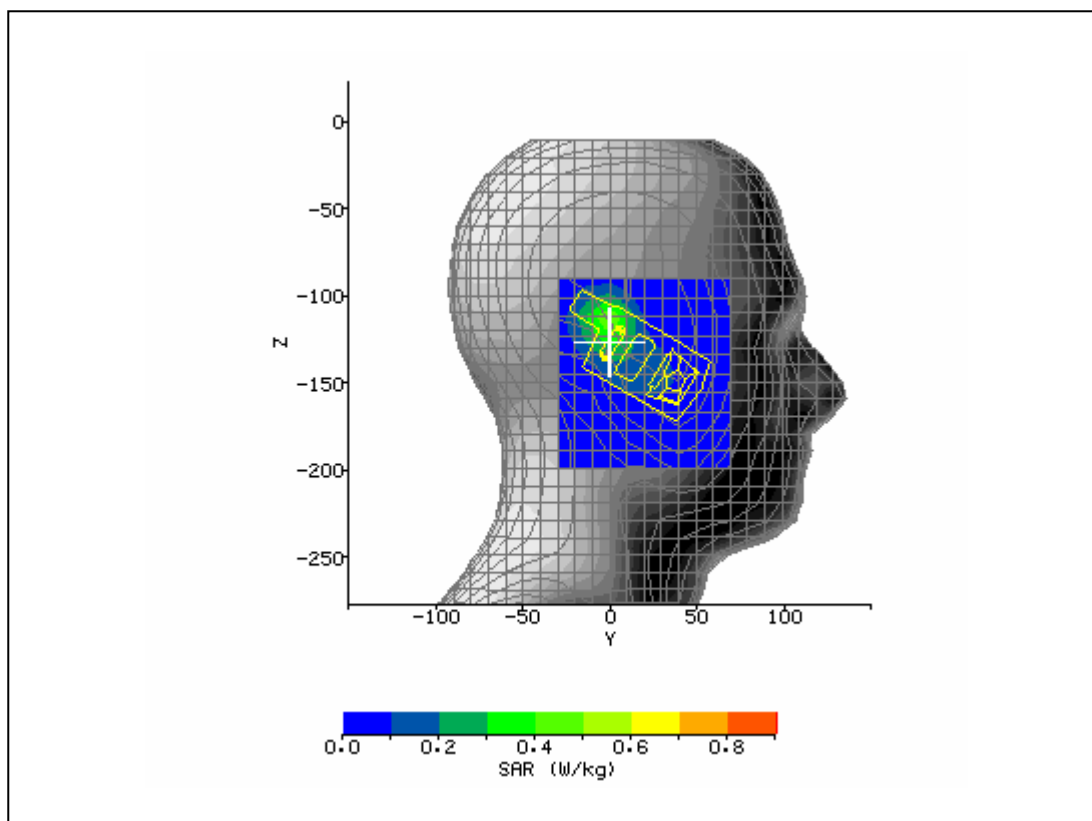

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	4/4/2005 8:46:34 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify	Relative Permittivity:	53.07
Relative Humidity:	50%	Conductivity:	1.562
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-11.00 mm
DUT Position:	body 1.5cm	Max SAR Z-axis Location:	-149.40 mm
Antenna Configuration:	integral	Max E Field:	19.60 V/m
Test Frequency:	1880MHz	SAR 1g:	0.502 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.304 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.153 W/kg
Type of Modulation:		SAR End:	0.155 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.06 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	4/4/05
Input Power Level:	max	Extrapolation:	poly4

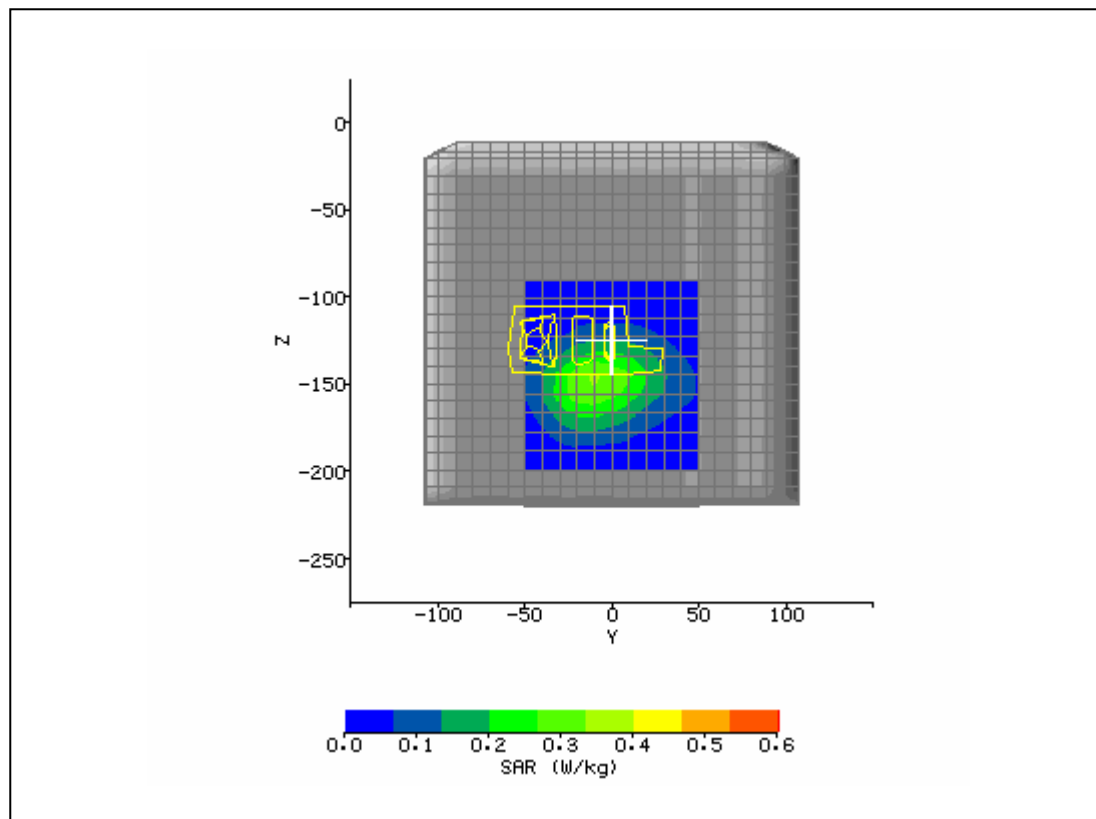

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	4/4/2005 9:18:32 AM	DUT Battery Model/No:	
Filename:	661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify	Relative Permittivity:	53.29
Relative Humidity:	50%	Conductivity:	1.549
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-9.00 mm
DUT Position:	body 1.5cm	Max SAR Z-axis Location:	-149.40 mm
Antenna Configuration:	integral	Max E Field:	19.77 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.511 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.315 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.166 W/kg
Type of Modulation:		SAR End:	0.166 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	4/4/05
Input Power Level:	max	Extrapolation:	poly4

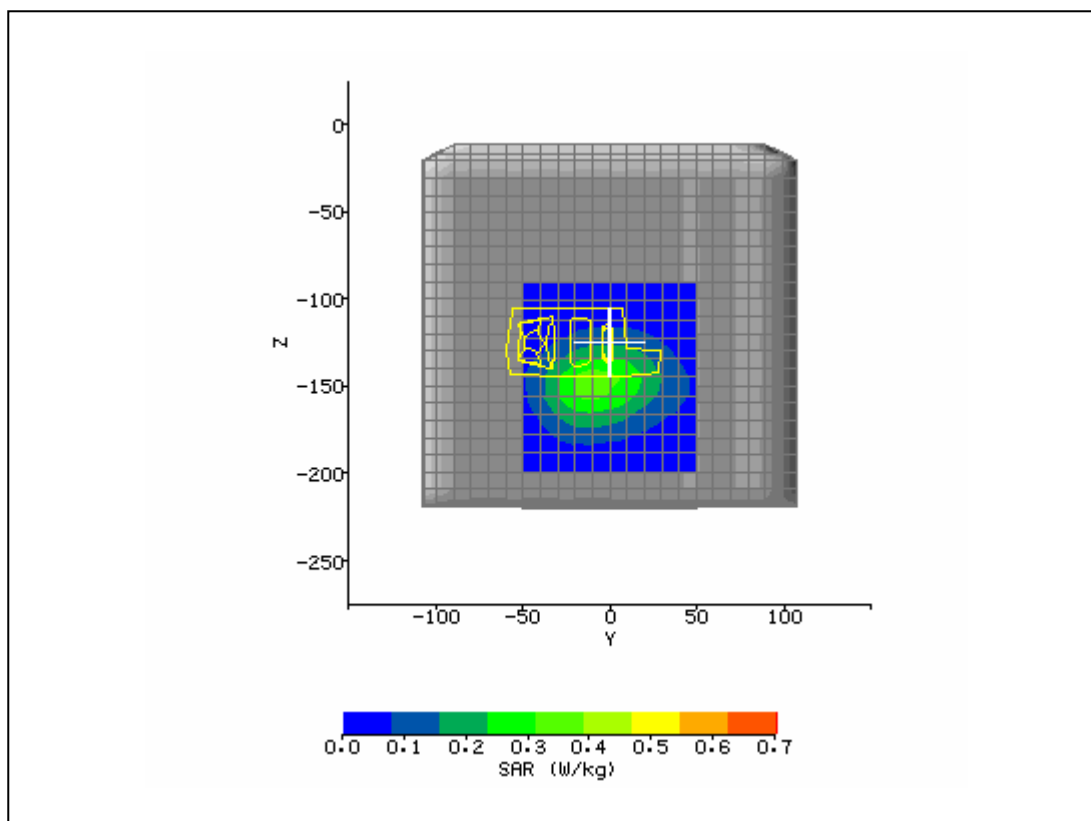

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	4/4/2005 9:49:10 AM	DUT Battery Model/No:	
Filename:	512_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Wherify	Relative Permittivity:	52.91
Relative Humidity:	50%	Conductivity:	1.566
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-9.00 mm
DUT Position:	body 1.5cm	Max SAR Z-axis Location:	-148.30 mm
Antenna Configuration:	integral	Max E Field:	18.43 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.451 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.274 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.141 W/kg
Type of Modulation:		SAR End:	0.141 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.000 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	4/4/05
Input Power Level:	max	Extrapolation:	poly4

