


ENGINEERING TEST REPORT



MOBILE PAYMENT TERMINAL **Model No.: K78-202 & K78-204/LP9100**

Applicant: **KEYCORP LIMITED**
Level 8, 67 Albert Avenue
Chatswood NSW 2067
AUSTRALIA

Tested in Accordance With

Federal Communications Commission (FCC)
47 CFR, PARTS 2 and 90 (Subpart I)

UltraTech's File No.: KYC3FCC90

This Test report is Issued under the Authority of
Tri M. Luu, Professional Engineer,
Vice President of Engineering
UltraTech Group of Labs

Date: November 19, 2001



Report Prepared by: Tri Luu

Tested by: Hung Trinh, RFI Engineer

Issued Date: November 19, 2001

Test Dates: November 4, 2001

- *The results in this Test Report apply only to the sample(s) tested, which was randomly selected.*
- *Under no circumstances may this report be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Telephone (905) 829-1570 Facsimile (905) 829-8050

Website: www.ultratech-labs.com

Email: vhk.ultratech@sympatico.ca

TABLE OF CONTENTS

EXHIBIT 1.	SUBMITTAL CHECK LIST	1
EXHIBIT 2.	INTRODUCTION.....	2
2.1.	SCOPE	2
2.2.	NORMATIVE REFERENCES	2
EXHIBIT 3.	PERFORMANCE ASSESSMENT	3
3.1.	CLIENT INFORMATION	3
3.2.	EQUIPMENT UNDER TEST (EUT) INFORMATION	3
3.3.	EUT'S TECHNICAL SPECIFICATIONS	5
3.4.	LIST OF ANCILLARY EQUIPMENT	5
EXHIBIT 4.	EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS	6
4.1.	CLIMATE TEST CONDITIONS	6
4.2.	OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS	6
EXHIBIT 5.	SUMMARY OF TEST RESULTS.....	7
5.1.	LOCATION OF TESTS.....	7
5.2.	APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS.....	8
5.3.	MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES.....	8
EXHIBIT 6.	MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS	9
6.1.	TEST PROCEDURES	9
6.2.	MEASUREMENT UNCERTAINTIES	9
6.3.	MEASUREMENT EQUIPMENT USED:	9
6.4.	ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:	9
6.5.	RF POWER OUTPUT @ FCC 2.1046 & 90.205	10
6.5.1.	<i>Limits @ FCC 90.205.....</i>	<i>10</i>
6.5.2.	<i>Method of Measurements</i>	<i>10</i>
6.5.3.	<i>Test Equipment List.....</i>	<i>10</i>
6.5.4.	<i>Test Arrangement</i>	<i>10</i>
6.5.5.	<i>Test Data</i>	<i>11</i>
6.6.	RF EXPOSURE REQUIRMENTS @ 1.1310 & 2.1093.....	12
6.7.	TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 90.210	13
6.7.1.	<i>Limits @ FCC 90.210.....</i>	<i>13</i>
6.7.2.	<i>Method of Measurements</i>	<i>13</i>
6.7.3.	<i>Test Equipment List.....</i>	<i>13</i>
6.7.4.	<i>Test Data</i>	<i>14</i>
EXHIBIT 7.	MEASUREMENT UNCERTAINTY	17
7.1.	RADIATED EMISSION MEASUREMENT UNCERTAINTY	17
EXHIBIT 8.	MEASUREMENT METHODS	18
8.1.	CONDUCTED POWER MEASUREMENTS	18
8.2.	RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD	19
8.2.1.	<i>Maximizing RF Emission Level (E-Field)</i>	<i>19</i>
8.2.2.	<i>Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method</i>	<i>20</i>

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 1. SUBMITTAL CHECK LIST

Annex	Exhibit Type	Description of Contents	Quality Check (OK)
	Test Report	- Exhibit 1: Submittal check lists - Exhibit 2: Introduction - Exhibit 3: Performance Assessment - Exhibit 4: EUT Operation and Configuration during Tests - Exhibit 5: Summary of test Results - Exhibit 6: Measurement Data - Exhibit 7: Measurement Uncertainty - Exhibit 8: Measurement Methods	OK
1	Test Setup Photos	Radiated Emissions at OFTS	OK
2	External Photos of EUT	External EUT Photos	OK
3	Internal Photos of EUT	Internal EUT Photos	OK
4	Cover Letters	- Letter from Ultratech for Certification Request - Letter from the Applicant to appoint Ultratech to act as an agent - Letter from the Applicant to request for Confidentiality Filing	OK
5	Block Diagram	K78-2xx Main Board	OK
6	Schematics	- Main Board - Modem	OK
7	ID Label/Location Info	- ID Label - Location of ID Label	OK
8	Operational Description	Product Description of K78-2xx Mobile Payment Terminal	OK
9	Users Manual	Mobile Payment Terminal User Guide	OK
10	RF Exposure Info	SAR Test Report	OK

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 2. INTRODUCTION

2.1. SCOPE

Reference:	FCC Parts 2 and 90
Title:	Telecommunication - Code of Federal Regulations, 47 CFR, Parts 2 & 90
Purpose of Test:	To gain FCC Certification Authorization for Radio operating in the frequency bands 806-821 MHz (25 kHz Channel Spacing).
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2.2. NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 0-19, 80-End	2000	Code of Federal Regulations – Telecommunication
ANSI C63.4	1992	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CISPR 22 & EN 55022	1997 1998	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
CISPR 16-1		Specification for Radio Disturbance and Immunity measuring apparatus and methods

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 3. PERFORMANCE ASSESSMENT

3.1. CLIENT INFORMATION

APPLICANT	
Name:	Keycorp Limited
Address:	Level 8, 67 Albert Avenue Chatswood NSW 2067 AUSTRALIA
Contact Person:	Mr. Ken McAnulty Phone #: +61 2 9415 2900 Fax #: +61 2 9415 1363 Email Address: kmcanulty@keycorp.net

MANUFACTURER	
Name:	Research In Motion Ltd.
Address:	295 Philip Street Waterloo, Ontario Canada, N2L 3W8
Contact Person:	Mr. Masud Attayi Phone #: 519-888-7465, ext. 2442 Fax #: 519-888-6906 Email Address: mattayi@rim.net

3.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	Keycorp Limited
Product Name:	Mobile Payment Terminal
Model Name or Number:	K78-202 & K78-204/LP9100
Serial Number:	Pre-Production
Type of Equipment:	Licensed Non-Broadcast Radio Communication Equipment
External Power Supply:	None
Transmitting/Receiving Antenna Type:	Integral

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

K78-202 & K78-204/LP9100 MOBILE PAYMENT TERMINAL - PRODUCT DESCRIPTION

The K78-202 & K78-204/LP9100 are mobile payment terminals for use in both mobile and fixed applications. The terminal is capable of supporting magnetic card and smart card transactions by using wireless data communication via the Motient network.

The terminal features a printer module, a battery module, user interface including a display, an integrated wireless modem module and a dial up modem. The K78 terminal may also be used in a fixed configuration through external communication ports.

The terminal provides the following features:

- (a) Credit/debit transactions off-line or on-line through the internally fitted wireless modem module.
- (b) Smart card transactions
- (c) Print receipts through the integrated printer or an external device.
- (d) Storage of transaction logs on a removable storage media

Magnetic Card Reader

The K78 supports a magnetic card reader.

Customer and Merchant Smart Card Slots

The K78 supports two full size smart cards, one for the merchant and one for the customer. Each card is fully enclosed within the K78.

SAM Slots

The K78 supports 1 SAM module.

LCD

The terminal provides a 128(h) x 64(v) LCD monochrome graphics display.

Power Switch

The power switch on the K78 prevents accidental powering on or off.

Printer

The terminal includes a thermal printer.

Communications Module

The terminal includes an internal wireless modem module.

External Cable

The terminal provides an external port connector to support RS 232 ports through external interface cable 763-578059.

The external cable may be used for connection of external devices such as an external modem, printer or PC.

Power Supply

The K78 terminal is normally powered from internal batteries. This is a 4.8V NiMH battery pack.

The batteries can be charged or the K78 can be operated using an external power supply (Ault type PW 107) or a 12Vdc car adapter.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

3.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	☒ Portable ☒ Mobile ☒ Base station (fixed use)
Intended Operating Environment:	☒ Commercial ☒ Light Industry & Heavy Industry
Power Supply Requirement:	4.8V NiMH battery pack
RF Output Power Rating:	2 Watts (conducted)
Operating Frequency Range:	806-821 MHz
RF Output Impedance:	50 Ohms
Channel Spacing:	25 kHz
Emission Designation:	20K0F1D
Antenna information:	Manufacturer: Ace Technologies Model No.: MAX-1000 Antenna Type: extendable with ¼ length helical over ¼ wavelength whip. Frequency Range: 824 – 894 MHz Gain: 2.0 ± 1 dBi (extended) -1.0 ± 1 dBi (retracted) Radiation Pattern: Omni – directional Connector Type: thread NOTE: This antenna is designed for operating in 824 - 894 MHz band but it is used for operation in 806 – 821 MHz. Therefore, the gain in 806 – 821 MHz is expected to be negative in ERP measurements.

3.4. LIST OF ANCILLARY EQUIPMENT

None.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 4. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

4.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power input source:	4.8V NiMH battery pack

4.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

Operating Modes:	The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data.
Special Test Software:	None
Special Hardware Used:	None
Transmitter Test Antenna:	The EUT is tested with the transmitter antenna port terminated to a 50 Ohms RF Load.

Transmitter Test Signals	
Frequency Band(s): ▪ 806-821 MHz band:	Near lowest, near middle & near highest frequencies in each frequency bands that the transmitter covers: ▪ 806 MHz, 813.5 MHz, 821 MHz
Transmitter Wanted Output Test Signals: ▪ RF Power Output (measured maximum output power): ▪ Normal Test Modulation ▪ Modulating signal source:	 ▪ 33.0 dBm Maximum ▪ FM Data ▪ Internal

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 5. SUMMARY OF TEST RESULTS

5.1. LOCATION OF TESTS

All of the measurements described in this report were performed at UltraTech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- Radiated Emissions were performed at the Ultratech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario.
- The above site have been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville Open Field Test Site has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049). Last Date of Site Calibration: August 08, 2001.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC PARAGRAPH.	TEST REQUIREMENTS	APPLICABILITY (YES/NO)
90.205 & 2.1046	RF Power Output	Yes
1.1307, 1.1310, 2.1091 & 2.1093	RF Exposure Limit	Yes (refer to the attached SAR test report)
90.213 & 2.1055	Frequency Stability	See Note 1
90.242(b)(8) & 2.1047(a)	Audio Frequency Response	See Note 1
90.210 & 2.1047(b)	Modulation Limiting	See Note 1
90.209 90.210 & 2.1049	Emission Limitation & Emission Mask	See Note 1
90.210, 2.1057 & 2.1051	Emission Limits - Spurious Emissions at Antenna Terminal	See Note 1
90.210, 2.1057 & 2.1053	Emission Limits - Field Strength of Spurious Emissions	Yes

Note 1: There are no changes to the FCC certified MOBILE PAYMENT TERMINAL manufactured by Research In Motion Ltd. (RIM), FCC ID: L6AR802D-2-O, therefore this test is not required to be performed. For more details, please refer to the FCC ID mentioned above.

Note 2: The Mobile Payment Terminal, Models K78-202 and K78-204/LP9100 are exactly identical except for the following difference:

- The Models K78-204 and LP9100 are exactly identical. The differences of the model numbers are only for marketing purposes. It has an additional PSTN line-modem port (RJ-11)
- Model K78-202 is exactly identical to Model K78-204 but it has no PSTN line modem.

Since there is no mechanical and electrical difference in radio circuitry, the model K78-204/LP9100 is used for testing for compliance with FCC Part 90 and it shall represent for both models.

The Models K78-202 and K78-204/LP9100 incorporates a Radio transceiver module Model 802D manufactured by Research In Motion Ltd. (RIM), which is approved as a modular radio transceiver, FCC ID: L6AR802D-2-O. This module is supplied as a complete OEM unit, with no tuning or modifications required for operation in this device. The only change to this modular transceiver is the transmitter's antenna.

5.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 6. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

6.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in Exhibit 8 of this report

6.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 7 for Measurement Uncertainties.

6.3. MEASUREMENT EQUIPMENT USED:

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4:1992 and CISPR 16-1.

6.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:

The essential function of the EUT is to correctly communicate data to and from radios over RF link.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.5. RF POWER OUTPUT @ FCC 2.1046 & 90.205

6.5.1. Limits @ FCC 90.205

Please refer to FCC 47 CFR, Part 90, Subpart I, Para. 90.205 for specification details.

6.5.2. Method of Measurements


Refer to Exhibit 8, § 8.1 (Conducted) and 8.2 (Radiated) of this report for measurement details

6.5.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Power Meter	Hewlett Packard	436A	1725A02249	10 kHz – 50 GHz, sensor dependent
Power Sensor	Hewlett Packard	8481A	2702A68983	10 MHz – 18 GHz
Attenuator(s)	Bird	...	...	DC – 22 GHz
EMI Receiver/ EMI Receiver	Advantest	R3271	15050203	100 Hz – 26.5 GHz
Attenuator(s)	Weinschel Corp	24-20-34	BJ2357	DC – 8.5 GHz
Dipole Antenna	EMCO	3121C	8907-440	30 MHz – 1 GHz
Dipole Antenna	EMCO	3121C	8907-434	30 MHz – 1 GHz
Synthesized RF Signal Generator	Gigatronic	6061A	5130408	10kHz – 1050 MHz

6.5.4. Test Arrangement

- Power at RF Power Output Terminals



ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.5.5. Test Data

6.5.5.1. Conducted RF Output Power Measurements

Transmitter Channel Output	Fundamental Frequency (MHz)	Measured Power (dBm)	Power Rating by the Radio Supplier (Research in Motion) (dBm)
Near Lowest	806.0	33.0	33.0
Near Middle	813.5	32.9	33.0
Near Highest	821.0	32.8	33.0

6.5.5.2. ERP Measurements using Substitution Method

EUT's Antenna was extended in full length, EUT Antenna Gain = 2 dBi max.					
Frequency (MHz)	Peak E-Field @ 3m (dBμV/m)	Antenna Polarization (V/H)	Peak Power From Signal GEN. Ps – Cable Loss (dBm)	Substitution Antenna (Dipole) Gain Gd (dBi)	Measured Peak ERP = Ps+Gd-2.15 (dBm)
806.0	127.36	V	29.95	1.96	29.76
806.0	128.28	H	24.84	1.96	24.65
813.5	126.78	V	26.30	1.78	25.93
813.5	128.64	H	25.90	1.78	25.53
821.0	125.35	V	26.40	1.60	25.85
821.0	128.20	H	28.70	1.60	28.15
* The above readings were maximum with EUT oriented in three different orthogonal positions					

EUT's Antenna was retracted, EUT Antenna Gain = 0 dBi max.					
Frequency (MHz)	Peak E-Field @ 3m (dBμV/m)	Antenna Polarization (V/H)	Peak Power From Signal GEN. Ps – Cable Loss (dBm)	Substitution Antenna (Dipole) Gain Gd (dBi)	Measured Peak ERP = Ps+Gd-2.15 (dBm)
806.0	122.50	V	22.10	1.96	21.91
806.0	122.26	H	18.80	1.96	18.61
813.5	123.57	V	23.20	1.78	22.83
813.5	120.97	H	18.30	1.78	17.93
821.0	118.22	V	19.30	1.60	18.75
821.0	117.51	H	17.50	1.60	16.95
* The above readings were maximum with EUT oriented in three different orthogonal positions					

NOTE: This EUT's antenna is designed for operating in 824 - 894 MHz band but it is used for operation in 806 – 821 MHz. Therefore, the antenna gain in 806 – 821 MHz is expected to be negative in ERP measurements.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.6. RF EXPOSURE REQUIRMENTS @ 1.1310 & 2.1093

Evaluation of RF Exposure Compliance Requirements	
RF Exposure Requirements	Compliance with FCC Rules
SAR Tests for Portable Transmitters • Body Tissue • Brain Tissue	• Complies with SAR limits for General Population/Uncontrolled exposure; refer to SAR test report for detailed. • Not applicable
Caution statements and/or warning labels that is necessary in order to comply with the exposure limits.	Refer to User Guide for RF Exposure information to users.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.7. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 90.210

6.7.1. Limits @ FCC 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC RULES	ATTENUATION LIMIT (dBc)
FCC 90.210 (g)	43 + 10 log (P)

6.7.2. Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in Exhibit 8, § 8.2 of this report and its value in dBc is calculated as follows:

- (1) If the transmitter's antenna is an integral part of the EUT, the ERP is measured using substitution method.
- (2) If the transmitter's antenna is non-integral and diverse, the lowest ERP of the carrier with 0 dBi antenna gain is used for calculation of the spurious/harmonic emissions in dBc:
Lowest ERP of the carrier = EIRP – 2.15 dB = $P_c + G - 2.15 \text{ dB} = \text{xxx dBm (conducted)} + 0 \text{ dBi} - 2.15 \text{ dB}$
- (3) Spurious /harmonic emissions levels expressed in dBc (dB below carrier) are as follows:

$$\text{ERP of spurious/harmonic (dBc)} = \text{ERP of carrier (dBm)} - \text{ERP of spurious/harmonic emission (dBm)}$$

6.7.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Hewlett Packard	HP 8546A	...	9 kHz to 5.6 GHz with built-in 30 dB Gain Pre-selector, QP, Average & Peak Detectors.
RF Amplifier	Com-Power	PA-102		1 MHz to 1 GHz, 30 dB gain nominal
Microwave Amplifier	Hewlett Packard	HP 83017A		1 GHz to 26.5 GHz, 30 dB nominal
Biconilog Antenna	EMCO	3142	10005	30 MHz to 2 GHz
Dipole Antenna	EMCO	3121C	8907-434	30 GHz – 1 GHz
Dipole Antenna	EMCO	3121C	8907-440	30 GHz – 1 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz
Horn Antenna	EMCO	3155	9911-5955	1 GHz – 18 GHz
RF Signal Generator	Hewlett Packard	HP 83752B	3610A00457	0.01 – 20 GHz

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.7.4. Test Data

6.7.4.1. Near Lowest Frequency (806 MHz)

EUT Antenna Position: Extended
Carrier Frequency (MHz): 806.0
Power (dBm): 29.8
Limit (dBc): -42.8

Frequency (MHz)	E-Field (dBμV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP measured by Substitution Method		Limit (dBc)	Margin (dB)
				(dBm)	(dBc)		
806.0	127.4	Peak	V	29.8	n/a	n/a	n/a
806.0	128.3	Peak	H	24.7	n/a	n/a	n/a
1612.0	87.4	Peak	V	-14.8	-44.5	-42.8	-1.8
1612.0	84.5	Peak	H	-18.2	-47.9	-42.8	-5.1
2418.0	82.4	Peak	V	-19.4	-49.1	-42.8	-6.3
2418.0	80.7	Peak	H	-21.5	-51.2	-42.8	-8.5
4030.0	78.3	Peak	V	-22.4	-52.1	-42.8	-9.3
4030.0	82.0	Peak	H	-21.5	-51.2	-42.8	-8.5
4836.0	69.5	Peak	V	-32.7	-62.4	-42.8	-19.7
5642.0	69.7	Peak	V	-33.0	-62.7	-42.8	-20.0
5642.0	70.1	Peak	H	-32.7	-62.4	-42.8	-19.7

The emissions were scanned from 10 MHz to 10 GHz and all emissions within 20 dB below the limits were recorded.

EUT Antenna Position: Retracted
Carrier Frequency (MHz): 806.0
Power (dBm): 21.9
Limit (dBc): -34.9

Frequency (MHz)	E-Field (dBμV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP measured by Substitution Method		Limit (dBc)	Margin (dB)
				(dBm)	(dBc)		
806.0	122.5	Peak	V	21.9	n/a	n/a	n/a
806.0	122.3	Peak	H	18.6	n/a	n/a	n/a
1612.0	87.4	Peak	V	-15.8	-37.7	-34.9	-2.8
1612.0	83.3	Peak	H	-19.3	-41.2	-34.9	-6.3
2418.0	83.4	Peak	V	-17.4	-39.3	-34.9	-4.4
2418.0	79.5	Peak	H	-22.7	-44.6	-34.9	-9.7
4030.0	69.7	Peak	V	-31.4	-53.3	-34.9	-18.4

The emissions were scanned from 10 MHz to 10 GHz and all emissions within 20 dB below the limits were recorded.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.7.4.2. Near Middle Frequency (813.5 MHz)

EUT Antenna Position: Extended
 Carrier Frequency (MHz): 814
 Power (dBm): 25.9
 Limit (dBc): -38.9

Frequency (MHz)	E-Field (dB μ V/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP measured by Substitution Method		Limit (dBc)	Margin (dB)
				(dBm)	(dBc)		
813.5	126.8	Peak	V	25.9	n/a	n/a	n/a
813.5	128.6	Peak	H	25.5	n/a	n/a	n/a
1627.0	86.5	Peak	V	-16.9	-42.8	-38.9	-3.9
1627.0	84.8	Peak	H	-17.8	-43.7	-38.9	-4.8
2440.5	80.9	Peak	V	-19.8	-45.7	-38.9	-6.8
2440.5	82.9	Peak	H	-21.3	-47.2	-38.9	-8.3
4067.5	79.4	Peak	V	-23.4	-49.3	-38.9	-10.4
4067.5	80.0	Peak	H	-23.5	-49.4	-38.9	-10.5

The emissions were scanned from 10 MHz to 10 GHz and all emissions within 20 dB below the limits were recorded.

EUT Antenna Position: Retracted
 Carrier Frequency (MHz): 813.5
 Power (dBm): 22.8
 Limit (dBc): -35.8

Frequency (MHz)	E-Field (dB μ V/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP measured by Substitution Method		Limit (dBc)	Margin (dB)
				(dBm)	(dBc)		
813.5	123.6	Peak	V	22.8	n/a	n/a	n/a
813.5	121.0	Peak	H	17.9	n/a	n/a	n/a
1627.0	86.3	Peak	V	-17.3	-40.1	-35.8	-4.2
1627.0	83.9	Peak	H	-18.8	-41.6	-35.8	-5.7
2440.5	83.7	Peak	V	-17.2	-40.0	-35.8	-4.1
2440.5	79.5	Peak	H	-24.7	-47.5	-35.8	-11.7
4067.5	71.3	Peak	H	-32.5	-55.3	-35.8	-19.5

The emissions were scanned from 10 MHz to 10 GHz and all emissions within 20 dB below the limits were recorded.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90

November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.7.4.3. Near Highest Frequency (821 MHz)

EUT Antenna Position: Extended
 Carrier Frequency (MHz): 821.0
 Power (dBm): 28.2
 Limit (dBc): -41.2

Frequency (MHz)	E-Field (dBμV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP measured by Substitution Method		Limit (dBc)	Margin (dB)
				(dBm)	(dBc)		
821.0	125.4	Peak	V	25.9	n/a	n/a	n/a
821.0	128.2	Peak	H	28.2	n/a	n/a	n/a
1642.0	86.3	Peak	V	-16.6	-44.7	-41.2	-3.6
1642.0	83.3	Peak	H	-20.0	-48.1	-41.2	-6.9
2463.0	83.6	Peak	V	-19.0	-47.1	-41.2	-5.9
2463.0	80.3	Peak	H	-23.1	-51.2	-41.2	-10.1
4105.0	71.7	Peak	V	-31.3	-59.4	-41.2	-18.3
4105.0	71.2	Peak	H	-31.5	-59.6	-41.2	-18.5
5747.0	69.0	Peak	V	-32.8	-60.9	-41.2	-19.8

The emissions were scanned from 10 MHz to 10 GHz and all emissions within 20 dB below the limits were recorded.

EUT Antenna Position: Retracted
 Carrier Frequency (MHz): 821.0
 Power (dBm): 18.8
 Limit (dBc): -31.8

Frequency (MHz)	E-Field (dBμV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP measured by Substitution Method		Limit (dBc)	Margin (dB)
				(dBm)	(dBc)		
821.0	118.2	Peak	V	18.8	n/a	n/a	n/a
821.0	117.5	Peak	H	17.0	n/a	n/a	n/a
1642.0	86.3	Peak	V	-16.6	-35.3	-31.8	-3.6
1642.0	83.3	Peak	H	-20.0	-38.7	-31.8	-7.0
2463.0	83.6	Peak	V	-19.0	-37.7	-31.8	-6.0
2463.0	80.3	Peak	H	-23.1	-41.8	-31.8	-10.1
4105.0	71.7	Peak	V	-31.3	-50.0	-31.8	-18.3
4105.0	71.2	Peak	H	-31.5	-50.2	-31.8	-18.5
5747.0	69.0	Peak	V	-32.8	-51.5	-31.8	-19.8

The emissions were scanned from 10 MHz to 10 GHz and all emissions within 20 dB below the limits were recorded.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90

November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994)

7.1. Radiated Emission Measurement Uncertainty

CONTRIBUTION (Radiated Emissions)	PROBABILITY DISTRIBUTION	UNCERTAINTY (+ dB)	
		3 m	10 m
Antenna Factor Calibration	Normal (k=2)	± 1.0	± 1.0
Cable Loss Calibration	Normal (k=2)	± 0.3	± 0.5
EMI Receiver specification	Rectangular	± 1.5	± 1.5
Antenna Directivity	Rectangular	± 0.5	± 0.5
Antenna factor variation with height	Rectangular	± 2.0	± 0.5
Antenna phase center variation	Rectangular	0.0	± 0.2
Antenna factor frequency interpolation	Rectangular	± 0.25	± 0.25
Measurement distance variation	Rectangular	± 0.6	± 0.4
Site imperfections	Rectangular	± 2.0	± 2.0
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(\text{Bi}) 0.3 (\text{Lp})$ Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	+1.1 -1.25	± 0.5
System repeatability	Std. Deviation	± 0.5	± 0.5
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k=2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 8. MEASUREMENT METHODS

8.1. CONDUCTED POWER Measurements

- The following shall be applied to the combination(s) of the radio device and its intended antenna(e).
- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
- The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
- The measurement shall be performed using normal operation of the equipment with modulation.

Test procedure shall be as follows:

Step 1: Duty Cycle measurements if the transmitter's transmission is transient

- Using a EMI Receiver with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter, $x = \text{Tx on} / (\text{Tx on} + \text{Tx off})$ with $0 < x < 1$, is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


Step 2: Calculation of Average EIRP. See Figure 1

- The average output power of the transmitter shall be determined using a wideband, calibrated RF average power meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- The e.i.r.p. shall be calculated from the above measured power output "A", the observed duty cycle x , and the applicable antenna assembly gain "G" in dBi, according to the formula:

$$\text{EIRP} = A + G + 10\log(1/x)$$

{ $X = 1$ for continuous transmission $\Rightarrow 10\log(1/x) = 0 \text{ dB}$ }

Figure 1.

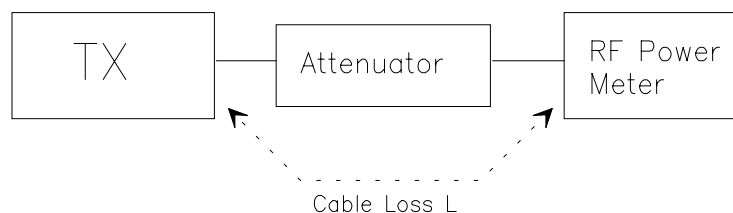

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

8.2. RADIATED POWER Measurements (ERP & EIRP) USING SUBSTITUTION METHOD

8.2.1. Maximizing RF Emission Level (E-Field)

- (a) The measurements was performed with full rf output power and modulation.
- (b) Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

- (f) Set the EMI Receiver and #2 as follows:

Center Frequency:	test frequency
Resolution BW:	100 kHz
Video BW:	same
Detector Mode:	positive
Average:	off
Span:	3 x the signal bandwidth

- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

8.2.2. Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency:	equal to the signal source
Resolution BW:	10 kHz
Video BW:	same
Detector Mode:	positive
Average:	off
Span:	3 x the signal bandwidth

- (b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

- (c) Select the frequency and E-field levels obtained in the Section 8.2.1 for ERP/EIRP measurements.
(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):
 - ◆ DIPOLE antenna for frequency from 30-1000 MHz or
 - ◆ HORN antenna for frequency above 1 GHz }.(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
(f) Use one of the following antenna as a receiving antenna:
 - ◆ DIPOLE antenna for frequency from 30-1000 MHz or
 - ◆ HORN antenna for frequency above 1 GHz }.(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
(i) Tune the EMI Receivers to the test frequency.
(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$EIRP = P + G1 = P3 + L2 - L1 + A + G1$$

$$ERP = EIRP - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input

P3: Power reading on the Average Power Meter

EIRP: EIRP after correction

ERP: ERP after correction

- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)
(p) Repeat step (d) to (o) for different test frequency
(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.
(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.:

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Figure 2

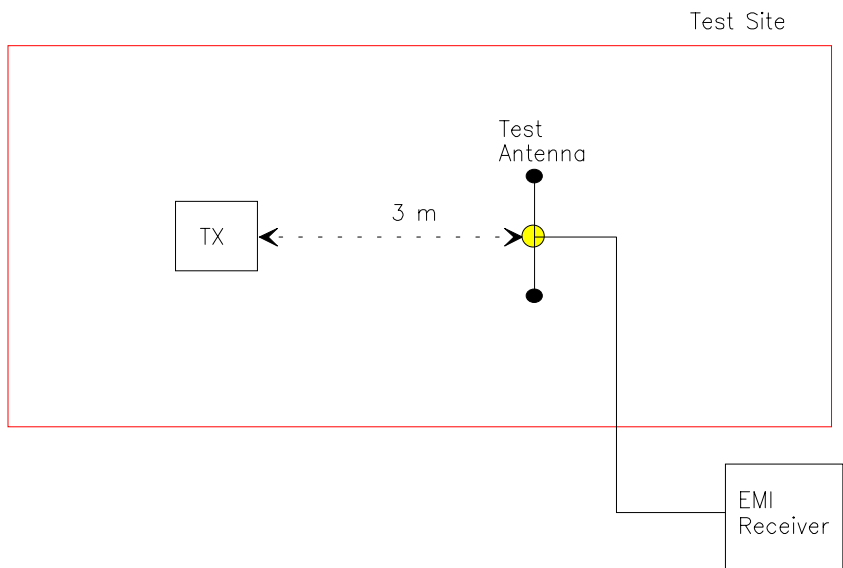
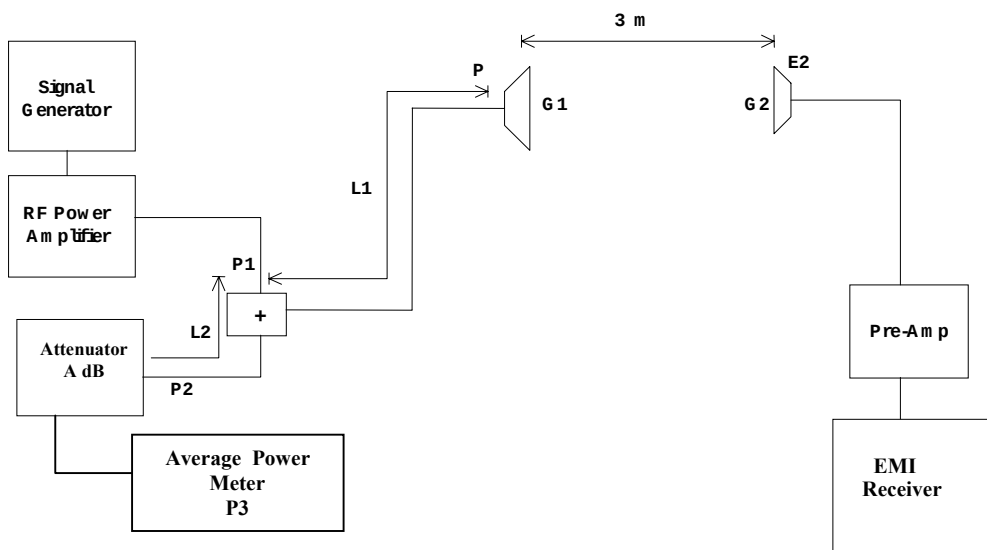


Figure 3

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: KYC3FCC90
November 19, 2001

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)