

CETECOM Inc.



CETECOM Inc.

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200 Fax: +1 408 586 6299

www.cetecom.com

Issued test report consists of 32 Pages

Page 1 (32)

FCC LISTED, REG. NO.: 101450 & RECOGNIZED BY INDUSTRY CANADA IC – 3925

Test report no.:201FCC/2001
FCC Part 15.247
(B091H1)

Table of Contents

1 General information

1.1 Notes

1.2 Testing laboratory

1.3 Details of applicant

1.4 Application details

1.5 Test item

1.6 Test standards

2 Technical test

2.1 Summary of test results

2.2 Test report

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

TEST REPORT PREPARED BY:

EMC & Radio Engineer: Harpreet Sidhu

1.2 Testing laboratory

CETECOM Inc.

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200 Fax: +1 408 586 6299

E-mail: lothar.schmidt@cetecomusa.com

Internet: www.cetecom.com

1.3 Details of applicant

Name : Uniwill Computer Corp.
Street : 14F, No. 67, Sec-1, Ching Shan Rd., Hsiy Chang City
City : Taipei
Country : Taiwan
Contact : Tony Kuan
Telephone : +886 2 852 16 888 Ext.-357
Telefax : +886 2 852 15 666
e-mail : tony_kuan@uniwill.com.tw

1.4 Application details

Date of receipt of application : 2001-09-10
Date of receipt of test item : 2001-10-17
Date of test : 2001-10-18 & 2001-11-06

1.5 Test item

Manufacturer : Applicant
Name of EUT : B091H1 Mini USB Dongle
Description : [Class-2 BT Module](#)
Model No. : B091H1
Serial No. : N/A
FCC ID :

Additional informations

Frequency : 2.402 – 2.480 GHz
Type of modulation : FHSS
Number of channels : 79
Antenna : External
Power supply : Via USB
Output power : 0 dBm
Extreme Vol. Limits :
Extreme Temp. Limits : 0°C - +35°C

1.6 Test standards: **FCC Part 15 §15.247**

2 Technical test**2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

Technical responsibility for area of testing :

2001-11-06**EMC & Radio****Lothar Schmidt**

Date**Section****Name****Signature**

2.2 Testreport

TEST REPORT

**Test report no. : 201FCC/2001
(B091H1)**

TEST REPORT REFERENCE**LIST OF MEASUREMENTS**

Paragraph	PARAMETER TO BE MEASURED	PAGE
	Transmitter parameters	
§ 15.204	Antenna gain	7
§ 15.247 (b)(2)	Maximum peak output power	8
§ 15.247 (c)(1)	Emission limitations	16
§ 15.107	Conducted emissions	25
	Receiver parameters	
§ 15.209	Spurious radiations - Radiated	27
	Test equipment listing	32

NOTE: Since this product (B091H1) is based on same BT module as in Model no. BTM 2010-X-Y with no major design changes, this test report covers only specific areas.

Please refer to Test Report No. 191FCC/2001

Antenna Gain

SUBCLAUSE § 15.204

The max gain is +dBi

(measured effectiv radiated power – measured conducted power with a temporary RF-connector)

**MAXIMUM PEAK OUTPUT POWER
(conducted)**

SUBCLAUSE § 15.247 (b) (1)

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)			
Frequency (MHz)		2402		2441	2480
$T_{nom}(23)^{\circ}C$	V_{nom}	PK	-1.15	-1.80	-1.98
Measurement uncertainty		$\pm 3dB$			

RBW / VBW : 3 MHz

LIMIT


SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b)


Lowest Channel: 2402MHz

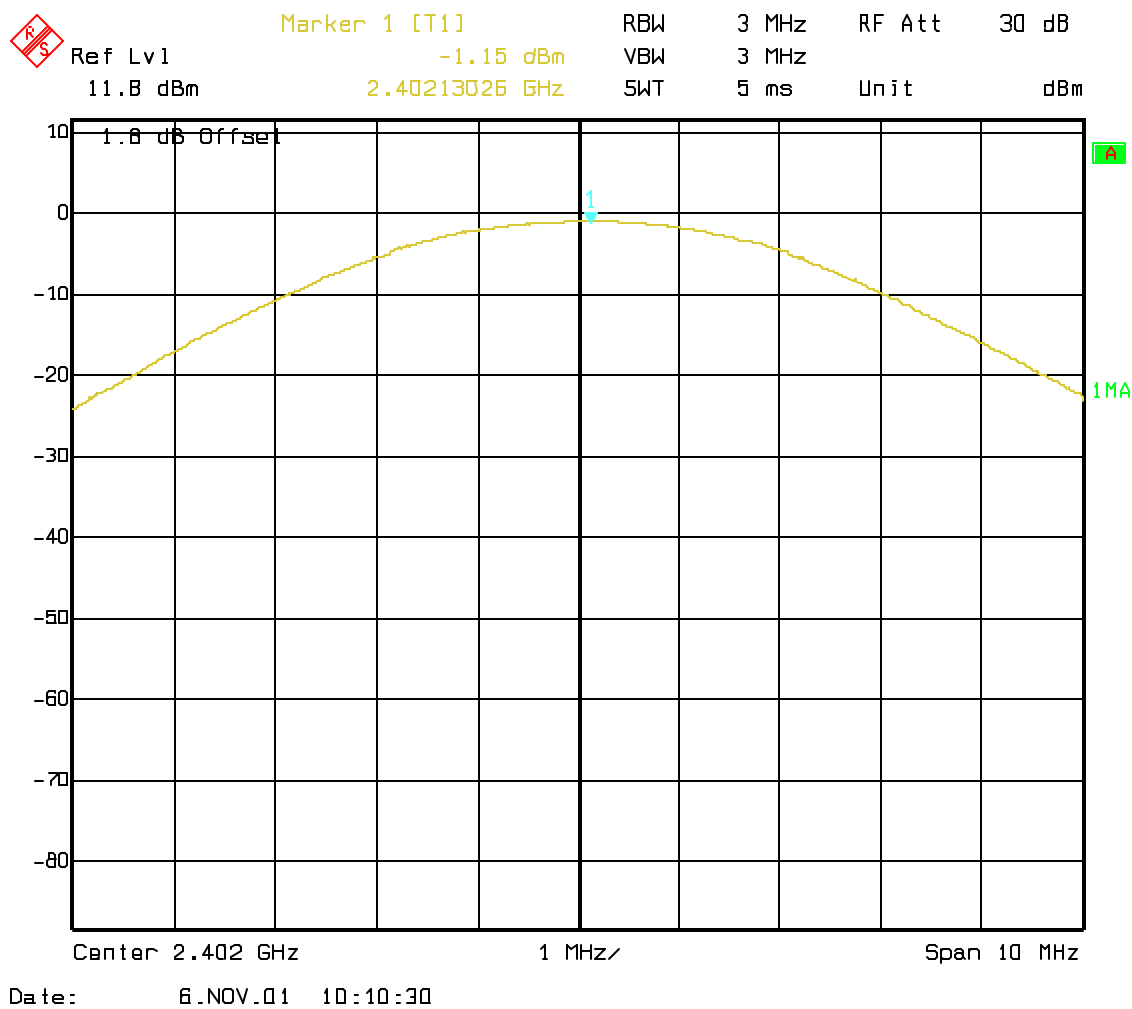

PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b)


Mid Channel: 2441MHz

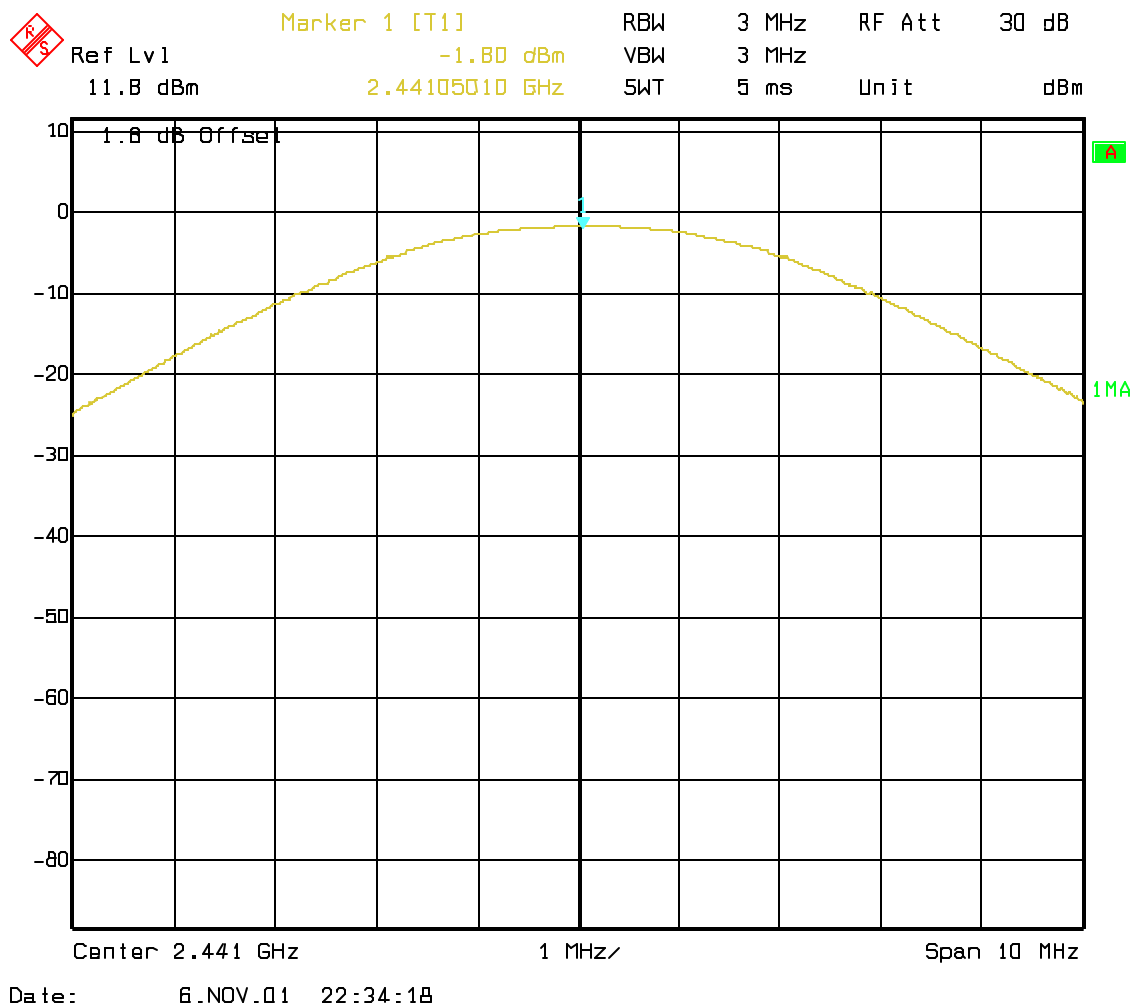

PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b)

Highest Channel: 2480MHz

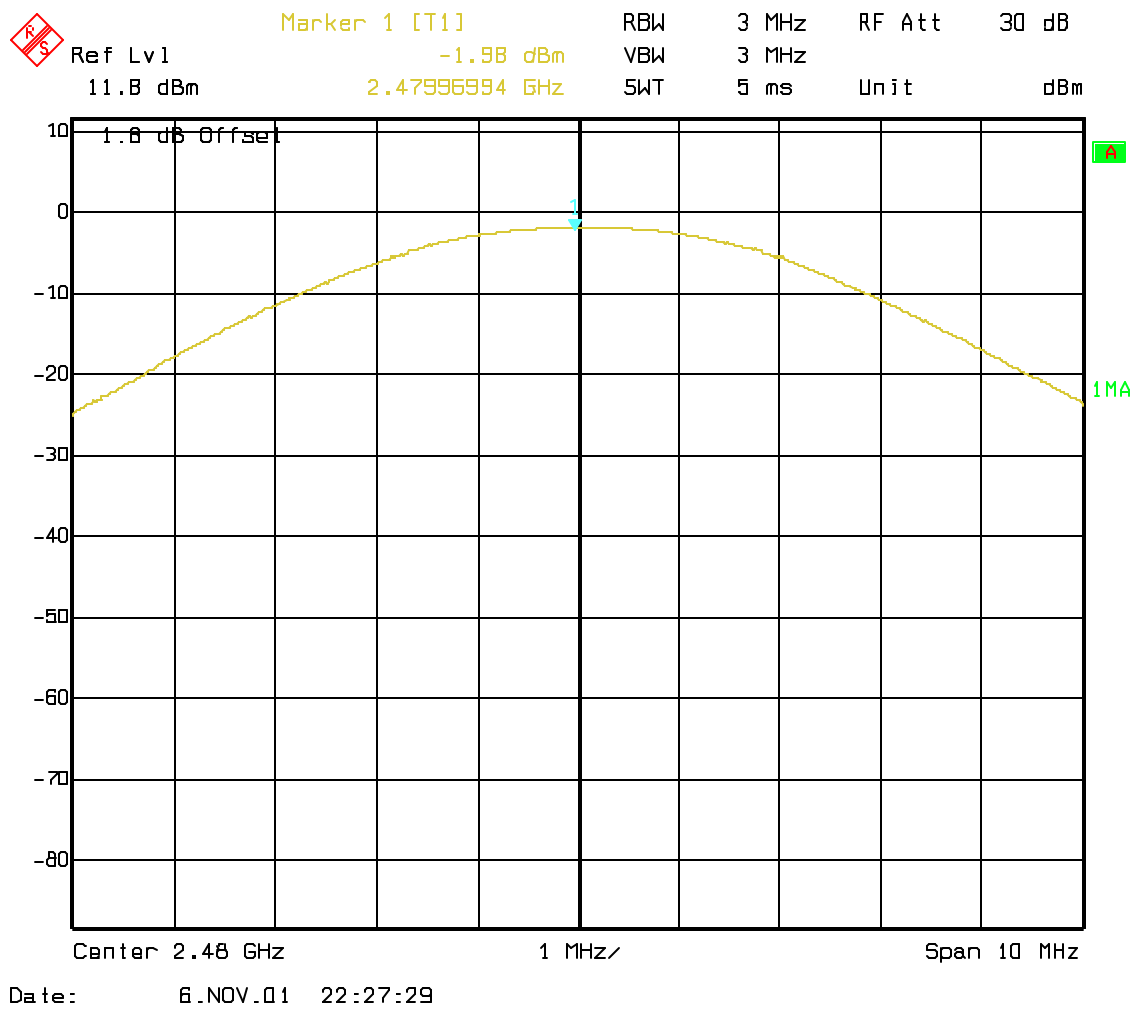

**MAXIMUM PEAK OUTPUT POWER
(RADIATED)**

SUBCLAUSE § 15.247 (b) (1)

EIRP:

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom}	0.96	2.43	1.24
Measurement uncertainty		±3dB		

RBW/VBW : 3 MHz

LIMIT

SUBCLAUSE § 15.247 (b) (1)


Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

PEAK OUTPUT POWER (RADIATED)

§15.247 (b) (1)

Lowest Channel: 2402MHz

ANALYZER SETTINGS: RBW = 3MHz VBW = 3MHz

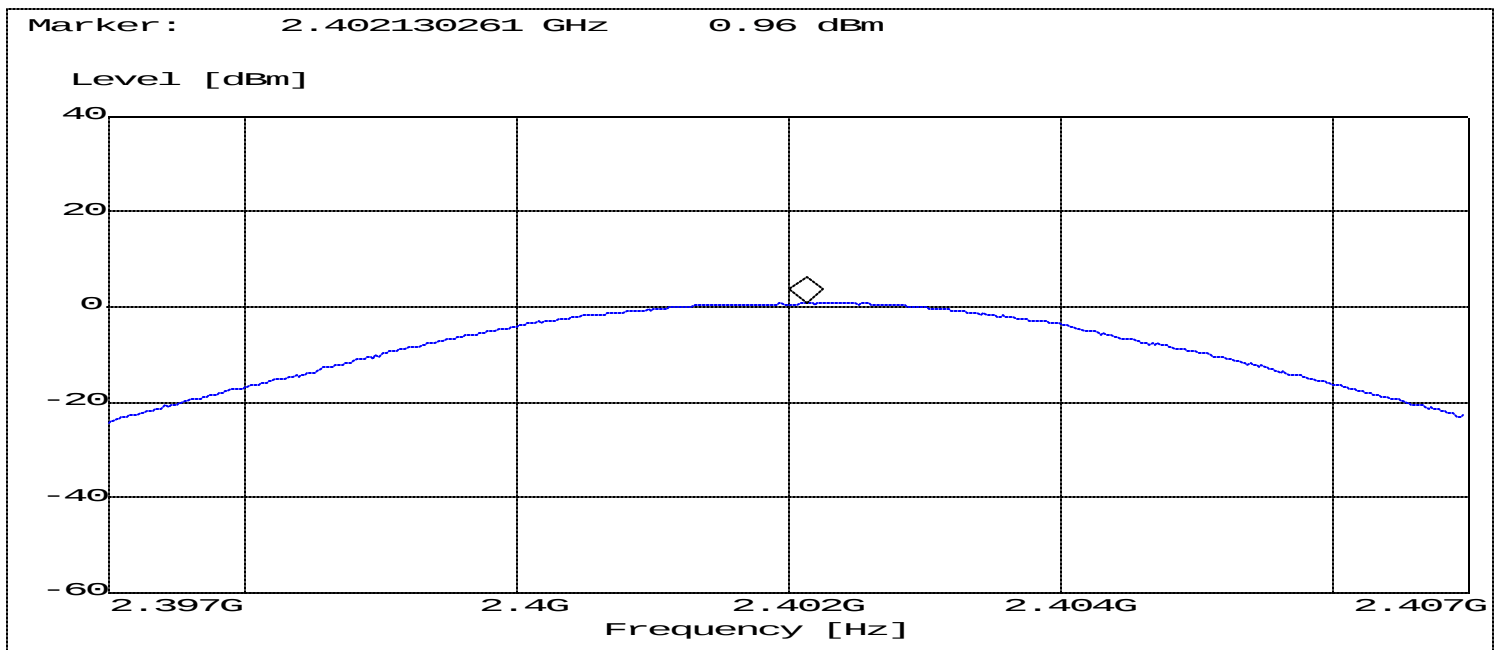


PEAK OUTPUT POWER (RADIATED)

§15.247 (b) (1)

Mid Channel: 2441MHz

ANALYZER SETTINGS: RBW = 3MHz VBW = 3MHz

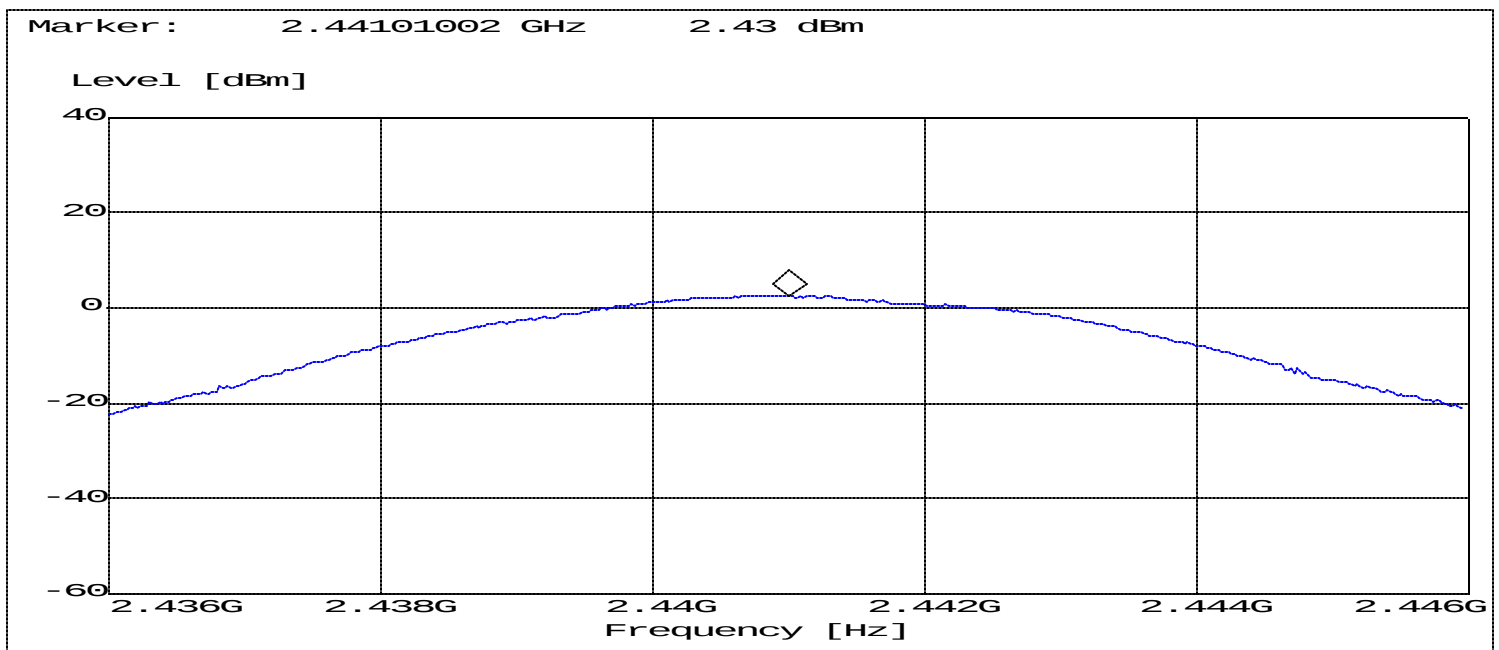


PEAK OUTPUT POWER (RADIATED)

§15.247 (b) (1)

Highest Channel: 2480MHz

ANALYZER SETTINGS: RBW = 3MHz VBW = 3MHz

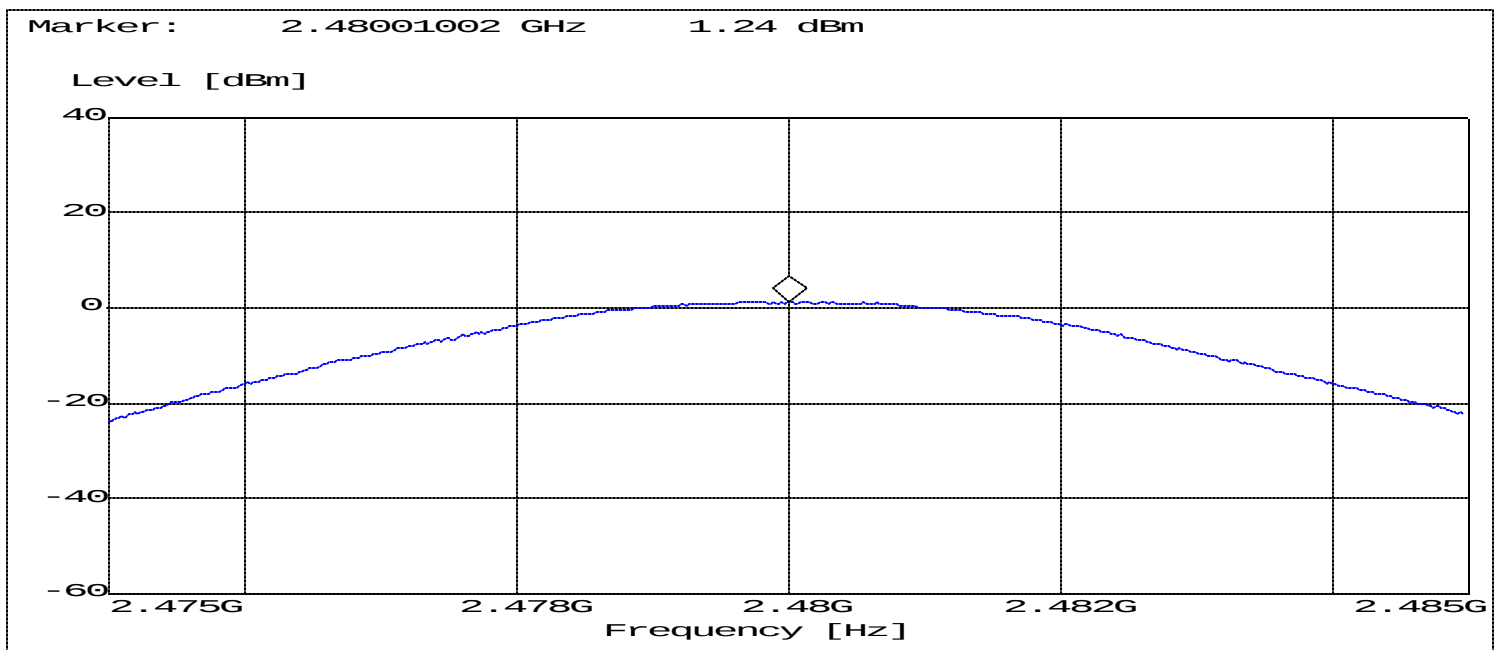

EMISSION LIMITATIONS - Radiated (Transmitter)**SUBCLAUSE § 15.247 (c) (1)****LIMITS**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.


Results for the radiated measurements below 30MHz according § 15.33

Frequency (MHz)	Measured values	Remarks
16-30	No emissions found, caused by the EUT	This is valid for all the tested channels

EMISSION LIMITATIONS - Radiated (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

Lowest Channel(2402MHz): 30MHz – 1GHz

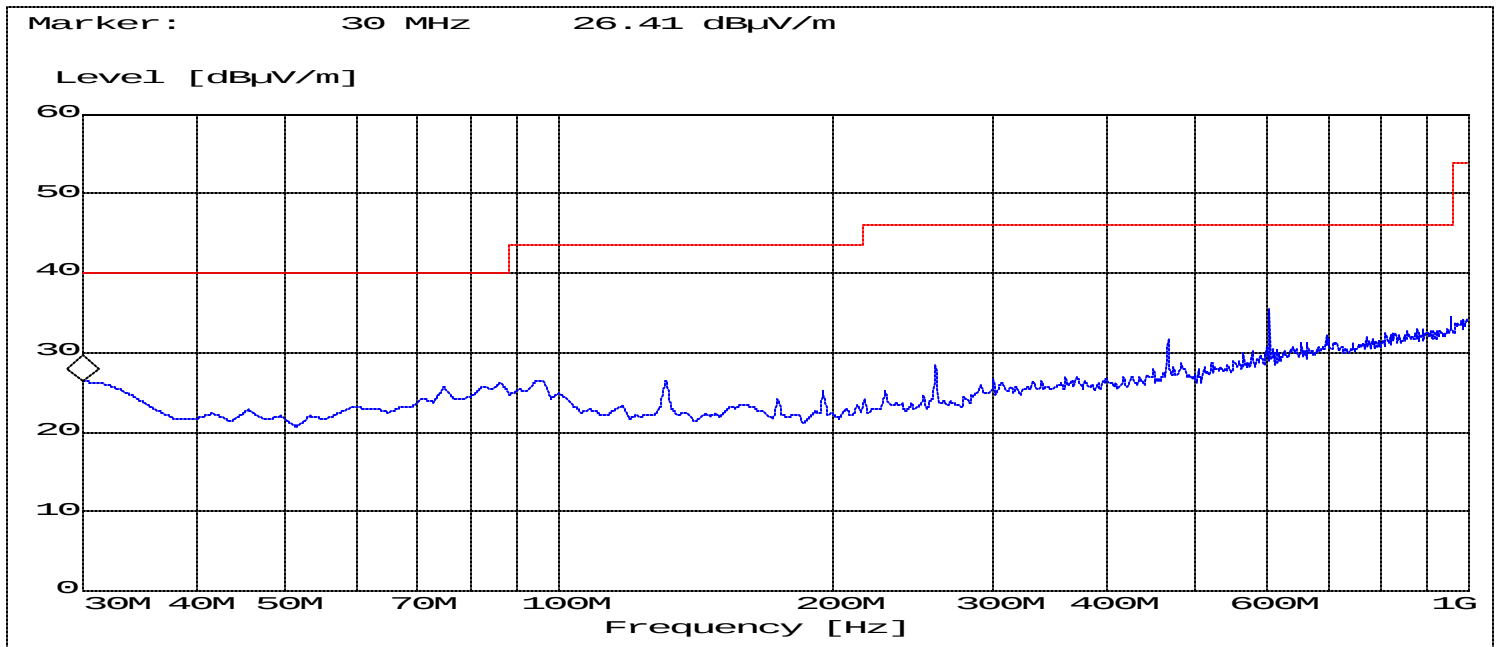


ANALYZER SETTINGS: RBW = 100KHz VBW = 100KHz

EMISSION LIMITATIONS - Radiated (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

Lowest Channel(2402MHz): 1GHz – 8GHz

NOTE: The peak above the limit line is the carrier frequency.

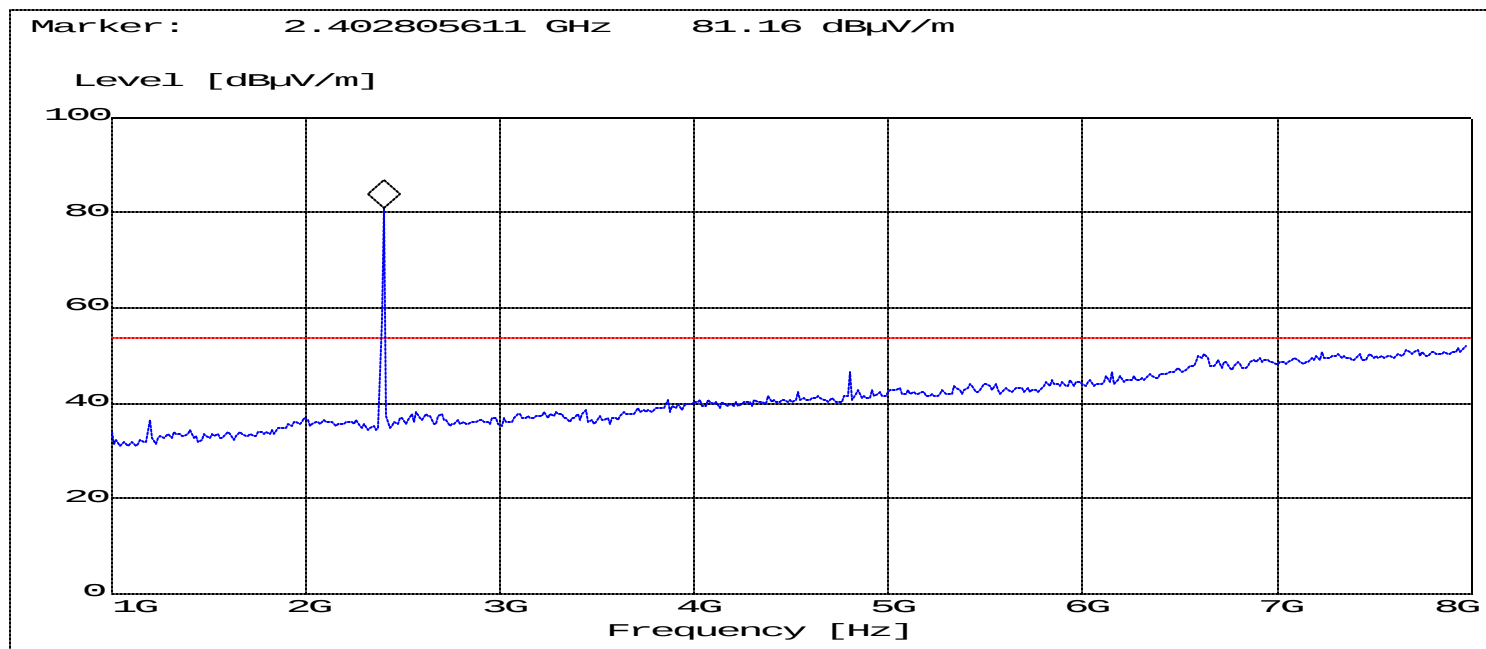


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

EMISSION LIMITATIONS - Radiated (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

Mid Channel(2441MHz): 30MHz – 1GHz

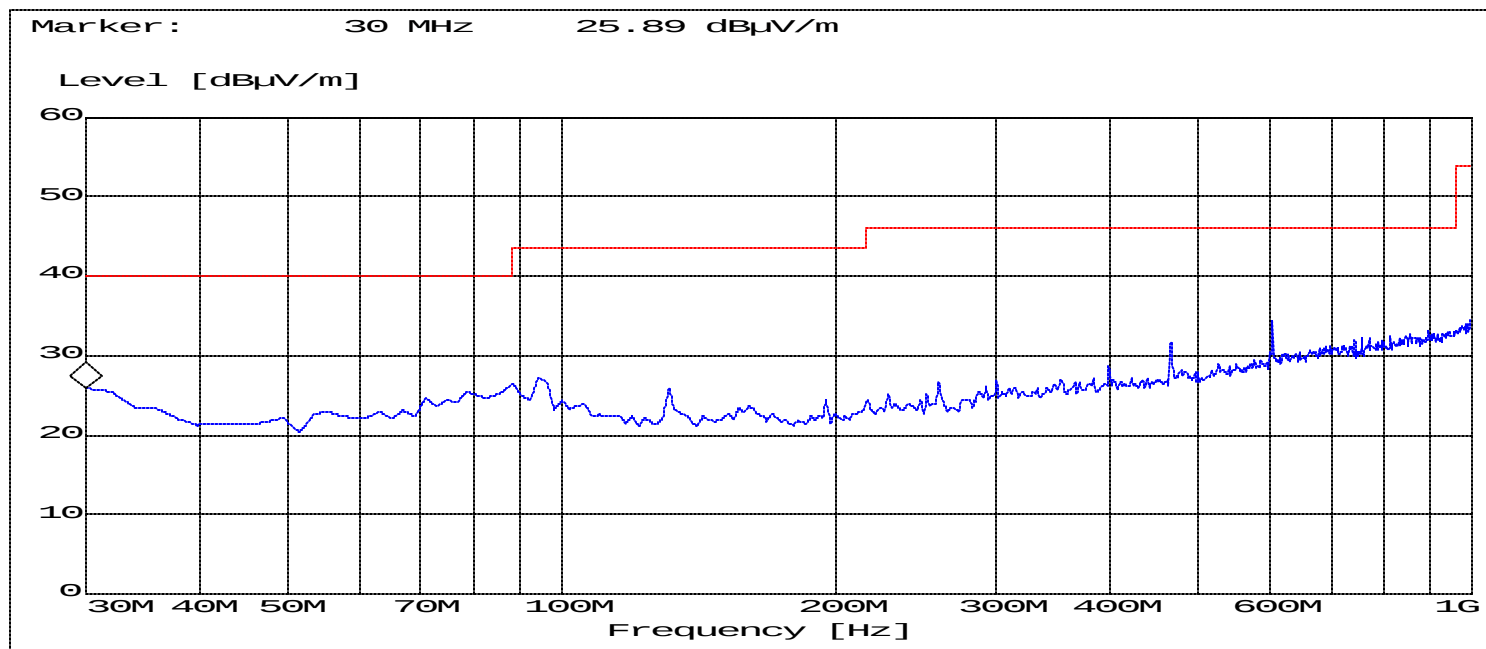


ANALYZER SETTINGS: RBW = 100KHz VBW = 100KHz

EMISSION LIMITATIONS - Radiated (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

Mid Channel(2441MHz): 1GHz – 8GHz

NOTE: The peak above the limit line is the carrier frequency.

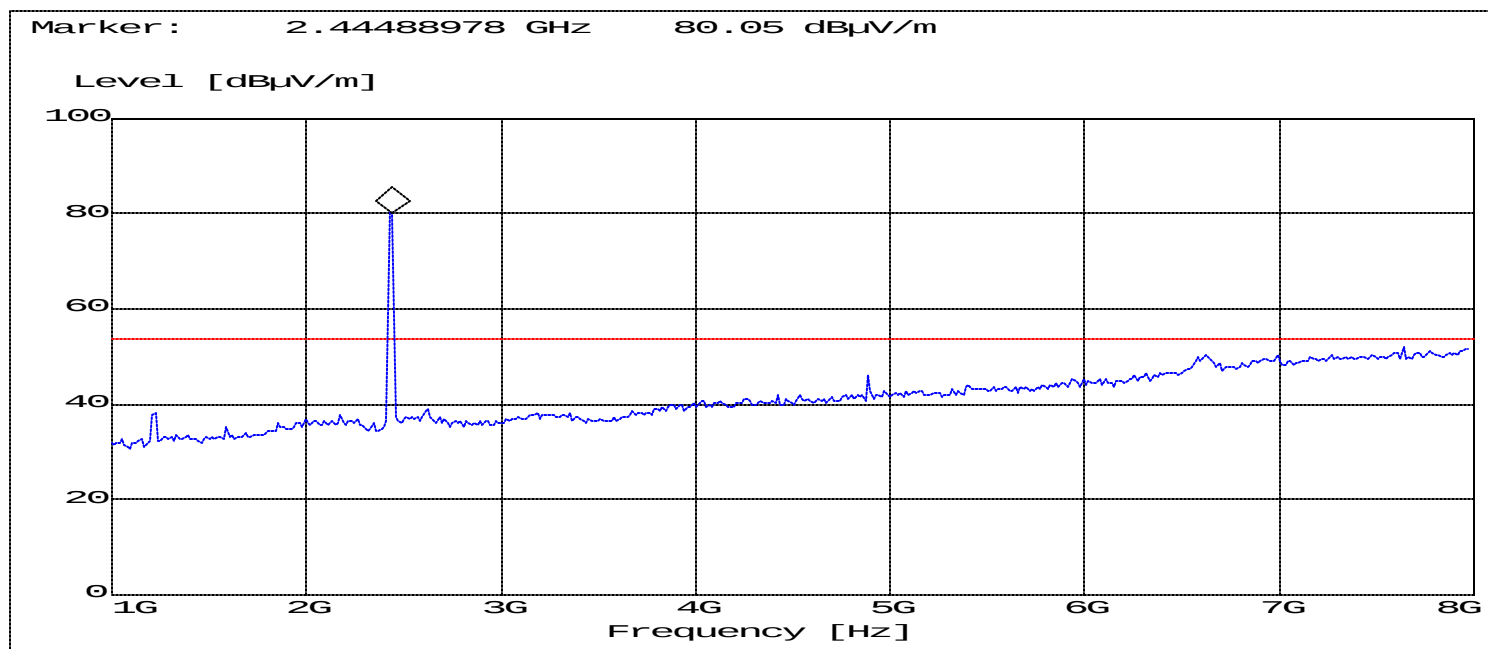


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

EMISSION LIMITATIONS - Radiated (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

Highest Channel(2480MHz): 30MHz – 1GHz

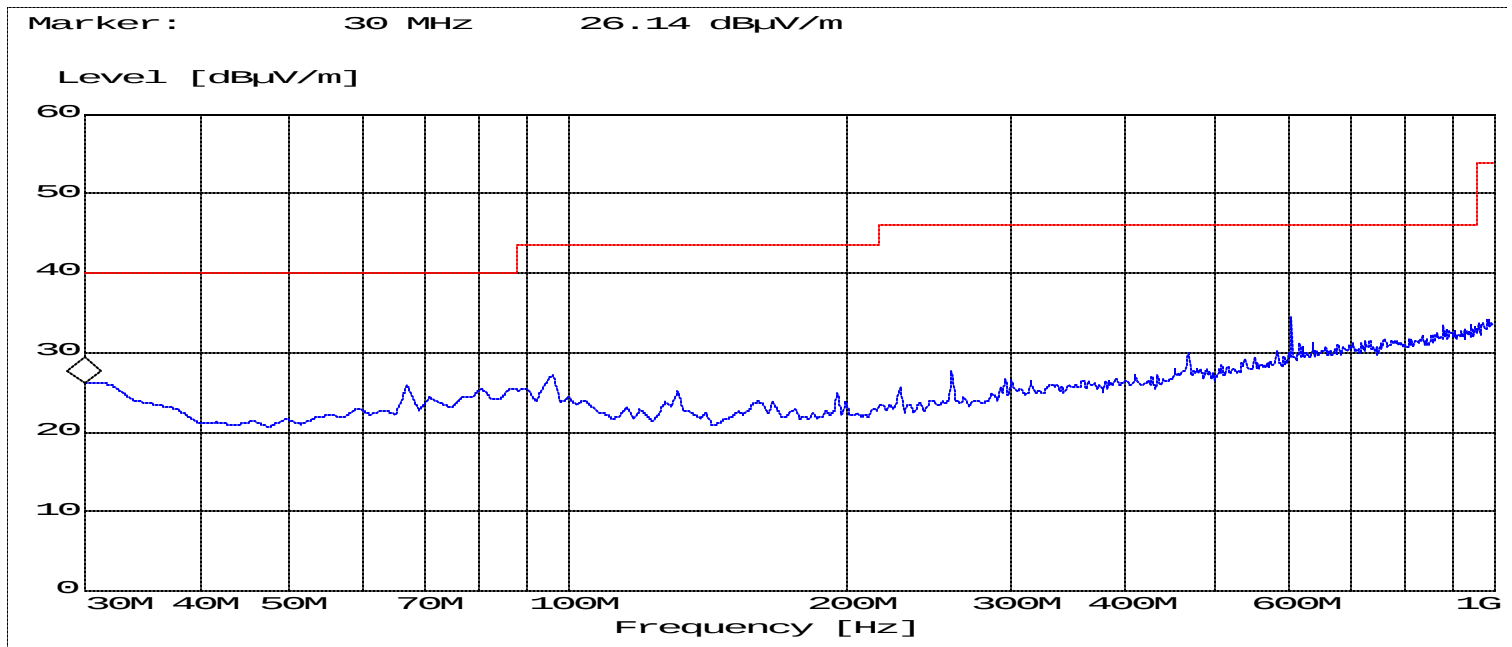


ANALYZER SETTINGS: RBW = 100KHz VBW = 100KHz

EMISSION LIMITATIONS - Radiated (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

Highest Channel(2480MHz): 1GHz – 8GHz

NOTE: The peak above the limit line is the carrier frequency.

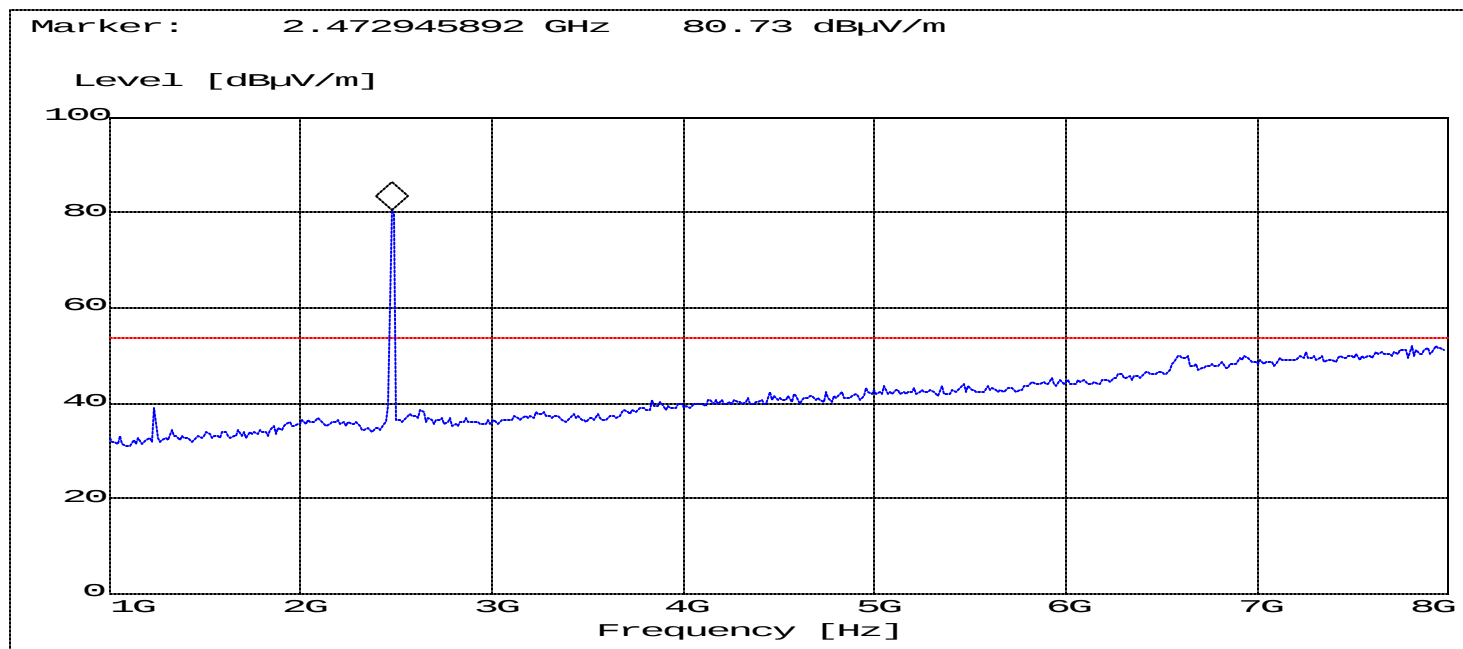


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

EMISSION LIMITATIONS - Radiated (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

8GHz – 18GHz

(This plot is valid for all three channels)

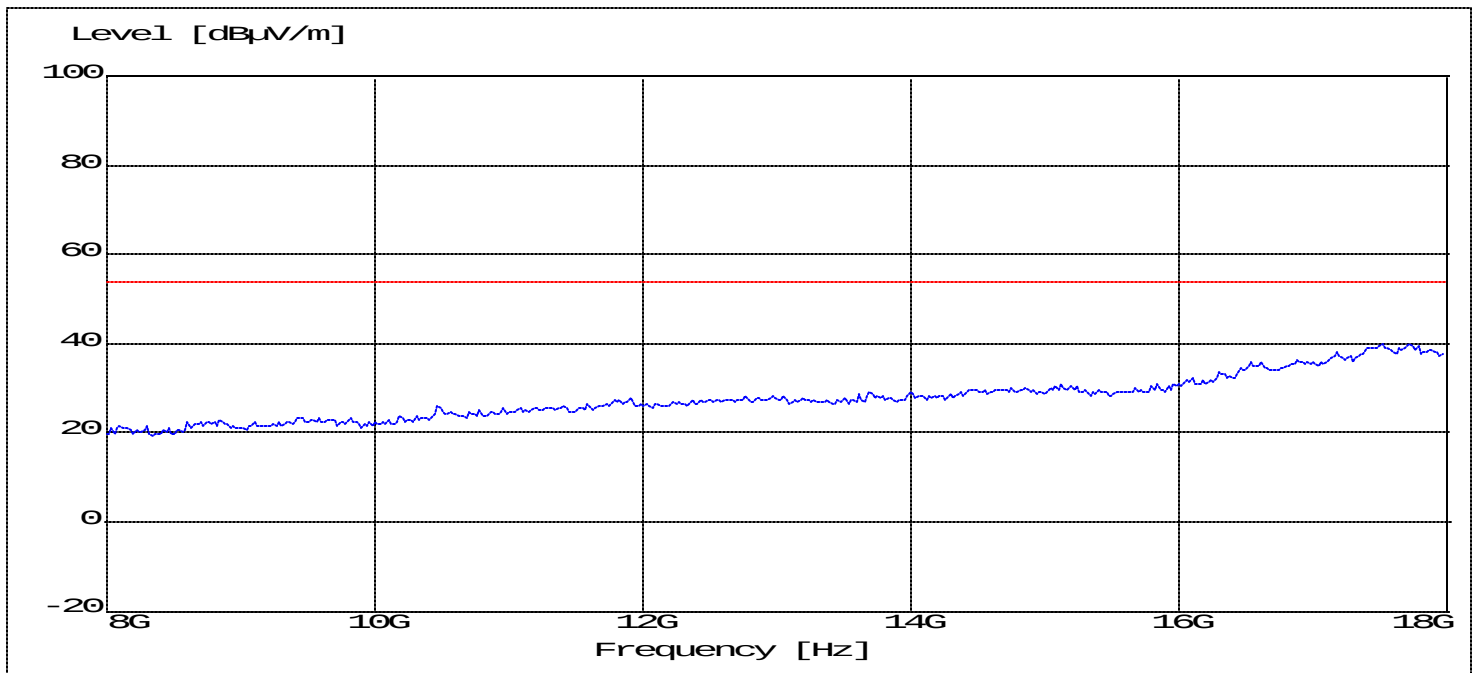


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

EMISSION LIMITATIONS - Radiated (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

18GHz – 25GHz

(This plot is valid for all three channels)

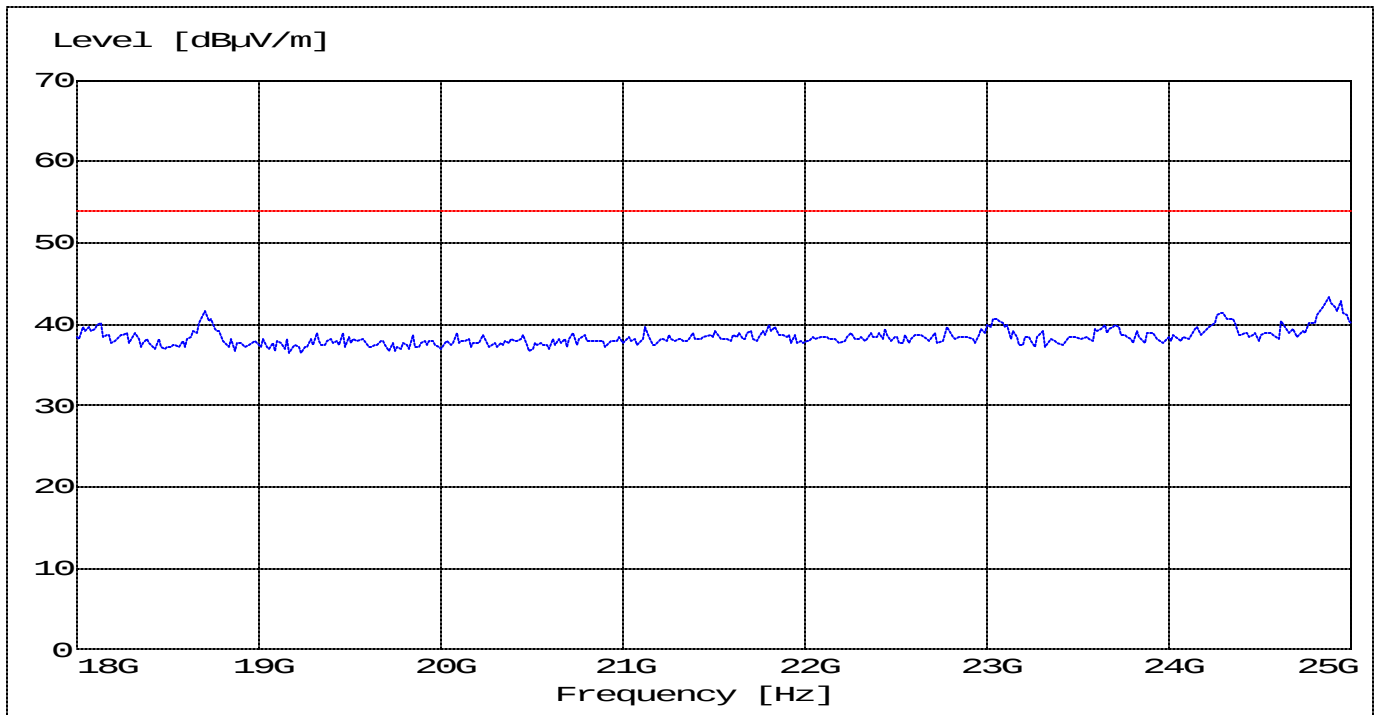


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

CONDUCTED EMISSIONS

§ 15.107/207

Measured with AC/DC power adapter

Phase: Line

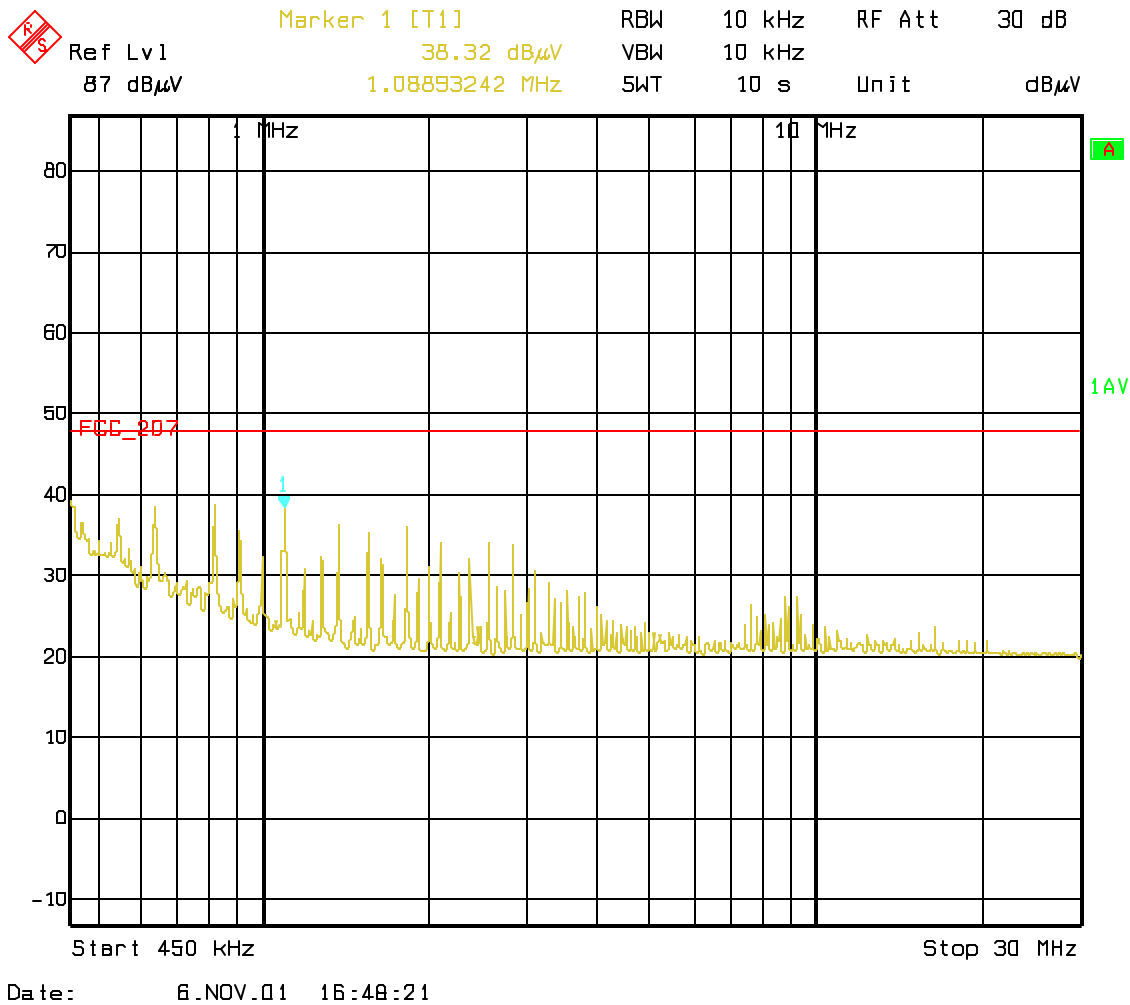


Technical specification : 15.107 / 15.207 (Revised as of October 1, 1991)

Limit

0.45 to 30 MHz	250 μV / 47.96 dBμV
----------------	---------------------

	Ref Lvl	Marker 1 [T1]	RBW	10 kHz	RF Att	30 dB
	87 dB μ V	36.82 dB μ V	VBW	10 kHz		
		1.08893242 MHz	SWT	10 s	Unit	dB μ V



0.45 to 30 MHz	250 μ V / 47.96 dB μ V
----------------	--------------------------------

RECEIVER SPURIOUS RADIATION

§ 15.209

Limits

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

NOTE:


1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
2. Measurements were done on low, mid & high channels, but plots depicting the worst case are submitted in the test report.

RECEIVER SPURIOUS RADIATION

§ 15.209

30MHz – 1GHz

(This plot is valid for all three channels)

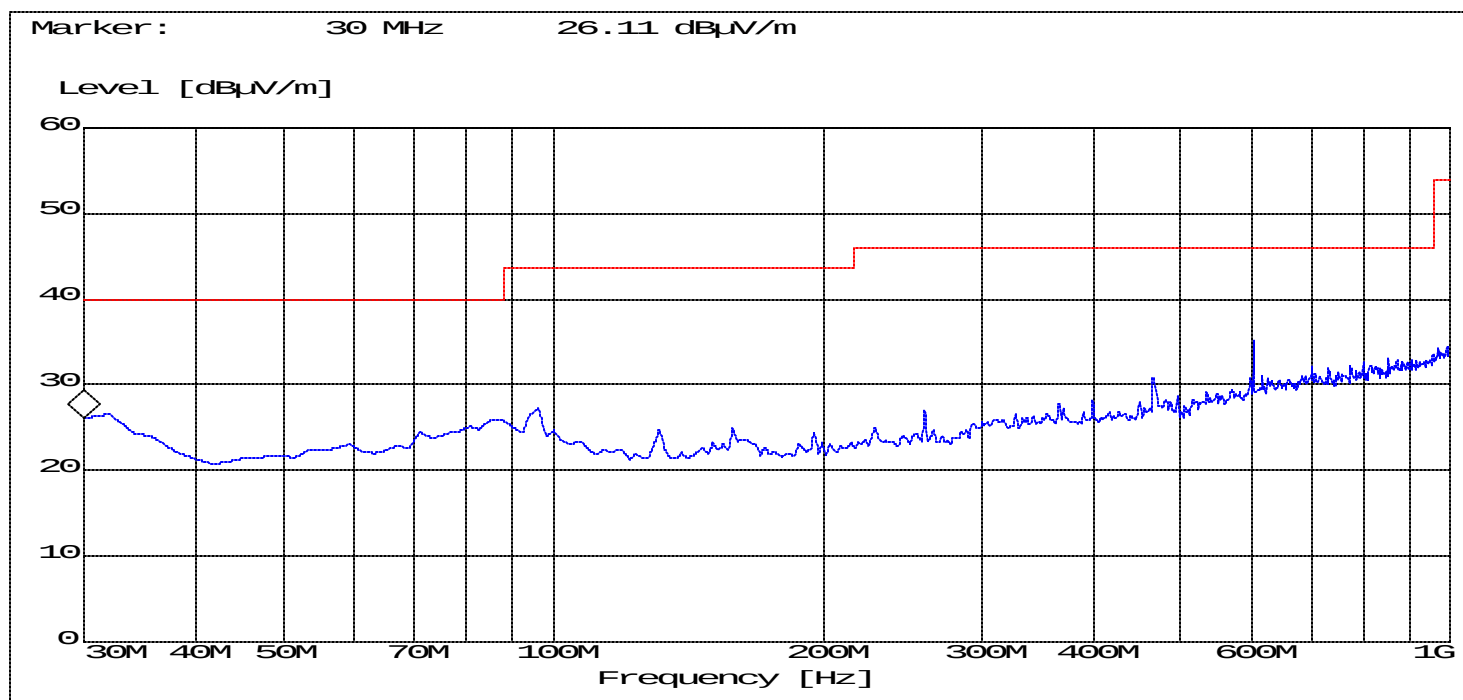


ANALYZER SETTINGS: RBW = 100KHz VBW = 100KHz

RECEIVER SPURIOUS RADIATION

§ 15.209

1GHz – 8GHz

(This plot is valid for all three channels)

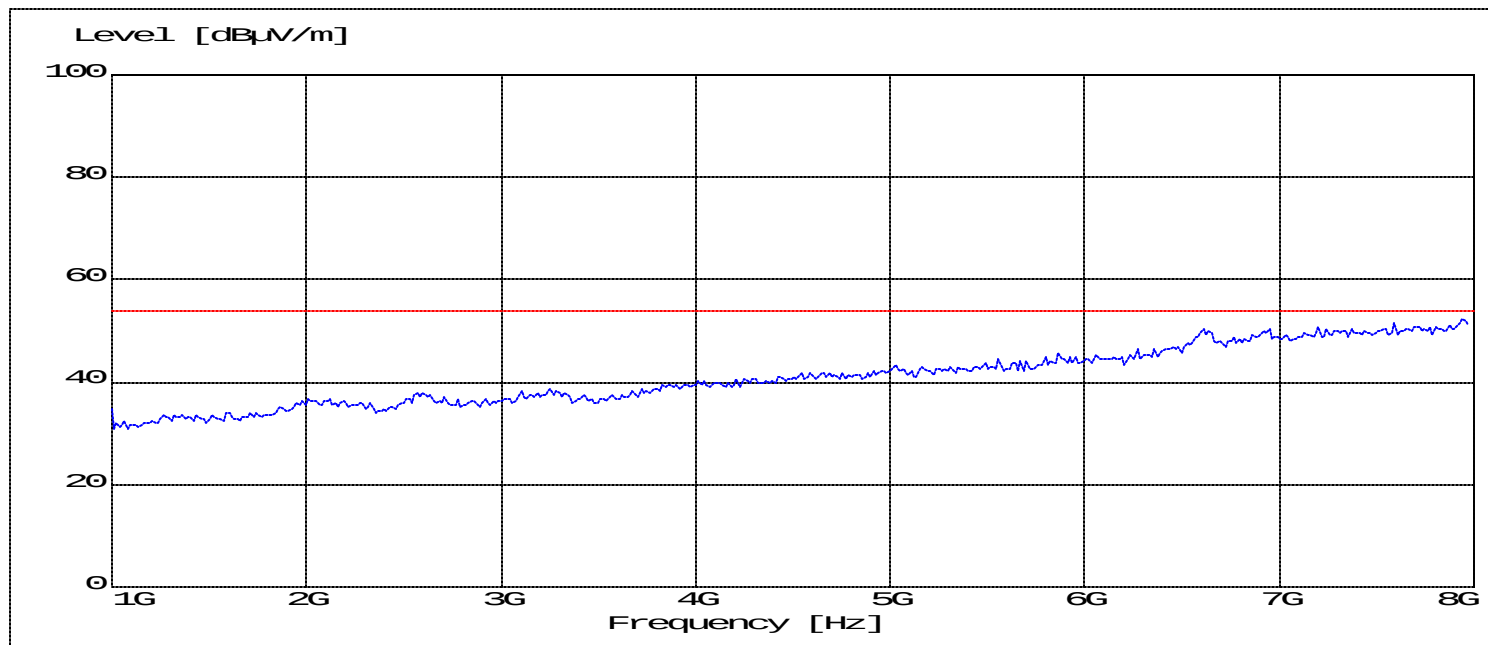


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

RECEIVER SPURIOUS RADIATION

§ 15.209

8GHz – 18GHz

(This plot is valid for all three channels)

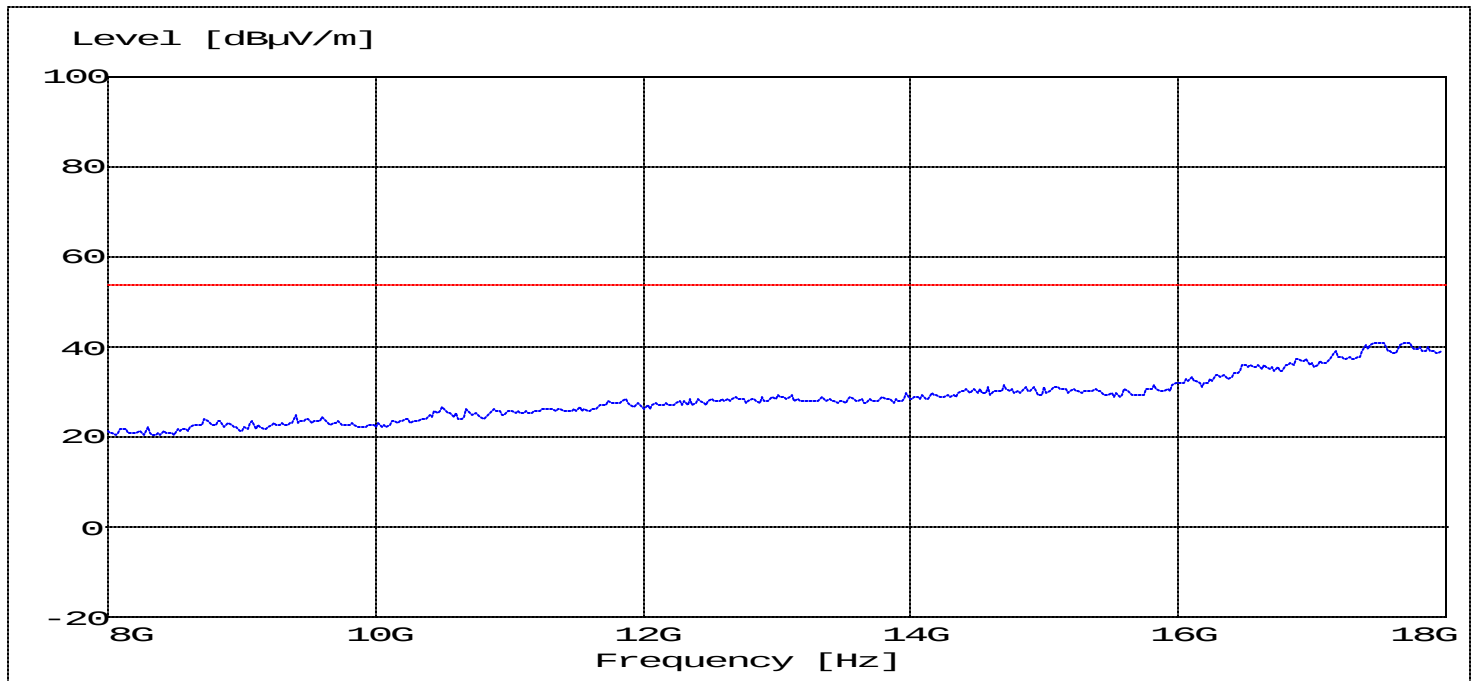


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

RECEIVER SPURIOUS RADIATION

§ 15.209

18GHz – 25GHz

(This plot is valid for all three channels)

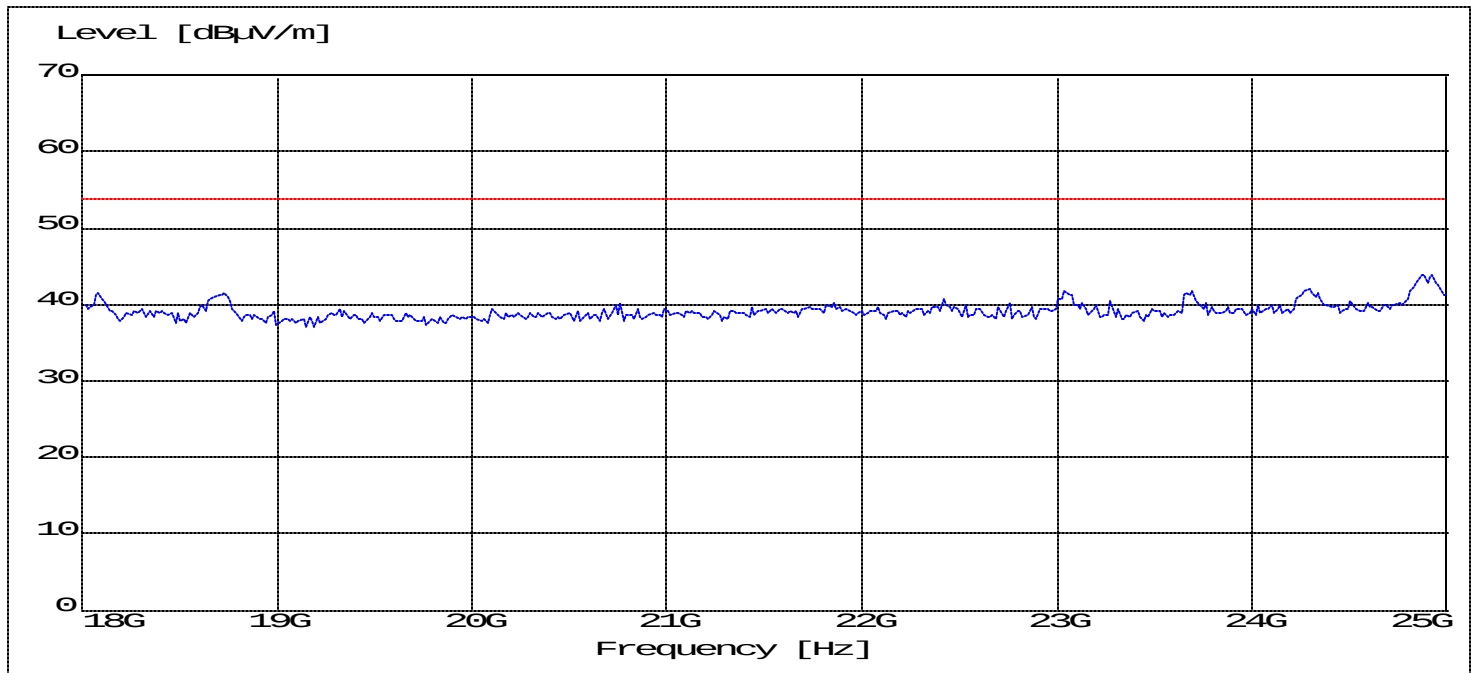

ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

[illegible]