

# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CERTIFICATION

**Test Report No.** : E067R-037

**AGR No.** : A067A-108

**Applicant** : KI RYUNG ELECTRONICS CO., LTD.  
**Address** : 219-6, Gasan-Dong, Kumchun-Ku, Seoul, 153-023, Korea

**Manufacturer** : KI RYUNG ELECTRONICS CO., LTD.  
**Address** : 219-6, Gasan-Dong, Kumchun-Ku, Seoul, 153-023, Korea

**Type of Equipment** : Digital Satellite Radio (FM Transmitter)

**FCC ID.** : P3HXTRH3G3S

**Model Name** : XTR3-SSM

**Serial number** : N/A

**Total page of Report** : 19 pages (including this page)


**Date of Incoming** : July 18, 2006


**Date of Issuing** : July 24, 2006

## SUMMARY

The equipment complies with the regulation of *FCC CRF 47 PART 15, SUBPART C, SECTION 15.239*.

This test report contains only the results of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by:   
Young-Min, Choi / Project Engineer  
EMC Div.  
ONETECH Corp.

Reviewed by:   
Y. K. Kwon / Director  
EMC Div.  
ONETECH Corp.

# **CONTENTS**

|                                                                                | Page                                |
|--------------------------------------------------------------------------------|-------------------------------------|
| <b>1. VERIFICATION OF COMPLIANCE.....</b>                                      | <b>3</b>                            |
| <b>2. GENERAL INFORMATION.....</b>                                             | <b>4</b>                            |
| <b>2.1 PRODUCT DESCRIPTION.....</b>                                            | <b>4</b>                            |
| <b>2.2 MODEL DIFFERENCES.....</b>                                              | <b>4</b>                            |
| <b>2.3 RELATED SUBMITTAL(S) / GRANT(S) .....</b>                               | <b>4</b>                            |
| <b>2.4 TEST SYSTEM DETAILS .....</b>                                           | <b>4</b>                            |
| <b>2.5 TEST METHODOLOGY .....</b>                                              | <b>4</b>                            |
| <b>2.6 TEST FACILITY .....</b>                                                 | <b>4</b>                            |
| <b>3. SYSTEM TEST CONFIGURATION.....</b>                                       | <b>5</b>                            |
| <b>3.1 JUSTIFICATION .....</b>                                                 | <b>5</b>                            |
| <b>3.2 EUT EXERCISE SOFTWARE.....</b>                                          | <b>5</b>                            |
| <b>3.3 CABLE DESCRIPTION .....</b>                                             | <b>5</b>                            |
| <b>3.4 NOISE SUPPRESSION PARTS ON CABLE .....</b>                              | <b>ERROR! BOOKMARK NOT DEFINED.</b> |
| <b>3.5 EQUIPMENT MODIFICATIONS .....</b>                                       | <b>5</b>                            |
| <b>3.6 CONFIGURATION OF TEST SYSTEM .....</b>                                  | <b>6</b>                            |
| <b>3.7 ANTENNA REQUIREMENT .....</b>                                           | <b>6</b>                            |
| <b>4. PRELIMINARY TEST.....</b>                                                | <b>6</b>                            |
| <b>4.1 AC POWER LINE CONDUCTED EMISSION TEST .....</b>                         | <b>6</b>                            |
| <b>4.2 RADIATED EMISSION TEST .....</b>                                        | <b>6</b>                            |
| <b>5. FINAL RESULT OF MEASUREMENT .....</b>                                    | <b>7</b>                            |
| <b>5.1 CONDUCTED EMISSION TEST.....</b>                                        | <b>7</b>                            |
| <b>5.2 RADIATED EMISSION TEST (WITHIN THE PERMITTED 200 KHZ BAND).....</b>     | <b>9</b>                            |
| <b>5.2.1 Operating Condition: AC/DC Adaptor Mode .....</b>                     | <b>9</b>                            |
| <b>5.2.2 Operating Condition: Car Adaptor Mode.....</b>                        | <b>10</b>                           |
| <b>5.3 RADIATED EMISSION TEST (OUTSIDE OF THE SPECIFIED 200 KHZ BAND).....</b> | <b>11</b>                           |
| <b>5.3.1 Operating Condition: AC/DC Adaptor Mode .....</b>                     | <b>11</b>                           |
| <b>5.3.2 Operating Condition: Car Adaptor Mode.....</b>                        | <b>12</b>                           |
| <b>5.4 BANDWIDTH OF THE OPERATING FREQUENCY .....</b>                          | <b>13</b>                           |
| <b>6. FIELD STRENGTH CALCULATION .....</b>                                     | <b>18</b>                           |
| <b>7. LIST OF TEST EQUIPMENT.....</b>                                          | <b>19</b>                           |

**1. VERIFICATION OF COMPLIANCE**

- APPLICANT : KI RYUNG ELECTRONICS CO., LTD.  
- ADDRESS : 219-6, Gasan-Dong, Kumchun-Ku, Seoul, 153-023, Korea  
- CONTACT PERSON : Mr. Won-Kyu, Choi / Q.C. Assistant Manager  
- TELEPHONE NO : +82-2-3282-2261  
- BRAND NAME : SIRIUS  
- FCC ID : P3HXTRH3G3S  
- MODEL NAME : XTR3-SSM  
- SERIAL NUMBER : N/A  
- DATE : July 24, 2006

|                                                         |                                            |
|---------------------------------------------------------|--------------------------------------------|
| DEVICE TYPE                                             | Low Power Communication Device Transmitter |
| E.U.T. DESCRIPTION                                      | Digital Satellite Radio (FM Transmitter)   |
| THIS REPORT CONCERNS                                    | ORIGINAL GRANT                             |
| MEASUREMENT PROCEDURES                                  | Charter 7 and 13 of ANSI C63.4: 2003       |
| TYPE OF EQUIPMENT TESTED                                | PRE-PRODUCTION                             |
| KIND OF EQUIPMENT<br>AUTHORIZATION REQUESTED            | CERTIFICATION                              |
| EQUIPMENT WILL BE OPERATED<br>UNDER FCC RULES PART(S)   | FCC PART 15 SECTION 15.239                 |
| MODIFICATIONS ON THE EQUIPMENT<br>TO ACHIEVE COMPLIANCE | Yes                                        |
| FINAL TEST WAS CONDUCTED ON                             | 3 METER OPEN AREA TEST SITE                |

- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. GENERAL INFORMATION

### 2.1 Product Description

The KI RYUNG ELECTRONICS CO., LTD., Model XTR3-SSM (referred to as the EUT in this report) is a Digital Satellite Radio that has the FM transmitter from 88.1 MHz to 107.9 MHz for audio signal of FM radio receiver. Product specification described herein was obtained from product data sheet or user's manual.

|                                                 |                                                                          |
|-------------------------------------------------|--------------------------------------------------------------------------|
| CHASSIS TYPE                                    | Plastic                                                                  |
| LIST OF EACH OSC. OR<br>CRY. FREQ.(FREQ.>=1MHz) | Main Board : 7.3728 MHz and 7.6 MHz<br>SSM Module: 17 MHz and 12.288 MHz |
| POWER REQUIREMENT                               | DC 12V from an AC/DC Adaptor or Car Adaptor                              |
| TX FREQUENCY RANGE                              | 88.1 MHz ~ 107.9 MHz (range into 200 KHz Step)                           |
| NUMBER OF LAYERS                                | Main Board : 4 Layers, SSM RF Module Board : 6 Layers                    |
| EXTERNAL CONNECTOR                              | DC In, Antenna In, Audio Out, FM Out                                     |

### 2.2 Model Differences

-. The difference(s) compared to the EUT is as follows: None

### 2.3 Related Submittal(s) / Grant(s)

-. Original submittal only

### 2.4 Test System Details

The model numbers for all the equipments which were used in the tested system is:

| Model           | Manufacturer         | FCC ID      | Description                  | Connected to |
|-----------------|----------------------|-------------|------------------------------|--------------|
| XTR3-SSM        | KI RYUNG ELECTRONICS | P3HXTRH3G3S | Digital Satellite Radio(EUT) | -            |
| DSA-0131F-12    | DVE                  | N/A         | AC/DC Adaptor                | EUT          |
| SIR-3.3R(TOMBO) | SIRIUS               | N/A         | Satellite Radio Antenna      | EUT          |

### 2.5 Test Methodology

The radiated testing was performed according to the procedures in chapter 7, 13 of ANSI C63.4: 2003 and performed at a distance of 3 meters from EUT to the antenna.

### 2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 307-51 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-080, Korea. Description details of test facilities were submitted to the Commission on August 30, 2005. (Registration Number: 340658)

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

| DEVICE TYPE     | MANUFACTURER | MODEL/PART NUMBER      | FCC ID |
|-----------------|--------------|------------------------|--------|
| Main Board      | SIRIUS       | XTR3-SSM REV.0A (Main) | N/A    |
| Front Board     | SIRIUS       | Slim-Jim Front REV.0   | N/A    |
| RF Module Board | SIRIUS       | SSM-K REV.1A           | N/A    |
| Adapter Board   | N/A          | N/A                    | N/A    |

#### 3.2 EUT exercise Software

The Model, XTR3-SSM is included a FM transmitter designed to operate on function in the 88.1 ~ 107.9 MHz. The EUT does not have an audio input port, so the internal 1 kHz modulation signal was transmitted with maximum audio level. 107.9 MHz was measured as the highest output power. Data from this channel was determined to be worst case.

#### 3.3 Cable Description

| Ports Name | Shielded | Ferrite Bead | Metal Hood | Length (m) | Connected to                    |
|------------|----------|--------------|------------|------------|---------------------------------|
| Audio Out  | N        | N            | BOTH END   | 1.5        | Terminator Resistor (10 Kohm)   |
| DC In      | N        | EUT END      | EUT END    | 1.2        | AC/DC Adaptor<br>or Car Adaptor |
| FM Out     | N        | N            | EUT END    | 1.2        | -                               |
| Antenna In | N        | N            | EUT END    | 1.2        | External Antenna                |

#### 3.4 Equipment Modifications

It is acknowledged by Ki Ryung Electronics Co., Ltd.. that the modifications below will be installed to the Model XTR3-SSM in order to comply with FCC Rules as a Low Power Communication Device Transmitter.

1. R409(680ohm) change to 1200ohm. For attenuate FM transmitter level.
2. C431(8.2pF) change to 6.8pF & L405(100nH) change to 82nH. For move the FM transmitter antenna matching.
3. R401, R28(510ohm) change to 12Kohm. For adjust 200KHz FM band width.

### 3.5 Configuration of Test System

**Line Conducted Test:** The EUT was connected to AC/DC adaptor and AC/DC adaptor was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4: 2003 7.2.3 to determine the worse operating conditions.

**Radiated Emission Test:** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2003 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter open area test site.

**Occupied Bandwidth Measurement:**

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer.

### 3.6 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**Antenna Construction:**

FM transmitter antenna of the EUT is fixed inside the EUT, no consideration of replacement by the user.

## 4. PRELIMINARY TEST

### 4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

| Operation Mode                      | The Worse operating condition (Please check one only) |
|-------------------------------------|-------------------------------------------------------|
| Transmit the RF Signal continuously | X                                                     |

### 4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

| Operation Mode                      | The Worse operating condition (Please check one only) |
|-------------------------------------|-------------------------------------------------------|
| Transmit the RF Signal continuously | X                                                     |

## 5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

### 5.1 Conducted Emission Test

Humidity Level : 60 % Temperature: 20 °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.207 (a)  
 Type of Test : Low Power Communication Device Transmitter  
 Result : PASSED BY -8.04 dB at 0.15 MHz under peak detector mode


EUT : Digital Satellite Radio Date: July 21, 2006  
 Operating Condition : Transmit the RF signal.  
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

| Frequency<br>(MHz) | Line | Peak (dBuV)    |            | Margin<br>(dB) |
|--------------------|------|----------------|------------|----------------|
|                    |      | Emission level | Q.P Limits |                |
| 0.15               | N    | 57.96          | 66.00      | -8.04          |
| 0.59               | N    | 37.28          | 56.00      | -18.72         |
| 2.66               | H    | 39.59          | 56.00      | -16.41         |
| 2.69               | N    | 37.28          | 56.00      | -18.72         |
| 4.13               | H    | 38.12          | 56.00      | -17.88         |
| 11.57              | N    | 40.67          | 60.00      | -19.33         |
| Frequency<br>(MHz) | Line | Average (dBuV) |            | Margin<br>(dB) |
|                    |      | Emission level | Limits     |                |
| 0.15               | N    | 44.48          | 56.00      | -11.52         |
| 0.59               | N    | 20.95          | 46.00      | -25.05         |
| 2.66               | H    | 14.92          | 46.00      | -31.08         |
| 2.69               | N    | 11.51          | 46.00      | -34.49         |
| 4.13               | H    | 17.38          | 46.00      | -28.62         |
| 11.57              | N    | 21.57          | 50.00      | -28.43         |


Line Conducted Emission Tabulated Data

Remark : "H": Hot Line, "N": Neutral line


See next page for an overview sweep performed with peak and average detector.



Tested by: Sue-Yong, Lee / Test Engineer

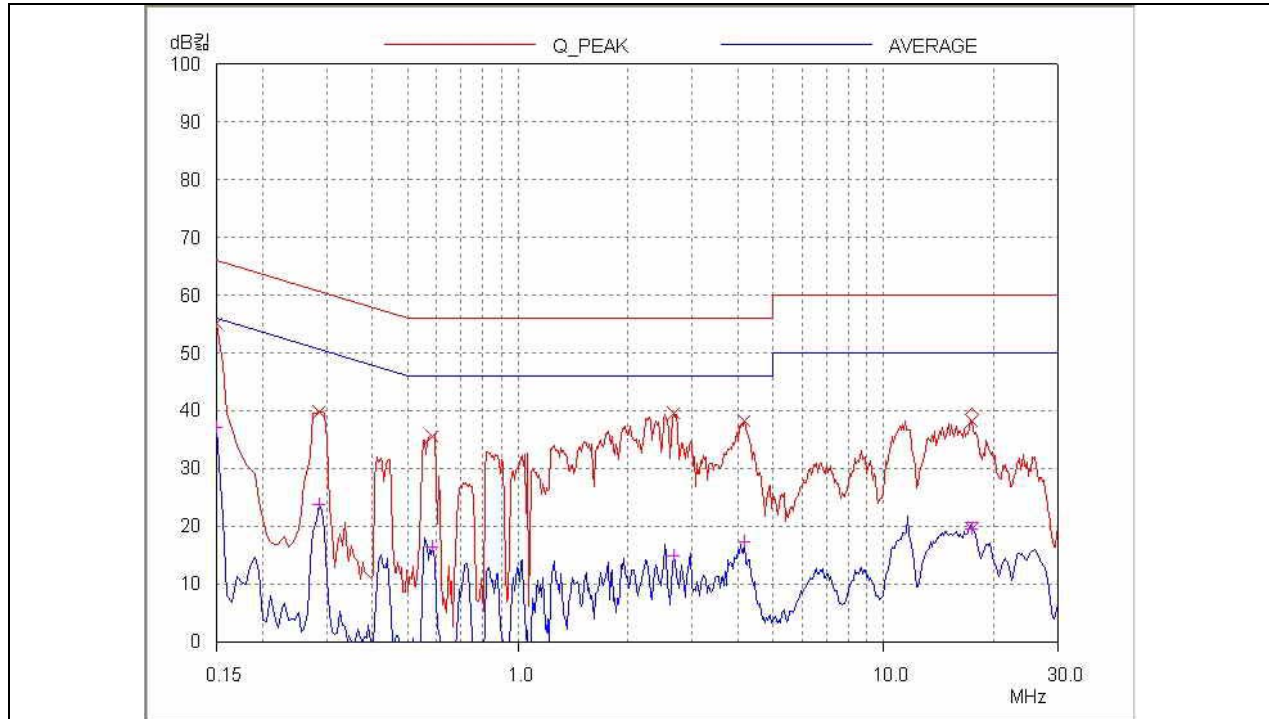

## HOT LINE

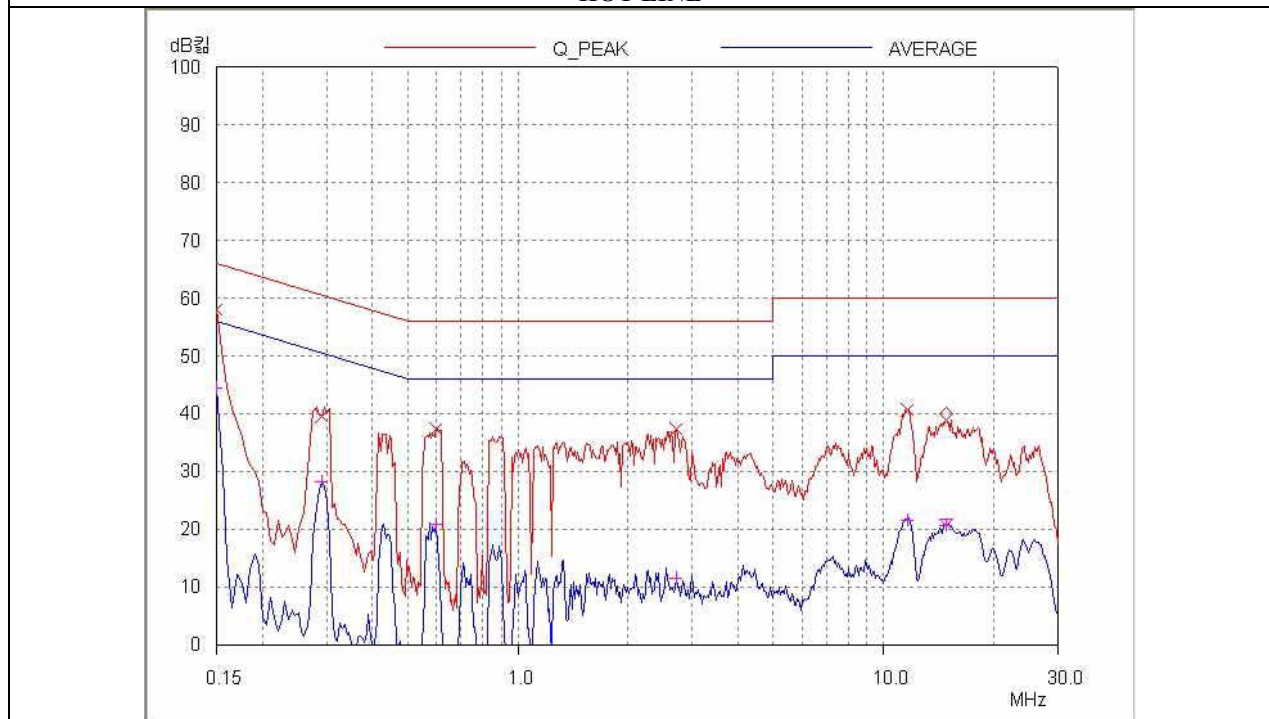

## NEUTRAL LINE

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-002 (Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-705, Korea  
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

**EMC Testing Dept** : 307-51 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

**5.2 Radiated Emission Test (Within the permitted 200 kHz band)**

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

**5.2.1 Operating Condition: AC/DC Adaptor Mode**

Humidity Level : 58 %

Temperature: 24 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (b)

Type of Test : Low Power Communication Device Transmitter

Result : PASSED BY – 6.87 dB at 88.10 MHz

EUT : Digital Satellite Radio


Date: July 20, 2006

Distance : 3 Meter

| Radiated Emission |                |                | Ant  | Correction Factors |               | Total            | Limit<br>(dBuV/m) | Margin<br>(dB) |
|-------------------|----------------|----------------|------|--------------------|---------------|------------------|-------------------|----------------|
| Freq.<br>(MHz)    | Amp.<br>(dBuV) | Detect<br>Mode | Pol. | Ant.<br>(dBuV/m)   | Cable<br>(dB) | Amp.<br>(dBuV/m) |                   |                |
| 88.10             | 31.50          | Peak           | H    | 7.89               | 1.74          | 41.13            | 48.00             | -6.87          |
| 88.10             | 29.30          | Peak           | V    | 7.89               | 1.74          | 38.93            | 48.00             | -9.07          |
| 97.90             | 27.30          | Peak           | H    | 9.66               | 1.90          | 38.86            | 48.00             | -9.14          |
| 97.90             | 25.10          | Peak           | V    | 9.66               | 1.90          | 36.66            | 48.00             | -11.34         |
| 107.90            | 22.30          | Peak           | H    | 11.07              | 1.90          | 35.27            | 48.00             | -12.73         |
| 107.90            | 23.00          | Peak           | V    | 11.07              | 1.90          | 35.97            | 48.00             | -12.03         |

Radiated Emission Tabulated Data

Remark: Per 15.31(m), three channels (near top, near middle and near bottom) were tested because the EUT's frequency range is more than 10 MHz.



Tested by: Sue-Young, Lee/ Test Engineer

**5.2.2 Operating Condition: Car Adaptor Mode**Humidity Level : 58 %Temperature: 24 °CLimits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (b)Type of Test : Low Power Communication Device TransmitterResult : PASSED BY – 6.84 dB at 97.90 MHz

EUT : Digital Satellite Radio


Date: July 20, 2006

Distance : 3 Meter

| Radiated Emission |                |                | Ant  | Correction Factors |               | Total            | Limit<br>(dBuV/m) | Margin<br>(dB) |
|-------------------|----------------|----------------|------|--------------------|---------------|------------------|-------------------|----------------|
| Freq.<br>(MHz)    | Amp.<br>(dBuV) | Detect<br>Mode | Pol. | Ant.<br>(dBuV/m)   | Cable<br>(dB) | Amp.<br>(dBuV/m) |                   |                |
| 88.10             | 26.80          | Peak           | H    | 7.89               | 1.74          | 36.43            | 48.00             | -11.57         |
| 88.10             | 28.60          | Peak           | V    | 7.89               | 1.74          | 38.23            | 48.00             | -9.77          |
| 97.90             | 28.00          | Peak           | H    | 9.66               | 1.90          | 39.56            | 48.00             | -8.44          |
| 97.90             | 29.60          | Peak           | V    | 9.66               | 1.90          | 41.16            | 48.00             | -6.84          |
| 107.90            | 19.50          | Peak           | H    | 11.07              | 1.90          | 32.47            | 48.00             | -15.53         |
| 107.90            | 24.70          | Peak           | V    | 11.07              | 1.90          | 37.67            | 48.00             | -10.33         |

Radiated Emission Tabulated Data

Remark: Per 15.31(m), three channels (near top, near middle and near bottom) were tested because the EUT's frequency range is more than 10 MHz.



Tested by: Sue-Young, Lee/ Test Engineer

### 5.3 Radiated Emission Test (Outside of the specified 200 kHz band)

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

#### 5.3.1 Operating Condition: AC/DC Adaptor Mode

Humidity Level : 58 % Temperature: 24 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209 (a)

Type of Test : Low Power Communication Device Transmitter

Result : PASSED BY -15.35 dB at 473.81 MHz

EUT : Digital Satellite Radio Date: July 20, 2006

Frequency range : 30MHz – 1000MHz

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

Distance : 3 Meter

Remark : Other emissions

| Radiated Emission |                | Ant  | Correction Factors |               | Total            | FCC               |                |
|-------------------|----------------|------|--------------------|---------------|------------------|-------------------|----------------|
| Freq.<br>(MHz)    | Amp.<br>(dBuV) | Pol. | Ant.<br>(dBuV/m)   | Cable<br>(dB) | Amp.<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) |
| 48.6              | 10.36          | H    | 11.63              | 1.56          | 23.55            | 40.00             | -16.45         |
| 155.97            | 9.36           | H    | 14.85              | 2.36          | 26.57            | 43.52             | -16.95         |
| 201.30            | 7.20           | H    | 16.22              | 2.81          | 26.23            | 43.52             | -17.29         |
| 250.14            | 9.20           | V    | 17.12              | 3.40          | 29.72            | 46.02             | -16.30         |
| 473.81            | 7.01           | H    | 18.68              | 4.98          | 30.67            | 46.02             | -15.35         |
| 488.38            | 5.22           | H    | 18.95              | 5.27          | 29.44            | 46.02             | -16.58         |


Tested by: Sue-Young, Lee/ Test Engineer

**5.3.2 Operating Condition: Car Adaptor Mode**

Humidity Level : 58 % Temperature: 24 °C  
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209 (a)  
Type of Test : Low Power Communication Device Transmitter  
Result : PASSED BY -12.24 dB at 213.80 MHz

EUT : Digital Satellite Radio Date: July 20, 2006  
Frequency range : 30MHz – 1000MHz  
Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)  
Distance : 3 Meter  
Remark : Other emissions

| Radiated Emission |                | Ant  | Correction Factors |               | Total            | FCC               |                |
|-------------------|----------------|------|--------------------|---------------|------------------|-------------------|----------------|
| Freq.<br>(MHz)    | Amp.<br>(dBuV) | Pol. | Ant.<br>(dBuV/m)   | Cable<br>(dB) | Amp.<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) |
| 43.50             | 10.20          | H    | 13.40              | 1.58          | 25.18            | 40.00             | -14.82         |
| 72.10             | 15.40          | V    | 5.74               | 1.54          | 22.68            | 40.00             | -17.32         |
| 155.10            | 8.20           | H    | 14.81              | 2.35          | 25.36            | 43.52             | -18.16         |
| 213.80            | 11.80          | V    | 16.57              | 2.91          | 31.28            | 43.52             | -12.24         |
| 240.60            | 8.22           | V    | 17.03              | 3.25          | 28.50            | 46.02             | -17.52         |
| 305.10            | 9.21           | V    | 14.86              | 3.84          | 27.91            | 46.02             | -18.11         |




Tested by: Sue-Young, Lee/ Test Engineer

**5.4 Bandwidth of the operating frequency**

Humidity Level : 58 % Temperature: 24 °C  
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (a)  
Result : PASSED

---


EUT : Digital Satellite Radio Date: July 20, 2006  
Operating Condition : Transmit the RF signal.  
Minimum Resolution  
Bandwidth : 10 kHz  
Remark : Refer to test data in next page.



---

Tested by: Sue-Young, Lee/ Test Engineer

## Operating Condition: AC/DC Adaptor Mode

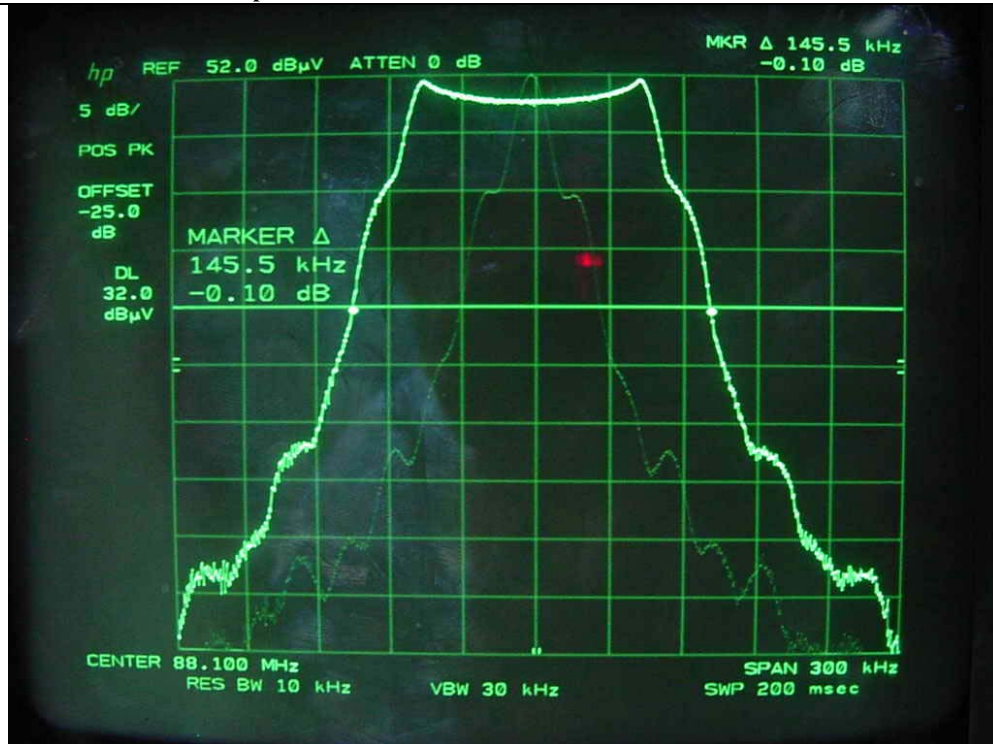

Bottom Frequency (88.1MHz)




Middle Frequency (97.9MHz)




Top Frequency(107.9 MHz)


## Operating Condition: Car Adaptor Mode

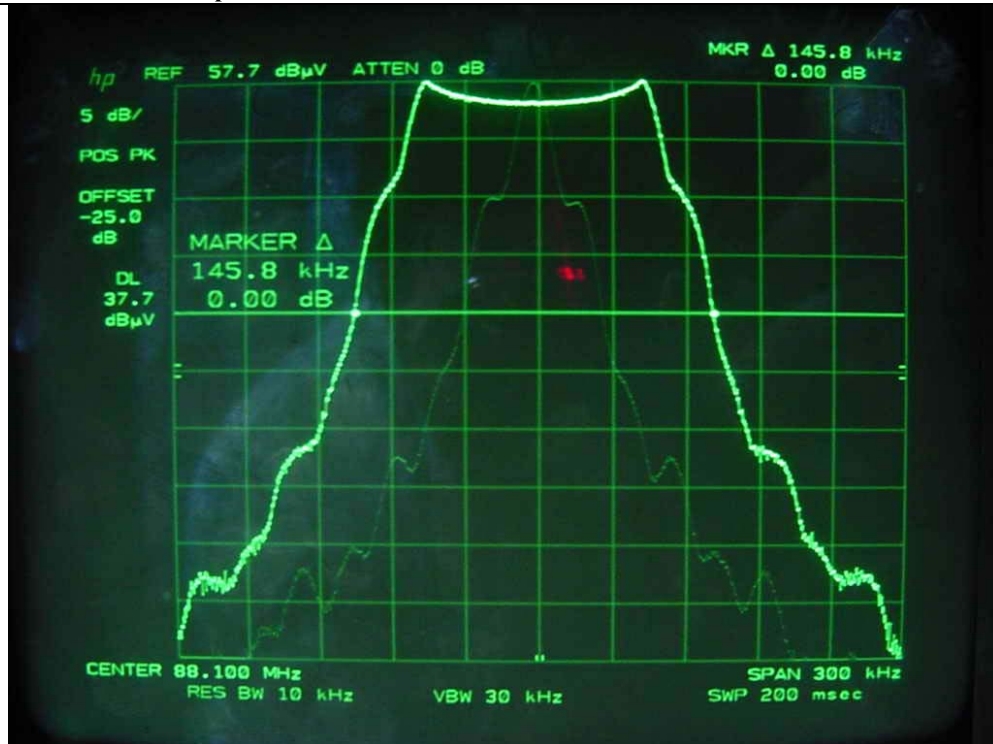

Bottom Frequency (88.1MHz)

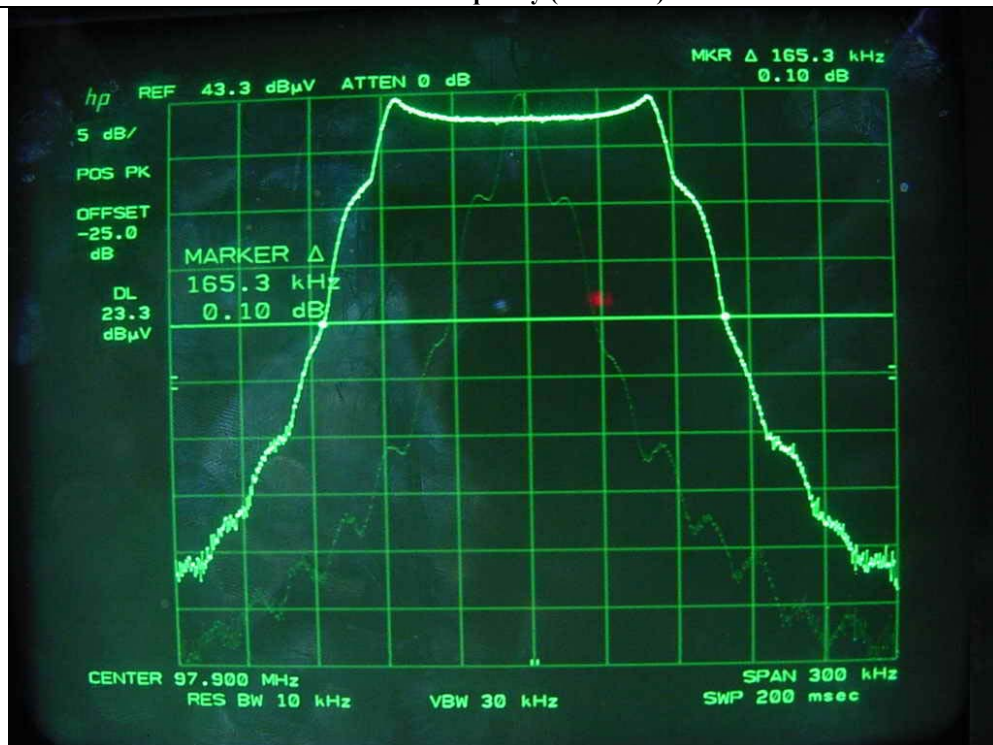

Middle Frequency (97.9MHz)

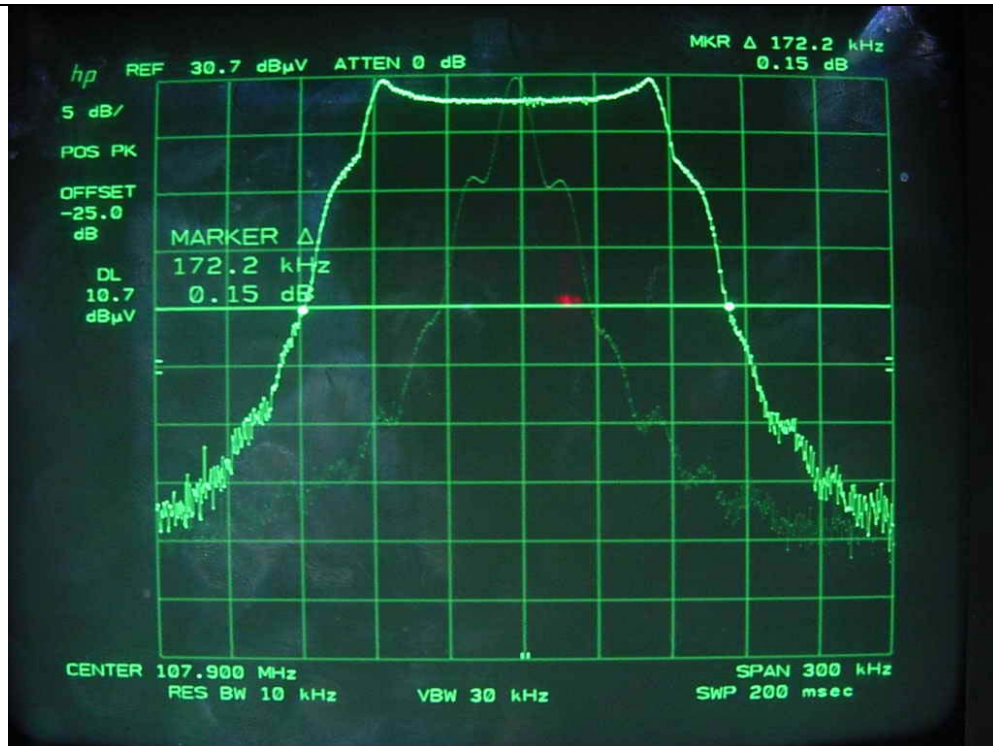

Top Frequency(107.9 MHz)

## 6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

---

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)

**7. LIST OF TEST EQUIPMENT**

| No. | EQUIPMENTS               | MFR.        | MODEL       | SER. NO.     | LAST CAL | DUE CAL | USE |
|-----|--------------------------|-------------|-------------|--------------|----------|---------|-----|
| 1.  | Test receiver            | R/S         | ESVS10      | 827864/005   | DEC/05   | 12MONTH | ■   |
| 2.  | Test receiver            | R/S         | ESHS 10     | 834467/007   | MAY/06   | 12MONTH | ■   |
| 3.  | Spectrum analyzer        | HP          | 8566B       | 3407A08547   | JUL/05   | 12MONTH | ■   |
| 4.  | TRILOG Broadband Antenna | Schwarzbeck | VULB9163    | VULB9163 166 | MAY/06   | 12MONTH |     |
| 5.  | Biconical antenna        | EMCO        | 3110        | 9003-1121    | FEB/06   | 12MONTH |     |
|     |                          | Schwarzbeck | VHA9103     | 91031852     | FEB/06   |         | ■   |
| 6.  | Log Periodic antenna     | EMCO        | 3146        | 9001-2614    | FEB/06   | 12MONTH |     |
|     |                          | Schwarzbeck | 9108-A(494) | 62281001     | FEB/06   |         | ■   |
| 7.  | LISN                     | EMCO        | 3825/2      | 9109-1867    | JUL/05   | 12MONTH | ■   |
|     |                          |             |             | 9109-1869    | JUL/05   |         |     |
|     |                          | Schwarzbeck | NSLK 8126   | 8126-404     | AUG/05   |         | ■   |
| 8.  | Position Controller      | HD GmbH     | HD100       | N/A          | N/A      | N/A     | ■   |
| 9.  | Turn Table               | HD GmbH     | DS420S      | N/A          | N/A      | N/A     | ■   |
| 10. | Antenna Master           | HD GmbH     | MA240       | N/A          | N/A      | N/A     | ■   |