




FCC RADIO TEST REPORT

FCC ID : P4Q-N672A
Equipment : Smart Module
Brand Name : MiTAC, Mio, NAVMAN, MAGELLAN
Model Name : SC600T-WF
Applicant : MiTAC Digital Technology Corporation
4F., NO. 1, R&D ROAD 2, HSINCHU SCIENCE
PARK, HSINCHU 30076, TAIWAN, R.O.C.
Manufacturer : MITAC Computer (Kunshan) Co., Ltd.
No. 269, 2nd Avenue, District A,
Comprehensive Free Trade Zone, 300
Kunshan, China
Standard : FCC Part 15 Subpart C §15.247

The product was received on Dec. 09, 2020 and testing was started from Dec. 25, 2020 and completed on Feb. 04, 2021. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	6
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
3 Test Result.....	11
3.1 Output Power Measurement.....	11
3.2 Radiated Band Edges and Spurious Emission Measurement	12
3.3 AC Conducted Emission Measurement.....	16
3.4 Antenna Requirements.....	18
4 List of Measuring Equipment	19
5 Uncertainty of Evaluation.....	21
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR0D1804B	01	Initial issue of report	Feb. 23, 2021

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.247(a)(2)	6dB Bandwidth	-	See Note
-	2.1049	99% Occupied Bandwidth	-	See Note
3.1	15.247(b)(3)	Output Power	Pass	-
-	15.247(e)	Power Spectral Density	-	See Note
-	15.247(d)	Conducted Band Edges and Spurious Emission	-	See Note
3.2	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	Under limit 9.18 dB at 2379.195 MHz
3.3	15.207	AC Conducted Emission	Pass	Under limit 16.15 dB at 0.573 MHz
3.4	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Note: The module (Model: SC600T-WF) makes no difference after verifying output power, this report reuses test data from the module report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Yimin Ho

1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n and Wi-Fi 5GHz 802.11a/n/ac.

Product Specification subjective to this standard	
Sample 1	EUT with Host 1
Sample 2	EUT with Host 2
Antenna Type	WLAN: PIFA Antenna Bluetooth: PIFA Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	0.7

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

The product was installed into Tablet (Brand Name: MiTAC, Mio, NAVMAN, MAGELLAN, Model Name: N672A) during test, and the host information was recorded in the following table.

Host Information	
Host 1	Host with SKU A
Host 2	Host with SKU B

Host Sample Information			
Functions	SKU A	SKU B	SKU C
Screen	5" 720x1280 (HD), IPS, 350nits (w/ touch)	5" 720x1280 (HD), IPS, 350nits (w/ touch)	5" 720x1280 (HD), IPS, 350nits (w/ touch)
CPU	SD625 octa core 2.0GHz	SD625 octa core 2.0GHz	SD625 octa core 2.0GHz
battery	4110mAh (hard pack),	4110mAh (hard pack),	4110mAh (hard pack),
RAM	3GB	3GB	3GB
Storage	32GB	32GB	32GB
External storage	Support	Support	Support
WLAN Module	Support (SC600T-WF)	Support (SC600T-WF)	Support (SC600T-WF)
NFC/RFID(HF)	Support	Support	Support
GPS	Not Support	Not Support	Not Support
Barcode	Support(N6603)	Support(N3601)	Not Support

Functions	SKU D	SKU E	SKU F
Screen	5" 720x1280 (HD), IPS, 350nits (w/ touch)	5" 720x1280 (HD), IPS, 350nits (w/ touch)	5" 720x1280 (HD), IPS, 350nits (w/ touch)
CPU	SD625 octa core 2.0GHz	SD625 octa core 2.0GHz	SD625 octa core 2.0GHz
battery	4110mAh (hard pack),	4110mAh (hard pack),	4110mAh (hard pack),
RAM	2GB	2GB	2GB
Storage	16GB	16GB	16GB
External storage	Support	Support	Support
WLAN Module	Support (SC600T-WF)	Support (SC600T-WF)	Support (SC600T-WF)
NFC/RFID(HF)	Support	Support	Support
GPS	Not Support	Not Support	Not Support
Barcode	Support(N6603)	Support(N3601)	Not Support

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH05-HY, CO05-HY, 03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190



1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-




2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: WLAN (2.4GHz) Link + Bluetooth Link + H-Pattern + Battery + Earphone + U Cable (Charging from AC Adapter) for Sample 1

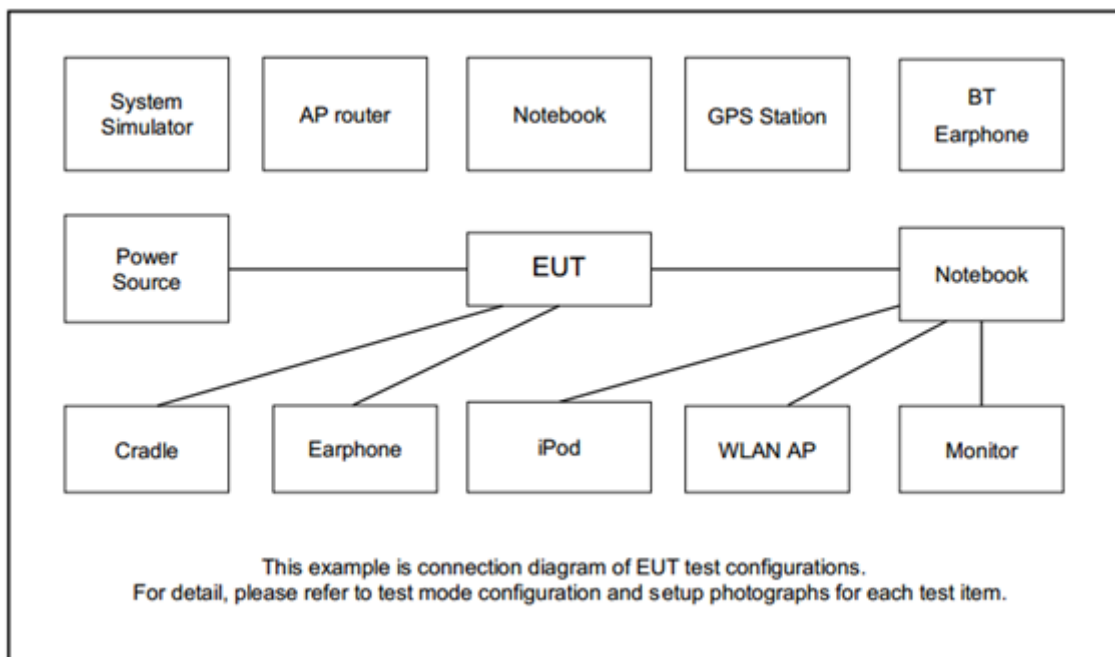2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY700A2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
3.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "QRCT Ver.3.0.297.0" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

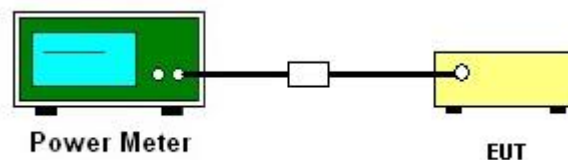
3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT was connected to the power meter by RF cable and attenuator.
3. The path loss was compensated to the results for each measurement.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of Average Output Power

Please refer to Appendix A.

3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

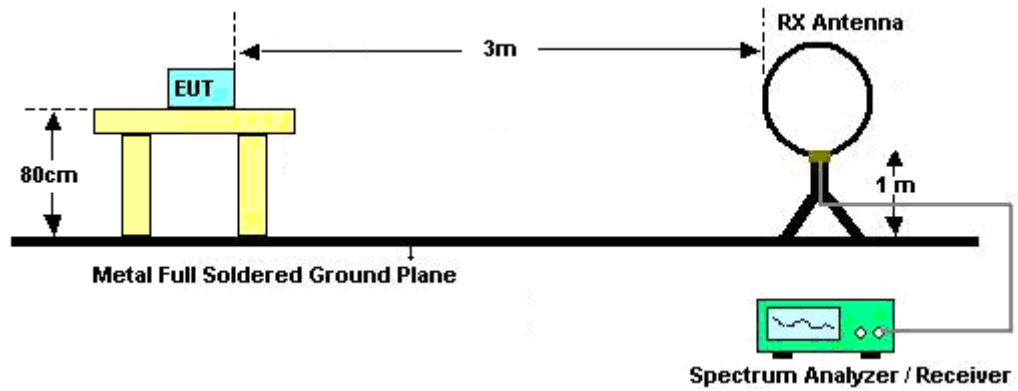
See list of measuring equipment of this test report.

3.2.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.2.4 Test Setup


For radiated test below 30MHz




For radiated test from 30MHz to 1GHz

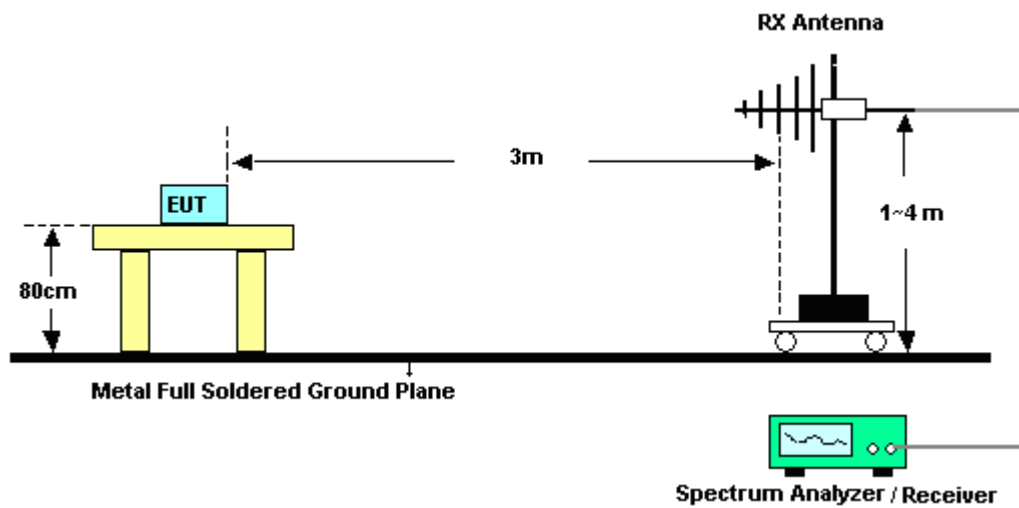

For radiated test from 1GHz to 18GHz

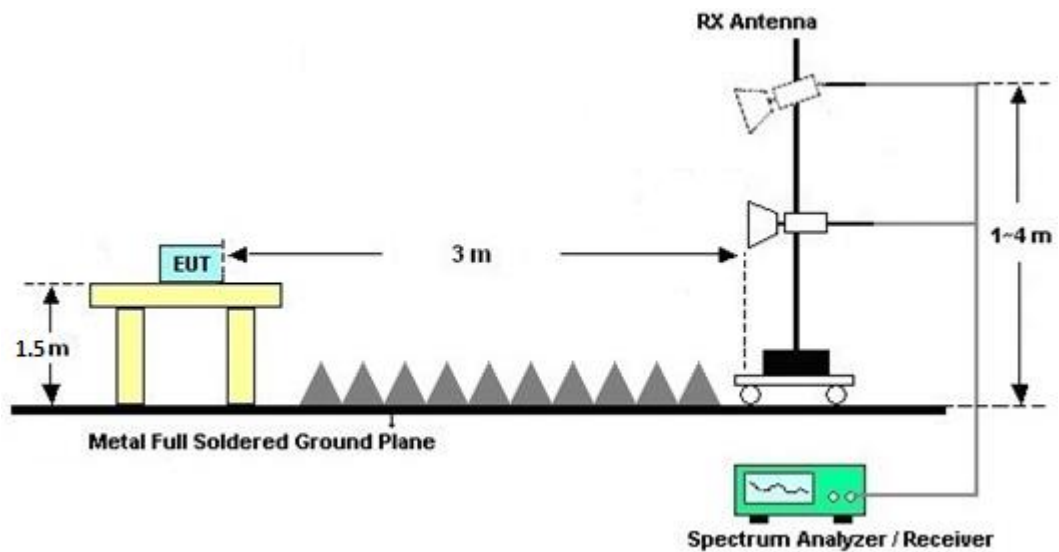

For radiated test above 18GHz

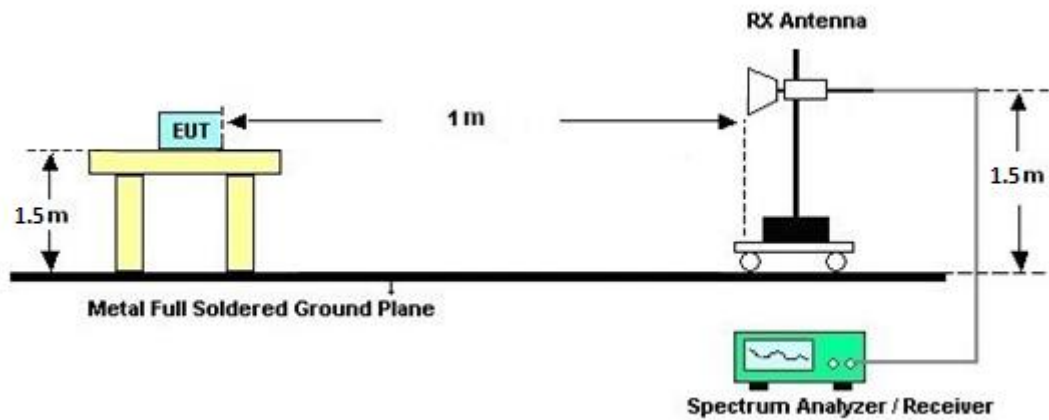

3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.2.7 Duty Cycle

Please refer to Appendix E.

3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.3 AC Conducted Emission Measurement

3.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

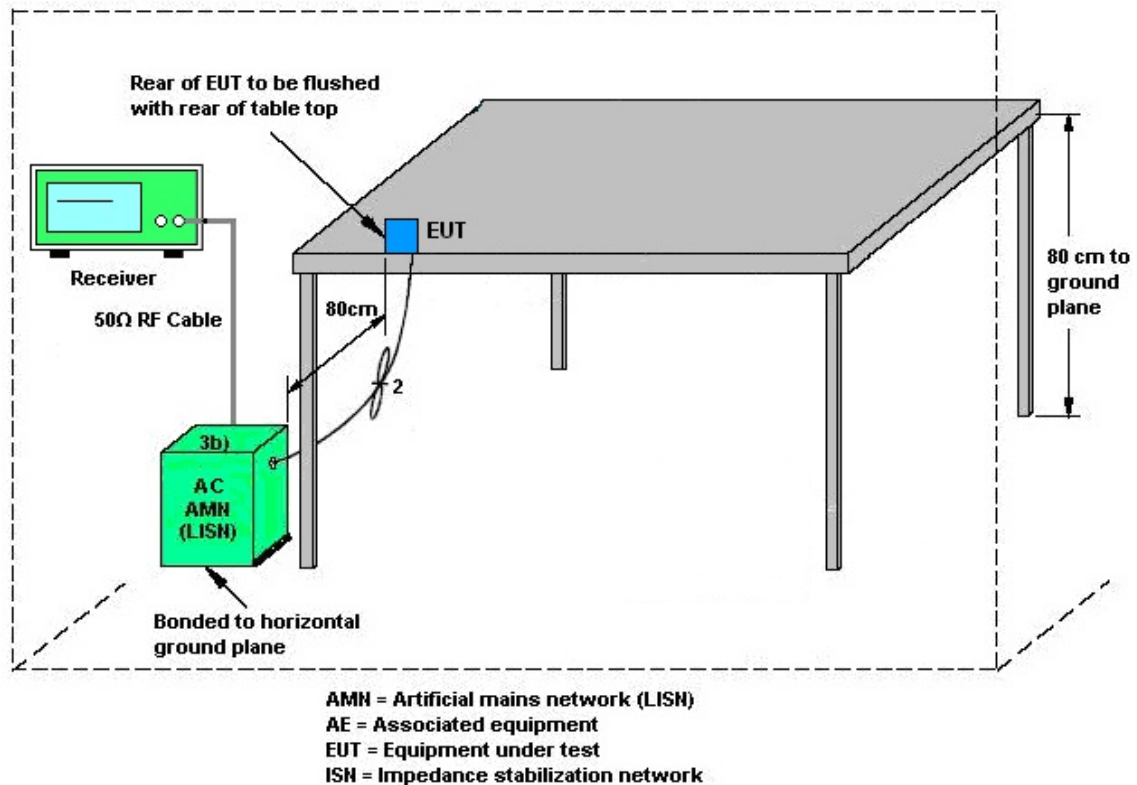
3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.3.4 Test Setup



3.3.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.4 Antenna Requirements

3.4.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.4.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Jan. 06, 2021~ Feb. 04, 2021	Jan. 03, 2022	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	35419 & 03	30MHz~1GHz	Apr. 29, 2020	Jan. 06, 2021~ Feb. 04, 2021	Apr. 28, 2021	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 01, 2020	Jan. 06, 2021~ Feb. 04, 2021	Nov. 30, 2021	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZB ECK	BBHA 9170	BBHA91702 51	18GHz~40GHz	Dec. 02, 2020	Jan. 06, 2021~ Feb. 04, 2021	Dec. 01, 2021	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY5329005 3	20Hz~26.5GHz	May 21, 2020	Jan. 06, 2021~ Feb. 04, 2021	May 20, 2021	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY5235027 6	3Hz~44GHz	Jun. 09, 2020	Jan. 06, 2021~ Feb. 04, 2021	Jun. 08, 2021	Radiation (03CH07-HY)
Preamplifier	COM-POWE R	PA-103A	161241	10MHz~1GHz	May 19, 2020	Jan. 06, 2021~ Feb. 04, 2021	May 18, 2021	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 23, 2020	Jan. 06, 2021~ Feb. 04, 2021	Apr. 22, 2021	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Oct. 31, 2020	Jan. 06, 2021~ Feb. 04, 2021	Oct. 30, 2021	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18GHz~40GHz	Jul. 31, 2020	Jan. 06, 2021~ Feb. 04, 2021	Jul. 30, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2,8 01606/2	18GHz~40GHz	Feb. 25, 2020	Jan. 06, 2021~ Feb. 04, 2021	Feb. 24, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971/4, MY28655/4	9kHz~30MHz	Feb. 25, 2020	Jan. 06, 2021~ Feb. 04, 2021	Feb. 24, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	30MHz~1GHz	Feb. 25, 2020	Jan. 06, 2021~ Feb. 04, 2021	Feb. 24, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	1GHz~18GHz	Feb. 25, 2020	Jan. 06, 2021~ Feb. 04, 2021	Feb. 24, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	N/A	Jan. 06, 2021~ Feb. 04, 2021	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Jan. 06, 2021~ Feb. 04, 2021	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jan. 06, 2021~ Feb. 04, 2021	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB249 5	N/A	N/A	Jan. 06, 2021~ Feb. 04, 2021	N/A	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	N/A	N/A	N/A	Jan. 06, 2021~ Feb. 04, 2021	N/A	Radiation (03CH07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 02, 2020	Dec. 30, 2020	Mar. 01, 2021	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054S NO12	10MHz~6GHz	Dec. 16, 2020	Dec. 30, 2020	Dec. 15, 2021	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz ~ 40GHz	Jul. 22, 2020	Dec. 30, 2020	Jul. 21, 2021	Conducted (TH05-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2020	Dec. 30, 2020	Mar. 16, 2021	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Dec. 25, 2020	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 11, 2020	Dec. 25, 2020	Sep. 10, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 18, 2020	Dec. 25, 2020	Nov. 17, 2021	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 16, 2020	Dec. 25, 2020	Nov. 15, 2021	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Dec. 25, 2020	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	Dec. 25, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	Dec. 25, 2020	Jan. 01, 2021	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Jacob Yu	Temperature:	22.6	°C
Test Date:	2020/12/30	Relative Humidity:	56.3	%

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	-1.30
BLE	1Mbps	1	19	2440	-2.80
BLE	1Mbps	1	39	2480	-3.10




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	23~26℃
		Relative Humidity :	40~50%

EUT Information

Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

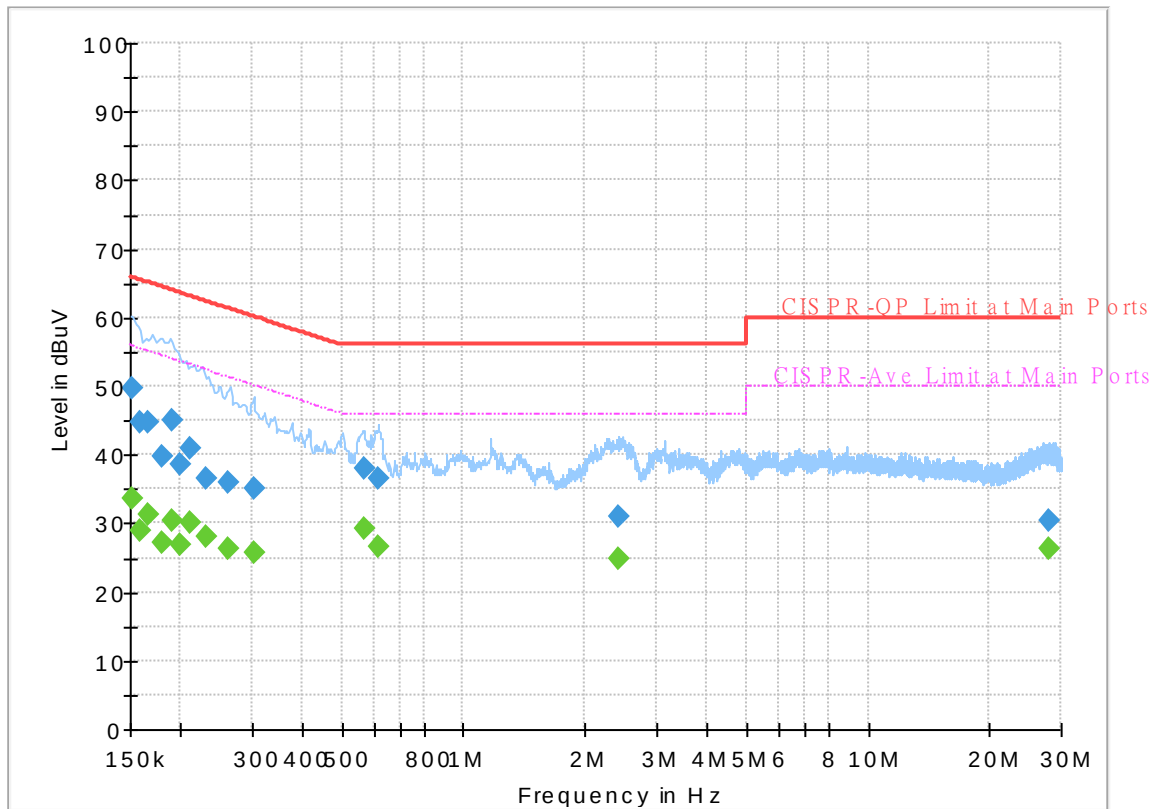Full Spectrum



Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	33.75	55.88	22.13	L1	OFF	19.6
0.152250	49.69	---	65.88	16.19	L1	OFF	19.6
0.159000	---	28.85	55.52	26.67	L1	OFF	19.6
0.159000	44.66	---	65.52	20.86	L1	OFF	19.6
0.166920	---	31.17	55.11	23.94	L1	OFF	19.6
0.166920	44.71	---	65.11	20.40	L1	OFF	19.6
0.178980	---	27.17	54.53	27.36	L1	OFF	19.6
0.178980	39.78	---	64.53	24.75	L1	OFF	19.6
0.190590	---	30.27	54.01	23.74	L1	OFF	19.6
0.190590	45.05	---	64.01	18.96	L1	OFF	19.6
0.199680	---	27.02	53.62	26.60	L1	OFF	19.6
0.199680	38.70	---	63.62	24.92	L1	OFF	19.6
0.210750	---	30.19	53.18	22.99	L1	OFF	19.5
0.210750	41.05	---	63.18	22.13	L1	OFF	19.5
0.231000	---	28.21	52.41	24.20	L1	OFF	19.5
0.231000	36.48	---	62.41	25.93	L1	OFF	19.5
0.262230	---	26.24	51.36	25.12	L1	OFF	19.5
0.262230	35.82	---	61.36	25.54	L1	OFF	19.5
0.303000	---	25.62	50.16	24.54	L1	OFF	19.5
0.303000	35.07	---	60.16	25.09	L1	OFF	19.5
0.567150	---	29.25	46.00	16.75	L1	OFF	19.6

0.567150	38.04	---	56.00	17.96	L1	OFF	19.6
0.618000	---	26.50	46.00	19.50	L1	OFF	19.6
0.618000	36.53	---	56.00	19.47	L1	OFF	19.6
2.409000	---	24.93	46.00	21.07	L1	OFF	19.7
2.409000	31.02	---	56.00	24.98	L1	OFF	19.7
27.868200	---	26.40	50.00	23.60	L1	OFF	20.5
27.868200	30.42	---	60.00	29.58	L1	OFF	20.5

EUT Information

Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

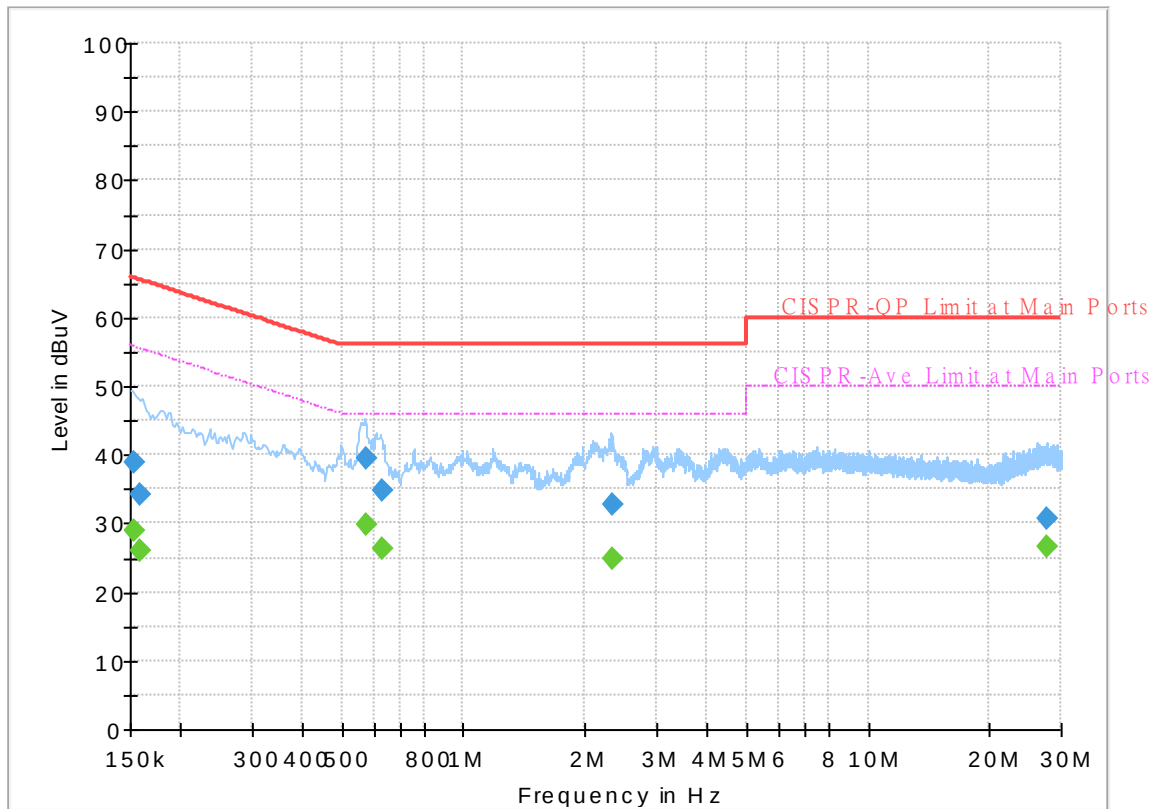Full Spectrum



Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152768	---	28.95	55.85	26.90	N	OFF	19.6
0.152768	38.87	---	65.85	26.98	N	OFF	19.6
0.159270	---	26.04	55.50	29.46	N	OFF	19.6
0.159270	34.08	---	65.50	31.42	N	OFF	19.6
0.572820	---	29.85	46.00	16.15	N	OFF	19.6
0.572820	39.61	---	56.00	16.39	N	OFF	19.6
0.627000	---	26.31	46.00	19.69	N	OFF	19.6
0.627000	34.85	---	56.00	21.15	N	OFF	19.6
2.328000	---	24.96	46.00	21.04	N	OFF	19.7
2.328000	32.68	---	56.00	23.32	N	OFF	19.7
27.640050	---	26.53	50.00	23.47	N	OFF	20.6
27.640050	30.59	---	60.00	29.41	N	OFF	20.6



Appendix B. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh, Ken Wu	Temperature :	20~24°C
		Relative Humidity :	53~59%

<Sample 1>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2354.94	52.54	-21.46	74	38.17	31.83	17.94	35.4	308	337	P	H
		2381.4	44.18	-9.82	54	29.72	31.87	18	35.41	308	337	A	H
	*	2402	90.64	-	-	76.13	31.9	18.03	35.42	308	337	P	H
	*	2402	90.09	-	-	75.58	31.9	18.03	35.42	308	337	A	H
													H
													H
		2374.26	53.84	-20.16	74	39.41	31.87	17.97	35.41	297	29	P	V
		2376.045	44.12	-9.88	54	29.67	31.87	17.99	35.41	297	29	A	V
	*	2402	90.02	-	-	75.51	31.9	18.03	35.42	297	29	P	V
	*	2402	89.25	-	-	74.74	31.9	18.03	35.42	297	29	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****BLE (Harmonic @ 3m)**

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	39.9	-34.1	74	53.02	34	11.82	58.94	100	0	P	H
													H
													H
													H
		4804	40.69	-33.31	74	53.81	34	11.82	58.94	100	0	P	V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Emission above 18GHz

2.4GHz BLE (SHF)

[illegible]

Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30	22.23	-17.77	40	26.95	24.32	0.97	30.01	-	-	P	H
		74.82	25.28	-14.72	40	40.92	12.71	1.63	29.98	-	-	P	H
		153.39	29.97	-13.53	43.5	40.8	16.86	2.26	29.95	-	-	P	H
		741.7	30.54	-15.46	46	27.63	27.65	4.84	29.58	-	-	P	H
		835.5	31.57	-14.43	46	27.44	28.24	5.18	29.29	-	-	P	H
		951	33.85	-12.15	46	26.65	30.26	5.63	28.69	100	0	P	H
													H
													H
													H
													H
													H
													H
													H
		30	30.53	-9.47	40	35.25	24.32	0.97	30.01	100	0	P	V
		49.71	26.13	-13.87	40	40.04	14.78	1.3	29.99	-	-	P	V
		148.53	25.3	-18.2	43.5	35.85	17.2	2.2	29.95	-	-	P	V
		731.9	30.25	-15.75	46	27.75	27.29	4.81	29.6	-	-	P	V
		846	32.08	-13.92	46	27.55	28.58	5.19	29.24	-	-	P	V
		953.1	34.1	-11.9	46	26.72	30.42	5.64	28.68	-	-	P	V
													V
													V
													V
													V
													V
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	



<Sample 2>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2354.73	53.51	-20.49	74	39.14	31.83	17.94	35.4	307	325	P	H
		2379.195	44.82	-9.18	54	30.37	31.87	17.99	35.41	307	325	A	H
	*	2402	92.18	-	-	77.67	31.9	18.03	35.42	307	325	P	H
	*	2402	91.55	-	-	77.04	31.9	18.03	35.42	307	325	A	H
													H
													H
		2352.315	53.52	-20.48	74	39.15	31.83	17.94	35.4	299	27	P	V
		2381.505	44.66	-9.34	54	30.2	31.87	18	35.41	299	27	A	V
	*	2402	91.25	-	-	76.74	31.9	18.03	35.42	299	27	P	V
	*	2402	90.76	-	-	76.25	31.9	18.03	35.42	299	27	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****BLE (Harmonic @ 3m)**

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	40.05	-33.95	74	53.17	34	11.82	58.94	100	0	P	H
													H
													H
													H
		4804	39.43	-34.57	74	52.55	34	11.82	58.94	100	0	P	V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Emission above 18GHz

2.4GHz BLE (SHF)

[illegible]

Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE LF		134.76	32.76	-10.74	43.5	43.09	17.55	2.08	29.96	100	0	P	H	
		156.36	30.55	-12.95	43.5	41.45	16.76	2.29	29.95	-	-	P	H	
		199.29	32.02	-11.48	43.5	44.39	14.97	2.59	29.93	-	-	P	H	
		750.8	31.13	-14.87	46	28.06	27.77	4.86	29.56	-	-	P	H	
		862.1	32.69	-13.31	46	27.68	28.89	5.28	29.16	-	-	P	H	
		944.7	33.94	-12.06	46	27.23	29.82	5.62	28.73	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
		30	30.67	-9.33	40	35.39	24.32	0.97	30.01	100	0	P	V	
		36.21	27.04	-12.96	40	34.53	21.44	1.07	30	-	-	P	V	
		60.24	25.6	-14.4	40	42.25	11.91	1.43	29.99	-	-	P	V	
		745.9	30.5	-15.5	46	27.45	27.77	4.85	29.57	-	-	P	V	
		850.2	32.61	-13.39	46	27.89	28.74	5.2	29.22	-	-	P	V	
		958	34.21	-11.79	46	26.77	30.44	5.65	28.65	-	-	P	V	
														V
														V
														V
														V
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

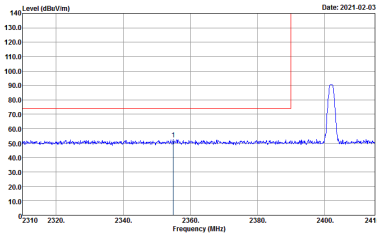
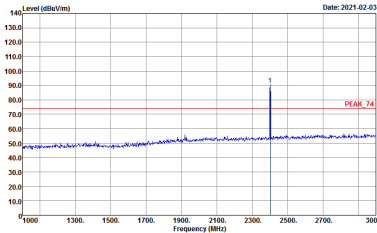
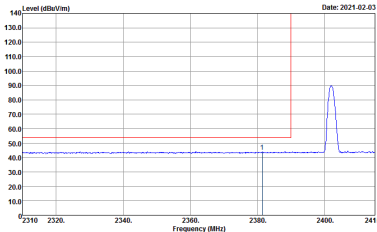
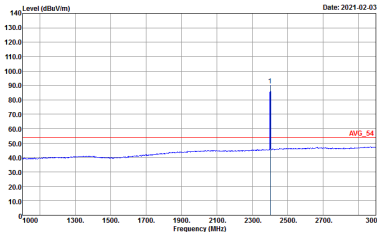
Test Engineer :	Jesse Wang, Stan Hsieh, Ken Wu	Temperature :	20~24°C
		Relative Humidity :	53~59%



<Sample 1>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto : Peak	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto : Peak
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBW:3.000kHz SWT:Auto : Peak	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBW:3.000kHz SWT:Auto : Peak





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	Site : 03CH02-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Peak	Site : 03CH02-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Peak
Avg	Site : 03CH02-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3.000kHz SWT:Auto Peak	Site : 03CH02-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3.000kHz SWT:Auto Peak



2.4GHz 2400~2483.5MHz

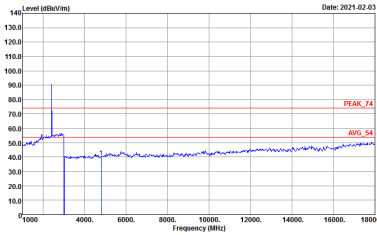
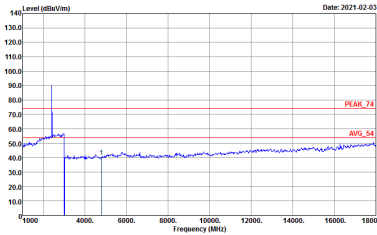
BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-4V Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak	 Site : 03CH07-4V Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak





Emission above 18GHz

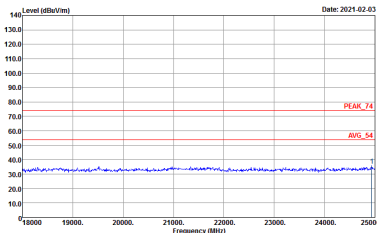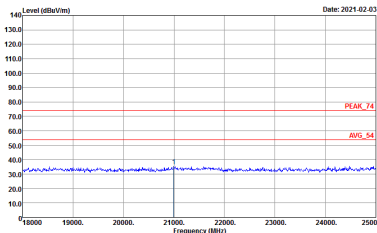2.4GHz BLE (SHF)

BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
QP / Peak	 Site : 03CH07-4Y Condition : PEAK_74 1m SHF-EHF_5170251 HORIZONTAL Detector : Peak	 Site : 03CH07-4Y Condition : PEAK_74 1m SHF-EHF_5170251 VERTICAL Detector : Peak

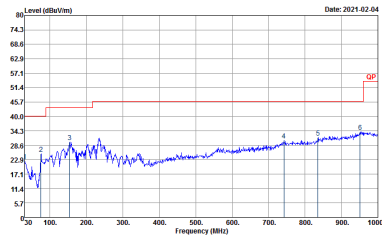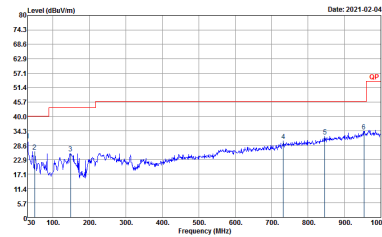Emission below 1GHz
2.4GHz BLE (LF)





BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	 Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(s) HORIZONTAL Detector : Peak	 Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(s) VERTICAL Detector : Peak



<Sample 2>

2.4GHz 2400~2483.5MHz

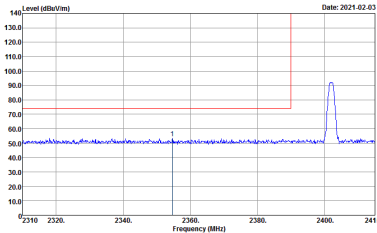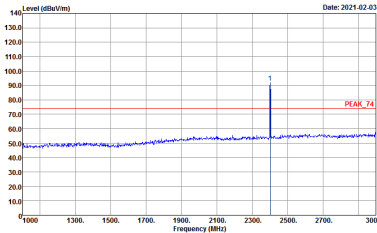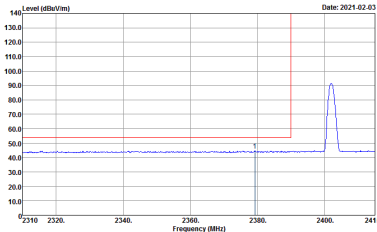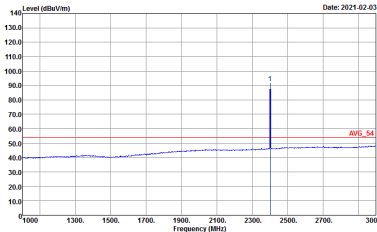BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto : Peak	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto : Peak
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBW:3.000kHz SWT:Auto : Peak	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBW:3.000kHz SWT:Auto : Peak





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWTAuto : Peak	Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWTAuto : Peak
Avg	Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3.000kHz SWTAuto : Peak	Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3.000kHz SWTAuto : Peak



2.4GHz 2400~2483.5MHz

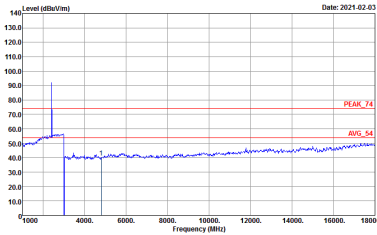
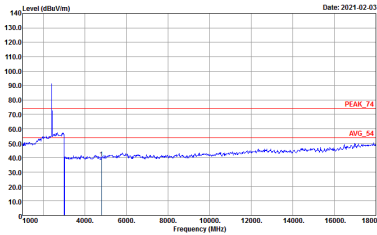
BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-4V Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak	 Site : 03CH07-4V Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak





Emission above 18GHz

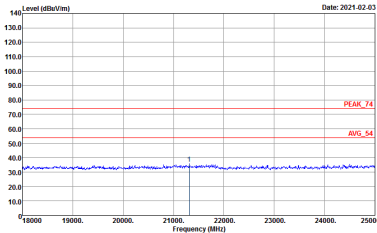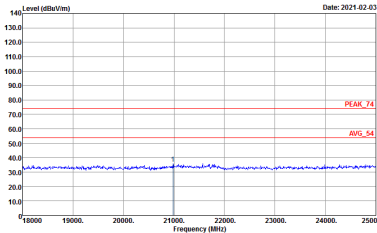2.4GHz BLE (SHF)

BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
QP / Peak	 Site : 03CH07-4Y Condition : PEAK_74 1m SHF-EHF_5170251 HORIZONTAL Detector : Peak	 Site : 03CH07-4Y Condition : PEAK_74 1m SHF-EHF_5170251 VERTICAL Detector : Peak

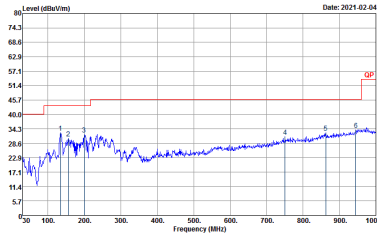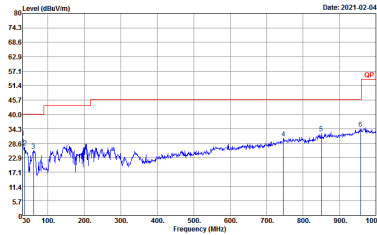Emission below 1GHz
2.4GHz BLE (LF)

BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	 Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(s) HORIZONTAL Detector : Peak	 Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(s) VERTICAL Detector : Peak



Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
Bluetooth -LE	62.4	390	2.56	3kHz	2.05

