



Shenzhen CTL Testing Technology Co., Ltd.

Tel: +86-755-89486194 Fax: +86-755-26636041

TEST REPORT

Part 15.247

Report Reference No.....: **CTL1512313913-WF**

Compiled by

(position+printed name+signature) .: File administrators Happy Guo

Happy Guo

Name of the organization performing the tests

Test Engineer Nice Nong

Nice Nong

(position+printed name+signature) .:

Approved by

(position+printed name+signature) .: Manager Tracy Qi

Tracy Qi

Date of issue.....: Jan. 21, 2016

Test Laboratory Name: **Shenzhen CTL Testing Technology Co., Ltd.**

Address: Floor 1-A, Baisha Technology Park, No.3011, Shahe Xi Road, Nanshan District, Shenzhen, China 518055

Applicant's name.....: **Kar-Tech, Inc.**

Address: 111 Enterprise Road, P.O. Box 180606, Delafield, Wisconsin, 53018, USA

Test specification:

Standard: **47 CFR FCC Part 15 Subpart C 15.247 & RSS 247 Issue 1, May 2015**

TRF Originator.....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: 2.4GHz modular transceiver

FCC ID.....: P4U-MOD153

IC.....: 4534A-MOD153

Trade Mark: Kar-tech

Model/Type reference: MOD153

Modulation: DSSS

Work Frequency Range: 2405~2480MHz

Antenna Type: External Antenna

Antenna Gain.....: 1.1dBi

Result: **Positive**

TEST REPORT

Test Report No. : CTL1512313913-WF	Jan.21, 2016 Date of issue
---	-------------------------------

Equipment under Test : 2.4GHz modular transceiver

Model /Type : MOD153

Applicant : Kar-Tech, Inc.

Address : 111 Enterprise Road, P.O. Box 180606, Delafield, Wisconsin, 53018, USA

Manufacturer : Kar-Tech, Inc.

Address : 111 Enterprise Road, P.O. Box 180606, Delafield, Wisconsin, 53018, USA

Test Result according to the standards on page 4:

Positive

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1.	<u>TEST STANDARDS</u>	<u>4</u>
2.	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	6
2.5.	EUT configuration	6
2.6.	NOTE	6
2.7.	Related Submittal(s) / Grant (s)	6
2.8.	Modifications	6
3.	<u>TEST ENVIRONMENT</u>	<u>7</u>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	7
3.4.	Configuration of Tested System	7
3.5.	Duty Cycle	8
3.6.	Statement of the measurement uncertainty	8
3.7.	Equipments Used during the Test	9
3.8.	Summary of Test Result	10
4.	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>11</u>
4.1.	Conducted Emissions Test	11
4.2.	Radiated Emission and Bandedge Test	14
4.3.	6dB Bandwidth Measurement	19
4.4.	Maximum Peak Output Power	21
4.5.	Power Spectral Density Measurement	22
4.6.	Spurious RF Conducted Emission and bandedge	24
4.8.	Antenna Requirement	28
5.	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>29</u>
6.	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>31</u>

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

RSS-247-Issue 1: Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

RSS-Gen Issue 4: General Requirements for Compliance of Radio Apparatus

ANSI C63.10:2013 : American National Standard for Testing Unlicensed Wireless Devices

ANSI C63.4: 2014: –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

KDB Publication No. 558074 D01 v03r03 Guidance on Measurements for Digital Transmission Systems



2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Dec. 31, 2015
Testing commenced on	:	Dec. 31, 2015
Testing concluded on	:	Jan. 21, 2016

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 120V / 60 Hz	☐ 115V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 3.3V

Channel list

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2405	9	2445
2	2410	10	2450
3	2415	11	2455
4	2420	12	2460
5	2425	13	2465
6	2430	14	2470
7	2435	15	2475
8	2440	16	2480

2.3. Short description of the Equipment under Test (EUT)

2.4GHz modular transceiver, support 802.15.4

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.4. EUT operation mode

Test Mode:

1. The EUT has been tested under normal operating condition.
2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed. Channel low (2405MHz), mid (2440MHz) and high (2480MHz) with highest data rate are chosen for full testing.
3. Test Mode:

Test Mode(TM)	Description	Remark
1	Transmitting	2405MHz
2	Transmitting	2440MHz
3	Transmitting	2480MHz

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

☐ - supplied by the manufacturer

☒ - supplied by the lab

☐ Testing Jig

Manufacturer: Kar-Tech, Inc.

Model No.: ----

☒ Notebook PC(FCC DOC approved)

Manufacturer: DELL

Model No.: PP18L

2.6. NOTE

1. The EUT is a 2.4GHz modular transceiver ,The functions of the EUT listed as below:

	Test Standards	Reference Report
802.15.4	FCC Part 15 Subpart C (Section15.247) FCC Per 47 CFR 2.1091(b) RSS 247 Issue 1	CTL1512313913-WF CTL1512313913-WM

2. The frequency bands used in this EUT are listed as follows:

Frequency Band(MHz)	2400-2483.5	5150-5350	5470-5725	5725-5850
802.15.4	√	—	—	—

3. The EUT incorporates a SISO function, Physically,the EUT provides one completed transmitter and one completed receivers.

Modulation Mode	TX Function
802.15.4	1TX

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCCID: P4U-MOD153 and IC: 4534A-MOD153 filing to comply with of the FCC part15.247 Rules and RSS 247 Issue 1.

2.8. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.
Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 (2013) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.


3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

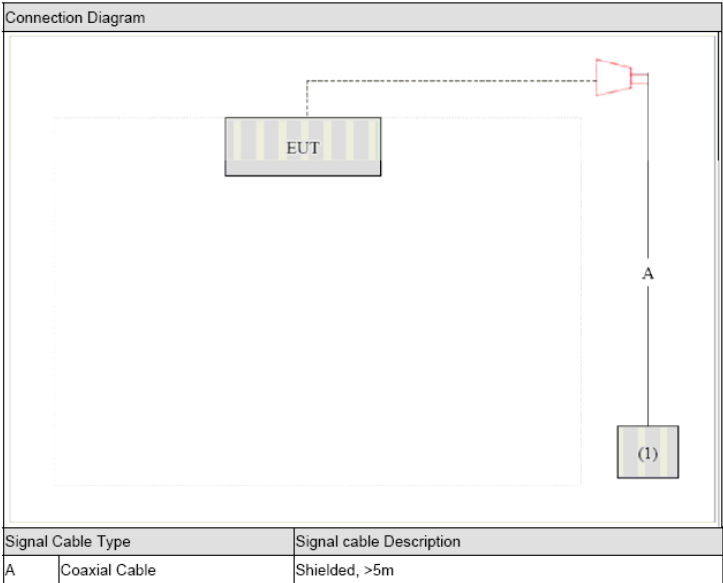

3.5. Duty Cycle

Operated Mode for Worst Duty Cycle		
☐ Operated normally mode for worst duty cycle		
☒ Operated test mode for worst duty cycle		
Mode	Duty Cycle (%)	Duty Factor (dB)
802.15.4	100	0

3.6. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~12.75GHz	4.32dB	(1)
Radiated Emission	12.75GHz-25 GHz	4.68dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3.7. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
ULTRA-ROADBAND ANTENNA	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	103710	2015/06/02	2016/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2015/05/21	2016/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2015/05/21	2016/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
Active Loop Antenna	Daze	ZN30900A	N/A	2015/05/19	2016/05/18
LISN	R&S	ENV216	3560.6550.12	2015/06/02	2016/06/01
LISN	R&S	ESH2-Z5	860014/010	2015/06/02	2016/06/01
ISN	FCC	F-071115-1057-1-09	11229	2015/05/19	2016/05/18
Amplifier	Agilent	8349B	3008A02306	2015/05/19	2016/05/18
Amplifier	Agilent	8447D	2944A10176	2015/05/19	2016/05/18
Transient Limiter	SCHWARZCECK	VTSD 9561F	9666	2015/06/02	2016/06/01
Radio Communication Tester	R&S	CMU200	115419	2015/05/22	2016/05/21
Temperature/Humidity Meter	Gangxing	CTH-608	02	2015/05/20	2016/05/19
SIGNAL GENERATOR	Agilent	E4421B	US40051744	2015/05/20	2016/05/19
Wideband Peak Power Meter	Anritsu	ML2495A	220.23.35	2015/05/20	2016/05/19
Power Sensor	Rohde&Schwarz	OSP-120 (including B157)	115683	2015/05/20	2016/05/19
Climate Chamber	ESPEC	EL-10KA	A20120523	2015/05/20	2016/05/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	N/A	2015/05/20	2016/05/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	N/A	2015/05/20	2016/05/19
RF Cable	HUBER+SUHNER	RG214	N/A	2015/05/20	2016/05/19

3.8. Summary of Test Result

FCC and IC Requirements		
FCC Part 15.207 RSS-Gen 8.8	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2) RSS 247 5.2 (1)	6dB and 99% Bandwidth	PASS
FCC Part 15.247(d) RSS 247 5.5	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b) RSS 247 5.4 (4)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e) RSS 247 5.2 (2)	Power Spectral Density	PASS
FCC Part 15.205/ 15.209 RSS-Gen 8.9	Radiated Emissions	PASS
FCC Part 15.247(d) RSS-Gen 8.10	Band Edge	PASS

Remark: The measurement uncertainty is not included in the test result. All test are according to ANSI C63.4 : 2014 and ANSI C63.10 : 2013.


Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases.

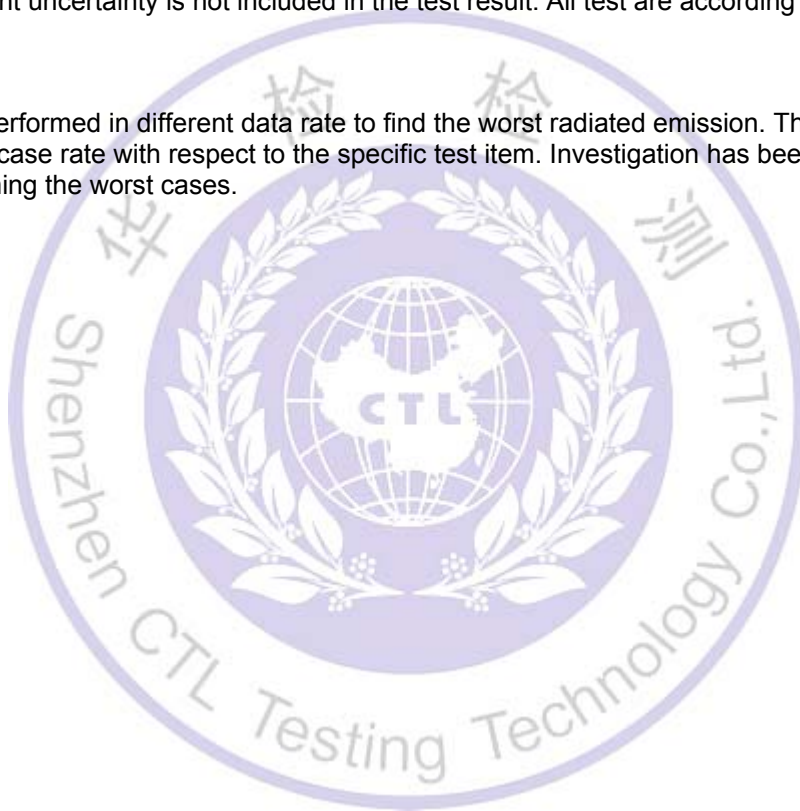

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emissions Test

TEST CONFIGURATION

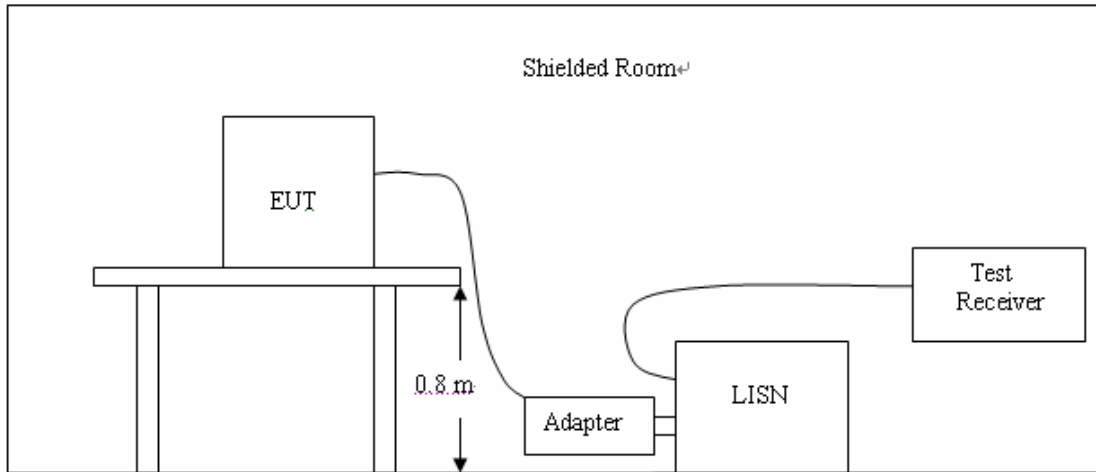

TEST PROCEDURE

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency


For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

1. Please follow the guidelines in ANSI C63.10-2013.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

TEST RESULTS

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

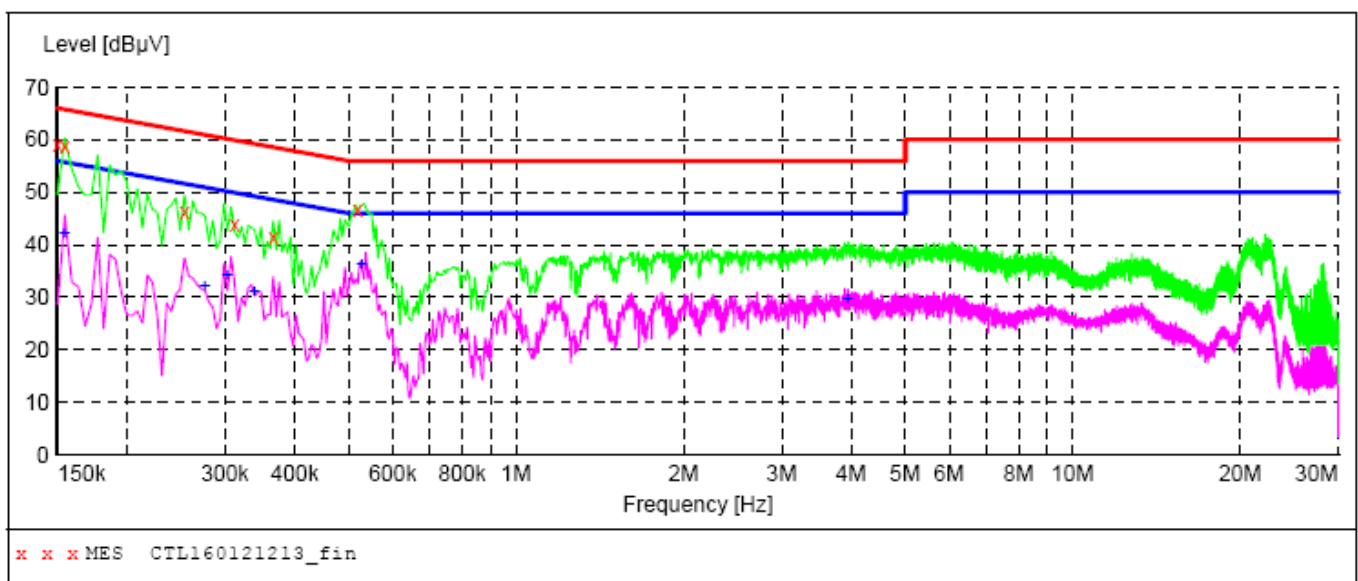**MEASUREMENT RESULT: "CTL160121213_fin"**

1/21/2016 1:37PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150001	59.10	10.2	66	6.9	QP	N	GND
0.154501	58.90	10.2	66	6.9	QP	N	GND
0.253501	46.30	10.2	62	15.3	QP	N	GND
0.312001	43.90	10.2	60	16.0	QP	N	GND
0.366001	41.30	10.2	59	17.3	QP	N	GND
0.519001	46.60	10.2	56	9.4	QP	N	GND


MEASUREMENT RESULT: "CTL160121213_fin2"

1/21/2016 1:37PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154501	42.10	10.2	56	13.7	AV	N	GND
0.276001	32.00	10.2	51	18.9	AV	N	GND
0.303001	34.10	10.2	50	16.1	AV	N	GND
0.339001	31.00	10.2	49	18.2	AV	N	GND
0.528001	36.40	10.2	46	9.6	AV	N	GND
3.939001	29.70	10.4	46	16.3	AV	N	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

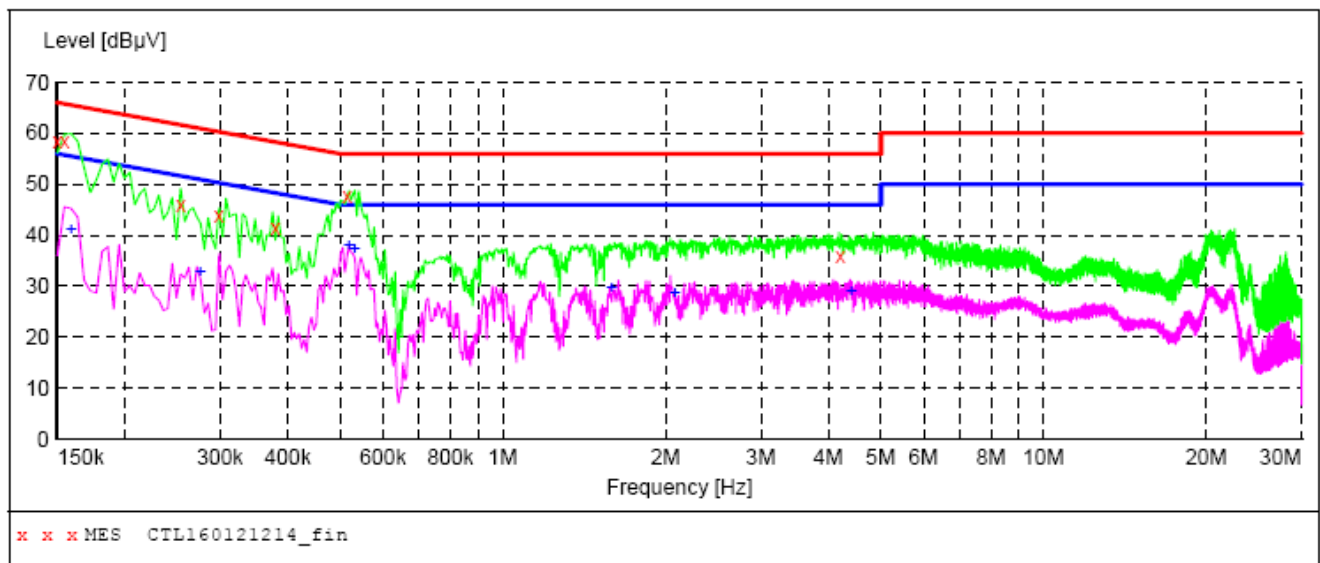**MEASUREMENT RESULT: "CTL160121214_fin"**

1/21/2016 1:41PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150001	58.50	10.2	66	7.5	QP	L1	GND
0.154501	58.50	10.2	66	7.3	QP	L1	GND
0.253501	45.90	10.2	62	15.7	QP	L1	GND
0.298501	43.80	10.2	60	16.5	QP	L1	GND
0.379501	41.60	10.2	58	16.7	QP	L1	GND
0.514501	47.80	10.2	56	8.2	QP	L1	GND
4.209001	36.00	10.4	56	20.0	QP	L1	GND

MEASUREMENT RESULT: "CTL160121214_fin2"


1/21/2016 1:41PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.159001	41.20	10.2	56	14.3	AV	L1	GND
0.276001	32.80	10.2	51	18.1	AV	L1	GND
0.519001	38.00	10.2	46	8.0	AV	L1	GND
0.532501	37.20	10.2	46	8.8	AV	L1	GND
1.590001	29.70	10.3	46	16.3	AV	L1	GND
2.080501	28.70	10.4	46	17.3	AV	L1	GND
4.411501	29.10	10.4	46	16.9	AV	L1	GND


4.2. Radiated Emission and Bandedge Test

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

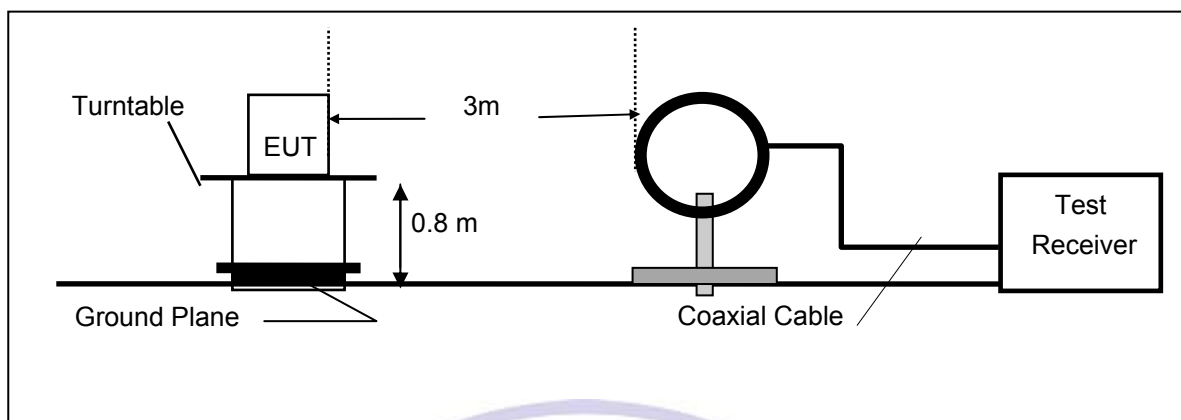

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

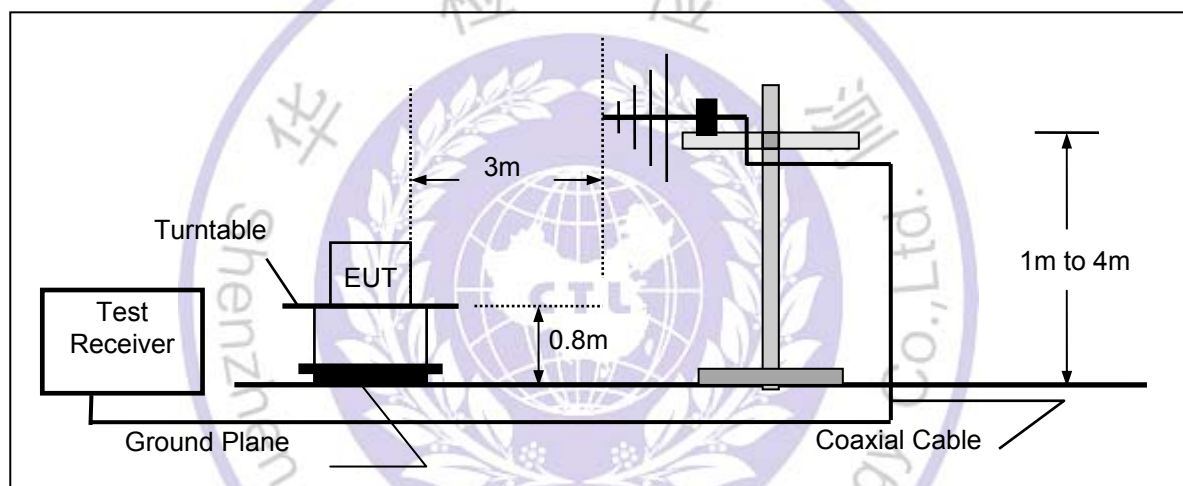

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

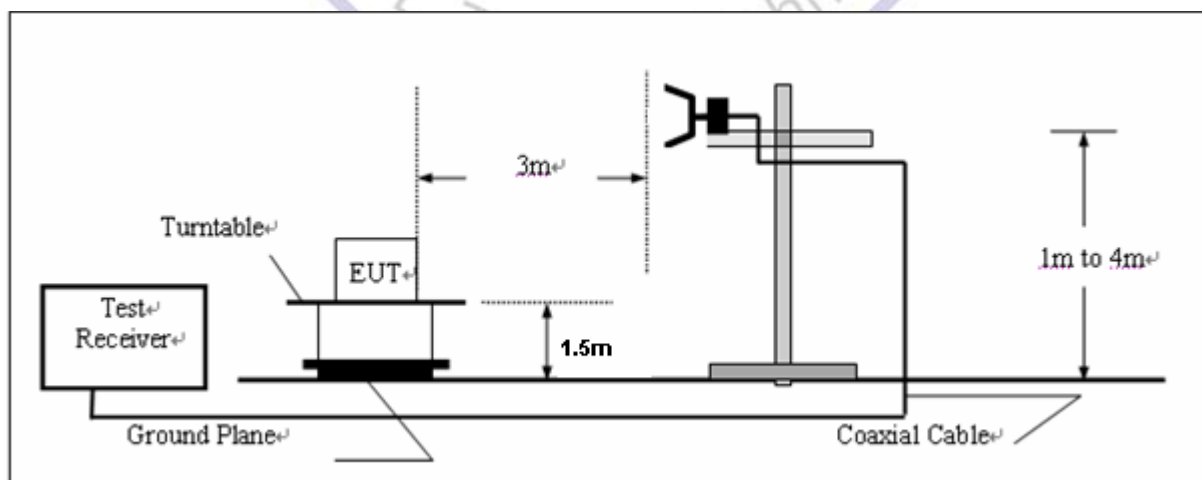

FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

TEST PROCEDURE

1. The testing follows FCC KDB Publication No. 558074 D01 v03r03 (Measurement Guidelines of DTS).
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f > 1$ GHz, 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Repeat above procedures until all frequency measurements have been completed.

Note:

When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keeping the antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 60 degrees for H-plane and 90 degrees for E-plane.

LIMIT

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

TEST RESULTS**9KHz-30MHz:**

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note: The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor= 40 log (specific distance/ test distance) (dB);


Limit line= specific limits (dBuV) + distance extrapolation factor.

Below 1GHz:

The radiated measurement are performed the each test mode, the datum recorded below (mode1) is the worst case for all the test mode and channel.

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1

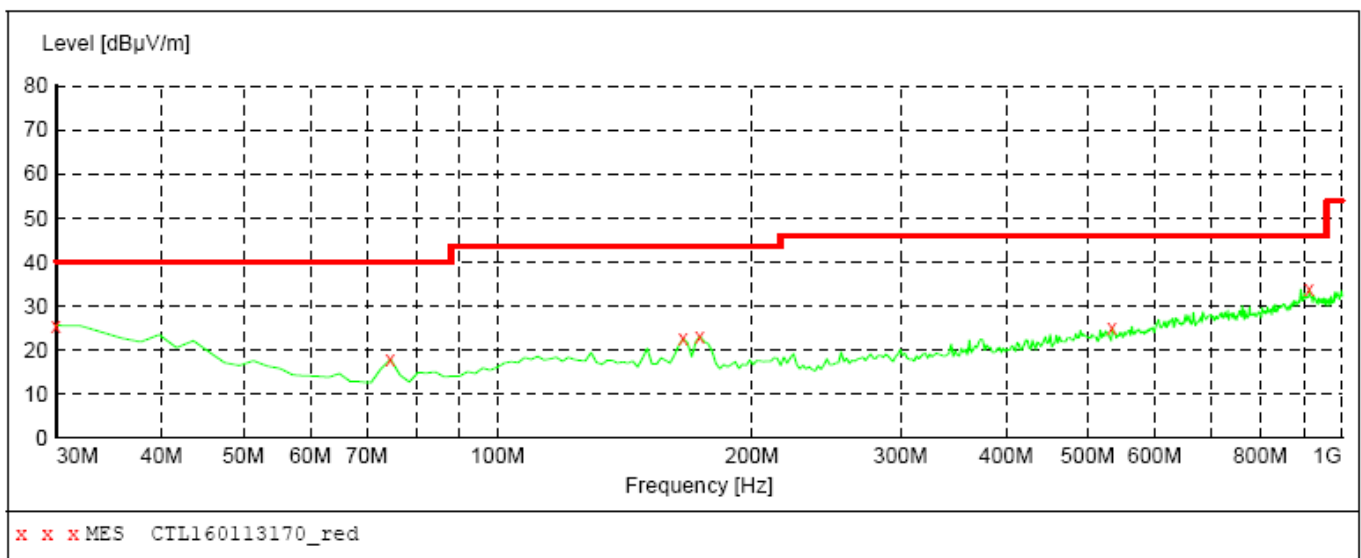
***MEASUREMENT RESULT: "CTL160113170_red"***

1/13/2016 11:32AM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	25.50	20.8	40.0	14.5	---	0.0	0.00	VERTICAL
74.620000	17.80	8.3	40.0	22.2	---	0.0	0.00	VERTICAL
165.800000	22.50	13.5	43.5	21.0	---	0.0	0.00	VERTICAL
173.560000	23.00	13.0	43.5	20.5	---	0.0	0.00	VERTICAL
534.400000	24.90	20.5	46.0	21.1	---	0.0	0.00	VERTICAL
914.640000	33.80	26.1	46.0	12.2	---	0.0	0.00	VERTICAL

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1

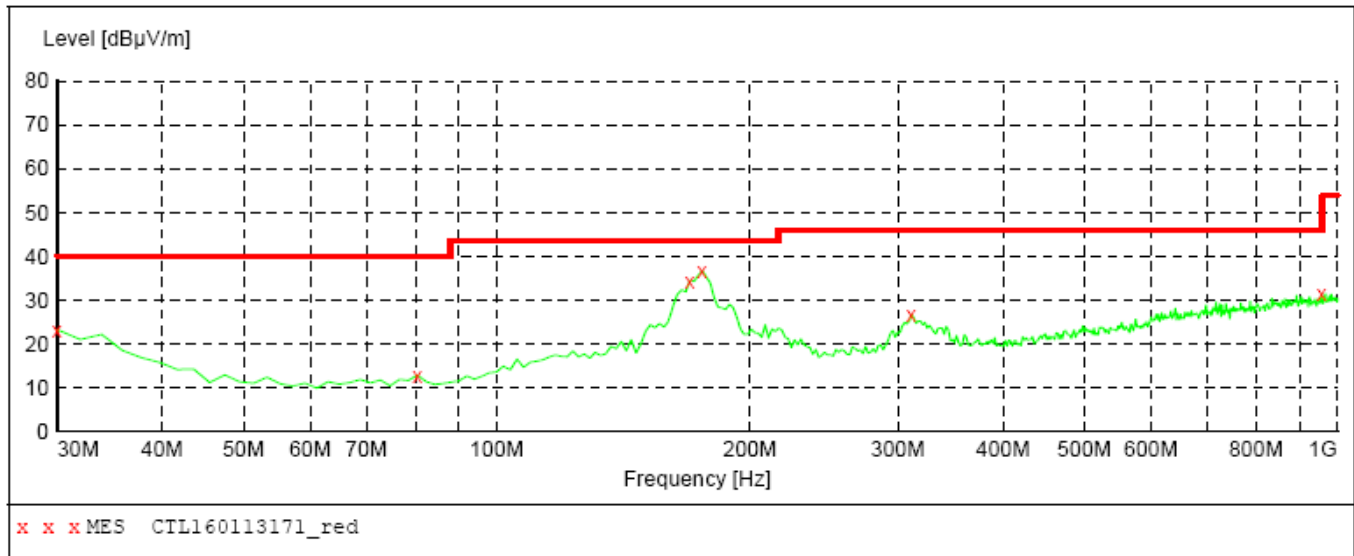**MEASUREMENT RESULT: "CTL160113171_red"**

1/13/2016 11:33AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	23.20	20.8	40.0	16.8	---	0.0	0.00	HORIZONTAL
80.440000	12.80	8.5	40.0	27.2	---	0.0	0.00	HORIZONTAL
169.680000	34.40	13.3	43.5	9.1	---	0.0	0.00	HORIZONTAL
175.500000	36.70	12.9	43.5	6.8	---	0.0	0.00	HORIZONTAL
311.300000	26.70	15.5	46.0	19.3	---	0.0	0.00	HORIZONTAL
957.320000	31.30	26.6	46.0	14.7	---	0.0	0.00	HORIZONTAL



Above 1GHz:

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	V	2405	64.5	30.8	95.3	Fundamental	/	PK
	V	3200	12.7	31.1	43.8	54(note3)	10.2	PK
	V	2390	36.9	32.2	69.1	74	4.9	PK
	V	2390	15.0	32.2	47.2	54	6.8	AV
	V	2400	38.5	32.1	70.6	74	3.4	PK
	V	2400	16.4	32.1	48.5	54	5.5	AV
	V	4810	5.1	42.6	47.7	54(note3)	6.3	PK
	V	7215	22.1	46.5	68.6	74	5.4	PK
	V	7215	-0.4	46.5	46.1	54	7.9	AV
	H	24000	11.7	38.9	50.6	54	3.4	PK
8	V	2440	63.3	31.2	94.5	Fundamental	/	PK
	V	3200	10.3	31.1	41.4	54(note3)	12.6	PK
	V	4880	16.5	32.8	49.3	54(note3)	4.7	PK
	V	7200	21.3	46.8	68.1	74	5.9	PK
	V	7200	1.7	46.1	47.8	54	6.2	AV
	H	24000	11.7	38.9	50.6	54	3.4	PK
16	V	2480	62.7	30.9	93.6	Fundamental	/	PK
	V	3200	10.3	31.1	41.4	54(note3)	12.6	PK
	V	2483.5	32.3	30.2	62.5	74	11.5	PK
	V	2483.5	15.1	30.2	45.3	54	8.7	AV
	V	4960	14.8	32.5	47.3	54(note3)	6.7	PK
	V	7440	23.5	46.3	69.8	74	4.2	PK
	V	7440	2.8	46.3	49.1	54	4.9	AV
	H	24000	11.7	38.9	50.6	54	3.4	PK

Note: 1. Measure Level = Reading Level + Factor.

2. The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.


3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Remark: RBW 1MHz VBW 3MHz peak detector for PK value, RMS detector for AV value

4. Horizontal and Vertical all have been tested ,only worse case is reported

4.3. 6dB and 99% Bandwidth Measurement

TEST CONFIGURATION



TEST PROCEDURE

1. The testing follows FCC KDB Publication No. 558074 D01 v03r03 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.
4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

LIMIT


For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST RESULTS

Product	:	2.4GHZ MODULAR TRANSCEIVER
Test Item	:	6dB and 99% Occupied Bandwidth

Channel No.	Frequency (MHz)	6dB Bandwidth (kHz)	99% Bandwidth (kHz)	Limit (kHz)	Result
01	2405	503.1	686.95	500	Pass
08	2440	501.1	650.24	500	Pass
16	2480	500.9	632.70	500	Pass


Channel 01 (2405MHz)

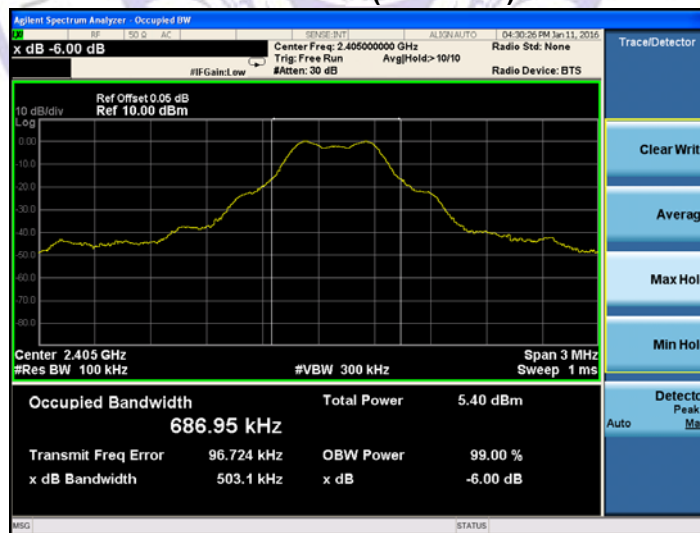

Channel 08 (2440MHz)




Channel 16 (2480MHz)

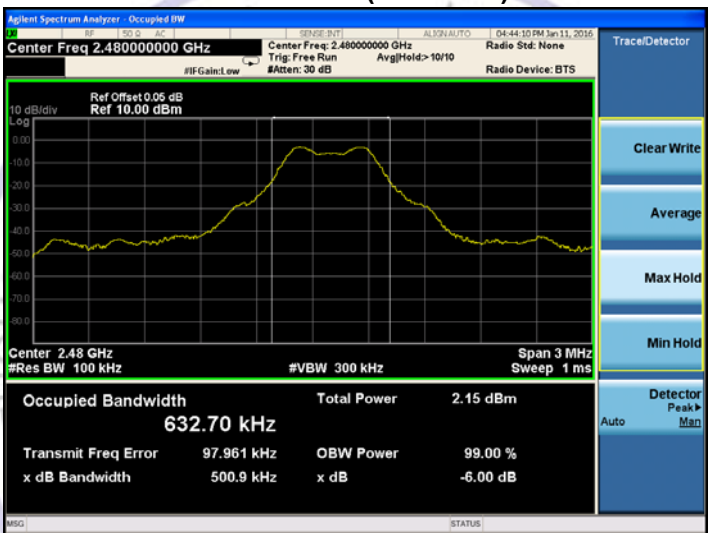

4.4. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to C63.10 -2013 and KDB558074 D01 v03r03, The EUT was directly connected to the power meter / spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

Use the wideband power meter to test peak power and record the result.

LIMIT

The Peak Output Power Measurement limits are 30dBm.

TEST RESULTS


Product	:	2.4GHZ MODULAR TRANSCEIVER
Test Item	:	Power Output

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
1	2405	-0.012	30.00	Pass
8	2440	-1.194	30.00	Pass
16	2480	-2.766	30.00	Pass

Note: The test results including the cable lose.

4.5. Power Spectral Density Measurement

TEST CONFIGURATION



TEST PROCEDURE

The EUT was tested according to KDB558074 D01 v03r03 for compliance to FCC 47CFR 15.247 and requirements. Set RBW= 3 kHz, VBW $\geq$ 10KHz, SPAN to 1.5 times greater than the EBW,.

LIMIT


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST RESULTS


Product	:	2.4GHZ MODULAR TRANSCEIVER
Test Item	:	Power Spectral Density

Channel No.	Frequency (MHz)	Measurement PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
01	2405	-7.026	8	Pass
08	2440	-8.093	8	Pass
16	2480	-8.085	8	Pass


Channel 01 (2405MHz)

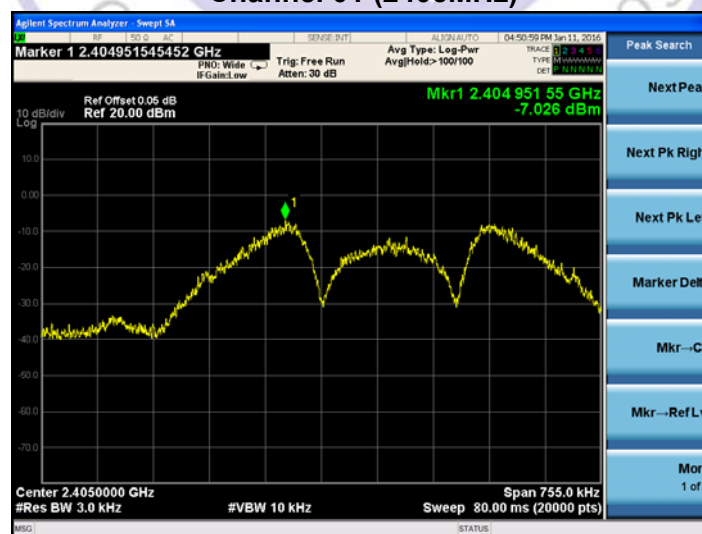

Channel 08 (2440MHz)

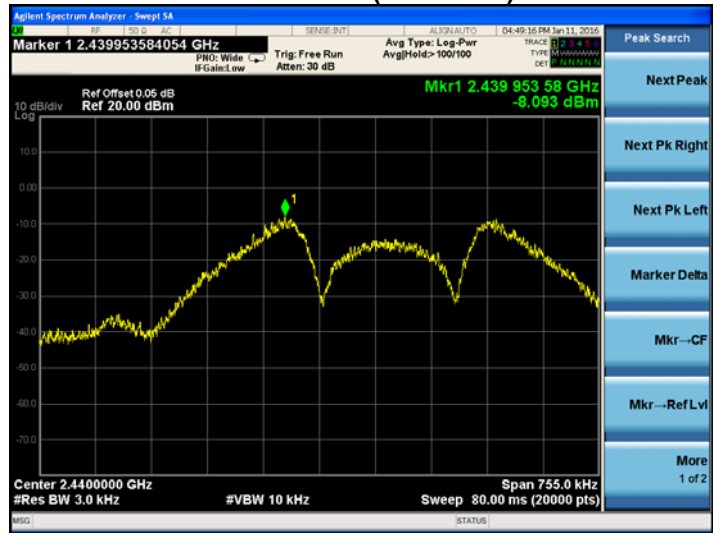


Channel 16 (2480MHz)

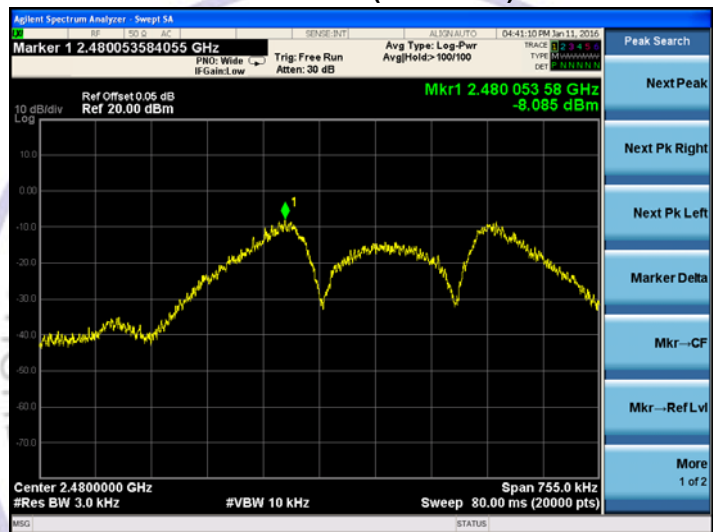

4.6. Spurious RF Conducted Emission and bandedge

TEST CONFIGURATION



TEST PROCEDURE

The EUT was tested according to KDB558074 D01 v03r03 for compliance to FCC 47CFR 15.247 requirements.

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBM= 300KHz to measure the peak field strength, and measure frequency range from 30MHz to 26.5GHz.


LIMIT



In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

TEST RESULTS



Product	:	2.4GHZ MODULAR TRANSCEIVER
Test Item	:	RF Antenna Conducted Spurious

Channel 01 (2405MHz)



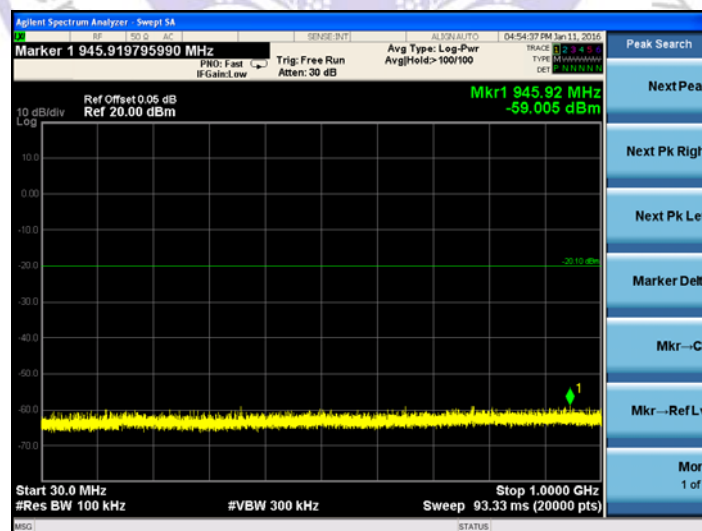


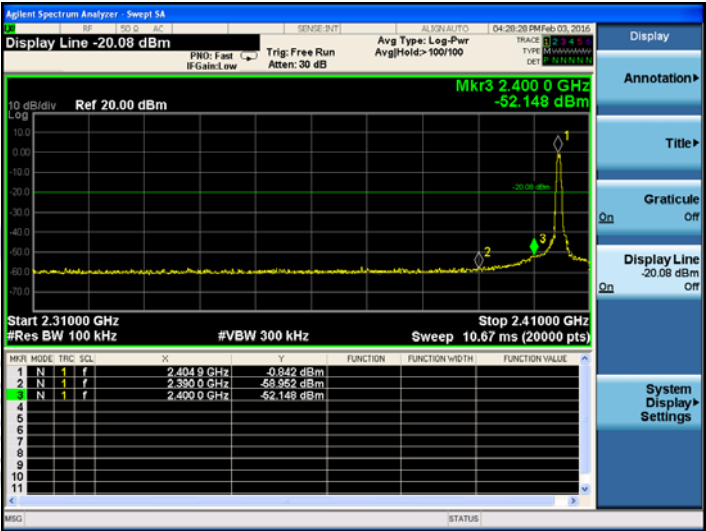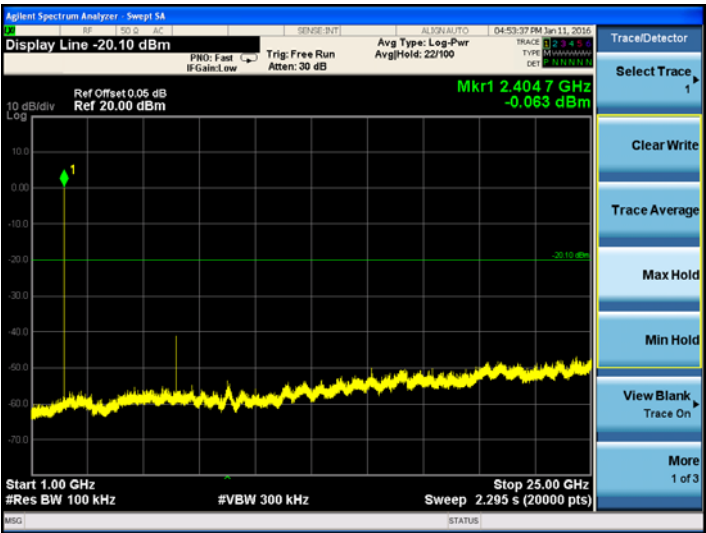

Channel 06 (2440MHz)

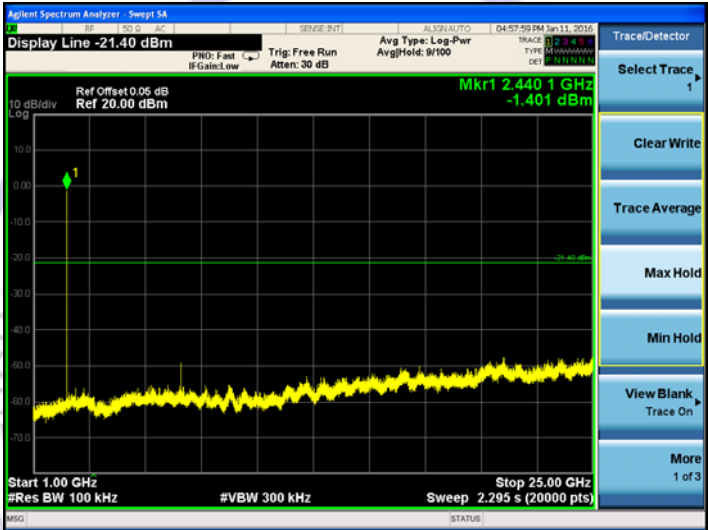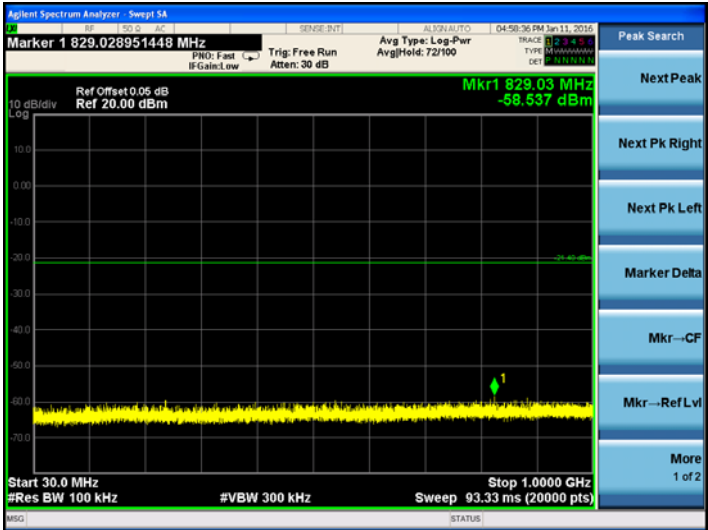

Channel 11 (2480MHz)

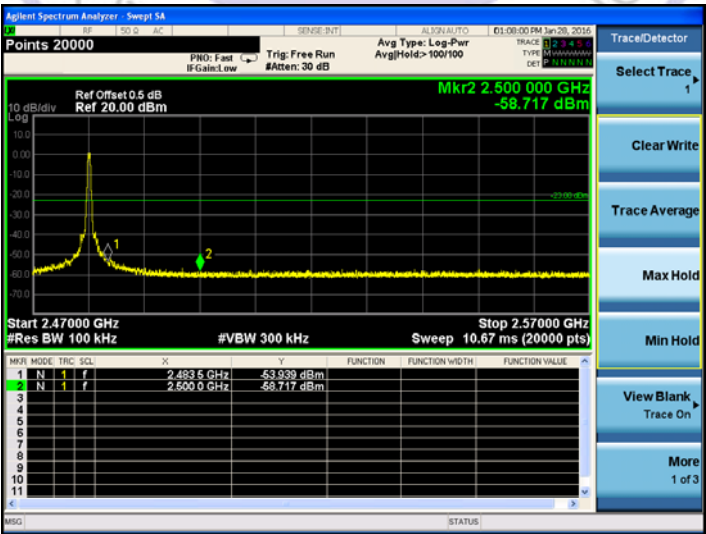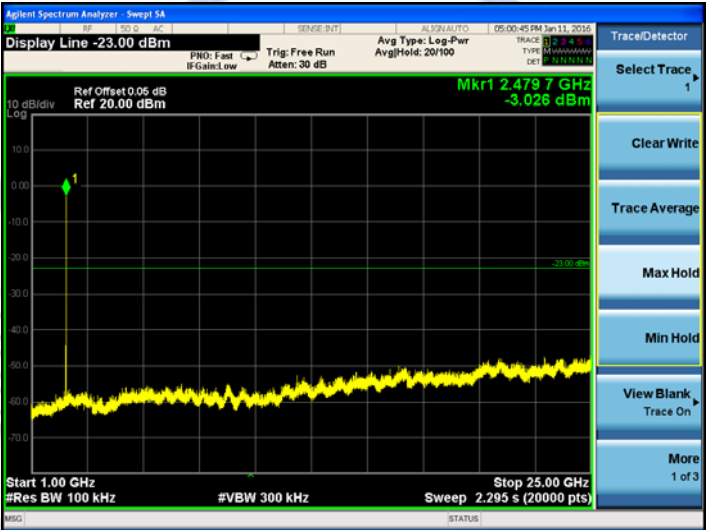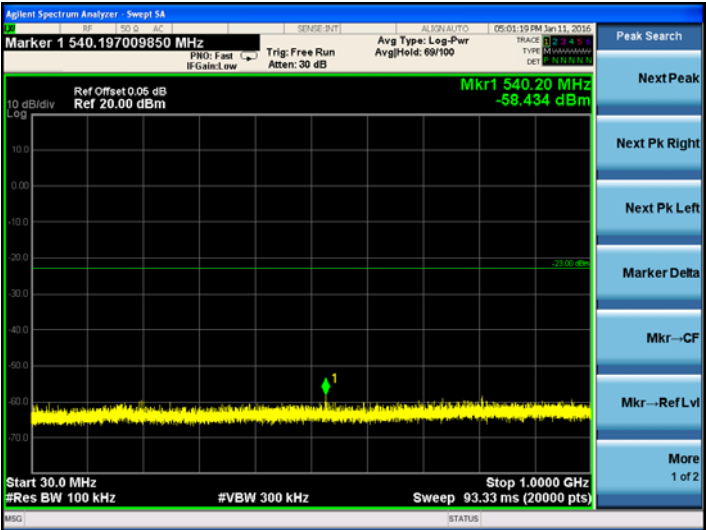

4.8. Antenna Requirement

STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

ANTENNA CONNECTED CONSTRUCTION

The directional gains of antenna used for transmitting is 1.1 dBi, and the antenna connector is nonstandard. Please see EUT photo for details.



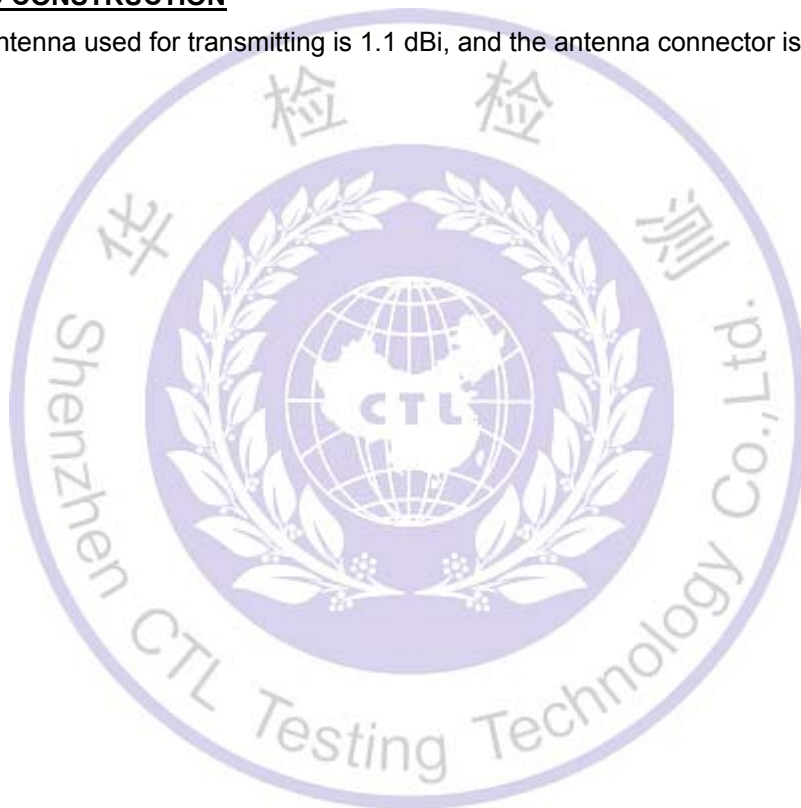




5. Test Setup Photos of the EUT

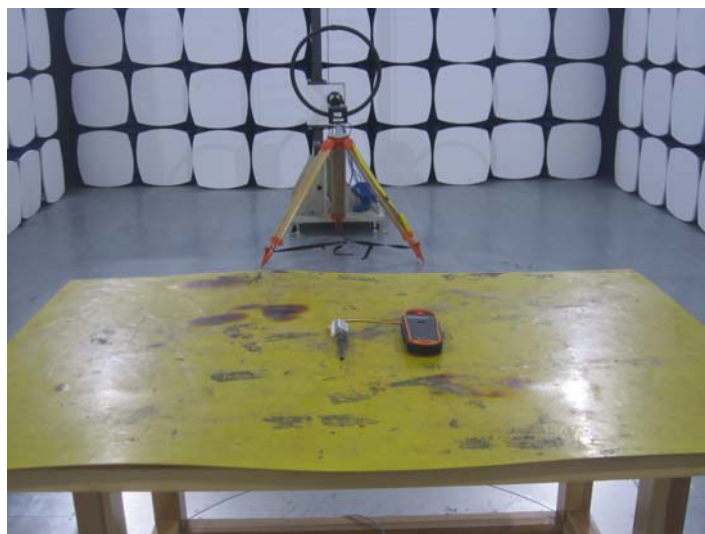



6. External and Internal Photos of the EUT

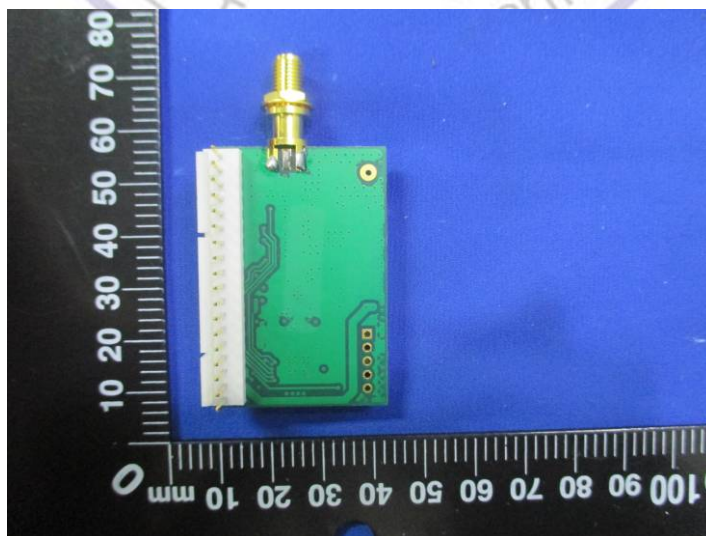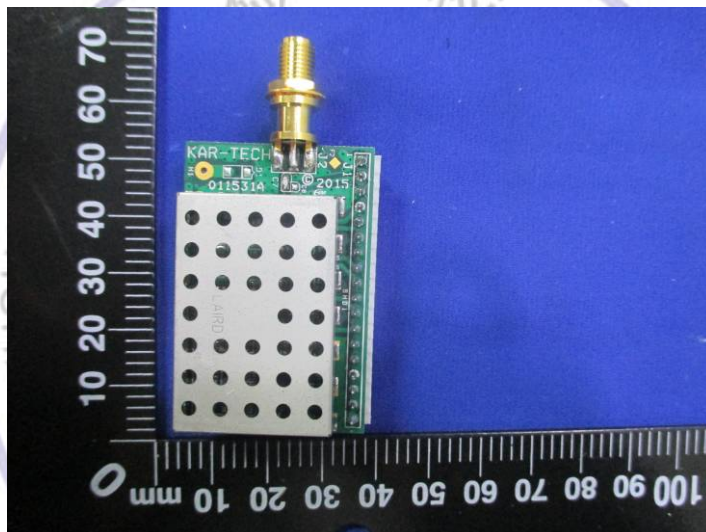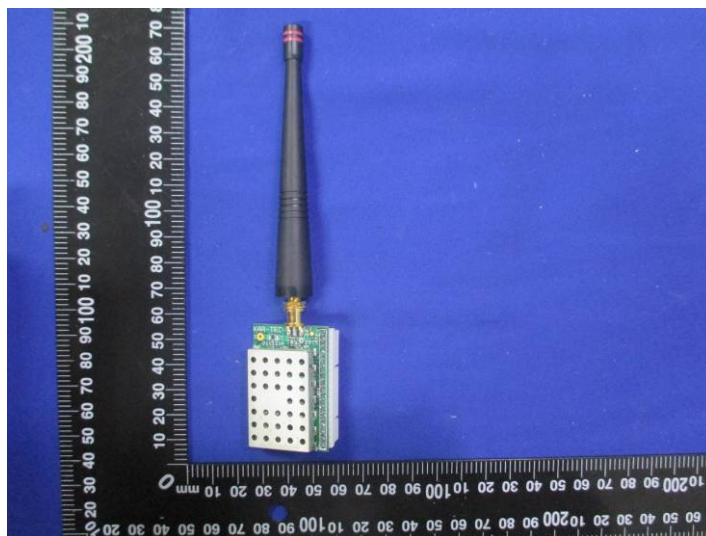

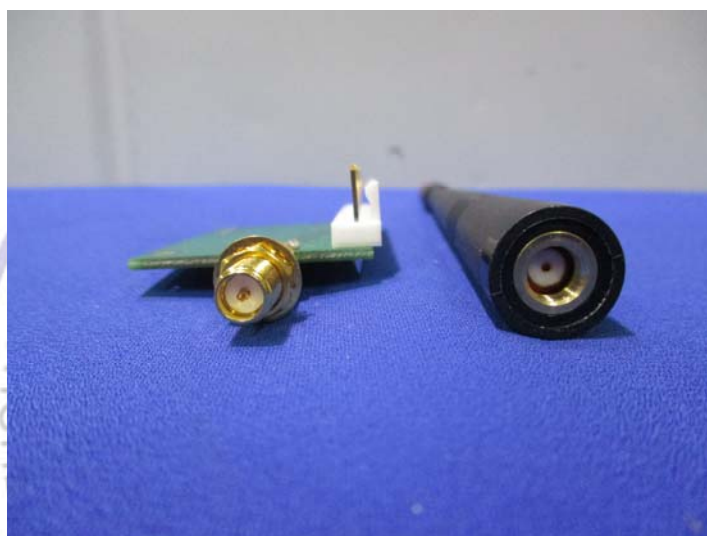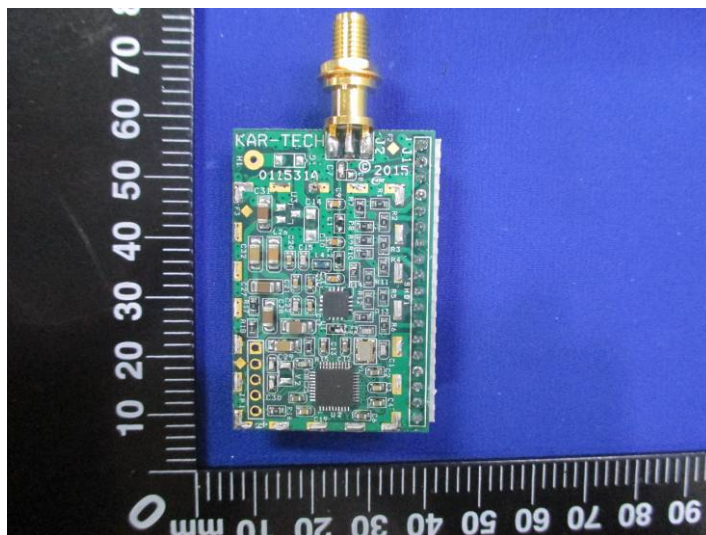

.....End of Report.....