


|              |                                        |           |           |
|--------------|----------------------------------------|-----------|-----------|
| EUT:         | 2.4GHz Wi-Fi/BLE Module                | Polarity: | Vertical  |
| Model:       | EMC6270-E                              | S/N:      | /         |
| Mode:        | Transmit by 802.11b at Channel 2462MHz | Voltage:  | DC3.3V    |
| Environment: | Temp: 21°C; Humi:51%                   | Engineer: | Chuang Li |

### Test Graph

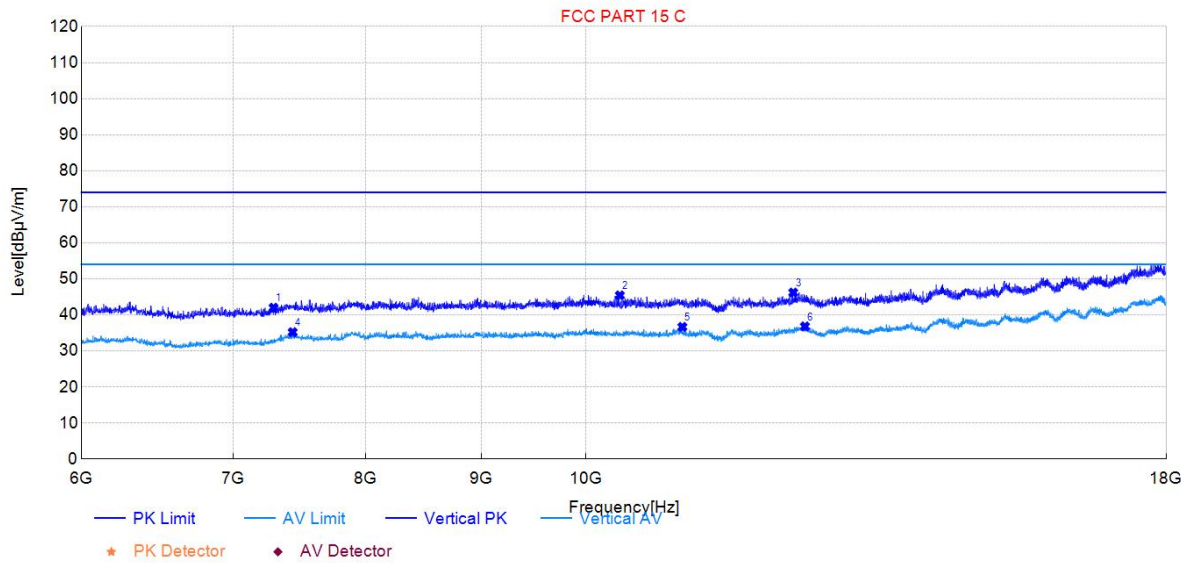

| Frequency (MHz) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------|----------------|-------------|----------------|-------------|----------|--------------|
| 7290.00         | 42.00          | -3.54       | 74.00          | 32.00       | PK       | Vertical     |
| 10353.00        | 45.41          | 0.48        | 74.00          | 28.59       | PK       | Vertical     |
| 12340.50        | 46.19          | 1.94        | 74.00          | 27.81       | PK       | Vertical     |
| 7432.50         | 35.20          | -2.82       | 54.00          | 18.80       | AV       | Vertical     |
| 11029.50        | 36.66          | 1.23        | 54.00          | 17.34       | AV       | Vertical     |
| 12487.50        | 36.80          | 2.53        | 54.00          | 17.20       | AV       | Vertical     |


Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 26.5GHz), therefore no data appear in the report.

## The worst case of Radiated Emission below 1GHz:

### 30MHz – 1GHz Test Data

|              |                                        |           |            |
|--------------|----------------------------------------|-----------|------------|
| EUT:         | 2.4GHz Wi-Fi/BLE Module                | Polarity: | Horizontal |
| Model:       | EMC6270-E                              | S/N:      | /          |
| Mode:        | Transmit by 802.11b at Channel 2412MHz | Voltage:  | DC3.3V     |
| Environment: | Temp: 21°C; Humi:51%                   | Engineer: | Chuang Li  |

### Test Graph

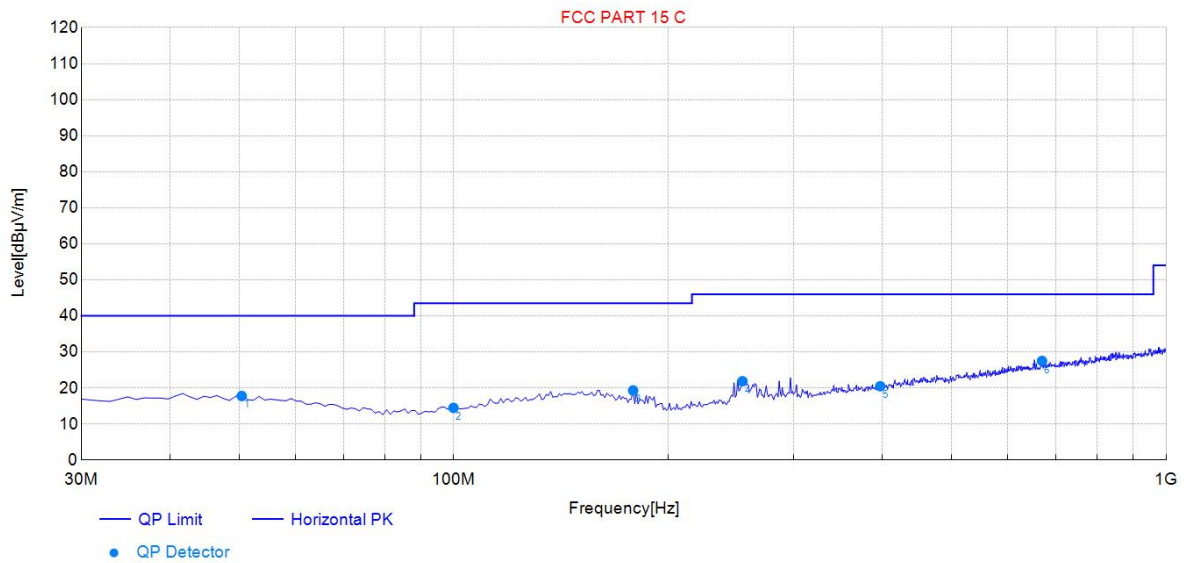


### Final Data List

| NO. | Freq. [MHz] | Factor [dB] | QP Value [dBμV/m] | QP Limit [dBμV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 50.39       | 14.50       | 17.78             | 40.00             | 22.22          | 100         | 66        | Horizontal |
| 2   | 99.91       | 11.49       | 14.49             | 43.50             | 29.01          | 100         | 257       | Horizontal |
| 3   | 178.56      | 13.71       | 19.32             | 43.50             | 24.18          | 100         | 355       | Horizontal |
| 4   | 254.29      | 13.88       | 21.87             | 46.00             | 24.13          | 100         | 193       | Horizontal |
| 5   | 397.03      | 17.34       | 20.49             | 46.00             | 25.51          | 100         | 204       | Horizontal |
| 6   | 669.87      | 22.73       | 27.50             | 46.00             | 18.50          | 100         | 60        | Horizontal |

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

|              |                                        |           |           |
|--------------|----------------------------------------|-----------|-----------|
| EUT:         | 2.4GHz Wi-Fi/BLE Module                | Polarity: | Vertical  |
| Model:       | EMC6270-E                              | S/N:      | /         |
| Mode:        | Transmit by 802.11b at Channel 2412MHz | Voltage:  | DC3.3V    |
| Environment: | Temp: 21°C; Humi:51%                   | Engineer: | Chuang Li |

### Test Graph

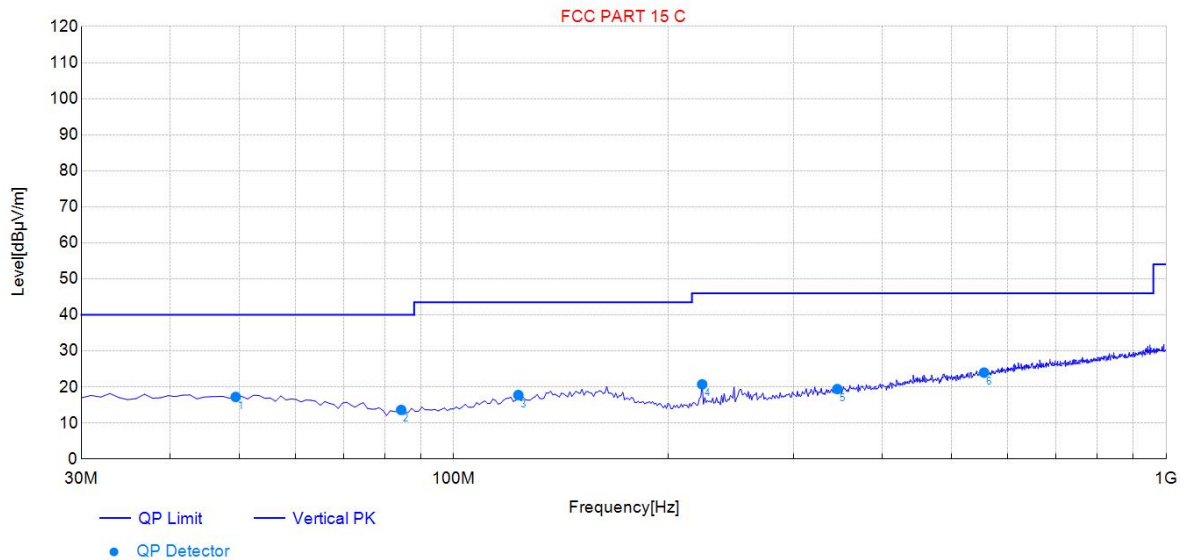


### Final Data List

| NO. | Freq. [MHz] | Factor [dB] | QP Value [dBμV/m] | QP Limit [dBμV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 49.42       | 14.53       | 17.24             | 40.00             | 22.76          | 100         | 5         | Vertical |
| 2   | 84.37       | 10.61       | 13.64             | 40.00             | 26.36          | 100         | 227       | Vertical |
| 3   | 123.21      | 13.96       | 17.77             | 43.50             | 25.73          | 100         | 101       | Vertical |
| 4   | 223.22      | 12.69       | 20.73             | 46.00             | 25.27          | 100         | 234       | Vertical |
| 5   | 345.57      | 16.23       | 19.42             | 46.00             | 26.58          | 100         | 314       | Vertical |
| 6   | 555.30      | 20.67       | 23.99             | 46.00             | 22.01          | 100         | 354       | Vertical |

### 30MHz – 1GHz Test Data

|              |                                        |           |            |
|--------------|----------------------------------------|-----------|------------|
| EUT:         | 2.4GHz Wi-Fi/BLE Module                | Polarity: | Horizontal |
| Model:       | EMC6270-E                              | S/N:      | /          |
| Mode:        | Transmit by 802.11b at Channel 2437MHz | Voltage:  | DC3.3V     |
| Environment: | Temp: 21°C; Humi:51%                   | Engineer: | Chuang Li  |

### Test Graph

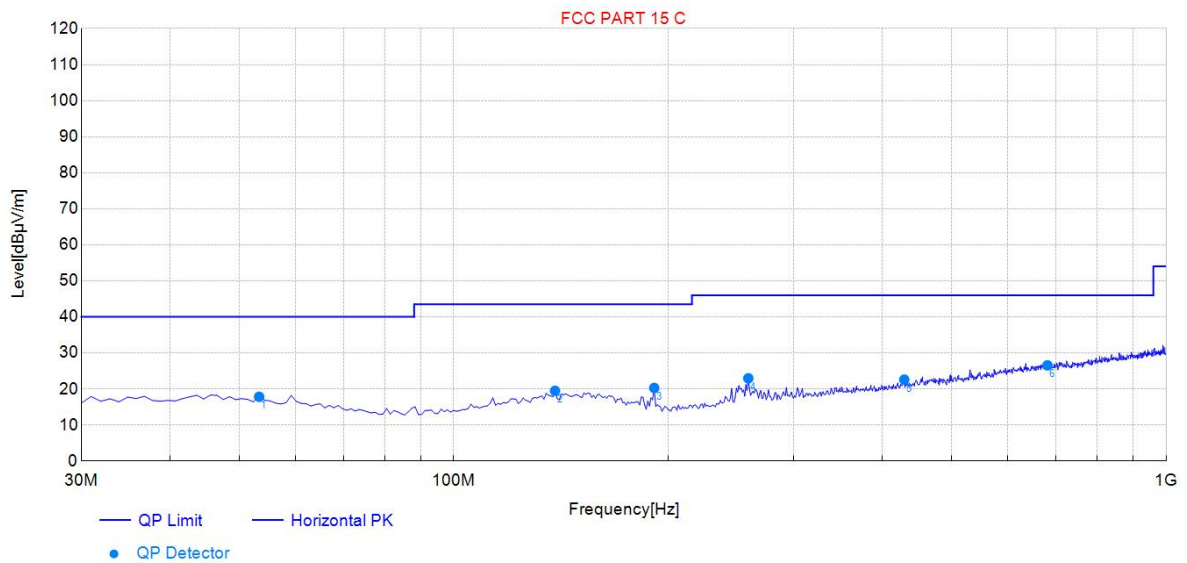


### Final Data List

| NO. | Freq. [MHz] | Factor [dB] | QP Value [dBμV/m] | QP Limit [dBμV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 53.30       | 14.30       | 17.84             | 40.00             | 22.16          | 100         | 169       | Horizontal |
| 2   | 138.75      | 15.06       | 19.50             | 43.50             | 24.00          | 100         | 301       | Horizontal |
| 3   | 191.18      | 12.59       | 20.30             | 43.50             | 23.20          | 100         | 23        | Horizontal |
| 4   | 259.15      | 14.04       | 22.97             | 46.00             | 23.03          | 100         | 193       | Horizontal |
| 5   | 429.07      | 18.23       | 22.61             | 46.00             | 23.39          | 100         | 341       | Horizontal |
| 6   | 681.52      | 22.97       | 26.57             | 46.00             | 19.43          | 100         | 130       | Horizontal |

|              |                                        |           |           |
|--------------|----------------------------------------|-----------|-----------|
| EUT:         | 2.4GHz Wi-Fi/BLE Module                | Polarity: | Vertical  |
| Model:       | EMC6270-E                              | S/N:      | /         |
| Mode:        | Transmit by 802.11b at Channel 2437MHz | Voltage:  | DC3.3V    |
| Environment: | Temp: 21°C; Humi:51%                   | Engineer: | Chuang Li |

### Test Graph

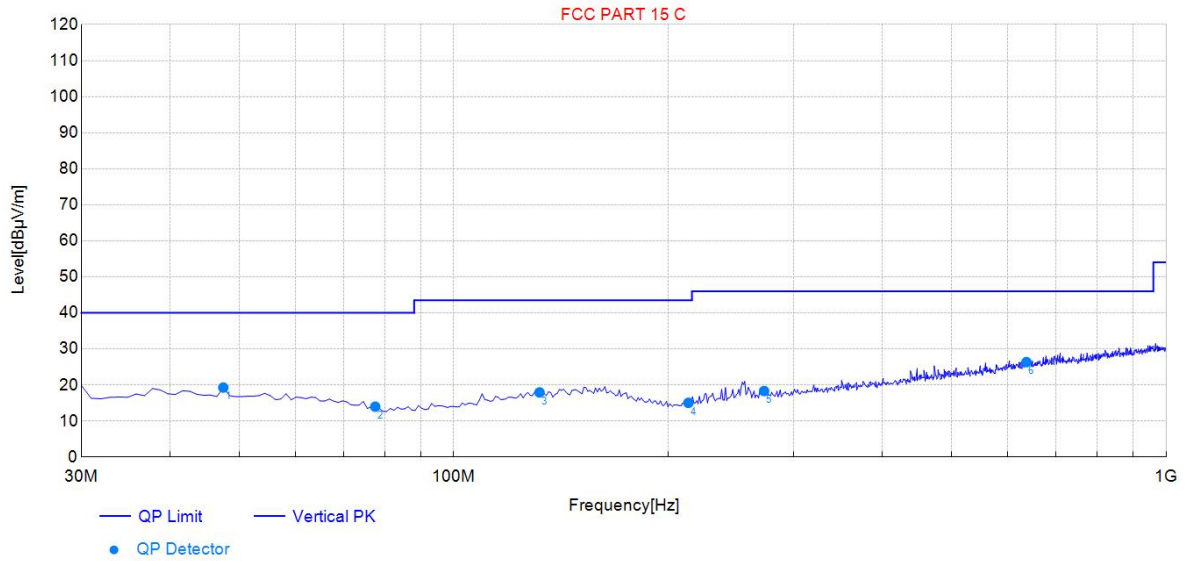

### Final Data List


| NO. | Freq. [MHz] | Factor [dB] | QP Value [dBμV/m] | QP Limit [dBμV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 47.48       | 14.56       | 19.29             | 40.00             | 20.71          | 100         | 173       | Vertical |
| 2   | 77.58       | 10.88       | 13.99             | 40.00             | 26.01          | 100         | 22        | Vertical |
| 3   | 131.95      | 14.53       | 17.94             | 43.50             | 25.56          | 100         | 206       | Vertical |
| 4   | 213.51      | 12.31       | 15.05             | 43.50             | 28.45          | 100         | 42        | Vertical |
| 5   | 272.74      | 14.35       | 18.33             | 46.00             | 27.67          | 100         | 0         | Vertical |
| 6   | 636.86      | 22.24       | 26.35             | 46.00             | 19.65          | 100         | 150       | Vertical |

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

### 30MHz – 1GHz Test Data

|              |                                        |           |            |
|--------------|----------------------------------------|-----------|------------|
| EUT:         | 2.4GHz Wi-Fi/BLE Module                | Polarity: | Horizontal |
| Model:       | EMC6270-E                              | S/N:      | /          |
| Mode:        | Transmit by 802.11b at Channel 2462MHz | Voltage:  | DC3.3V     |
| Environment: | Temp: 21°C; Humi:51%                   | Engineer: | Chuang Li  |

### Test Graph

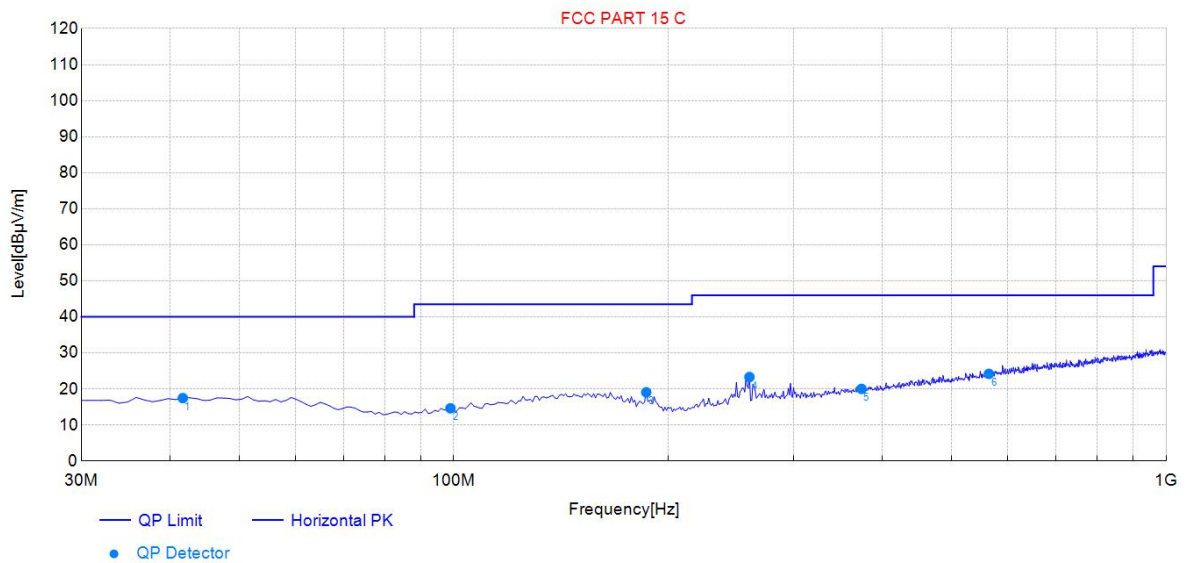


### Final Data List

| NO. | Freq. [MHz] | Factor [dB] | QP Value [dBμV/m] | QP Limit [dBμV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 41.65       | 14.81       | 17.48             | 40.00             | 22.52          | 100         | 115       | Horizontal |
| 2   | 98.94       | 11.41       | 14.65             | 43.50             | 28.85          | 100         | 55        | Horizontal |
| 3   | 186.33      | 13.02       | 19.09             | 43.50             | 24.41          | 100         | 58        | Horizontal |
| 4   | 260.12      | 14.07       | 23.32             | 46.00             | 22.68          | 100         | 177       | Horizontal |
| 5   | 373.72      | 16.89       | 20.03             | 46.00             | 25.97          | 100         | 52        | Horizontal |
| 6   | 564.03      | 20.86       | 24.20             | 46.00             | 21.80          | 100         | 52        | Horizontal |

|              |                                        |           |           |
|--------------|----------------------------------------|-----------|-----------|
| EUT:         | 2.4GHz Wi-Fi/BLE Module                | Polarity: | Vertical  |
| Model:       | EMC6270-E                              | S/N:      | /         |
| Mode:        | Transmit by 802.11b at Channel 2462MHz | Voltage:  | DC3.3V    |
| Environment: | Temp: 21°C; Humi:51%                   | Engineer: | Chuang Li |

### Test Graph

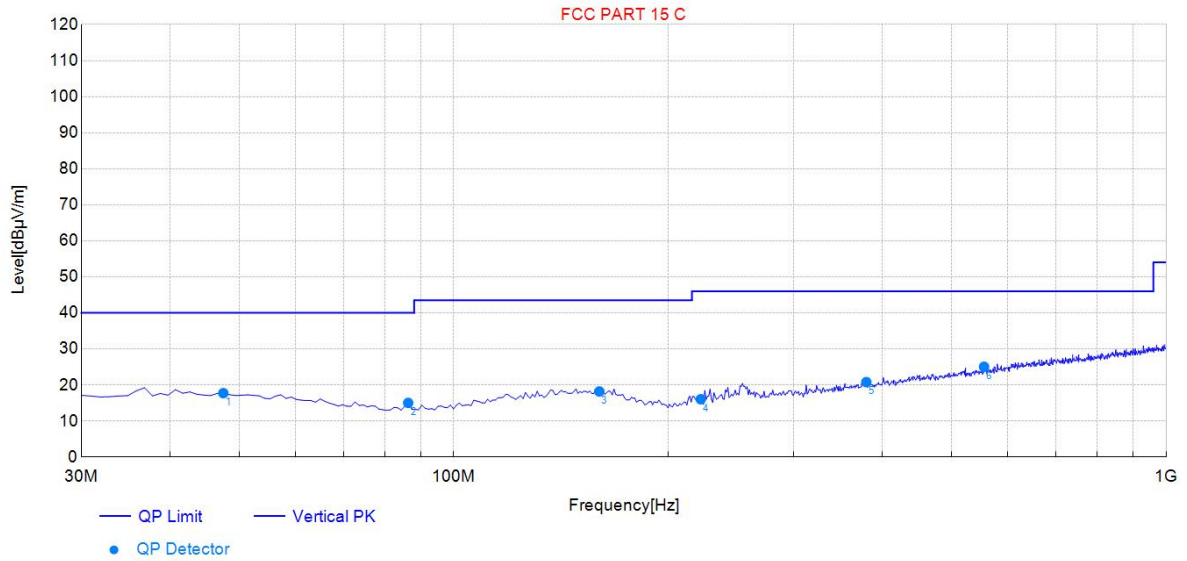

### Final Data List

| NO. | Freq. [MHz] | Factor [dB] | QP Value [dBμV/m] | QP Limit [dBμV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 47.48       | 14.56       | 17.74             | 40.00             | 22.26          | 100         | 317       | Vertical |
| 2   | 86.32       | 10.65       | 15.04             | 40.00             | 24.96          | 100         | 103       | Vertical |
| 3   | 160.11      | 15.83       | 18.20             | 43.50             | 25.30          | 100         | 232       | Vertical |
| 4   | 222.25      | 12.64       | 16.05             | 46.00             | 29.95          | 100         | 360       | Vertical |
| 5   | 379.55      | 17.02       | 20.80             | 46.00             | 25.20          | 100         | 176       | Vertical |
| 6   | 555.30      | 20.67       | 25.06             | 46.00             | 20.94          | 100         | 1         | Vertical |

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

## 7.7. Restricted Band Edge Measurement

### 7.7.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz)  | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|---------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42 - 16.423      | 399.9 - 410        | 4.5 - 5.15         |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614          | 5.35 - 5.46        |
| 2.1735 - 2.1905            | 16.80425 - 16.80475 | 960 - 1240         | 7.25 - 7.75        |
| 4.125 - 4.128              | 25.5 - 25.67        | 1300 - 1427        | 8.25 - 8.5         |
| 4.17725 - 4.17775          | 37.5 - 38.25        | 1435 - 1626.5      | 9.0 - 9.2          |
| 4.20725 - 4.20775          | 73 - 74.6           | 1645.5 - 1646.5    | 9.3 - 9.5          |
| 6.215 - 6.218              | 74.8 - 75.2         | 1660 - 1710        | 10.6 - 12.7        |
| 6.26775 - 6.26825          | 108 - 121.94        | 1718.8 - 1722.2    | 13.25 - 13.4       |
| 6.31175 - 6.31225          | 123 - 138           | 2200 - 2300        | 14.47 - 14.5       |
| 8.291 - 8.294              | 149.9 - 150.05      | 2310 - 2390        | 15.35 - 16.2       |
| 8.362 - 8.366              | 156.52475 - 156.525 | 2483.5 - 2500      | 17.7 - 21.4        |
| 8.37625 - 8.38675          | 156.7 - 156.9       | 2690 - 2900        | 22.01 - 23.12      |
| 8.41425 - 8.41475          | 162.0125 - 167.17   | 3260 - 3267        | 23.6 - 24.0        |
| 12.29 - 12.293             | 167.72 - 173.2      | 3332 - 3339        | 31.2 - 31.8        |
| 12.51975 - 12.52025        | 240 - 285           | 3345.8 - 3358      | 36.43 - 36.5       |
| 12.57675 - 12.57725        | 322 - 335.4         | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36 - 13.41              | --                  | --                 | --                 |

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

#### 7.7.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

#### 7.7.3. Test Setting


##### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Power Average (RMS)
5. Number of sweep point = 2001 (Number of sweep points must be  $\geq 2 \times \text{span} / \text{RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

#### 7.7.4. Test Setup

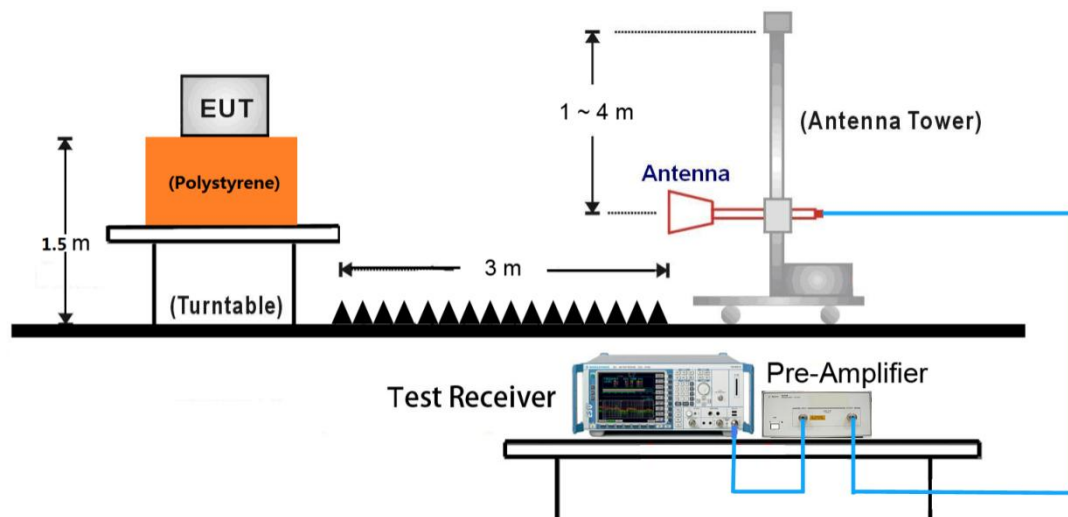


### 7.7.5. Test Result

#### 802.11b

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11b                                                                                                                                                                           | Test Date:     | 2024-10-11 |
| Test Channel: | 2412                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


#### Test Graph

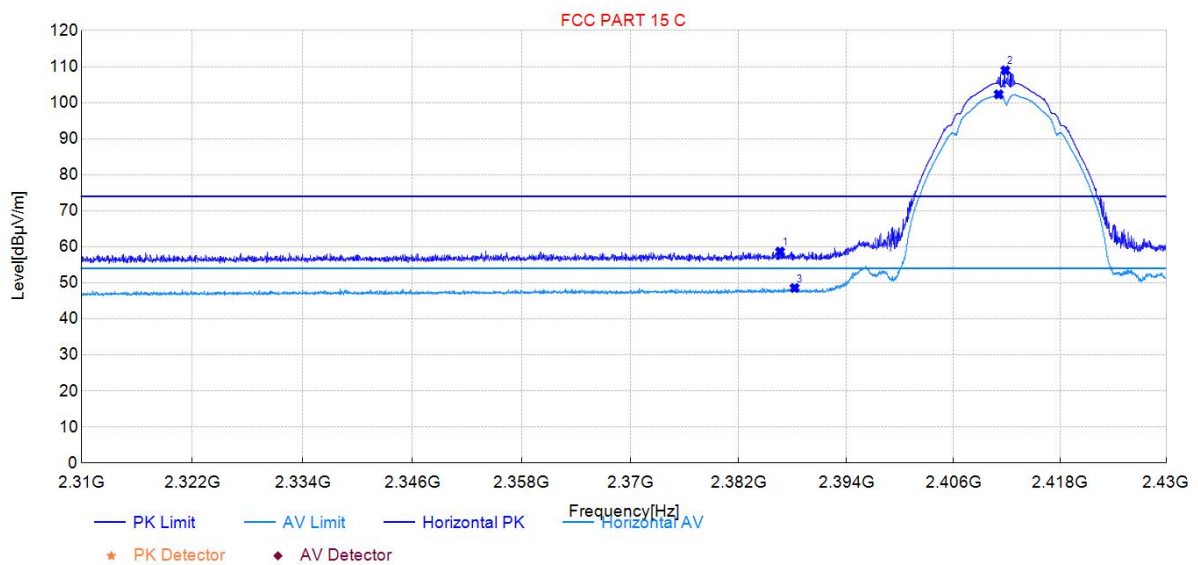

| Freq. [MHz] | Level [dBuV/m] | Factor [dB] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity   |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|------------|
| 2386.61     | 58.66          | 36.08       | 74.00          | 15.34       | 150         | 142       | Peak     | Horizontal |
| 2411.85     | 108.97         | 36.18       | 74.00          | -34.97      | 150         | 315       | Peak     | Horizontal |
| 2388.23     | 48.57          | 36.09       | 54.00          | 5.43        | 150         | 293       | Average  | Horizontal |
| 2411.10     | 102.31         | 36.18       | 54.00          | -48.31      | 150         | 138       | Average  | Horizontal |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11b                                                                                                                                                                           | Test Date:     | 2024-10-11 |
| Test Channel: | 2412                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

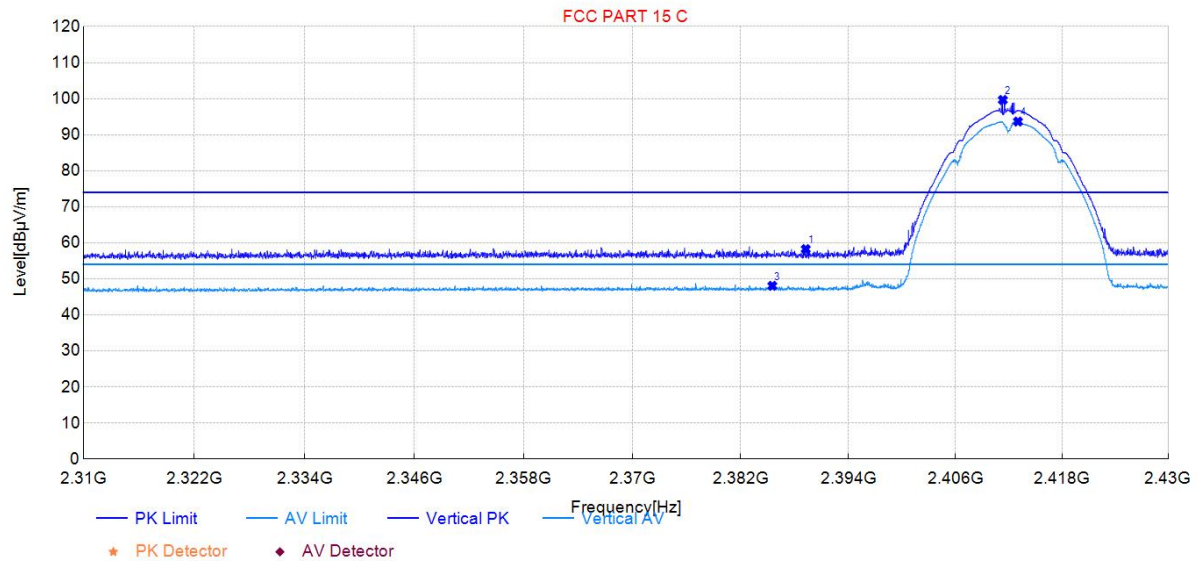

| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 2389.25     | 58.25          | 35.95       | 74.00          | 15.75       | 150         | 36        | Peak     | Vertical |
| 2411.34     | 99.65          | 36.00       | 74.00          | -25.65      | 150         | 99        | Peak     | Vertical |
| 2385.53     | 48.07          | 35.94       | 54.00          | 5.93        | 150         | 158       | Average  | Vertical |
| 2413.05     | 93.65          | 36.00       | 54.00          | -39.65      | 150         | 99        | Average  | Vertical |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11b                                                                                                                                                                           | Test Date:     | 2024-10-11 |
| Test Channel: | 2462                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

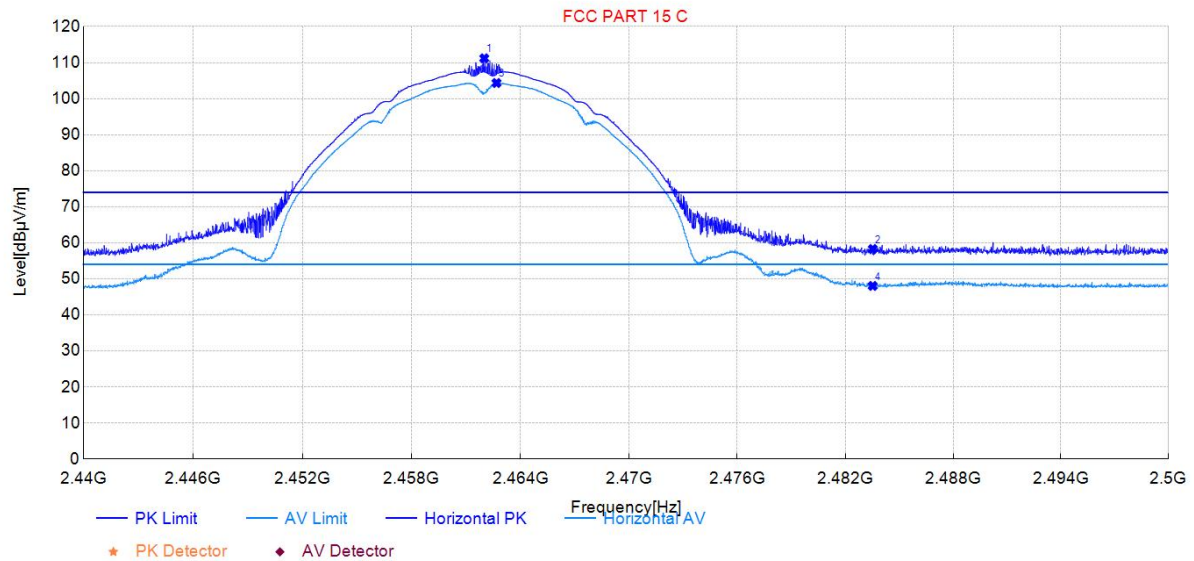

| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity   |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|------------|
| 2462.01     | 111.20         | 36.31       | 74.00          | -37.20      | 150         | 137       | Peak     | Horizontal |
| 2483.53     | 58.29          | 36.36       | 74.00          | 15.71       | 150         | 210       | Peak     | Horizontal |
| 2462.69     | 104.35         | 36.31       | 54.00          | -50.35      | 150         | 137       | Average  | Horizontal |
| 2483.53     | 48.04          | 36.36       | 54.00          | 5.96        | 150         | 270       | Average  | Horizontal |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11b                                                                                                                                                                           | Test Date:     | 2024-10-11 |
| Test Channel: | 2462                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |

### Test Graph

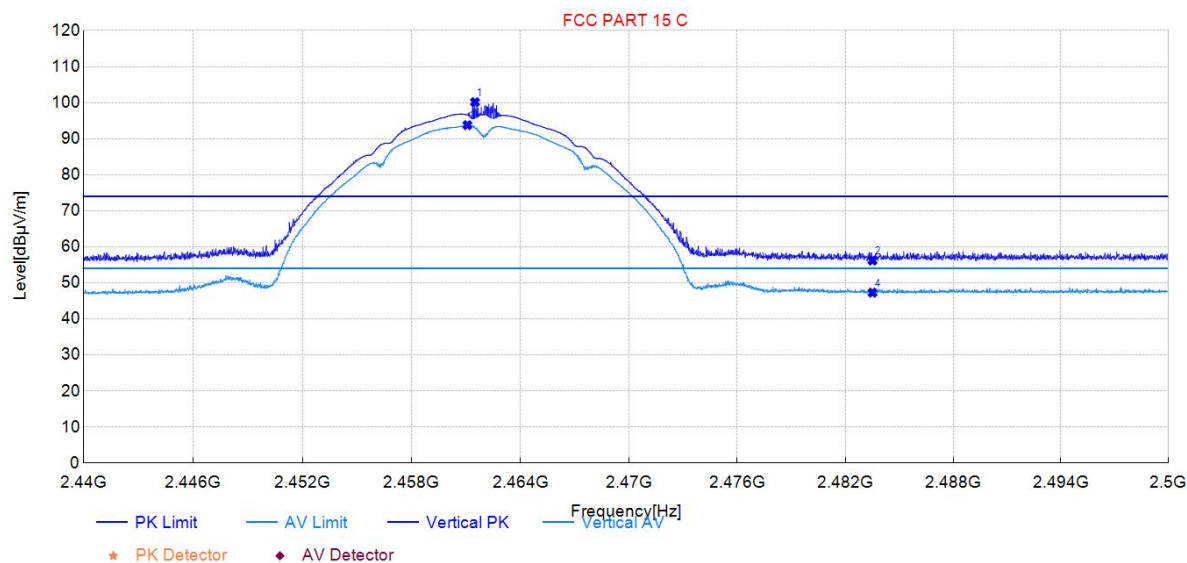


| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 2461.50     | 100.15         | 36.06       | 74.00          | -26.15      | 150         | 74        | Peak     | Vertical |
| 2483.51     | 56.18          | 36.08       | 74.00          | 17.82       | 150         | 6         | Peak     | Vertical |
| 2461.08     | 93.78          | 36.06       | 54.00          | -39.78      | 150         | 74        | Average  | Vertical |
| 2483.51     | 47.28          | 36.08       | 54.00          | 6.72        | 150         | 45        | Average  | Vertical |

## 802.11g

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11g                                                                                                                                                                           | Test Date:     | 2024-10-11 |
| Test Channel: | 2412                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

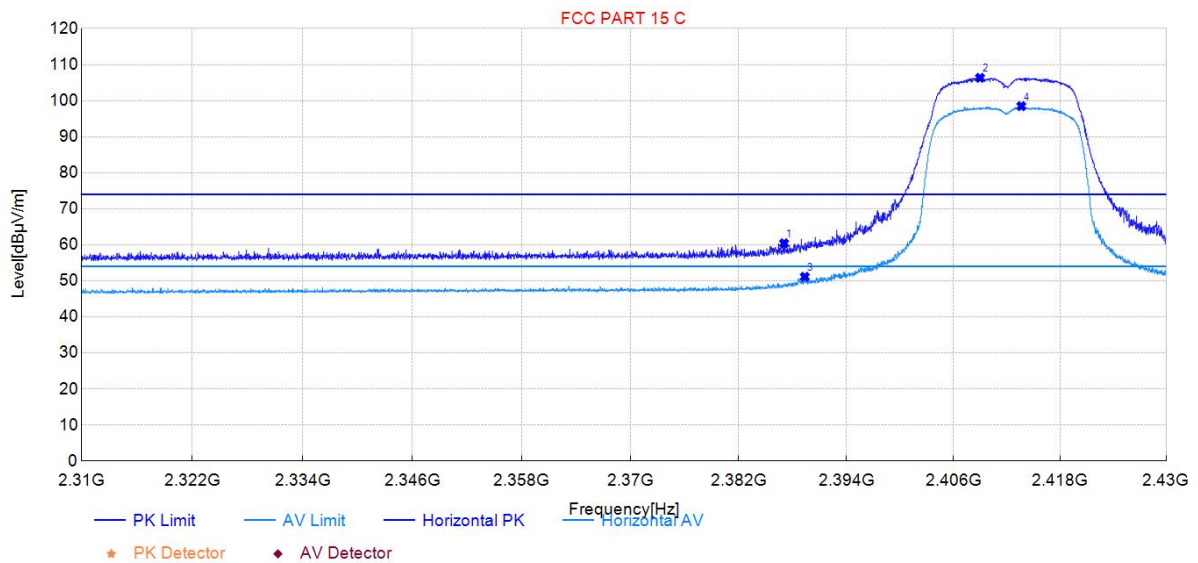

| Freq. [MHz] | Level [dBuV/m] | Factor [dB] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity   |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|------------|
| 2387.06     | 60.42          | 36.09       | 74.00          | 13.58       | 150         | 309       | Peak     | Horizontal |
| 2408.99     | 106.34         | 36.17       | 74.00          | -32.34      | 150         | 313       | Peak     | Horizontal |
| 2389.37     | 51.13          | 36.09       | 54.00          | 2.87        | 150         | 309       | Average  | Horizontal |
| 2413.65     | 98.48          | 36.18       | 54.00          | -44.48      | 150         | 316       | Average  | Horizontal |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11g                                                                                                                                                                           | Test Date:     | 2024-10-11 |
| Test Channel: | 2412                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

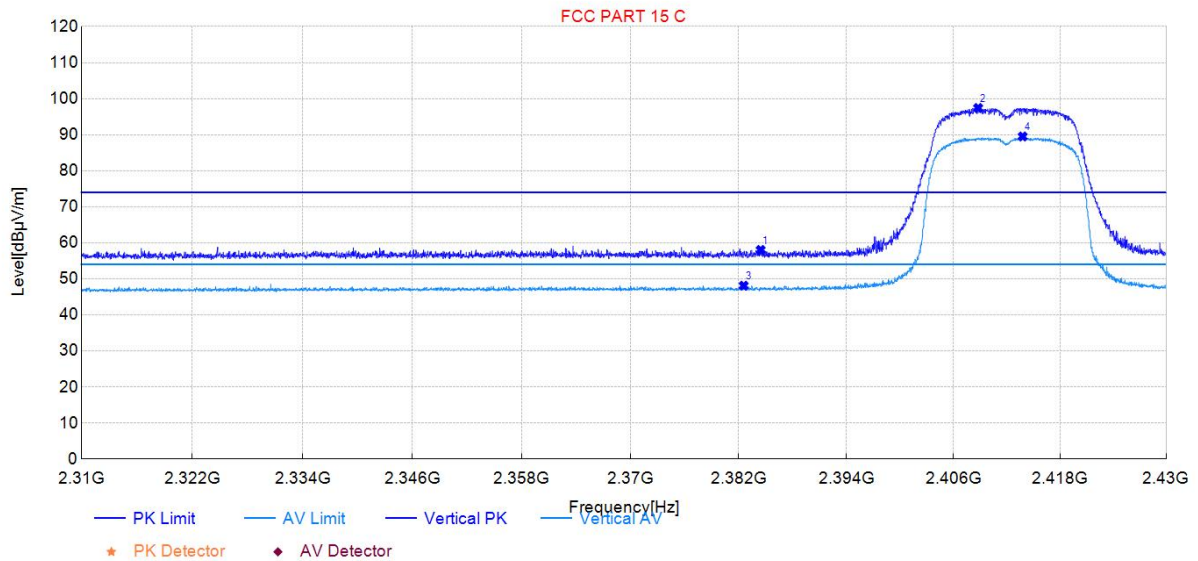

| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 2384.45     | 58.02          | 35.93       | 74.00          | 15.98       | 150         | 17        | Peak     | Vertical |
| 2408.78     | 97.41          | 36.00       | 74.00          | -23.41      | 150         | 99        | Peak     | Vertical |
| 2382.56     | 48.10          | 35.92       | 54.00          | 5.90        | 150         | 2         | Average  | Vertical |
| 2413.80     | 89.51          | 36.00       | 54.00          | -35.51      | 150         | 99        | Average  | Vertical |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11g                                                                                                                                                                           | Test Date:     | 2024-10-11 |
| Test Channel: | 2462                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

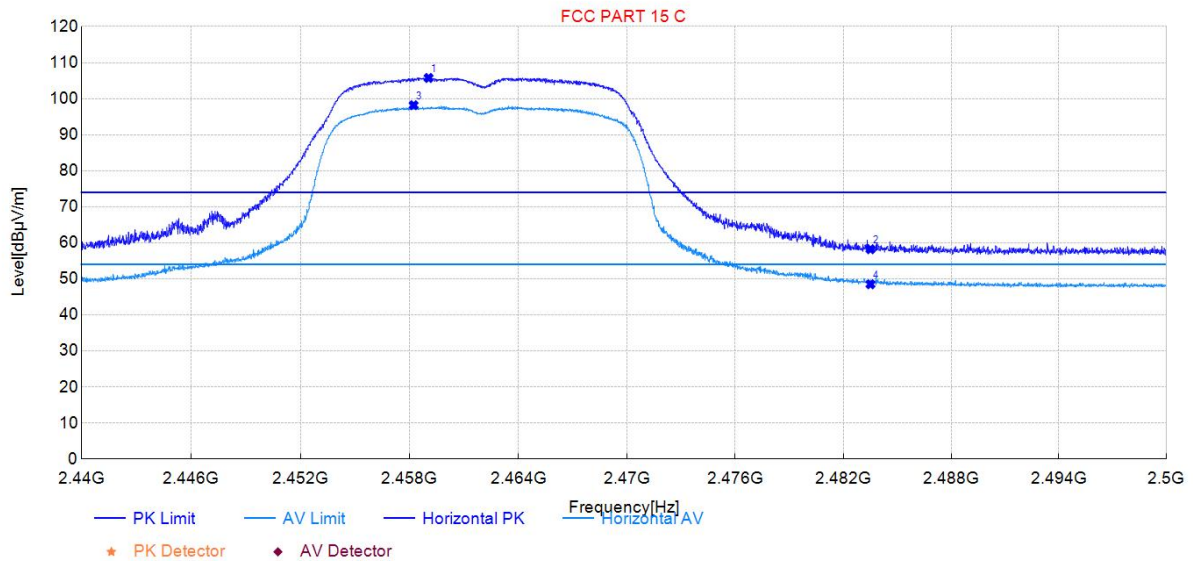

| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity   |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|------------|
| 2459.05     | 105.75         | 36.30       | 74.00          | -31.75      | 150         | 297       | Peak     | Horizontal |
| 2483.51     | 58.22          | 36.36       | 74.00          | 15.78       | 150         | 55        | Peak     | Horizontal |
| 2458.23     | 98.19          | 36.30       | 54.00          | -44.19      | 150         | 300       | Average  | Horizontal |
| 2483.51     | 48.50          | 36.36       | 54.00          | 5.50        | 150         | 112       | Average  | Horizontal |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11g                                                                                                                                                                           | Test Date:     | 2024-10-11 |
| Test Channel: | 2462                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |

### Test Graph

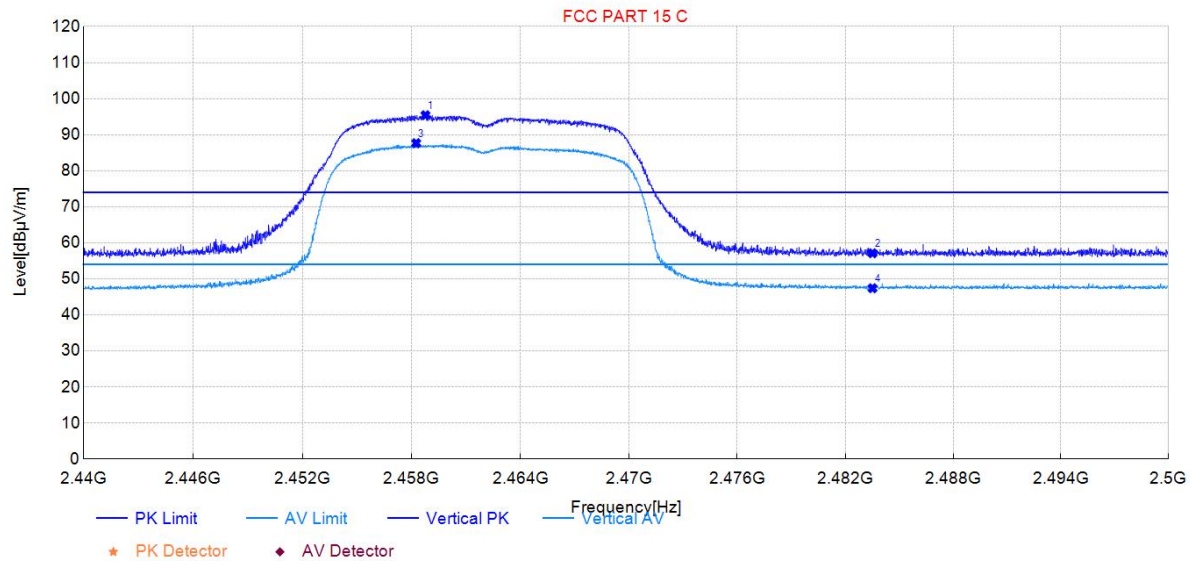


| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 2458.77     | 95.41          | 36.06       | 74.00          | -21.41      | 150         | 75        | Peak     | Vertical |
| 2483.51     | 57.11          | 36.08       | 74.00          | 16.89       | 150         | 328       | Peak     | Vertical |
| 2458.26     | 87.66          | 36.06       | 54.00          | -33.66      | 150         | 75        | Average  | Vertical |
| 2483.51     | 47.40          | 36.08       | 54.00          | 6.60        | 150         | 31        | Average  | Vertical |

## 802.11n20SISO

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11n20SISO                                                                                                                                                                     | Test Date:     | 2024-10-11 |
| Test Channel: | 2412                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

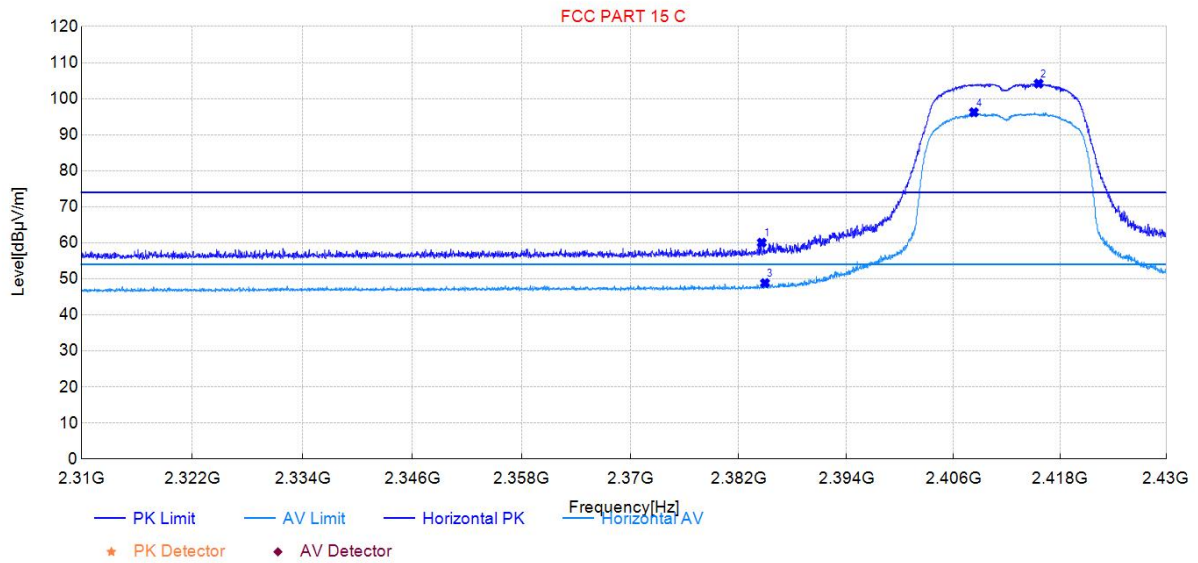

| Freq. [MHz] | Level [dBuV/m] | Factor [dB] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity   |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|------------|
| 2384.57     | 60.04          | 36.07       | 74.00          | 13.96       | 150         | 134       | Peak     | Horizontal |
| 2415.60     | 104.19         | 36.19       | 74.00          | -30.19      | 150         | 315       | Peak     | Horizontal |
| 2384.93     | 48.83          | 36.07       | 54.00          | 5.17        | 150         | 14        | Average  | Horizontal |
| 2408.30     | 96.23          | 36.17       | 54.00          | -42.23      | 150         | 315       | Average  | Horizontal |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11n20SISO                                                                                                                                                                     | Test Date:     | 2024-10-11 |
| Test Channel: | 2412                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

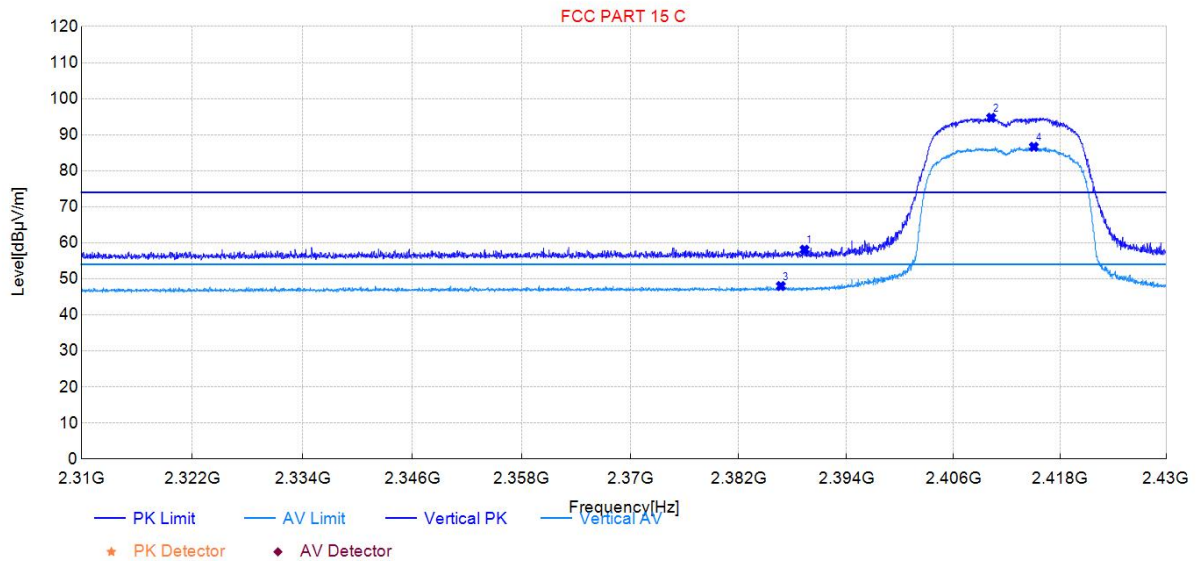

| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 2389.34     | 58.09          | 35.95       | 74.00          | 15.91       | 150         | 36        | Peak     | Vertical |
| 2410.26     | 94.70          | 36.00       | 74.00          | -20.70      | 150         | 103       | Peak     | Vertical |
| 2386.70     | 48.01          | 35.94       | 54.00          | 5.99        | 150         | 103       | Average  | Vertical |
| 2415.06     | 86.64          | 36.01       | 54.00          | -32.64      | 150         | 99        | Average  | Vertical |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11n20SISO                                                                                                                                                                     | Test Date:     | 2024-10-11 |
| Test Channel: | 2462                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

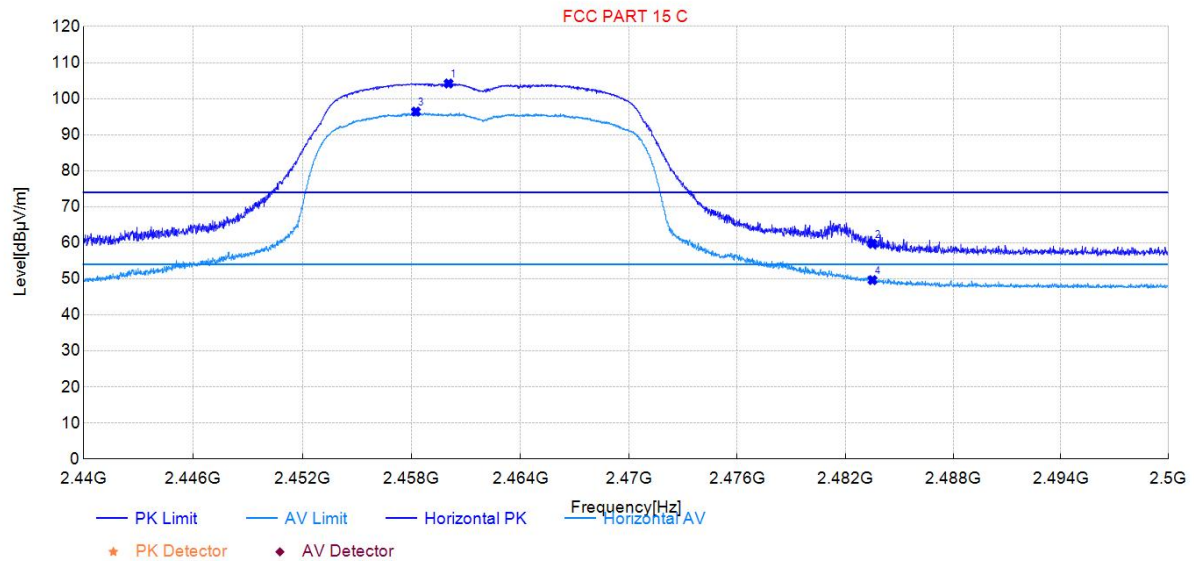

| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity   |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|------------|
| 2460.05     | 104.21         | 36.30       | 74.00          | -30.21      | 150         | 315       | Peak     | Horizontal |
| 2483.51     | 59.72          | 36.36       | 74.00          | 14.28       | 150         | 320       | Peak     | Horizontal |
| 2458.24     | 96.41          | 36.30       | 54.00          | -42.41      | 150         | 315       | Average  | Horizontal |
| 2483.51     | 49.65          | 36.36       | 54.00          | 4.35        | 150         | 312       | Average  | Horizontal |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11n20SISO                                                                                                                                                                     | Test Date:     | 2024-10-11 |
| Test Channel: | 2462                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |

### Test Graph

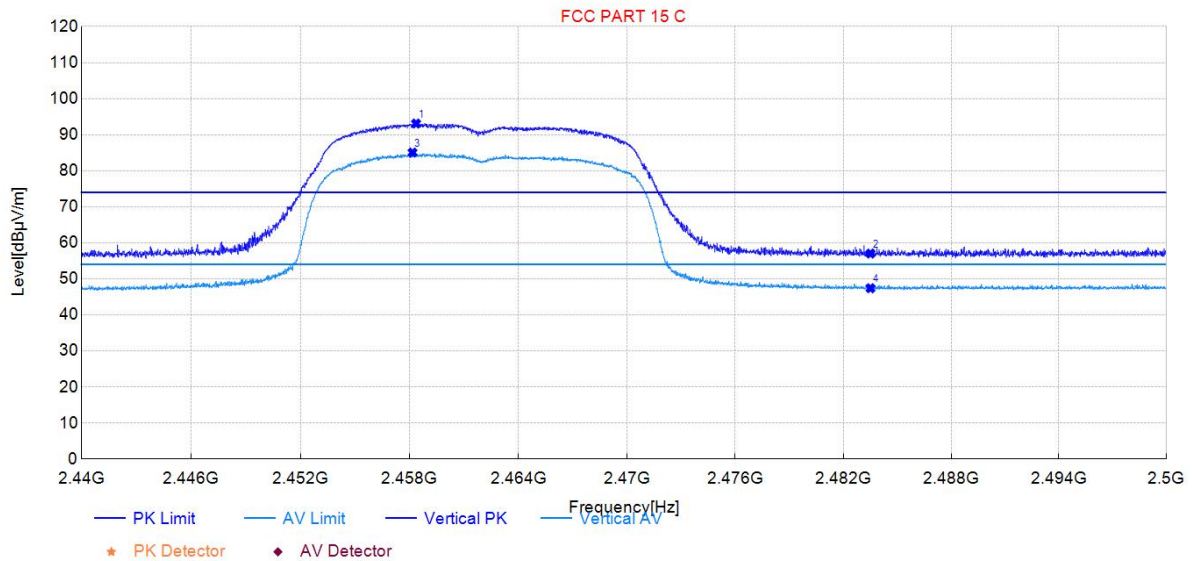


| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 2458.36     | 93.10          | 36.06       | 74.00          | -19.10      | 150         | 75        | Peak     | Vertical |
| 2483.51     | 57.02          | 36.08       | 74.00          | 16.98       | 150         | 93        | Peak     | Vertical |
| 2458.17     | 85.06          | 36.06       | 54.00          | -31.06      | 150         | 75        | Average  | Vertical |
| 2483.51     | 47.40          | 36.08       | 54.00          | 6.60        | 150         | 345       | Average  | Vertical |

## 802.11n40SISO

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11n40SISO                                                                                                                                                                     | Test Date:     | 2024-10-11 |
| Test Channel: | 2422                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

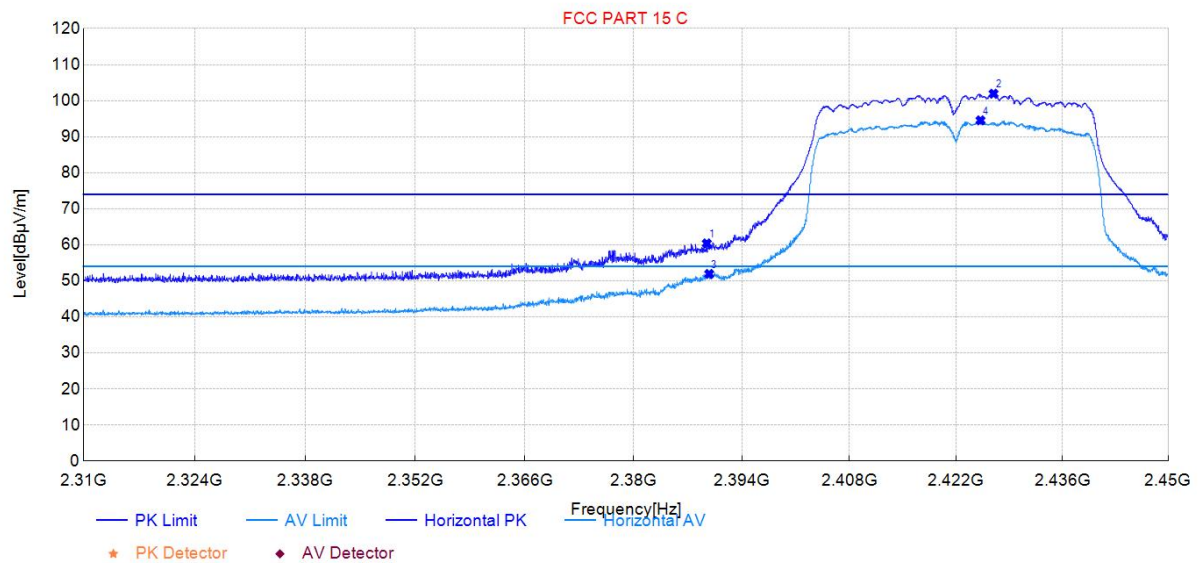

| Freq. [MHz] | Level [dBuV/m] | Factor [dB] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity   |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|------------|
| 2389.47     | 60.39          | 36.09       | 74.00          | 13.61       | 150         | 306       | Peak     | Horizontal |
| 2426.93     | 101.93         | 36.21       | 74.00          | -27.93      | 150         | 314       | Peak     | Horizontal |
| 2389.78     | 51.92          | 36.10       | 54.00          | 2.08        | 150         | 310       | Average  | Horizontal |
| 2425.21     | 94.53          | 36.21       | 54.00          | -40.53      | 150         | 314       | Average  | Horizontal |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11n40SISO                                                                                                                                                                     | Test Date:     | 2024-10-11 |
| Test Channel: | 2422                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

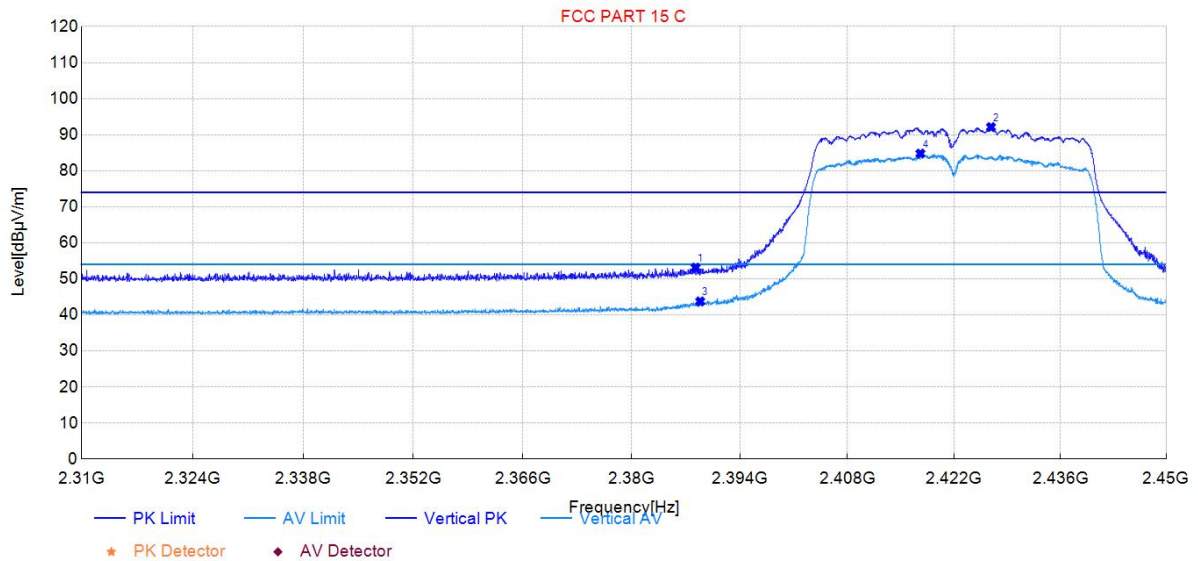

| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 2388.28     | 53.12          | 35.95       | 74.00          | 20.88       | 150         | 84        | Peak     | Vertical |
| 2426.86     | 92.12          | 36.02       | 74.00          | -18.12      | 150         | 100       | Peak     | Vertical |
| 2388.87     | 43.74          | 35.95       | 54.00          | 10.26       | 150         | 95        | Average  | Vertical |
| 2417.58     | 84.77          | 36.01       | 54.00          | -30.77      | 150         | 100       | Average  | Vertical |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11n40SISO                                                                                                                                                                     | Test Date:     | 2024-10-11 |
| Test Channel: | 2452                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

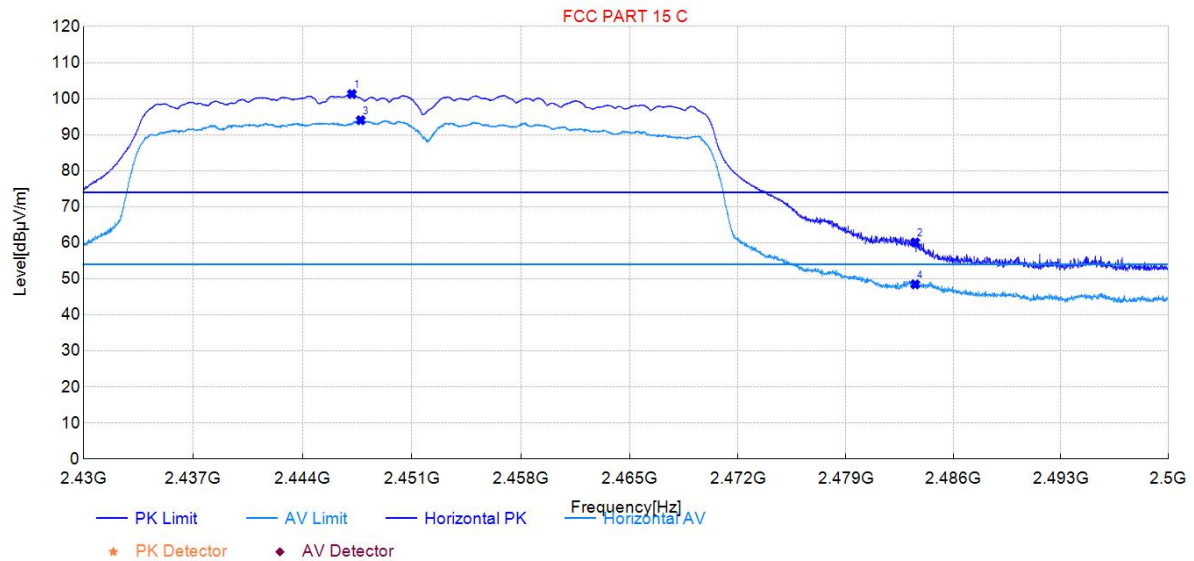

| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity   |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|------------|
| 2447.15     | 101.28         | 36.26       | 74.00          | -27.28      | 150         | 314       | Peak     | Horizontal |
| 2483.51     | 60.11          | 36.36       | 74.00          | 13.89       | 150         | 323       | Peak     | Horizontal |
| 2447.71     | 94.02          | 36.26       | 54.00          | -40.02      | 150         | 314       | Average  | Horizontal |
| 2483.51     | 48.47          | 36.36       | 54.00          | 5.53        | 150         | 311       | Average  | Horizontal |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11n40SISO                                                                                                                                                                     | Test Date:     | 2024-10-11 |
| Test Channel: | 2452                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |

### Test Graph

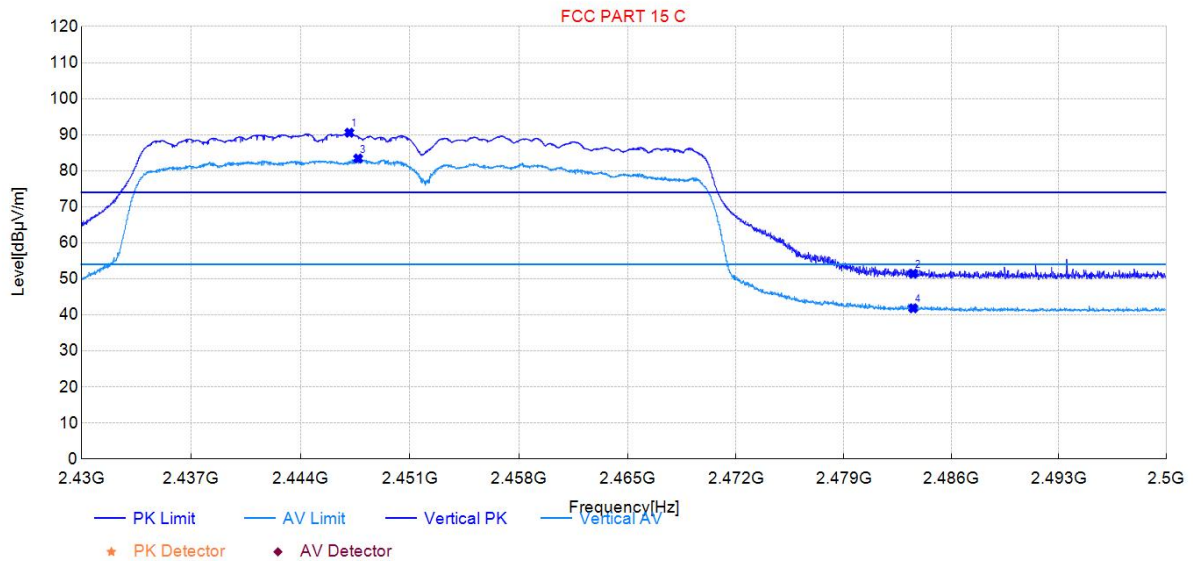


| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 2447.12     | 90.55          | 36.04       | 74.00          | -16.55      | 150         | 103       | Peak     | Vertical |
| 2483.51     | 51.42          | 36.08       | 74.00          | 22.58       | 150         | 168       | Peak     | Vertical |
| 2447.68     | 83.39          | 36.04       | 54.00          | -29.39      | 150         | 103       | Average  | Vertical |
| 2483.51     | 41.83          | 36.08       | 54.00          | 12.17       | 150         | 360       | Average  | Vertical |

## 802.11ax20SISO

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11ax20SISO                                                                                                                                                                    | Test Date:     | 2024-10-11 |
| Test Channel: | 2412                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

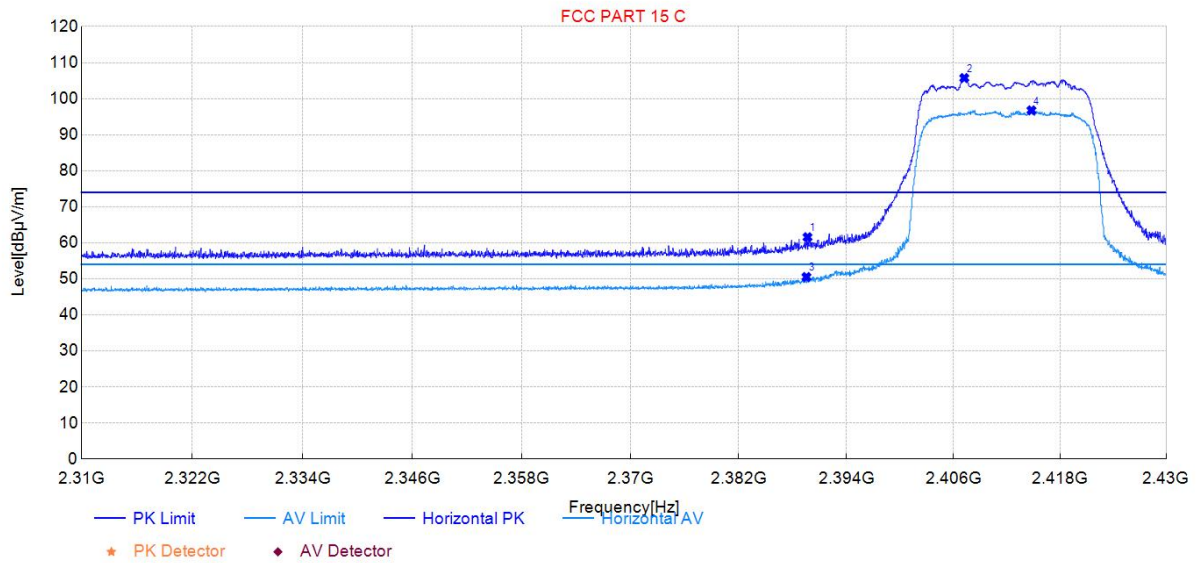

| Freq. [MHz] | Level [dBuV/m] | Factor [dB] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity   |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|------------|
| 2389.67     | 61.57          | 36.10       | 74.00          | 12.43       | 150         | 311       | Peak     | Horizontal |
| 2407.22     | 105.73         | 36.17       | 74.00          | -31.73      | 150         | 308       | Peak     | Horizontal |
| 2389.55     | 50.52          | 36.09       | 54.00          | 3.48        | 150         | 311       | Average  | Horizontal |
| 2414.79     | 96.76          | 36.19       | 54.00          | -42.76      | 150         | 316       | Average  | Horizontal |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11ax20SISO                                                                                                                                                                    | Test Date:     | 2024-10-11 |
| Test Channel: | 2412                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

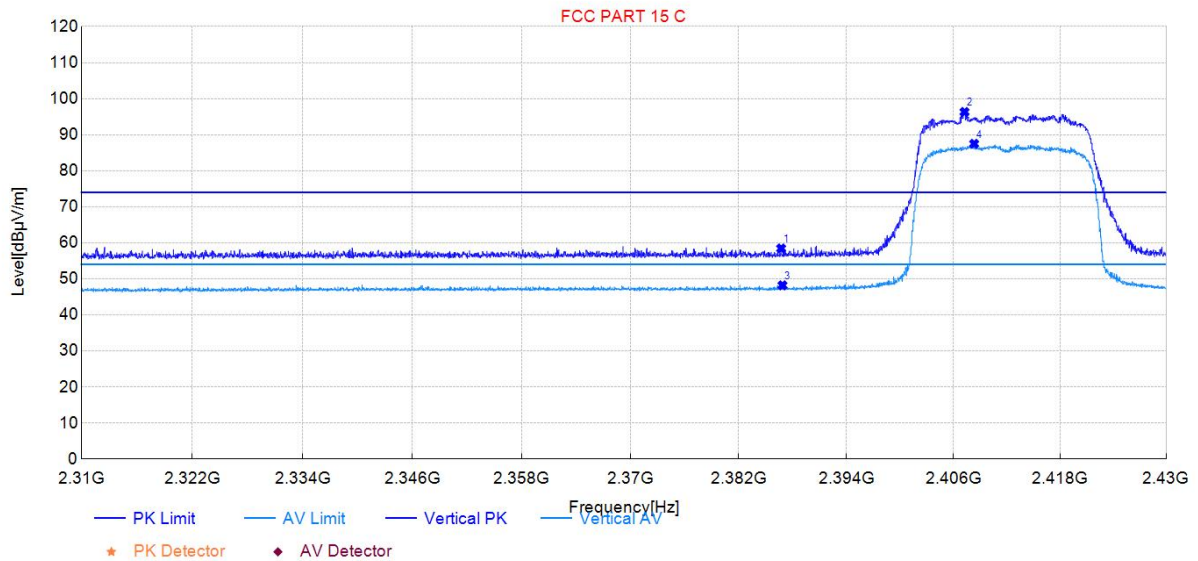

| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 2386.73     | 58.44          | 35.94       | 74.00          | 15.56       | 150         | 340       | Peak     | Vertical |
| 2407.25     | 96.31          | 36.00       | 74.00          | -22.31      | 150         | 99        | Peak     | Vertical |
| 2386.88     | 48.20          | 35.94       | 54.00          | 5.80        | 150         | 74        | Average  | Vertical |
| 2408.33     | 87.49          | 36.00       | 54.00          | -33.49      | 150         | 99        | Average  | Vertical |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11ax20SISO                                                                                                                                                                    | Test Date:     | 2024-10-11 |
| Test Channel: | 2462                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

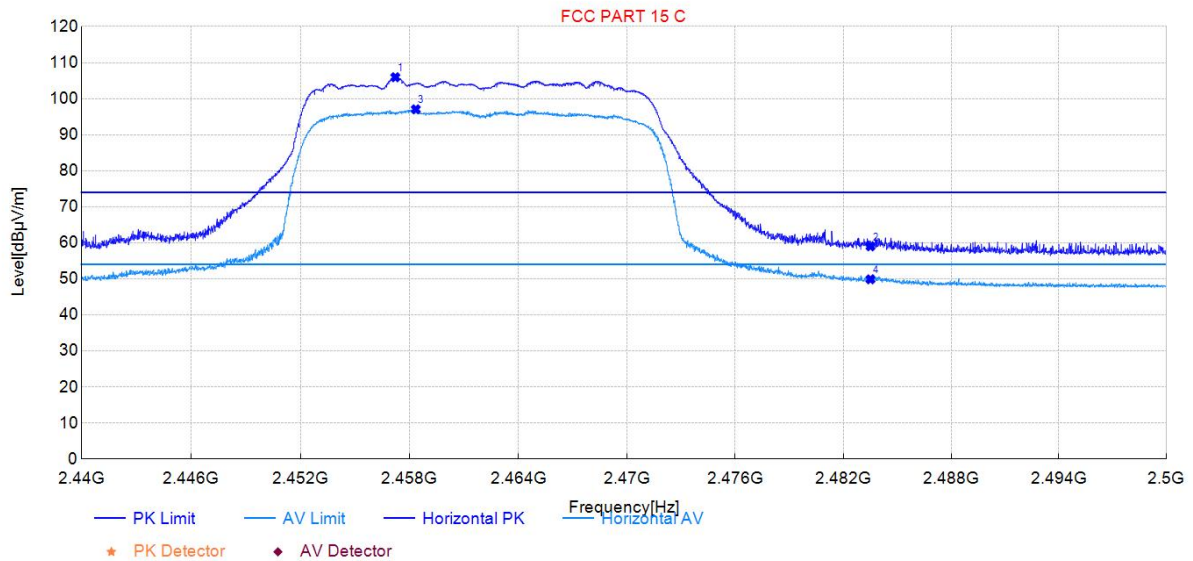

| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity   |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|------------|
| 2457.22     | 105.95         | 36.30       | 74.00          | -31.95      | 150         | 315       | Peak     | Horizontal |
| 2483.51     | 59.02          | 36.36       | 74.00          | 14.98       | 150         | 319       | Peak     | Horizontal |
| 2458.35     | 97.05          | 36.30       | 54.00          | -43.05      | 150         | 315       | Average  | Horizontal |
| 2483.51     | 49.87          | 36.36       | 54.00          | 4.13        | 150         | 315       | Average  | Horizontal |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11ax20SISO                                                                                                                                                                    | Test Date:     | 2024-10-11 |
| Test Channel: | 2462                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |

### Test Graph

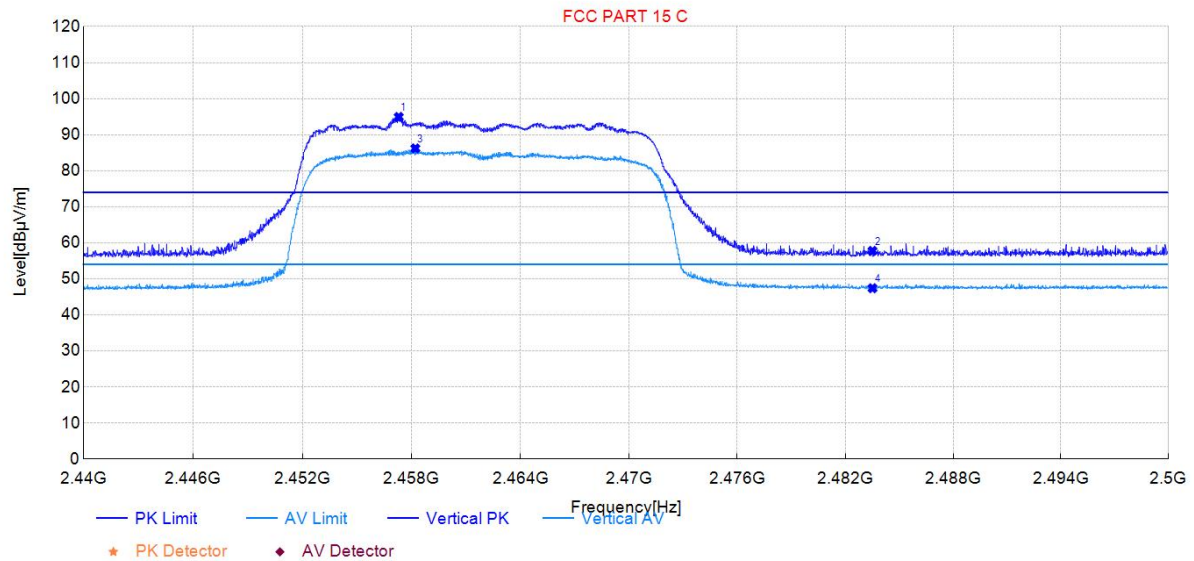


| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 2457.30     | 94.94          | 36.06       | 74.00          | -20.94      | 150         | 76        | Peak     | Vertical |
| 2483.51     | 57.77          | 36.08       | 74.00          | 16.23       | 150         | 88        | Peak     | Vertical |
| 2458.21     | 86.21          | 36.06       | 54.00          | -32.21      | 150         | 76        | Average  | Vertical |
| 2483.51     | 47.40          | 36.08       | 54.00          | 6.60        | 150         | 73        | Average  | Vertical |

## 802.11ax40SISO

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11ax40SISO                                                                                                                                                                    | Test Date:     | 2024-10-11 |
| Test Channel: | 2422                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

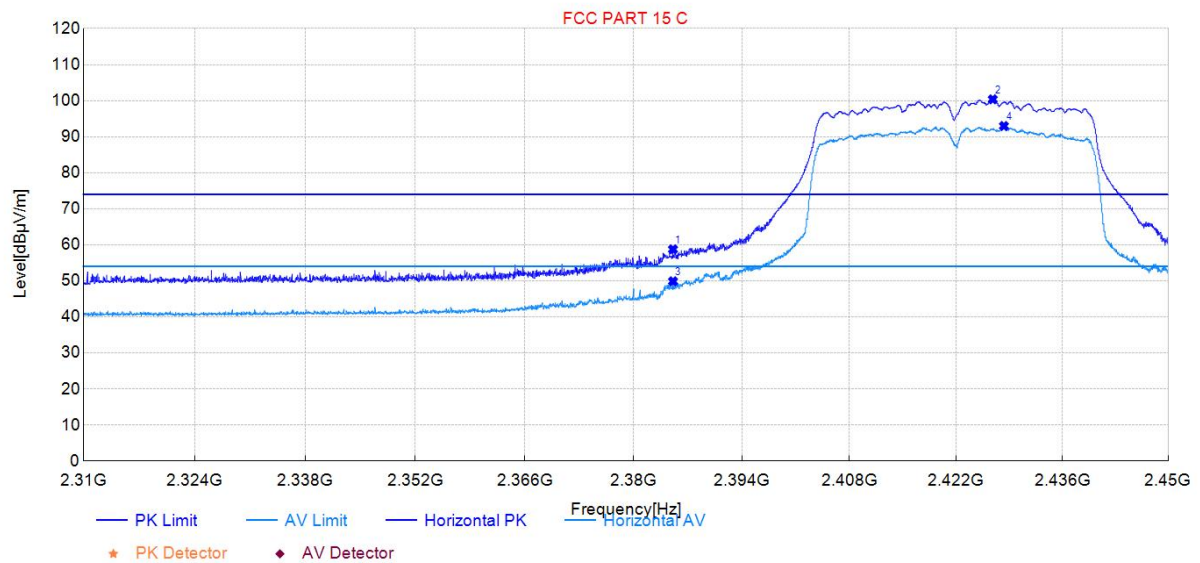

| Freq. [MHz] | Level [dBuV/m] | Factor [dB] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity   |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|------------|
| 2385.09     | 58.75          | 36.07       | 74.00          | 15.25       | 150         | 315       | Peak     | Horizontal |
| 2426.82     | 100.38         | 36.21       | 74.00          | -26.38      | 150         | 315       | Peak     | Horizontal |
| 2385.09     | 49.88          | 36.07       | 54.00          | 4.12        | 150         | 315       | Average  | Horizontal |
| 2428.29     | 92.97          | 36.22       | 54.00          | -38.97      | 150         | 315       | Average  | Horizontal |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11ax40SISO                                                                                                                                                                    | Test Date:     | 2024-10-11 |
| Test Channel: | 2422                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

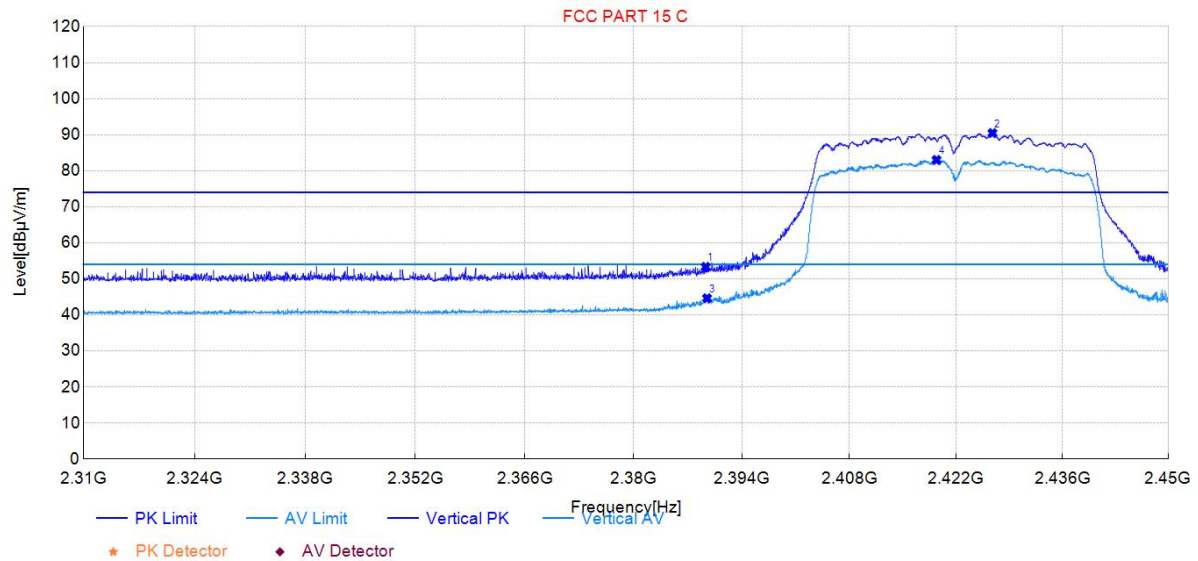

| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 2389.33     | 53.32          | 35.95       | 74.00          | 20.68       | 150         | 70        | Peak     | Vertical |
| 2426.79     | 90.45          | 36.02       | 74.00          | -16.45      | 150         | 103       | Peak     | Vertical |
| 2389.50     | 44.62          | 35.95       | 54.00          | 9.38        | 150         | 98        | Average  | Vertical |
| 2419.44     | 83.00          | 36.01       | 54.00          | -29.00      | 150         | 98        | Average  | Vertical |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11ax40SISO                                                                                                                                                                    | Test Date:     | 2024-10-11 |
| Test Channel: | 2452                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |


### Test Graph

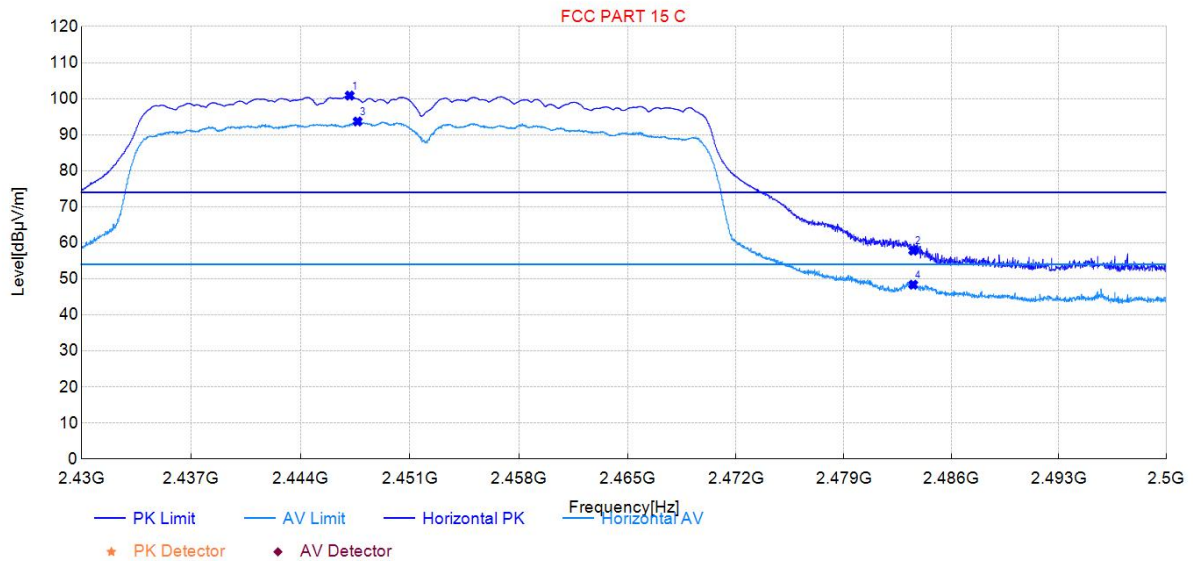

| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity   |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|------------|
| 2447.14     | 100.86         | 36.26       | 74.00          | -26.86      | 150         | 315       | Peak     | Horizontal |
| 2483.51     | 57.84          | 36.36       | 74.00          | 16.16       | 150         | 315       | Peak     | Horizontal |
| 2447.64     | 93.67          | 36.26       | 54.00          | -39.67      | 150         | 315       | Average  | Horizontal |
| 2483.51     | 48.38          | 36.36       | 54.00          | 5.62        | 150         | 319       | Average  | Horizontal |

|               |                                                                                                                                                                                   |                |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|
| Test Mode:    | 802.11ax40SISO                                                                                                                                                                    | Test Date:     | 2024-10-11 |
| Test Channel: | 2452                                                                                                                                                                              | Test Engineer: | Chuang Li  |
| Remark:       | The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm. |                |            |

### Test Graph

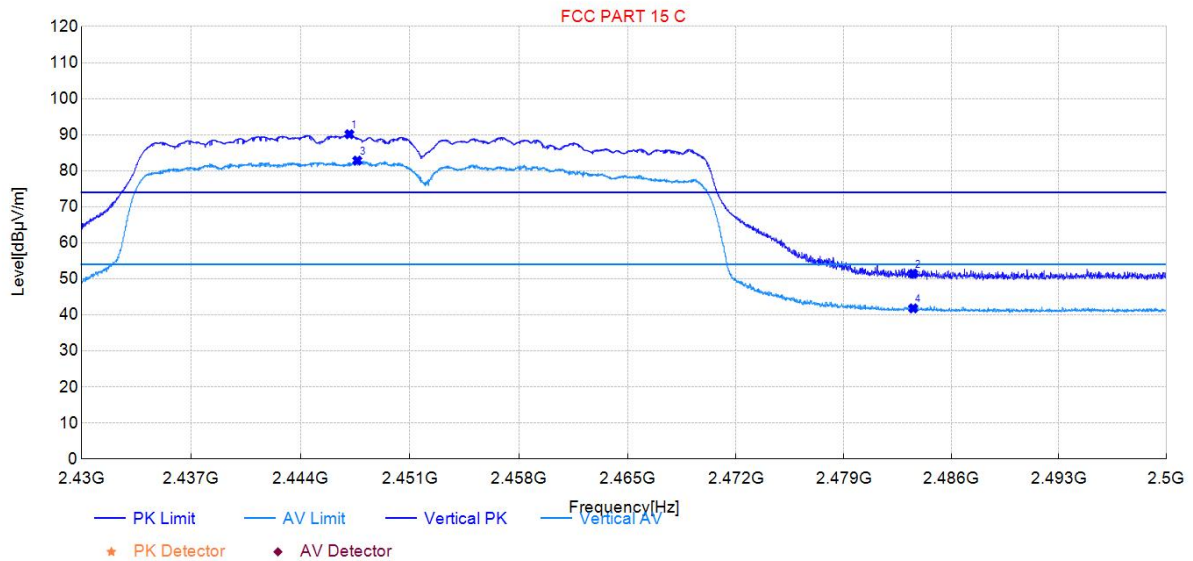

| Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity |
|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 2447.12     | 90.13          | 36.04       | 74.00          | -16.13      | 150         | 99        | Peak     | Vertical |
| 2483.51     | 51.42          | 36.08       | 74.00          | 22.58       | 150         | 104       | Peak     | Vertical |
| 2447.63     | 82.82          | 36.04       | 54.00          | -28.82      | 150         | 104       | Average  | Vertical |
| 2483.51     | 41.81          | 36.08       | 54.00          | 12.19       | 150         | 112       | Average  | Vertical |

## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits |           |           |
|-----------------------------------------------|-----------|-----------|
| Frequency (MHz)                               | QP (dBuV) | AV (dBuV) |
| 0.15 - 0.50                                   | 66 - 56   | 56 - 46   |
| 0.50 - 5.0                                    | 56        | 46        |
| 5.0 - 30                                      | 60        | 50        |

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Setup

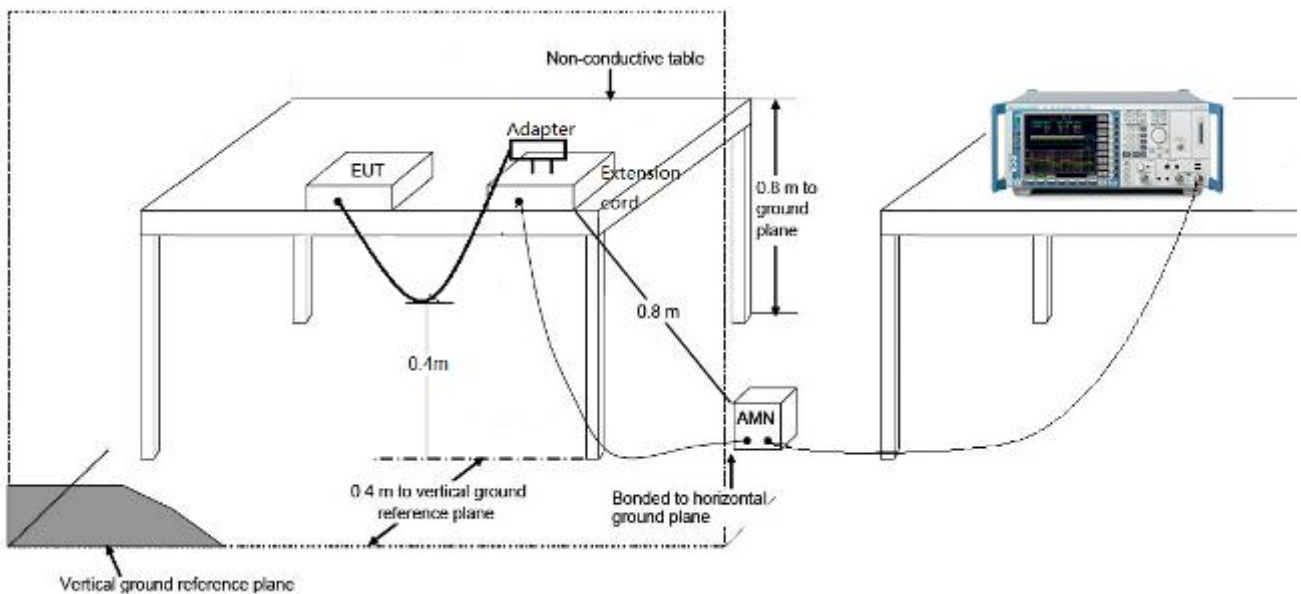

### **7.8.3. Test Result**

Not Applicable . The device is only powered by DC 3.3V.

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **2.4GHz Wi-Fi/BLE Module (Model: EMC6270-E )** is in compliance with Part 15C of the FCC Rules.

\_\_\_\_\_ The End \_\_\_\_\_