

**TEST REPORT****Nr. R19223301****Federal Communication Commission (FCC)**

Report Reference No.	R19223301
Date of issue:	28.11.19
Total number pages:	41
Applicant's name	Teleco Automation S.r.l.
Address	Via Calmaggione, 10/4 – 31100 Treviso (TV) – Italy
Test specification:	
Standards	FCC Rules & Regulations, Title 47:2018 Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 249
Non-standard test method	N/A
Test Report Form No.	15-249CMC
Test Report Form(s) Originator ..	CMC Centro Misure Compatibilità S.r.l.
Master TRF	2019-11
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of CMC Centro Misure Compatibilità S.r.l.	
Test item description	Hand and wall transmitter
Trademark	Teleco Automation
Manufacturer	Teleco Automation S.r.l.
Model / Type reference	TVNOON916NM63L
FCC ID	P59TVNOON916
Rating(s)	3 Vdc from battery
Report	
Tested by (name + signature)	M. Segalla
Approved by (name + signature)	R. Beghetto



1 Summary

1	Summary.....	2
2	Reference standard	3
3	List of attachments.....	3
4	Deviation(s) from test specification.....	3
5	Testing location.....	3
6	General description of test item(s).....	5
6.1	Photos of the test item	6
7	Verdict summary section	7
8	Test conditions	9
8.1	General	9
9	Test results	10
9.1	Antenna requirements	10
9.2	Radiated emissions and spurious emission	11
9.3	Peak Output Power.....	29
9.4	20 dB bandwidth	32
9.5	Band edge	35



2 Reference standard	
FCC Rules and Regulation Title 47 part 15:2018	--
3 List of attachments	
Attachment 1: Instruments list, measurement uncertainty, judgement of compliance and quality manual references	
4 Deviation(s) from test specification	
None	
5 Testing location	
CMC Centro Misure Compatibilità S.r.l. Via della Fisica, 20 – 36016 Thiene (VI) – Italy Test site facility's FCC registration number: 182474	



Testing and sampling:	
Date of receipt of test item	07.10.19
Testing start date	21.10.19
Testing end date	21.10.19
Sampling procedure.....	Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion. The results relate to the sample as it has been received.
General remarks:	
This report shall not be reproduced, except in full, without the written approval of CMC. The test results presented in this report relate only to the object tested. “(see appended table)”: refers to a table appended to the report. Throughout this report a comma is used as the decimal separator.	
Possible test case verdicts:	
Test case does not apply to the test object:	N/A (Not Applicable)
Test object does meet the requirement:	P (Pass)
Test object does not meet the requirement:	F (Fail)
Test object does not performed:	N/E (Not Executed)
Definition of symbols used in this test report:	
☒ Indicates that the listed condition, standard or equipment is applicable for this report. ☐ Indicates that the listed condition, standard or equipment is not applicable for this report.	






6 General description of test item(s)

Description	Hand and wall transmitter						
Model Number	TVNOON916NM63L						
FCC ID	P59TVNOON916						
Serial Number	--						
Brand name	Teleco Automation						
Frequency band	902 – 928 MHz						
Nominal frequency	Fc: 916 MHz						
Rated power supply		Voltage and Frequency	Reference poles				
			N	L1	L2	L3	PE
	☐	AC:	☐	☐	☐	☐	☐
	☐	AC:	☐	☐	☐	☐	☐
	☒	DC: 3 V from battery					☐
Test configuration	☐	Table top equipment					
	☐	Floor standing equipment					
	☒	Hand-held equipment					
Type of equipment	☒	Transmitter unit					
	☐	Receiver unit					
Type of station	☐	Fixed station					
	☒	Portable station					
	☐	Mobile station					
Operating modes	No.	Operating mode of test item					
	1	EUT in continuous transmission at maximum power					



6.1 Photos of the test item

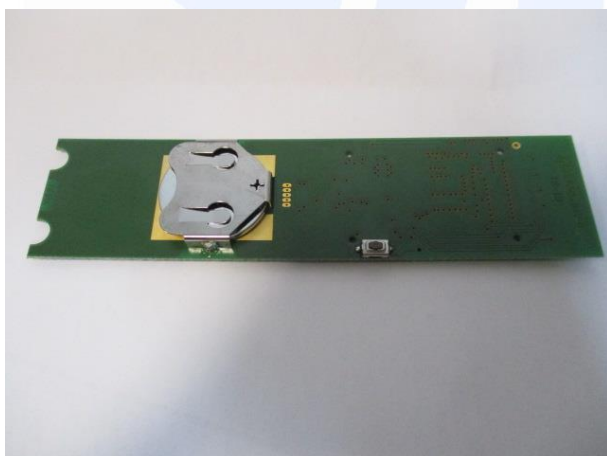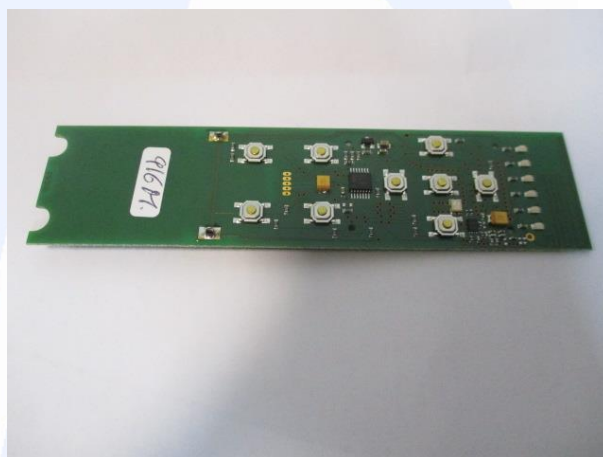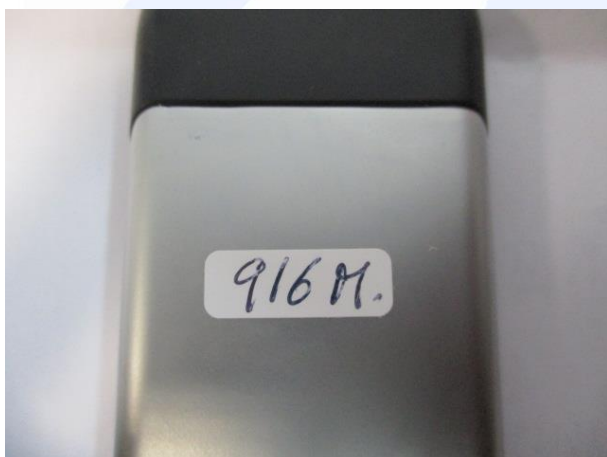



7 Verdict summary section

FCC Rules & Regulations, Title 47:2018 Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 249			
Clause	Requirement – Test case	Basic standard	Verdict
Part 15.203	Antenna requirements	ANSI C63.10	P
Part 15.207	Conducted emissions	ANSI C63.10	N/A (+)
Part 15.209	Radiated emissions and spurious emission	ANSI C63.10	P
Part 15.209 and 15.249	Peak Output Power	ANSI C63.10	P
Part 15.215	20 dB Bandwidth	ANSI C63.10	P
Part 15.249	Band edge	ANSI C63.10	P

(+) Devices which only employ battery power. See FCC Part 15.207 (c)



Normative references	
Reference no.	Description
FCC Rules and Regulation Title 47 part 15:2018	--
ANSI C63.4:2014	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices





8 Test conditions

8.1 General

Environmental reference conditions.....:	The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:		
	Temperature	Humidity	Atmospheric pressure
	15 °C – 35 °C	30 % - 60 %	800 hPa – 1060 hPa
	If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report.		
Measurement uncertainties	Attachment 1		



9 Test results

9.1 Antenna requirements

Tested by	M. Segalla	
Test date	21.10.19	
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.203 and 15.204	
Test specification	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded	
Antenna type.....	☒	Integral antenna
	☐	External antenna
Antenna gain.....	0 dBi	
External R.F. power amplifier	Not Present	



9.2 Radiated emissions and spurious emission

Tested by	M. Segalla
Test date	21.10.19
Test location (stand)	Semi-anechoic chamber (CMC A070)
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.209 ANSI C63.10 cl. 6.3, 6.4, 6.5 and 6.6
Test set-up description	☒ Table top equipment set-up (80 cm above the reference ground plane) ☐ Floor standing equipment set-up (insulating material up to 12 mm thick) ☐ False floor installation equipment set-up (insulating material up to 34 cm above the reference ground plane)
Supplementary test set-up description	--
Test method applied	☒ SAC with measurement distance [m]: 10
Supplementary information.....	--

Acceptance limits

Acceptance limits for emissions in restricted frequency bands ($f < 1000$ MHz)		
Frequency range (MHz)	Test distance (m)	Limits [dB(μ V/m)]
0,009 to 0,490	300	48,5 to 13,8
0,490 to 1,705	30	33,8 to 22,9
1,705 to 30	30	29,5
30 to 88	3	40
88 to 216	3	43,5
216 to 960	3	46,0
960 to 1000	3	54

Remarks: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz and 110–490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector. The results have been extrapolated to the specified distance using an extrapolation factor

Acceptance limits for emissions in restricted frequency bands ($f \geq 1000$ MHz)			
Frequency (MHz)	Test distance (m)	AV limits [dB(μ V/m)]	Peak limits [dB(μ V/m)]
> 1000	3	54	74



The restricted frequency bands are listed in the following table

MHz	MHz	MHz	GHz
0,090 – 0,110	16,42 – 16,423	399,9 – 410	4,5 – 5,15
0,495 – 0,505	16,69475 – 16,69525	608 – 614	5,35 – 5,46
2,1735 – 2,1905	16,80425 – 16,80475	960 – 1240	7,25 – 7,75
4,125 – 4,128	25,5 – 25,67	1300 – 1427	8,025 – 8,5
4,17725 – 4,17775	37,5 – 38,25	1435 – 1626,5	9,0 – 9,2
4,20725 – 4,20775	73 – 74,6	1645,5 – 1646,5	9,3 – 9,5
6,215 – 6,218	74,8 – 75,2	1660 – 1710	10,6 – 12,7
6,26775 – 6,26825	108 – 121,94	1718,8 – 1722,2	13,25 – 13,4
6,31175 – 6,31225	123 – 138	2200 – 2300	14,47 – 14,5
8,291 – 8,294	149,9 – 150,05	2310 – 2390	15,35 – 16,2
8,362 – 8,366	156,52475 – 156,52525	2483,5 – 2500	17,7 – 21,4
8,37625 – 8,38675	156,7 – 156,9	2690 – 2900	22,01 – 23,12
8,41425 – 8,41475	162,0125 – 167,17	3260 – 3267	23,6 – 24,0
12,29 – 12,293	167,72 – 173,2	3332 – 3339	31,2 – 31,8
12,51975 – 12,52025	240 – 285	3345,8 – 3358	36,43 – 36,5
12,57675 – 12,57725	322 – 335,4	3600 – 4400	Above 38,6
13,36 – 13,41			


Acceptance limits for emissions in non-restricted frequency bands

Field strength of harmonics: 500 $\mu\text{V/m}$ (54 dB($\mu\text{V/m}$)).

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Test setup


Frequency ≤ 30 MHz

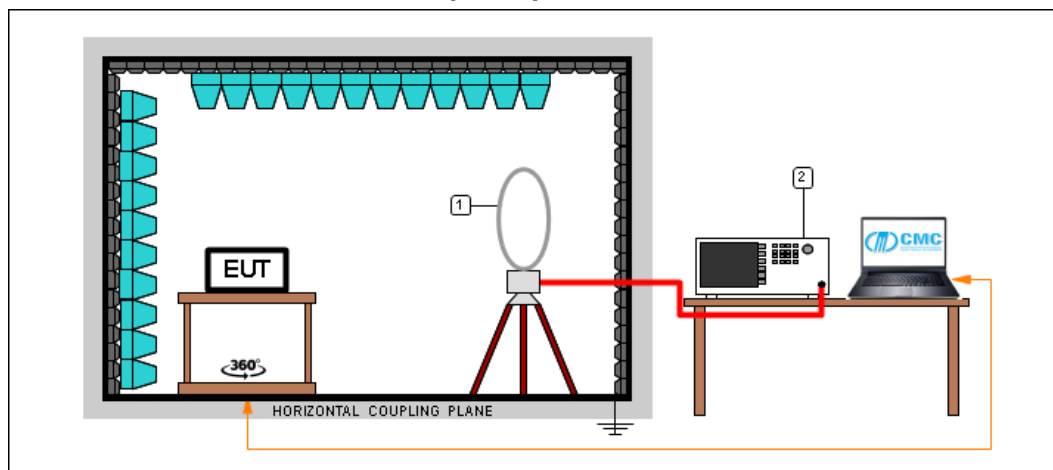

Test setup PE004_01

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S127	Schaffner	HLA6120	Loop Antenna 9kHz - 30MHz

Frequency ≤ 1 GHz

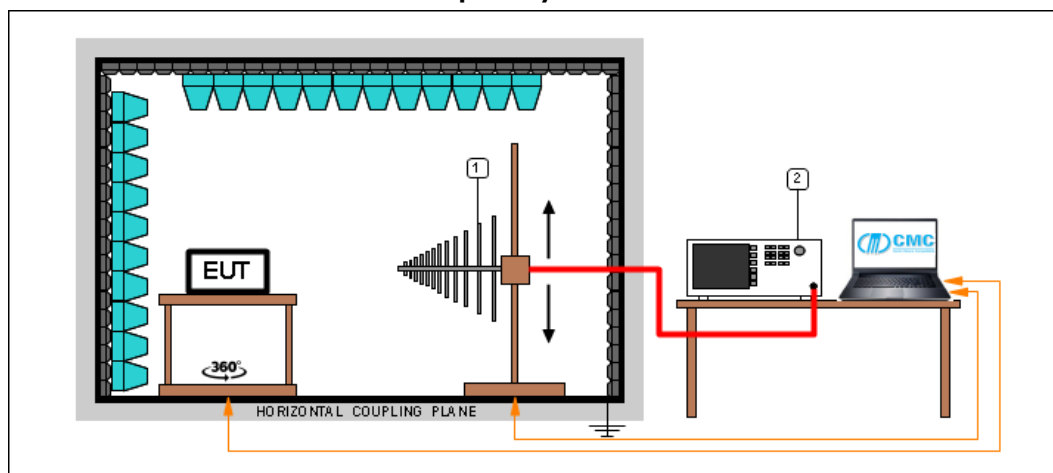

Test setup PE004_02


Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Broadband Antenna

Test setup PE004_03

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna



Frequency > 1 GHz

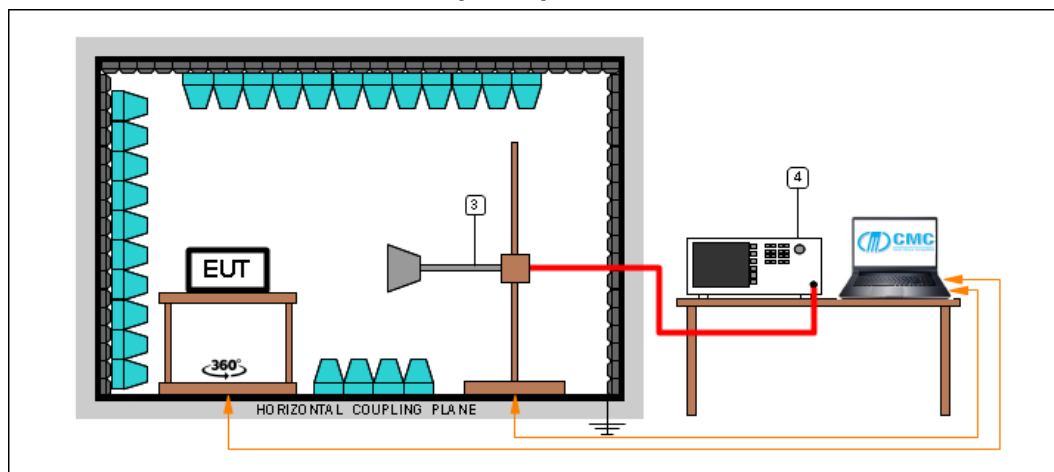

Test setup PE004_04

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S108	Emco	3115	Waveguide antenna

Result

Polarization	Frequency Range (MHz)	Graphs	Remarks	Result
V	300 – 1000	G19223305	--	P
H	300 – 1000	G19223306	--	P
H	30 – 300	G19223307	--	P
V	30 – 300	G19223308	--	P
Loop	0,009 – 30	G19223309	--	P
H	1000 – 10000	G19223315	--	P
V	1000 – 10000	G19223316	--	P

Remarks: EUT was tested in 3 orthogonal planes, graphs are related to the highest detected levels.

Measurements at frequencies lower than 30 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor $40\log(\text{test distance}/10)$ based on the measuring distance provided by the standard.

Measurements at frequencies higher than 30 MHz and lower than 1000 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor $20\log(\text{test distance}/10)$ based on the measuring distance provided by the standard.

Peaks above the limits are caused by the nominal transmitting frequencies


Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +

AV: Average; AV [1s] (average at 1 second) values are marked with a X



Graphs

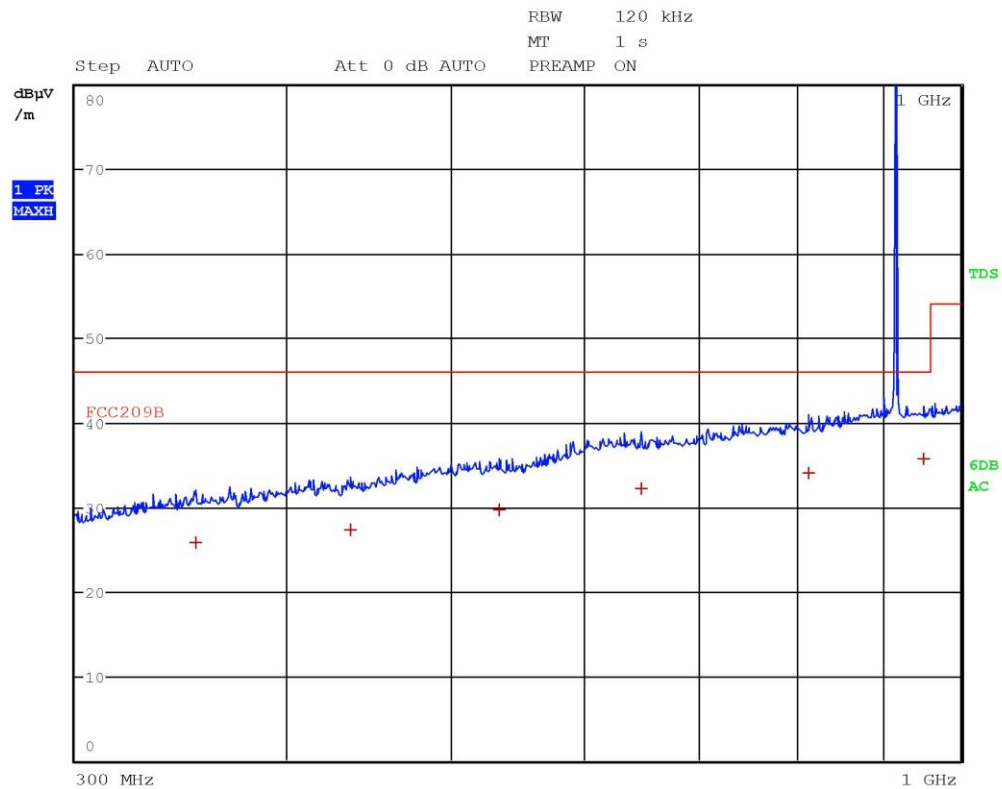


Segalla 19223305



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	353.72 MHz	25.73	-20.29
1 Quasi Peak	436.16 MHz	27.28	-18.73
1 Quasi Peak	533.64 MHz	29.62	-16.39
1 Quasi Peak	647.96 MHz	32.15	-13.86
1 Quasi Peak	813.88 MHz	34.05	-11.96
1 Quasi Peak	950.24 MHz	35.64	-10.37

Segalla 19223305

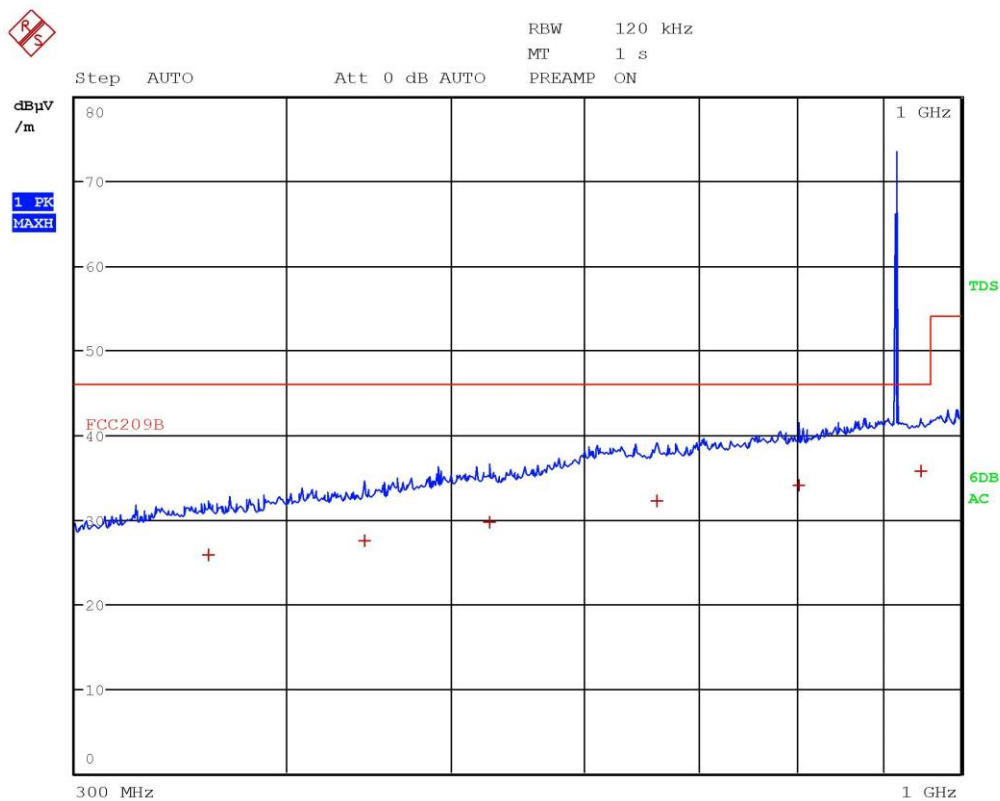


Segalla 19223306



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	359.32 MHz	25.84	-20.17
1 Quasi Peak	444.84 MHz	27.55	-18.47
1 Quasi Peak	526.72 MHz	29.64	-16.37
1 Quasi Peak	661.56 MHz	32.22	-13.79
1 Quasi Peak	802 MHz	34.01	-12.00
1 Quasi Peak	947.76 MHz	35.65	-10.36

Segalla 19223306

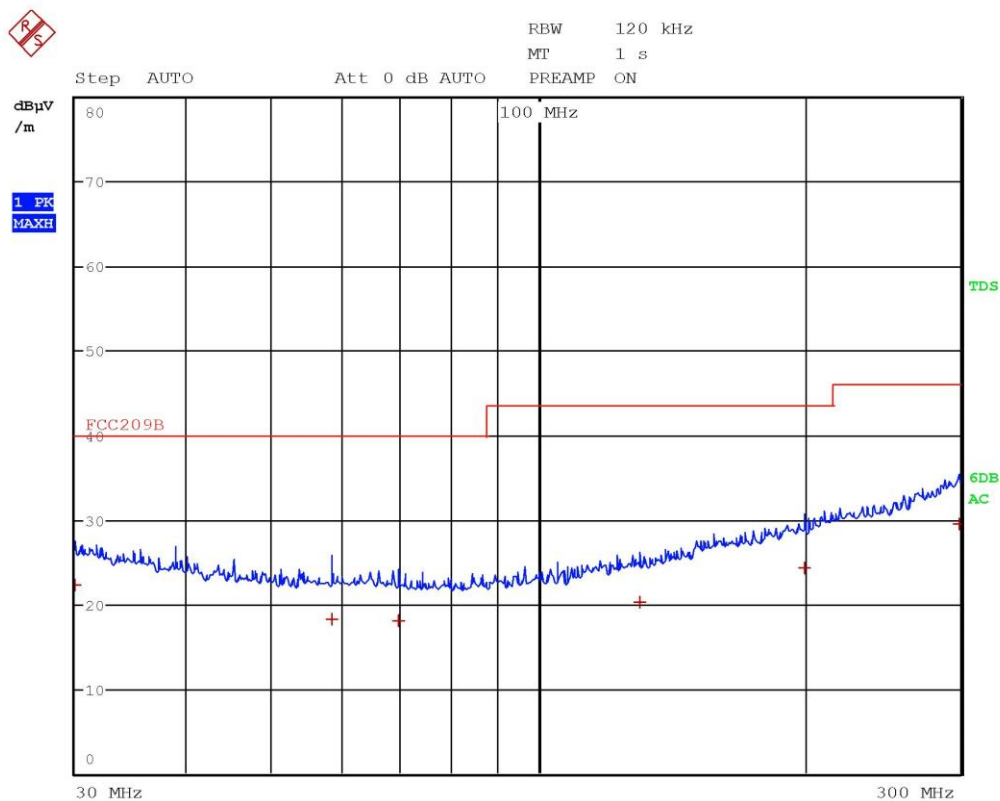


Segalla 19223307



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	30 MHz	22.33	-17.66
1 Quasi Peak	58.52 MHz	18.23	-21.77
1 Quasi Peak	69.56 MHz	18.07	-21.92
1 Quasi Peak	130.24 MHz	20.28	-23.23
1 Quasi Peak	199.64 MHz	24.31	-19.20
1 Quasi Peak	299.08 MHz	29.49	-16.52

Segalla 19223307

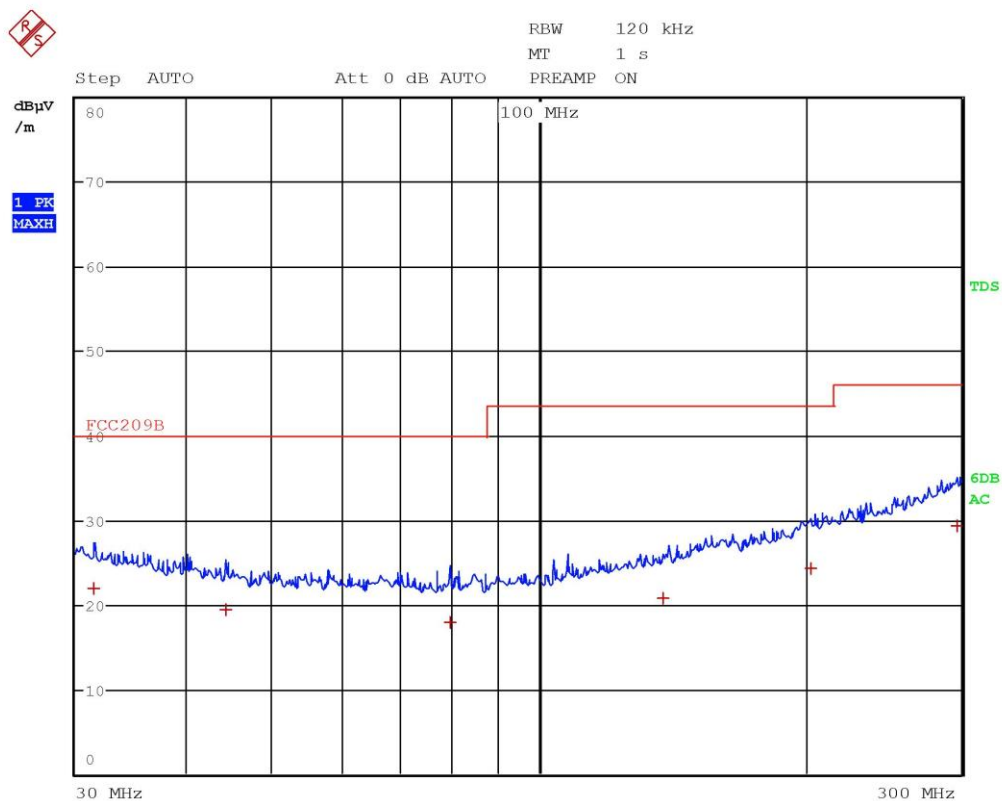


Segalla 19223308



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	31.48 MHz	21.96	-18.03
1 Quasi Peak	44.36 MHz	19.34	-20.65
1 Quasi Peak	79.44 MHz	17.92	-22.08
1 Quasi Peak	137.96 MHz	20.72	-22.79
1 Quasi Peak	202.84 MHz	24.32	-19.19
1 Quasi Peak	296.12 MHz	29.36	-16.65

Segalla 19223308

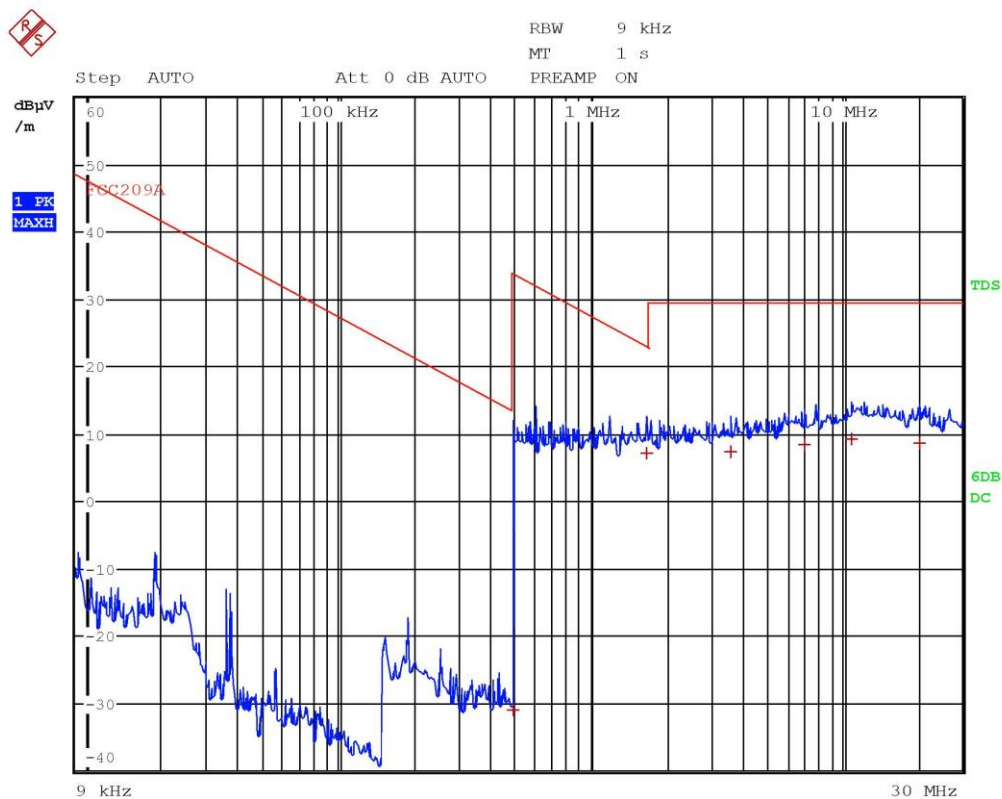


Segalla 19223309



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209A		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	490 kHz	-30.87	-64.67
1 Quasi Peak	1.674 MHz	7.26	-15.86
1 Quasi Peak	3.59 MHz	7.42	-22.11
1 Quasi Peak	7.082 MHz	8.33	-21.20
1 Quasi Peak	10.822 MHz	9.16	-20.37
1 Quasi Peak	20.43 MHz	8.61	-20.92

Segalla 19223309

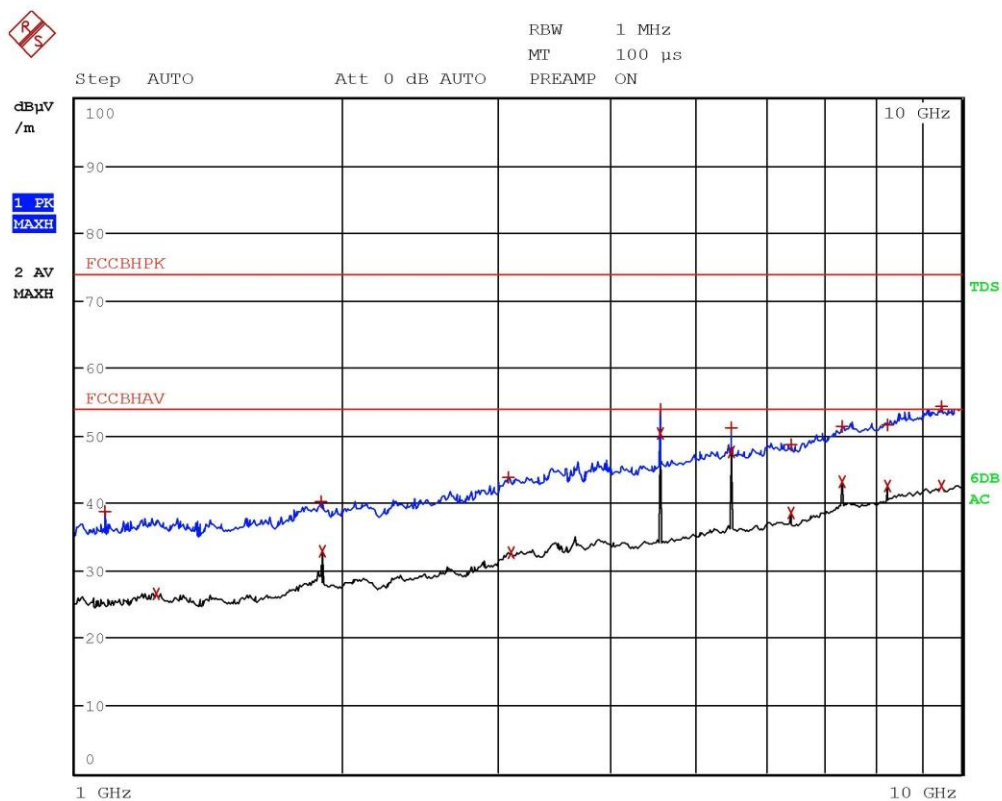


Segalla 19223315



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Max Peak	1.0804 GHz	38.73	-35.24
2 Average	1.2316 GHz	26.64	-27.33
1 Max Peak	1.83 GHz	40.33	-33.64
2 Average	1.8372 GHz	32.93	-21.04
1 Max Peak	3.0856 GHz	43.69	-30.28
2 Average	3.104 GHz	32.64	-21.33
1 Max Peak	4.58 GHz	53.81	-20.16
2 Average	4.58 GHz	50.29	-3.68
1 Max Peak	5.496 GHz	51.22	-22.75
2 Average	5.496 GHz	47.55	-6.42
1 Max Peak	6.4116 GHz	48.64	-25.34
2 Average	6.4116 GHz	38.52	-15.45
1 Max Peak	7.3276 GHz	51.42	-22.55
2 Average	7.328 GHz	43.12	-10.86
2 Average	8.2436 GHz	42.52	-11.45
1 Max Peak	8.2504 GHz	51.57	-22.40
2 Average	9.4916 GHz	42.51	-11.46
1 Max Peak	9.4928 GHz	54.29	-19.68

Segalla 19223315

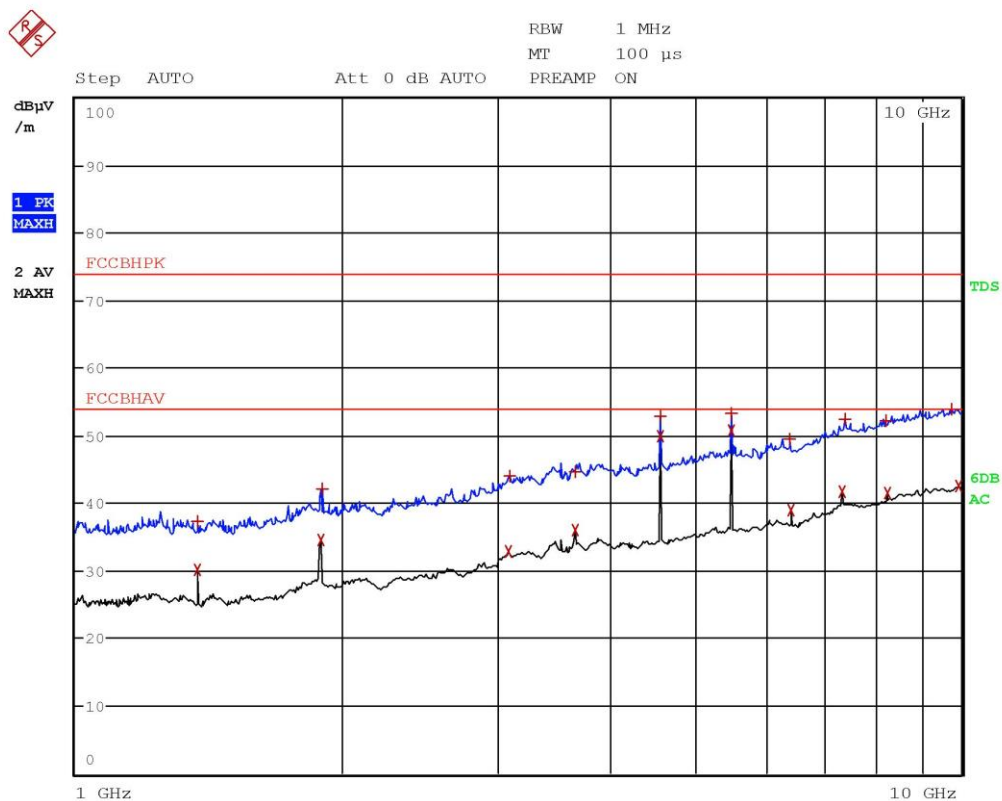

Segalla 19223316



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
2 Average	1.374 GHz	30.06	-23.91
1 Max Peak	1.374 GHz	37.29	-36.68
2 Average	1.8304 GHz	34.56	-19.41
1 Max Peak	1.8372 GHz	42.02	-31.95
2 Average	3.0792 GHz	32.87	-21.10
1 Max Peak	3.0928 GHz	43.97	-30.00
2 Average	3.664 GHz	35.99	-17.98
1 Max Peak	3.6676 GHz	44.65	-29.32
1 Max Peak	4.58 GHz	52.78	-21.19
2 Average	4.58 GHz	49.95	-4.02
1 Max Peak	5.496 GHz	53.18	-20.79
2 Average	5.496 GHz	50.75	-3.22
1 Max Peak	6.4076 GHz	49.42	-24.56
2 Average	6.4116 GHz	39.04	-14.93
2 Average	7.3276 GHz	41.67	-12.30
1 Max Peak	7.3912 GHz	52.40	-21.57
1 Max Peak	8.2188 GHz	52.17	-21.80
2 Average	8.244 GHz	41.54	-12.43
1 Max Peak	9.7396 GHz	53.98	-20.00
2 Average	9.91 GHz	42.52	-11.45

Segalla 19223316



9.3 Peak Output Power


Tested by	M. Segalla
Test date	21.10.19
Test location (stand)	Semi-anechoic chamber (CMC A070)
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.209 and 249
Supplementary test set-up description	EUT – antenna distance: 3 m
Supplementary information	--

Acceptance limits

Frequency range (MHz)	RF Power Output (mV/m)	RF Power Output dB(μV/m)
902 – 928	50	94

Frequency range (MHz)	RF Power Output (mV/m)	RF Power Output dB(μV/m)
2400 – 2483,5	50	94

Test setup

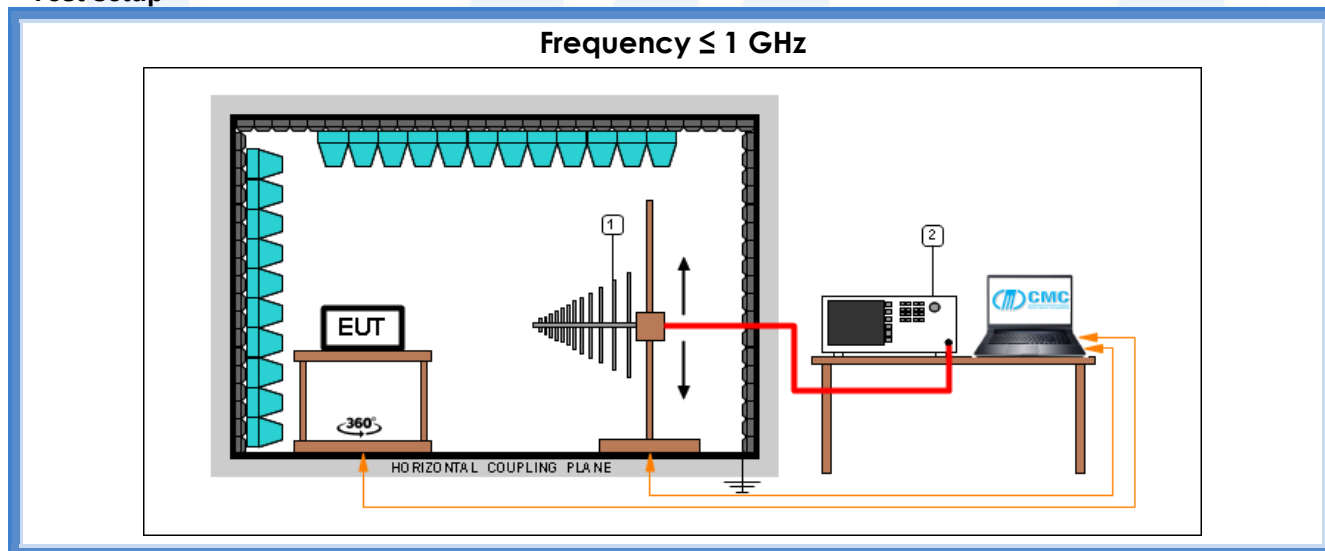

Test setup PE004_03				
Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna




Result

Frequency (MHz)	Polarization	Graphs	Measured level (dB μ V/m)	Limit (dB μ V/m)
916,00	Worst case	G19223310	88,24	94,00





Graphs

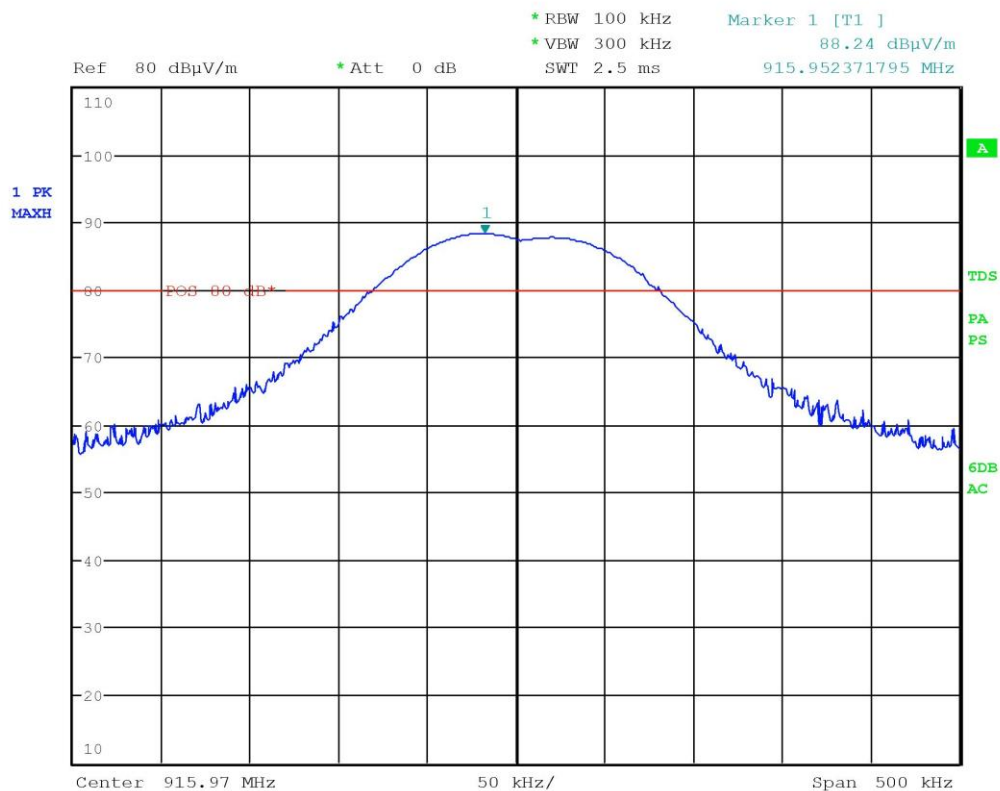


Segalla 19223310



9.4 20 dB bandwidth

Tested by	M. Segalla
Test date	21.10.19
Test location (stand)	Semi-anechoic chamber (CMC A070)
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.215 (c) ANSI C63.10 cl. 7.8.7
Test specification	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation

Test setup

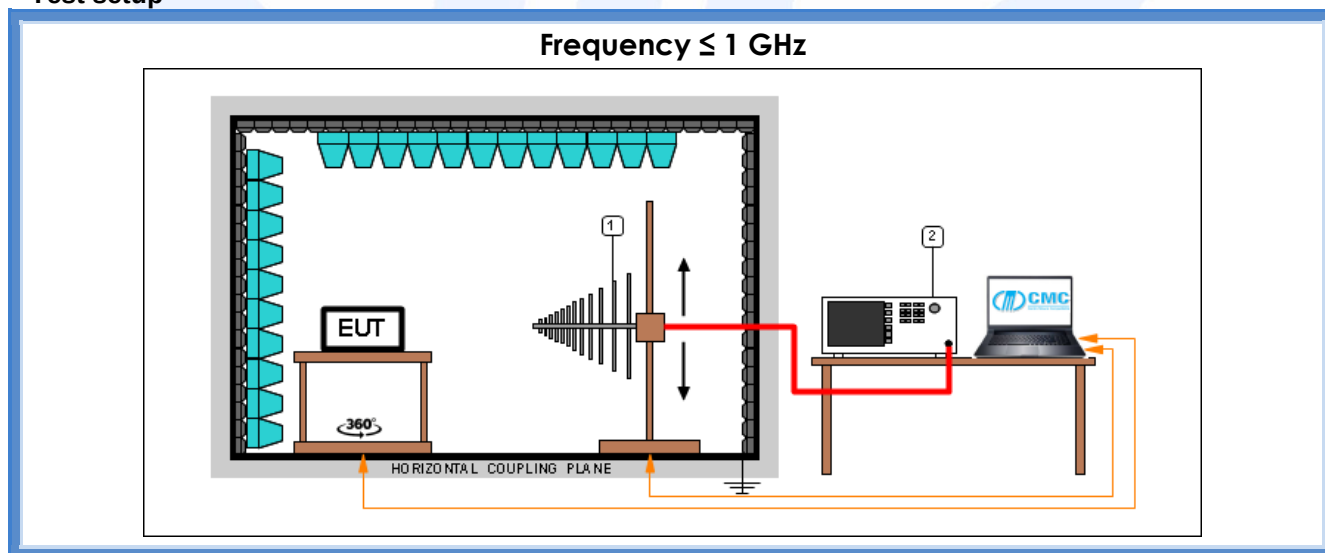

Test setup PE004_03

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna




Result

Channel	Graphs	20 dB bandwidth (MHz)	Limits (MHz)	Results
916 MHz	G19223312	915,947 – 915,994	902 – 928	Complies





Graphs

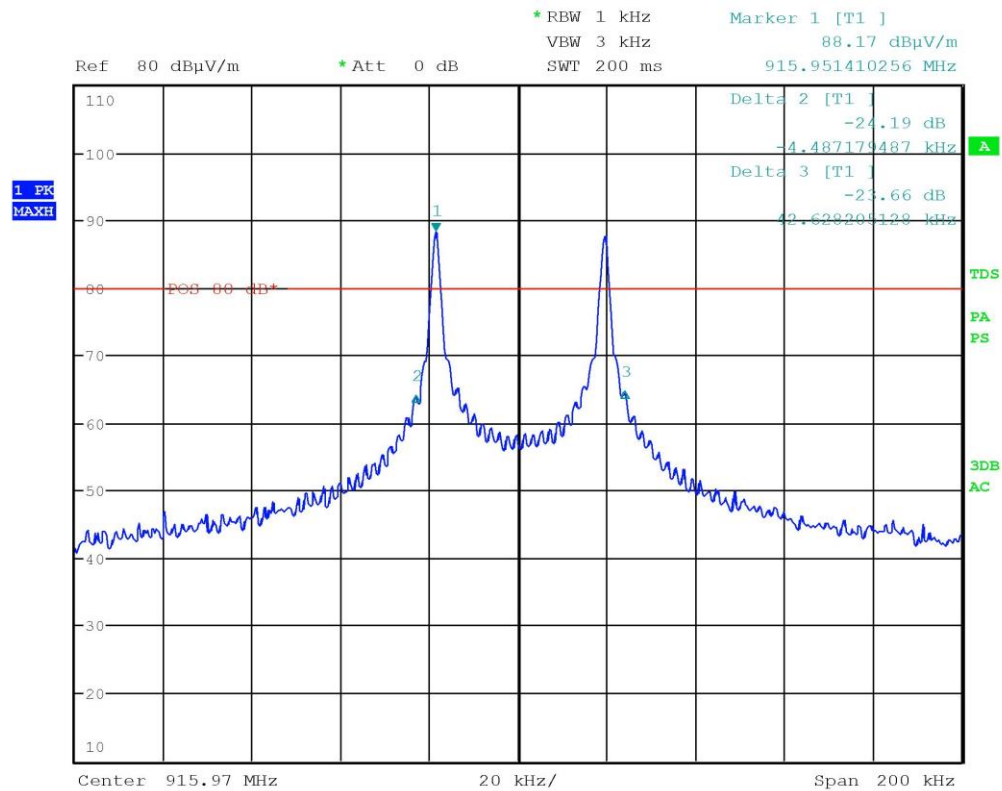

Segalla 19223312




9.5 Band edge

Tested by	M. Segalla
Test date	21.10.19
Test location (stand)	Semi-anechoic chamber (CMC A070)
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.249 (d)
Test specification	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation
Supplementary information.....	--

Acceptance limits

Operation within the band 902 – 928 MHz


Test setup

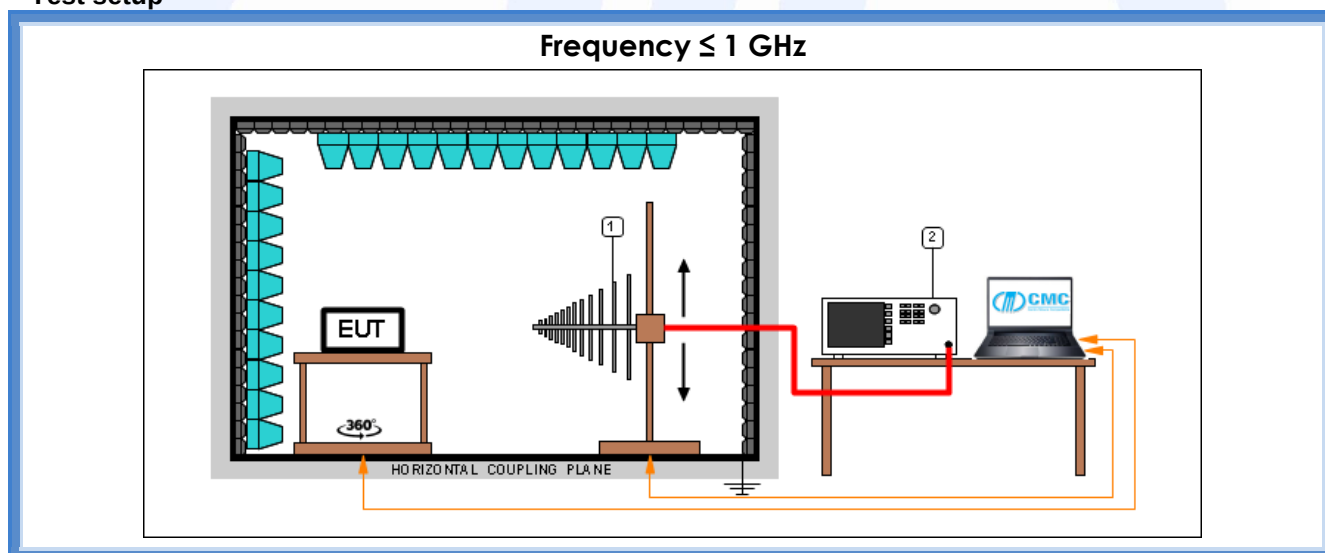


Test setup PE004_03				
Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna

Result

Frequency (MHz)	Graph(s)	Results	
916,00	G19223314	F _L : 914,4759 MHz	Complies
	G19223313	F _H : 917,4038 MHz	Complies

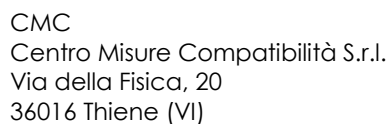

LAB N° 0168

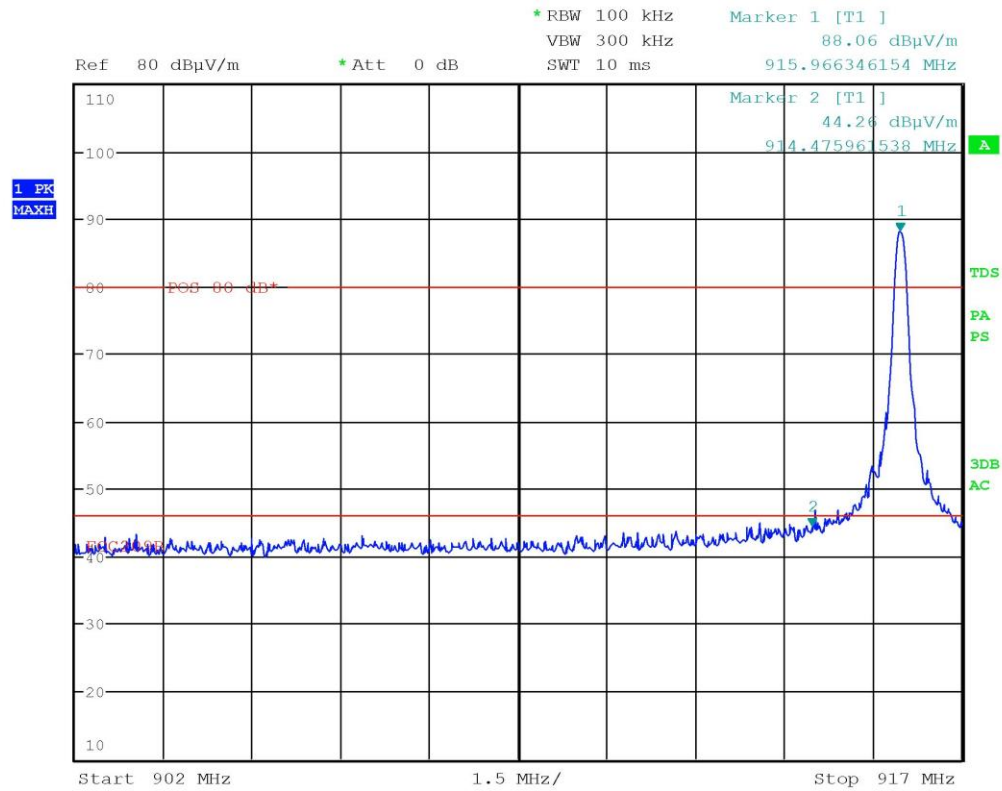

Segalla 19223314



Attachment 1

Instruments list

<i>Id. number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>	<i>Serial number</i>	<i>Last calibration</i>	<i>Due date calibration</i>
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses Limiting Device	- - -	January '19	January '20
CMC S108	EMCO	3115	Horn Antenna	9811-5622	June '19	June '22
CMC S127	Schaffner	HLA6120	Loop Antenna	1191	November '18	November '23
CMC S164	Rohde & Schwarz	ESU26	EMC interference receiver	100052	January '19	January '20
CMC S200	Schwarzbeck	NSLK 8128	V-LISN	8128-273	January '19	January '20
CMC S206	Rohde & Schwarz	ESCI 7	EMC Receiver 9KHz-7GHz	100781	January '19	January '20
CMC S260	CMC	Wfr_N	Shielded Cable	Wfr_ant10-1	November '18	November '19
CMC S261	CMC	Wfr_N	Shielded Cable	Wfr_ant20-1	November '18	November '19
CMC S262	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix32-1	November '18	November '19
CMC S263	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix31-1	November '18	November '19
CMC S264	CMC	Wfr_N	Shielded Cable	Wfr_ext03-1	November '18	November '19
CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Biconical Antenna (30-300MHz)	831	June '19	June '22
CMC S287	Schwarzbeck	VUSLP 9111B	Log-periodic Antenna (200 MHz-3GHz)	9111B-203	June '19	June '22
CMC S288	CMC	W_sma_white	Joint Shielded Cable	W_001	November '18	November '19
CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz	104059	November '16	November '19



Attachment 1

Measurement uncertainty

Test	Test Setup	Expanded uncertainty	Note
Conducted emission CISPR 16 LISN 50uH 0,009-0,0150MHz	PE001_01	3,4 dB	1
Conducted emission CISPR 16 LISN 50uH 0,150-30,0MHz	PE001_01	3,0 dB	1
Conducted emission CISPR 16 Voltage Probe 0,15-30MHz	PE001_02	2,9 dB	1
Conducted emission CISPR 16 Current Probe 0,15-30MHz	PE001_03	2,6 dB	1
Conducted emission CISPR 16 ISN 0,15-30MHz	PE001_04	4,7 dB	1
Clic CISPR 16 LISN 50uH 0,150-30,0MHz	PE001_05	3,1 dB	1
Disturbance Power 30-300 MHz	PE002_01	3,6 dB	1
Radiated Emission LAS 0,15-30MHz	PE003_01	2,0 dB	1
Radiated Emission CISPR 16 Loop Ant. 0,15-30MHz	PE004_01	4,0 dB	1
Radiated Emission CISPR 16 Bicon. Ant. 30-300MHz	PE004_02	3,9 dB	1
Radiated Emission CISPR 16 LogP. Ant. 300-1000MHz	PE004_03	3,8 dB	1
Radiated Emission CISPR 16 Horn Ant. 1-18GHz	PE004_04	4,2 dB	1
Human Exposure to electromagnetic fields	PE005_01	23,6 %	1
Harmonic current emissions test	PE006_01	10 mA + 2,6 %	1
Voltage fluctuation and flicker test	PE007_01	4,8 %	1
Radiated Immunity 80MHz-6GHz	PE102_XX	2,1 dB 0,82 V/m a 3V/m	1
Conducted Immunity 0,15-230MHz	PE105_XX	1,2 dB 0,44 V a 3V	1
AC Magnetic field	PE106_01	1,55 % 0,15 A/m a 10A/m	1
Pulse Magnetic field	PE107_01	6,25 % 18,7 A/m a 300A/m	1
Dumped Magnetic field	PE108_01	6,25 % 1,87 A/m a 30A/m	1
Common mode conducted immunity	PE112_01	2,21 % 0,22 V a 10V	1



Attachment 1

Test	Test Setup	Expanded uncertainty	Note
Power/Spurious 9kHz-30MHz	PR001_01	4,0 dB	1
Power/Spurious ERP 30-1000MHz d=10m	PR001_02+03	4,7 dB	1
Misura della potenza EIRP 1-18GHz d=3m	PR001_04	4,7 dB	1
Misura della potenza EIRP 18-40GHz d=3m	PR001_05	5,4 dB	1
Frequency error	PR002_01+02	$< 1 \times 10^{-7}$	1
Timing zero span (1001pts.)	PR002_01+02	0,2 % SWT	1
Modulation bandwidth	PR002_01+02	$< 1 \times 10^{-7}$	1
Conducted RF power and spurious emission	PR002_01+02	1,1 dB	1
Adjacent channel power	PR002_01+02	1,1 dB	1
Blocking	PR002_01+02	1,1 dB	1

Test	Test Setup	Expanded uncertainty	Note
Electrostatic discharge immunity test	PE101_0X		2
Electrical fast transients / burst immunity test	PE103_0X		2
Surge immunity test	PE104_0X		2
Short interruption immunity test	PE109_01		2
Rev_19_02 date 27/03/2019			

Note 1:

The expanded uncertainty reported according to the document EA-4-02 is based on a standard uncertainty multiplied by a coverage factor of $K=2$, providing a level of confidence of $p = 95\%$



Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor $k = 2$



Attachment 1

Judgement of compliance

Case 1	Case 2	Case 3	Case 4
			
The sample complies with the requirements. The measurement results is within the specification limit when the measurement uncertainty is taken into account.	The sample complies with the requirements. It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.	The sample does not comply with the requirements. It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.	The sample does not comply with the requirements. The measurement results is outside the specification limit when the measurement uncertainty is taken into account.

In agreement with ILAC-G8: 03/2009 Guidelines on the Reporting of Compliance with Specification

Quality manual references – Internal procedure

Internal Procedure PM001 rev. 3.0 (Quality Manual)	Measure procedure
Internal Procedure INC_M rev. 9.1 (Quality Manual)	Measurement uncertainty calculation