


TT700



Labels for Life.

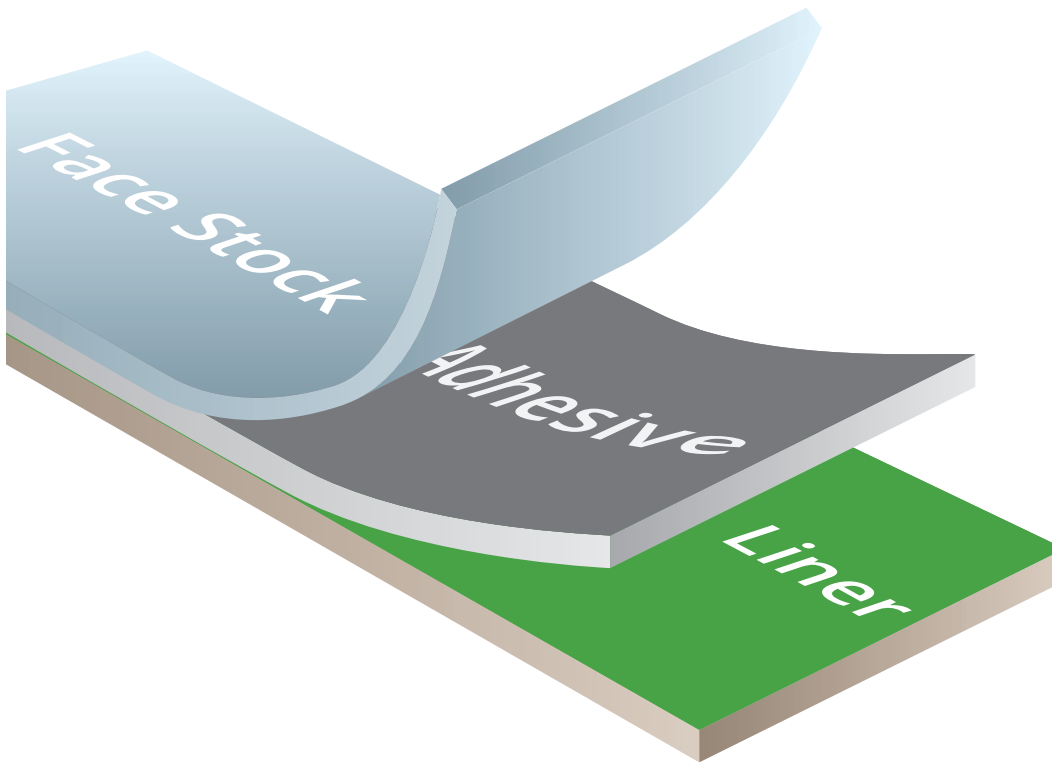

Face Stock: 2 mil topcoated gloss white polyester offers excellent abrasion and harsh chemical resistance. The material performs best on the topside of a circuit board where heat exposure is limited. The material will not shrink and is designed to be UV flexographic and thermal transfer printed

Adhesive: 0.8-0.9 mil high performance permanent acrylic adhesive offering excellent harsh chemical, smudge and abrasion resistance.

Release Liner: 50# kraft liner or a 1.5 mil polyester liner designed to offer excellent performance for both manual and automatic application.

Thermal Transfer Gloss White Polyester Film

TT700 is designed for UV flexographic with the option of thermal transfer printing. Key features include: indoor and outdoor applications and excellent smudge, solvent and abrasion resistance. When used in combination with the recommended IDENTCO printing, it will meet the most demanding durable labeling requirements.

Typical Applications

Name plates
Rating Plates
Serial identification labels
Industrial Barcodes
Electronic Components Marking

Typical Industry Sectors

Automotive
Electronics
Industrial



www.identco.com

TT700

Thermal Transfer Gloss White Polyester Film



Labels for Life.



Agency Recognitions

UL-MH16873/MH16225

CSA-089882_L_000`



Adhesion

Stainless Steel	55 oz/in	605 N/m	Polypropylene	15 oz/in	165 N/m
Polycarbonate	77 oz/in	847 N/m	Glass	69 oz/in	759 N/m



Material Caliper

Face Stock	.0020"	50.8μ	Liner (kraft/FL)	.0030"/.0015"	76.2/38.1μ
Adhesive	.0008"/.0009"	20.3/22.9μ	Total Material	.0058"/.0044"	147.3/111.8μ



Exterior Durability

Material Only: 2 Years

Material w/ TTRR-D Ribbon: 2 Years



Temperature Range

Service Temperature: -40 °F to 302 °F (-40 °C to 150 °C)

Minimum Application Temperature: 50 °F (10 °C)



Shelf Life

Recommended Storage: 45-90 °F (7-32 °C) 20-75% R.H.

Shelf Life: 2 years @ recommended storage



Recommended Ribbons

Pre-printing	Thermal Transfer Printing
UV flexographic inks	TTRR-B TTRR-D (Blue)
	TTRR-D TTRR-S
	TTRR-V



Chemical Resistance

Chemical Agents	Material Only (w/o printing)	Printing (TTRR Ribbon)	Printing (Cotton swab rub)
Household Cleaners	Passed	Passed	Passed
Oil	Passed	Passed	Passed
Water	Passed	Passed	Passed
Isopropyl Alcohol	Passed	Passed	Passed
Mild Acid	Passed	Passed	Passed
Mineral Spirits	Passed	Passed	Passed
Toluene	Passed	Failed	Failed



Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 11/1/2016

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866