

FCC TEST REPORT

REPORT NO.: RF950620L09

MODEL NO.: SBXW-166LHGE-6

RECEIVED: Jun. 20, 2006

TESTED: Jun. 24 ~ Jul. 11, 2006

ISSUED: Jul. 12, 2006

APPLICANT : SofaWare Technologies Ltd.

ADDRESS : 3 Hilazon St. Ramat-Gan Israel, 52522

ISSUED BY : Advance Data Technology Corporation

LAB ADDRESS : No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang
244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION : No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 78 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY.....	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4	DESCRIPTION OF SUPPORT UNITS	11
4	TEST TYPES AND RESULTS	12
4.1	CONDUCTED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	12
4.1.2	TEST INSTRUMENTS.....	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD.....	13
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	RADIATED EMISSION MEASUREMENT	31
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	31
4.2.2	TEST INSTRUMENTS.....	32
4.2.3	TEST PROCEDURES	33
4.2.4	DEVIATION FROM TEST STANDARD.....	33
4.2.5	TEST SETUP	34
4.2.6	EUT OPERATING CONDITIONS	34
4.2.7	TEST RESULTS	35
4.3	6dB BANDWIDTH MEASUREMENT.....	47
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	47
4.3.2	TEST INSTRUMENTS.....	47
4.3.3	TEST PROCEDURE.....	47
4.3.4	DEVIATION FROM TEST STANDARD.....	47
4.3.5	TEST SETUP	48
4.3.6	EUT OPERATING CONDITIONS	48
4.3.7	TEST RESULTS	49
4.4	MAXIMUM PEAK OUTPUT POWER.....	54
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	54
4.4.2	TEST INSTRUMENTS.....	54
4.4.3	TEST PROCEDURES	55
4.4.4	DEVIATION FROM TEST STANDARD.....	55
4.4.5	TEST SETUP	55
4.4.6	EUT OPERATING CONDITIONS	55

4.4.7	TEST RESULTS	56
4.5	POWER SPECTRAL DENSITY MEASUREMENT	57
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	57
4.5.2	TEST INSTRUMENTS.....	57
4.5.3	TEST PROCEDURE.....	57
4.5.4	DEVIATION FROM TEST STANDARD.....	57
4.5.5	TEST SETUP.....	57
4.5.6	EUT OPERATING CONDITIONS	57
4.5.7	TEST RESULTS	58
4.6	BAND EDGES MEASUREMENT	63
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	63
4.6.2	TEST INSTRUMENTS.....	63
4.6.3	TEST PROCEDURE.....	63
4.6.4	DEVIATION FROM TEST STANDARD.....	63
4.6.5	EUT OPERATING CONDITION.....	63
4.6.6	TEST RESULTS	64
4.7	ANTENNA REQUIREMENT	76
4.7.1	STANDARD APPLICABLE	76
4.7.2	ANTENNA CONNECTED CONSTRUCTION	76
5	INFORMATION ON THE TESTING LABORATORIES	77
APPENDIX-A		A-1

1 CERTIFICATION

PRODUCT: Wireless Broadband Router

MODEL: SBXW-166LHGE-6

BRAND: SofaWare

APPLICANT: SofaWare Technologies Ltd.

TESTED: Jun. 24 ~ Jul. 11, 2006

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Rennie Wang , **DATE:** Jul. 12, 2006
Rennie Wang

TECHNICAL
ACCEPTANCE : Long Chen , **DATE:** Jul. 12, 2006
Responsible for RF Long Chen

APPROVED BY : Gary Chang , **DATE:** Jul. 12, 2006
Gary Chang / Supervisor

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.90dB at 0.150MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.00dB at 778.40MHz, 2386.00MHz & 4874.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.71 dB
	200MHz ~ 1000MHz	3.73 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Broadband Router
MODEL NO.	SBXW-166LHGE-6
FCC ID	P6XSBXW-166LHGE-6
POWER SUPPLY	5Vdc from AC adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps (up to 108Mbps for turbo mode)
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for Normal mode / 1 for Turbo mode
MAXIMUM OUTPUT POWER	161.065mW
ANTENNA TYPE	Dipole antenna with 2dBi gain
DATA CABLE	1.7m shielded USB cable without core 1.8m shielded RJ45 cable without core
I/O PORTS	RJ45

NOTE:

- The EUT was powered by the following adapters:

Adapter 1	
BRAND:	SofaWare Technologies Ltd. FAIRWAY ELECTRONIC CO., LTD
MODEL:	WN20U-050
INPUT:	100-240Vac, 1.0A MAX, 50~60Hz
OUTPUT:	5Vdc, 3A
POWER LINE:	1.9m non-shielded cable without core

Adapter 2	
BRAND:	DVE
MODEL:	DSA-20P-05
INPUT:	100-240Vac, 1.0A MAX, 50~60Hz
OUTPUT:	5Vdc, 3A
POWER LINE:	1.9m non-shielded cable without core

2. The EUT, operates in the 2.4GHz frequency range, lets you connect IEEE 802.11g or IEEE 802.11b devices to the network. With its high-speed data transmissions of up to 54Mbps.
3. This EUT is capable of providing data rates of up to 108Mbps in Turbo Mode depending upon reception quality.
4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES


For 802.11b/g: 11 channels are provided to this EUT for normal mode.

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

For 802.11g: One channel is provided to this EUT for turbo mode.

CHANNEL	FREQUENCY
6	2437 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

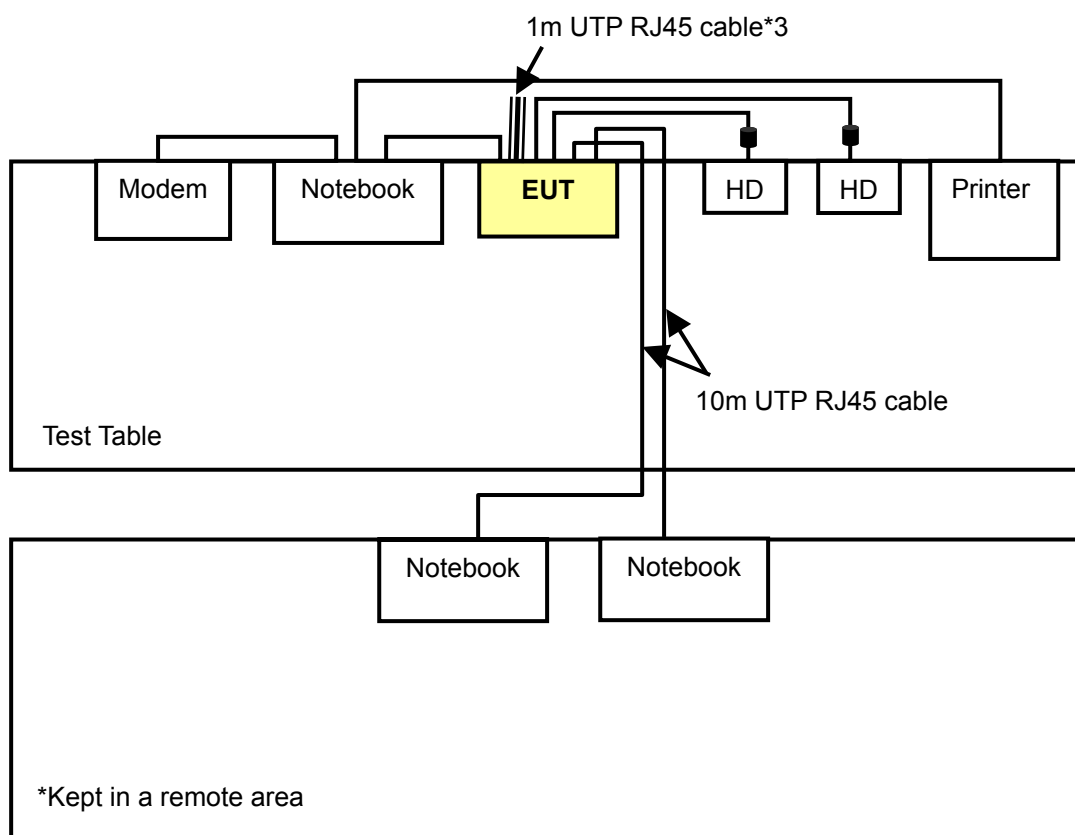

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT Configure Mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
A	√	√	√	√	Adapter model: WN20U-050
B	√	√	-	-	Adapter model: DSA-20P-05

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz
RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement

NOTE: “-” means no effect

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A, B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
A, B	802.11g Turbo	6	6	OFDM	QPSK	12

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A, B	802.11g	1 to 11	11	OFDM	BPSK	6
A, B	802.11g Turbo	6	6	OFDM	QPSK	12

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
A	802.11g Turbo	6	6	OFDM	QPSK	12

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6
A	802.11g Turbo	6	6	OFDM	QPSK	12

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
A	802.11g Turbo	6	6	OFDM	QPSK	12

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	9954115984	E2K24CLNS
2	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS
3	NOTEBOOK COMPUTER	DELL	PP05L	25191592336	E2K24CLNS
4	PRINTER	EPSON	LQ-300+	DCGY047265	FCC DoC Approved
5	MODEM	ACEEX	1414V/3	0401008248	IFAXDM1414
6	FireWire Hard Drive	Terasys	F12-UF	A0100222-4990029	FCC DoC Approved
7	FireWire Hard Drive	Terasys	F12-UF	A0100222-4990022	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	NA
4	1.2m shielded cable
5	1.2m shielded cable
6	NA
7	NA

NOTE1: All power cords of the above support units are non shielded (1.8m).

2: Item 2-3 acted as a communication partner to transfer data.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 11, 2006
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 06, 2007
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Feb. 15, 2007
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 07, 2007
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

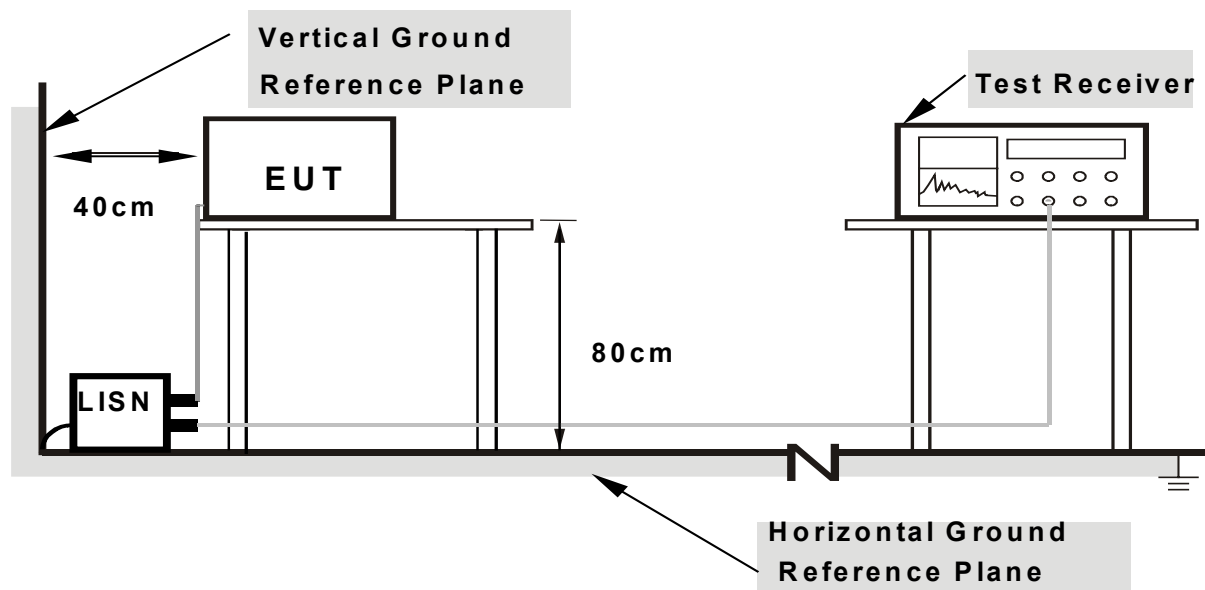

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a.Placed the EUT on the testing table.
- b.Prepared another notebook system to act as a communication partner and placed it outside of testing area.
- c.The communication partner run a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ45 cable.
- d.The communication partner sent data to EUT by command "PING".
- e.The notebook system read/write data from the USB HDD via EUT.
- f. The notebook system sent "H" messages to its screen.
- g.The notebook system sent "H" messages to modem.
- h.The notebook system sent "H" messages to printer, and the printer printed them on paper.
- i. Steps f ~ h were repeated.

4.1.7 TEST RESULTS


CONDUCTED WORST-CASE DATA

ADAPTER MODEL: WN20U-050

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	50.85	-	50.95	-	66.00	56.00	-15.05	-
2	0.295	0.10	41.98	-	42.08	-	60.40	50.40	-18.32	-
3	0.447	0.11	29.60	-	29.71	-	56.93	46.93	-27.23	-
4	0.880	0.18	31.62	-	31.80	-	56.00	46.00	-24.20	-
5	1.566	0.20	35.28	-	35.48	-	56.00	46.00	-20.52	-
6	6.263	0.47	28.93	-	29.40	-	60.00	50.00	-30.60	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

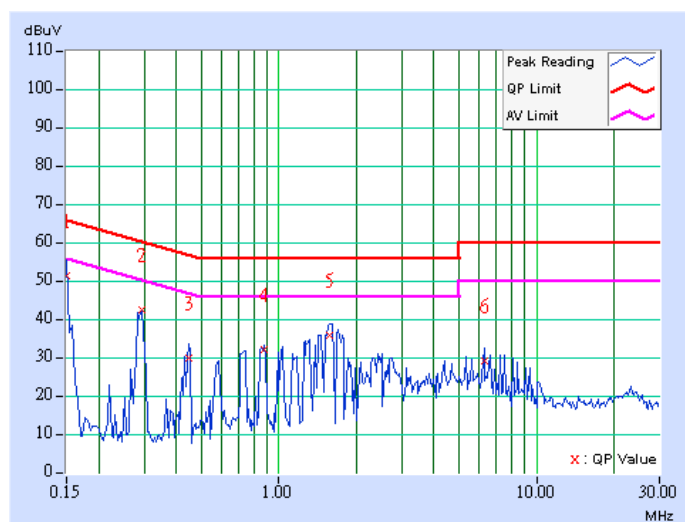

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	49.39	-	49.49	-	66.00	56.00	-16.51	-
2	0.287	0.10	37.65	-	37.75	-	60.62	50.62	-22.87	-
3	0.443	0.10	25.91	-	26.01	-	57.01	47.01	-31.00	-
4	0.732	0.10	33.16	-	33.26	-	56.00	46.00	-22.74	-
5	1.566	0.16	34.73	-	34.89	-	56.00	46.00	-21.11	-
6	6.254	0.40	28.37	-	28.77	-	60.00	50.00	-31.23	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

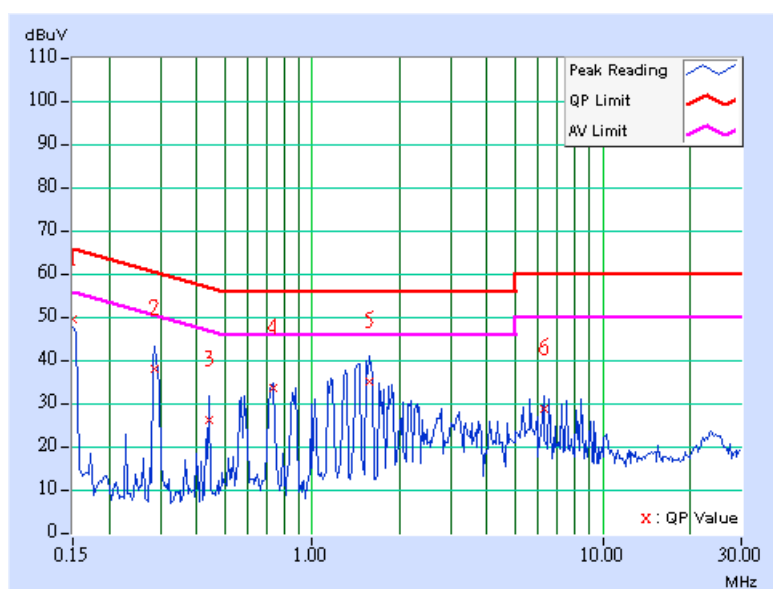

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	51.00	-	51.10	-	66.00	56.00	-14.90	-
2	0.287	0.10	41.06	-	41.16	-	60.61	50.61	-19.45	-
3	0.880	0.18	31.90	-	32.08	-	56.00	46.00	-23.92	-
4	1.035	0.20	31.16	-	31.36	-	56.00	46.00	-24.64	-
5	1.617	0.20	37.34	-	37.54	-	56.00	46.00	-18.46	-
6	5.324	0.47	26.98	-	27.45	-	60.00	50.00	-32.55	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

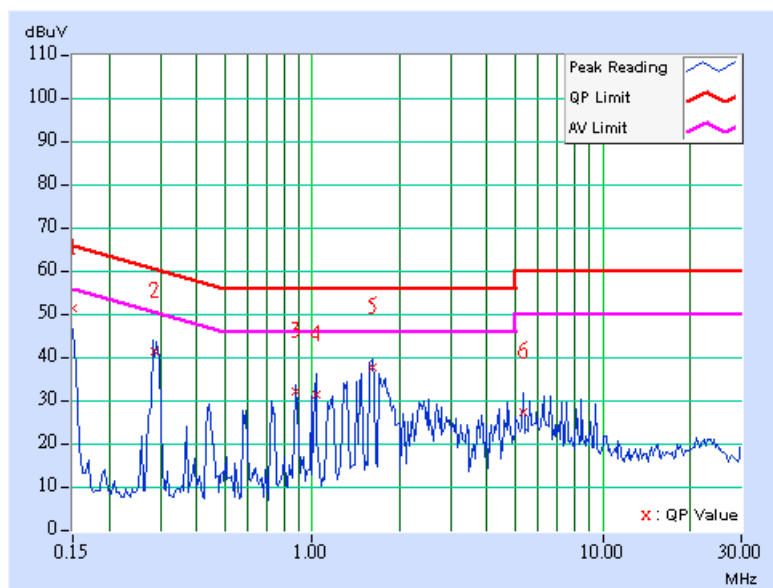

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	49.85	-	49.95	-	66.00	56.00	-16.05	-
2	0.298	0.10	37.97	-	38.07	-	60.29	50.29	-22.22	-
3	0.443	0.10	25.90	-	26.00	-	57.01	47.01	-31.01	-
4	0.884	0.10	32.51	-	32.61	-	56.00	46.00	-23.39	-
5	1.570	0.16	36.92	-	37.08	-	56.00	46.00	-18.92	-
6	6.578	0.41	28.68	-	29.09	-	60.00	50.00	-30.91	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

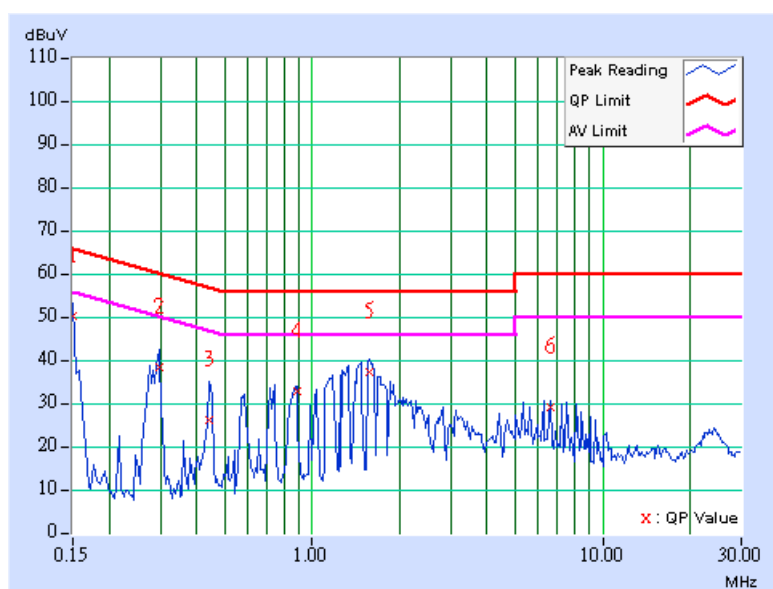

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	50.96	-	51.06	-	66.00	56.00	-14.94	-
2	0.287	0.10	40.96	-	41.06	-	60.62	50.62	-19.56	-
3	0.439	0.11	30.54	-	30.65	-	57.08	47.08	-26.43	-
4	1.035	0.20	30.69	-	30.89	-	56.00	46.00	-25.11	-
5	1.570	0.20	33.21	-	33.41	-	56.00	46.00	-22.59	-
6	6.273	0.47	29.38	-	29.85	-	60.00	50.00	-30.15	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

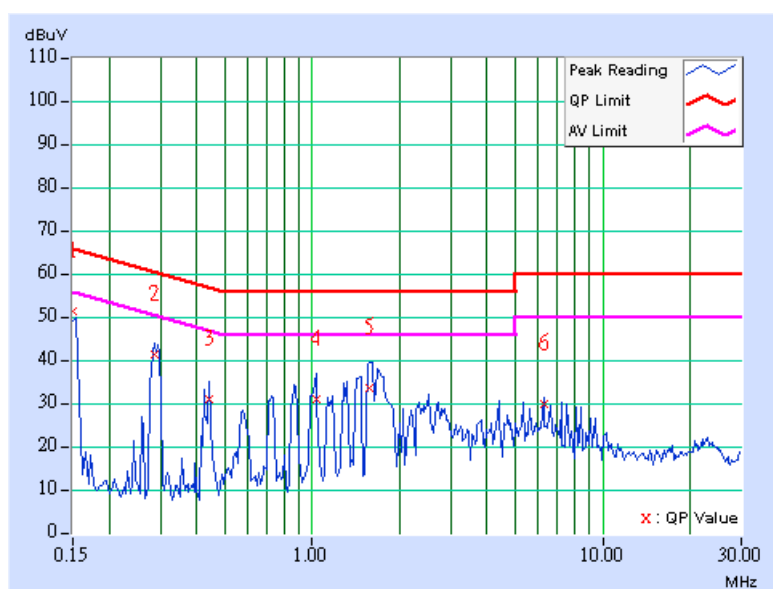

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	50.41	-	50.51	-	66.00	56.00	-15.49	-
2	0.295	0.10	40.06	-	40.16	-	60.40	50.40	-20.24	-
3	0.732	0.10	30.93	-	31.03	-	56.00	46.00	-24.97	-
4	0.884	0.10	33.30	-	33.40	-	56.00	46.00	-22.60	-
5	1.574	0.16	35.64	-	35.80	-	56.00	46.00	-20.20	-
6	6.270	0.40	30.00	-	30.40	-	60.00	50.00	-29.60	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

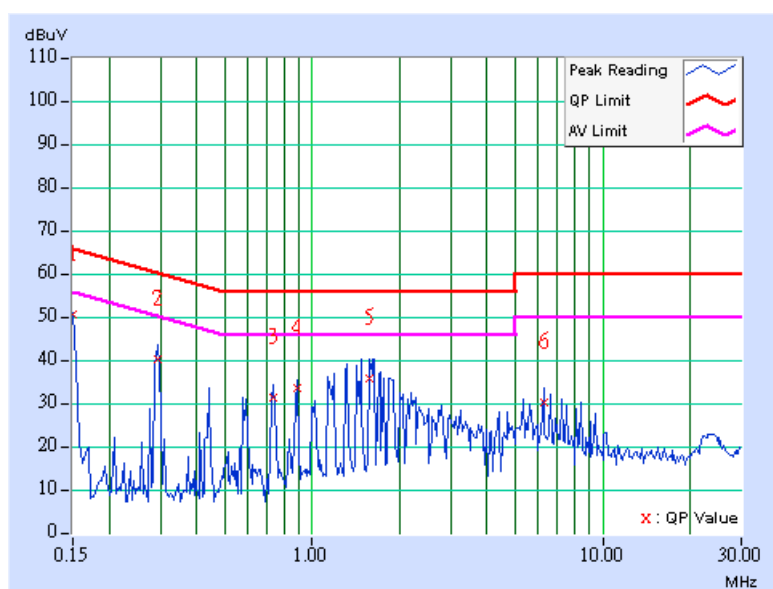


ADAPTER MODEL: DSA-20P-05

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 76%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	46.76	-	46.86	-	66.00	56.00	-19.14	-
2	0.302	0.10	34.67	-	34.77	-	60.18	50.18	-25.41	-
3	0.505	0.12	25.76	-	25.88	-	56.00	46.00	-30.12	-
4	0.943	0.19	18.99	-	19.18	-	56.00	46.00	-36.82	-
5	5.301	0.47	13.25	-	13.72	-	60.00	50.00	-46.28	-
6	21.164	0.88	18.85	-	19.73	-	60.00	50.00	-40.27	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

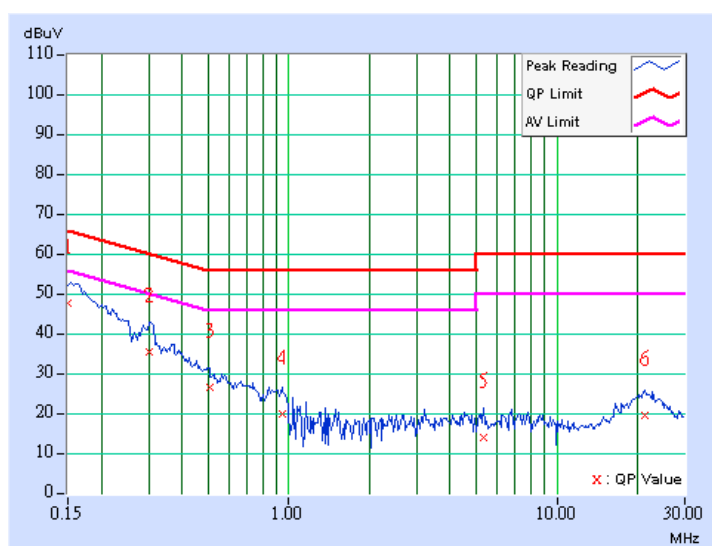

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 76%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.10	48.53	-	48.63	-	65.79	55.79	-17.16	-
2	0.197	0.10	43.44	-	43.54	-	63.74	53.74	-20.20	-
3	0.291	0.10	36.56	-	36.66	-	60.51	50.51	-23.85	-
4	1.434	0.14	21.38	-	21.52	-	56.00	46.00	-34.48	-
5	4.758	0.38	18.81	-	19.19	-	56.00	46.00	-36.81	-
6	20.563	0.63	17.83	-	18.46	-	60.00	50.00	-41.54	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

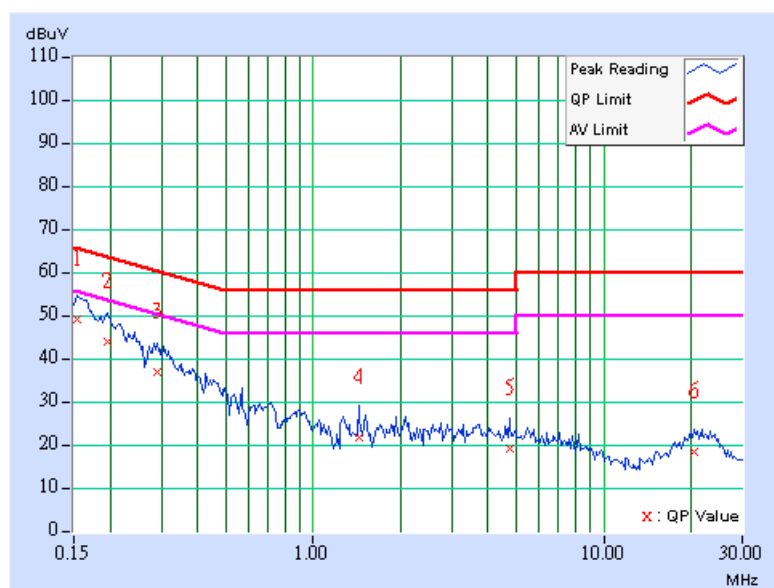

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 76%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	48.08	-	48.18	-	66.00	56.00	-17.82	-
2	0.306	0.10	37.66	-	37.76	-	60.07	50.07	-22.31	-
3	0.513	0.12	25.89	-	26.01	-	56.00	46.00	-29.99	-
4	0.861	0.18	19.50	-	19.68	-	56.00	46.00	-36.32	-
5	4.578	0.47	13.21	-	13.68	-	56.00	46.00	-42.32	-
6	20.262	0.84	18.42	-	19.26	-	60.00	50.00	-40.74	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

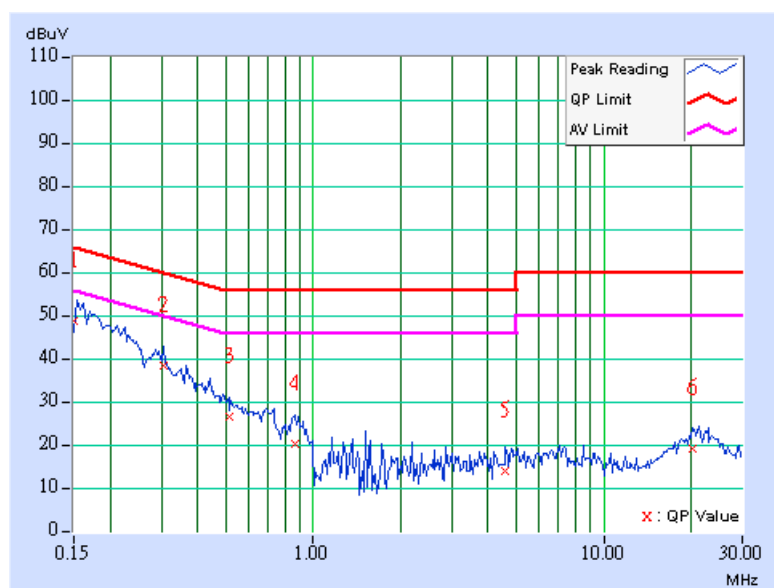

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 76%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	46.90	-	47.00	-	66.00	56.00	-19.00	-
2	0.295	0.10	35.11	-	35.21	-	60.40	50.40	-25.19	-
3	0.486	0.10	25.96	-	26.06	-	56.24	46.24	-30.18	-
4	0.943	0.10	23.40	-	23.50	-	56.00	46.00	-32.50	-
5	2.098	0.21	21.71	-	21.92	-	56.00	46.00	-34.08	-
6	22.070	0.63	17.82	-	18.45	-	60.00	50.00	-41.55	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

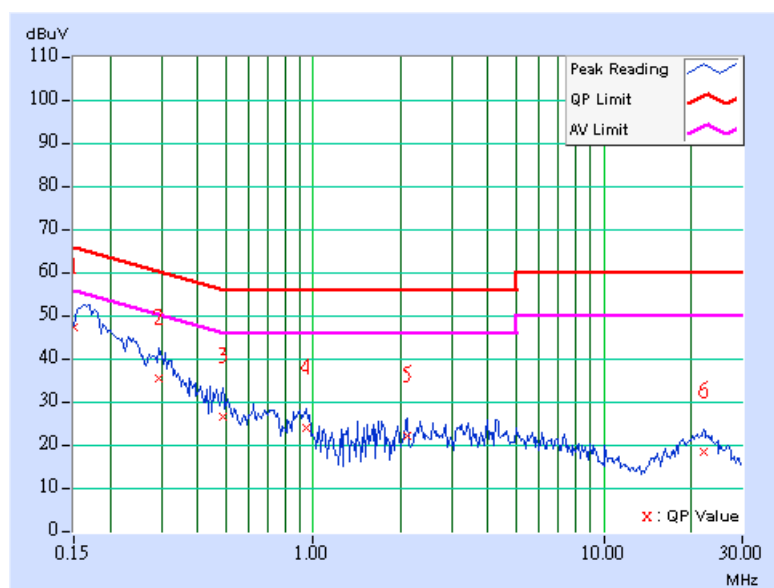

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 76%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	46.74	-	46.84	-	66.00	56.00	-19.16	-
2	0.295	0.10	35.15	-	35.25	-	60.40	50.40	-25.15	-
3	0.502	0.12	26.20	-	26.32	-	56.00	46.00	-29.68	-
4	0.912	0.19	18.48	-	18.67	-	56.00	46.00	-37.33	-
5	2.961	0.33	14.36	-	14.69	-	56.00	46.00	-41.31	-
6	21.918	0.91	18.56	-	19.47	-	60.00	50.00	-40.53	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

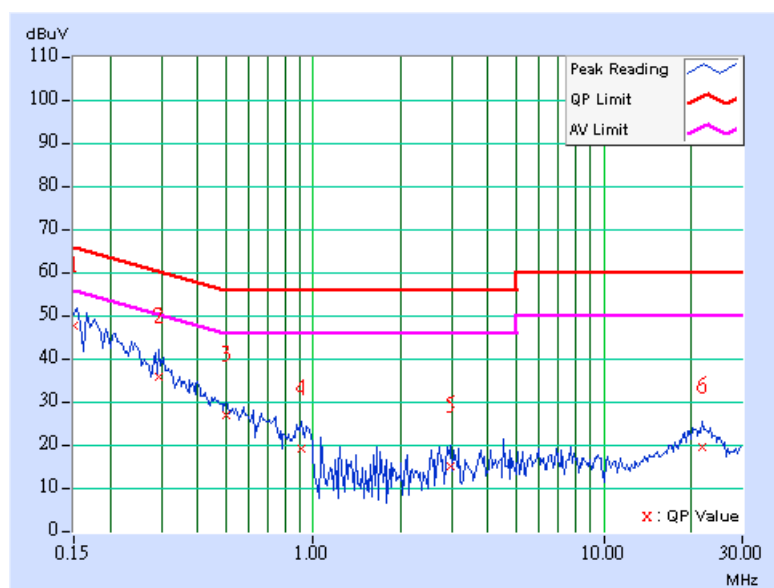

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 76%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	45.80	-	45.90	-	66.00	56.00	-20.10	-
2	0.224	0.10	38.89	-	38.99	-	62.66	52.66	-23.67	-
3	0.349	0.10	30.96	-	31.06	-	58.98	48.98	-27.92	-
4	0.670	0.10	23.84	-	23.94	-	56.00	46.00	-32.06	-
5	2.973	0.28	21.85	-	22.13	-	56.00	46.00	-33.87	-
6	22.680	0.63	17.82	-	18.45	-	60.00	50.00	-41.55	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

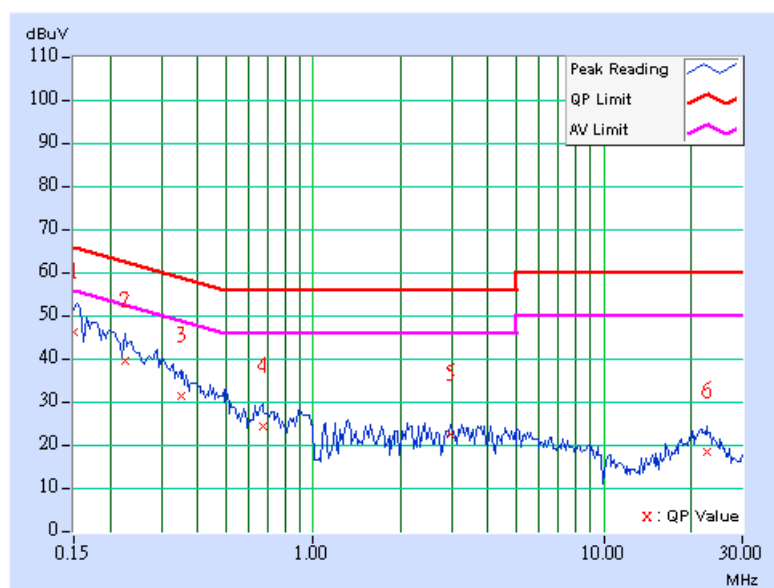


CONDUCTED WORST-CASE DATA_TURBO MODE

ADAPTER MODEL: WN20U-050

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	48.97	-	49.07	-	66.00	56.00	-16.93	-
2	0.287	0.10	38.18	-	38.28	-	60.62	50.62	-22.34	-
3	0.439	0.11	26.46	-	26.57	-	57.08	47.08	-30.51	-
4	0.728	0.15	32.30	-	32.45	-	56.00	46.00	-23.55	-
5	1.512	0.20	34.19	-	34.39	-	56.00	46.00	-21.61	-
6	6.241	0.47	29.33	-	29.80	-	60.00	50.00	-30.20	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

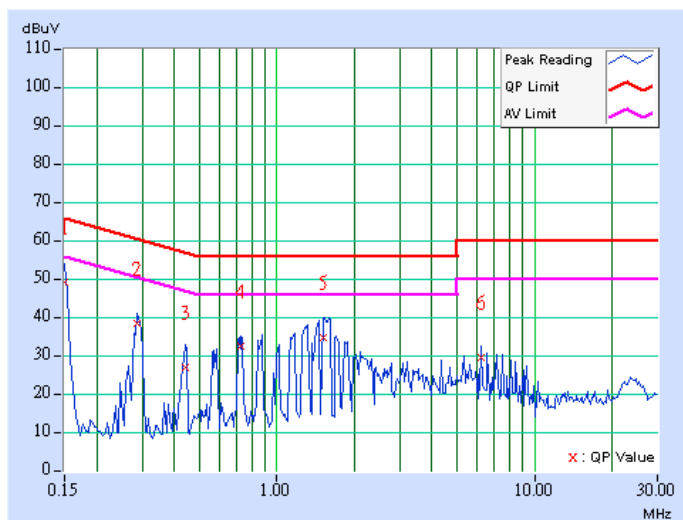

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Match Tsui	INPUT POWER (SYSTEM)	120Vac, 60 Hz

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	49.94	-	50.04	-	65.98	55.98	-15.94	-
2	0.295	0.10	41.80	-	41.90	-	60.40	50.40	-18.50	-
3	0.443	0.10	29.37	-	29.47	-	57.01	47.01	-27.54	-
4	0.880	0.10	31.04	-	31.14	-	56.00	46.00	-24.86	-
5	1.602	0.16	36.72	-	36.88	-	56.00	46.00	-19.12	-
6	6.246	0.40	25.25	-	25.65	-	60.00	50.00	-34.35	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

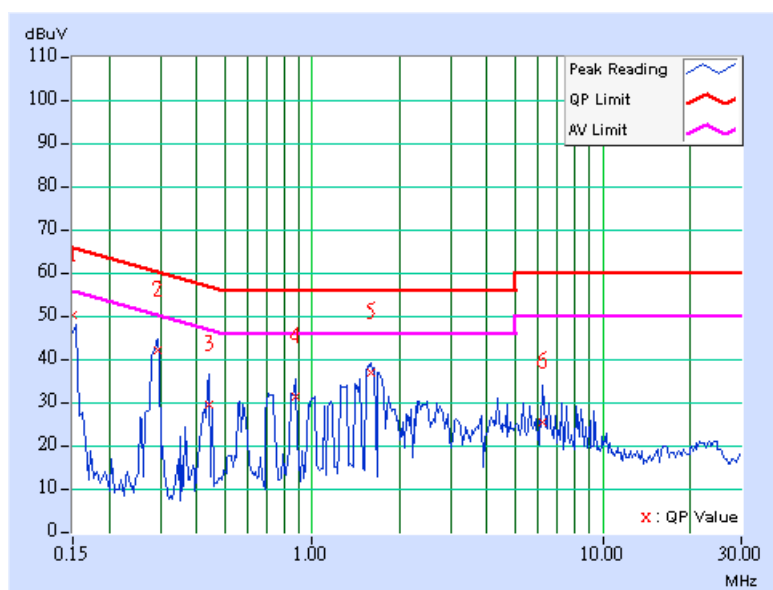


ADAPTER MODEL: DSA-20P-05

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 76%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	48.79	-	48.89	-	66.00	56.00	-17.11	-
2	0.306	0.10	36.96	-	37.06	-	60.07	50.07	-23.01	-
3	0.513	0.12	26.97	-	27.09	-	56.00	46.00	-28.91	-
4	0.861	0.18	20.50	-	20.68	-	56.00	46.00	-35.32	-
5	4.578	0.47	14.26	-	14.73	-	56.00	46.00	-41.27	-
6	20.262	0.84	19.03	-	19.87	-	60.00	50.00	-40.13	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

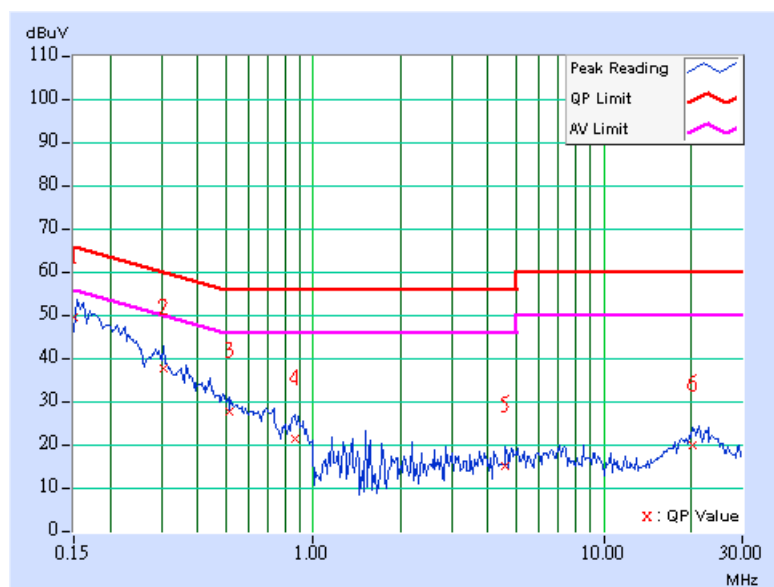

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	26deg. C, 76%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	47.30	-	47.40	-	66.00	56.00	-18.60	-
2	0.295	0.10	35.69	-	35.79	-	60.40	50.40	-24.61	-
3	0.486	0.10	25.31	-	25.41	-	56.24	46.24	-30.83	-
4	0.943	0.10	24.91	-	25.01	-	56.00	46.00	-30.99	-
5	2.098	0.21	22.31	-	22.52	-	56.00	46.00	-33.48	-
6	22.070	0.63	17.41	-	18.04	-	60.00	50.00	-41.96	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

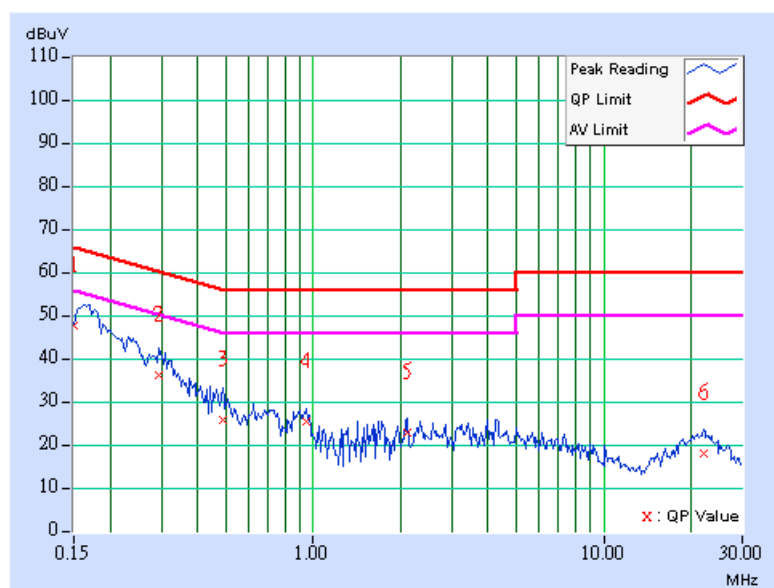

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 22, 2007
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100025	Dec. 05, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	May 31, 2007
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 08, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 19, 2007
Preamplifier Agilent	8447D	2944A10633	Nov. 04, 2006
Preamplifier Agilent	8449B	3008A01964	Oct. 30, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	214377/4	Dec. 13, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Dec. 13, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 2.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The VCCI Site Registration No. is R-237.
 5. The IC Site Registration No. is IC4924-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

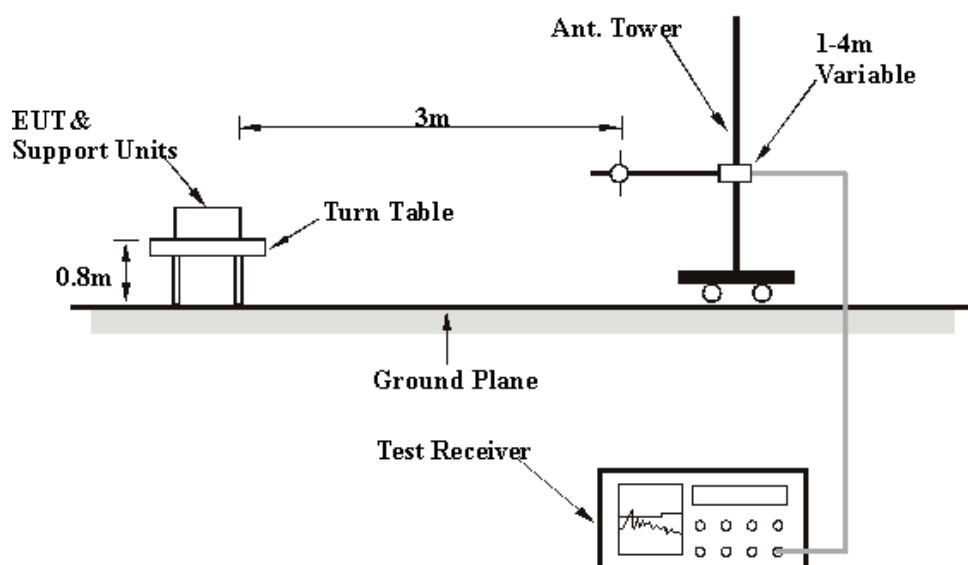

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS

RADIATED WORST-CASE DATA: BELOW 1GHz

ADAPTER MODEL: WN20U-050

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	200.01	42.10 QP	43.50	-1.40	1.05 H	29	30.93	11.17
2	249.66	40.33 QP	46.00	-5.67	1.00 H	271	27.67	12.66
3	300.20	43.89 QP	46.00	-2.11	1.00 H	274	28.00	15.89
4	333.25	41.80 QP	46.00	-4.20	1.00 H	274	25.39	16.42
5	399.34	34.51 QP	46.00	-11.49	1.00 H	121	16.24	18.28
6	444.05	35.71 QP	46.00	-10.29	1.25 H	19	16.64	19.08
7	479.04	40.72 QP	46.00	-5.28	1.00 H	220	20.80	19.93
8	500.42	44.77 QP	46.00	-1.23	1.00 H	256	24.29	20.48
9	640.38	35.56 QP	46.00	-10.44	1.25 H	13	12.08	23.47
10	667.60	37.00 QP	46.00	-9.00	1.00 H	295	13.18	23.81
11	722.02	36.70 QP	46.00	-9.30	1.25 H	28	11.52	25.18
12	778.40	45.00 QP	46.00	-1.00	1.00 H	163	18.49	26.51
13	799.78	44.89 QP	46.00	-1.11	1.25 H	16	18.22	26.67
14	834.77	41.20 QP	46.00	-4.80	1.00 H	220	14.21	26.99
15	889.20	37.44 QP	46.00	-8.56	1.00 H	145	9.96	27.48
16	945.57	37.92 QP	46.00	-8.08	1.00 H	8	9.65	28.27

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	55.27	34.06 QP	40.00	-5.94	1.50 V	112	20.13	13.93
2	166.07	41.87 QP	43.50	-1.63	1.25 V	331	28.56	13.31
3	199.12	42.00 QP	43.50	-1.50	1.25 V	331	30.79	11.21
4	300.20	39.67 QP	46.00	-6.33	1.75 V	352	23.77	15.89
5	333.25	41.69 QP	46.00	-4.31	1.25 V	178	25.28	16.42
6	399.34	38.58 QP	46.00	-7.42	1.00 V	274	20.30	18.28
7	479.04	43.15 QP	46.00	-2.85	1.25 V	7	23.22	19.93
8	500.42	43.60 QP	46.00	-2.40	1.50 V	28	23.12	20.48
9	554.85	40.40 QP	46.00	-5.60	1.75 V	115	18.86	21.53
10	611.22	36.54 QP	46.00	-9.46	1.50 V	199	13.30	23.24
11	722.02	37.18 QP	46.00	-8.82	1.25 V	202	12.00	25.18
12	778.40	41.67 QP	46.00	-4.33	1.50 V	112	15.17	26.51
13	799.75	44.99 QP	46.00	-1.01	1.00 V	88	18.32	26.67
14	834.77	44.00 QP	46.00	-2.00	1.25 V	7	17.01	26.99
15	889.20	44.40 QP	46.00	-1.60	1.00 V	175	16.92	27.48

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

ADAPTER MODEL: DSA-20P-05

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	27deg. C, 69%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	399.34	35.89 QP	46.00	-10.11	2.00 H	31	17.98	17.92
2	539.30	37.71 QP	46.00	-8.29	1.00 H	52	16.79	20.93
3	599.56	35.27 QP	46.00	-10.73	1.50 H	82	12.79	22.48
4	667.60	34.79 QP	46.00	-11.21	1.50 H	145	11.38	23.42
5	799.78	38.98 QP	46.00	-7.02	1.50 H	52	12.98	26.00
6	867.82	35.38 QP	46.00	-10.62	2.00 H	103	8.56	26.82

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.16	29.40 QP	40.00	-10.60	1.00 V	226	15.78	13.61
2	70.82	32.09 QP	40.00	-7.91	1.00 V	298	20.38	11.71
3	177.74	33.68 QP	43.50	-9.82	1.00 V	121	21.36	12.31
4	239.94	36.43 QP	46.00	-9.57	1.00 V	307	24.29	12.14
5	599.56	35.69 QP	46.00	-10.31	1.00 V	298	13.21	22.48
6	667.60	35.91 QP	46.00	-10.09	1.50 V	211	12.49	23.42
7	799.78	41.11 QP	46.00	-4.89	1.00 V	121	15.12	26.00
8	867.82	35.11 QP	46.00	-10.89	1.00 V	217	8.29	26.82
9	904.75	39.94 QP	46.00	-6.06	1.00 V	262	12.64	27.30
10	908.64	38.36 QP	46.00	-7.64	1.00 V	211	10.87	27.48

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

RADIATED WORST-CASE DATA: BELOW 1GHz_TURBO MODE

ADAPTER MODEL: WN20U-050

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	QPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	200.01	41.89 QP	43.50	-1.61	1.00 H	33	30.72	11.17
2	249.66	40.03 QP	46.00	-5.97	1.00 H	268	27.37	12.66
3	300.20	43.80 QP	46.00	-2.20	1.00 H	269	27.91	15.89
4	333.25	41.70 QP	46.00	-4.30	1.00 H	288	25.28	16.42
5	479.04	40.02 QP	46.00	-5.98	1.25 H	200	20.09	19.93
6	500.40	44.07 QP	46.00	-1.93	1.55 H	56	23.59	20.48
7	778.40	44.89 QP	46.00	-1.11	1.25 H	123	18.38	26.51
8	799.78	44.80 QP	46.00	-1.20	1.25 H	55	18.13	26.67
9	834.70	41.29 QP	46.00	-4.71	1.00 H	233	14.30	26.99

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	166.17	41.98 QP	43.50	-1.52	1.00 V	355	28.68	13.30
2	199.18	41.80 QP	43.50	-1.70	1.50 V	355	30.59	11.21
3	300.20	39.55 QP	46.00	-6.45	1.75 V	355	23.66	15.89
4	333.25	41.02 QP	46.00	-4.98	1.25 V	188	24.60	16.42
5	479.04	43.55 QP	46.00	-2.45	1.25 V	7	23.62	19.93
6	500.42	43.52 QP	46.00	-2.48	1.50 V	33	23.04	20.48
7	799.75	44.81 QP	46.00	-1.19	1.00 V	77	18.14	26.67
8	834.75	44.15 QP	46.00	-1.85	1.00 V	9	17.16	26.99
9	889.20	44.20 QP	46.00	-1.80	1.00 V	169	16.72	27.48

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

ADAPTER MODEL: DSA-20P-05

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	QPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	27deg. C, 69%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	115.49	30.01 QP	43.50	-13.49	1.00 H	25	19.61	10.40
2	399.51	35.89 QP	46.00	-10.11	1.00 H	31	17.97	17.92
3	480.01	33.12 QP	46.00	-12.88	1.00 H	324	13.50	19.62
4	500.42	33.51 QP	46.00	-12.49	1.50 H	167	13.44	20.07
5	539.45	37.23 QP	46.00	-8.77	1.50 H	30	16.30	20.93
6	600.10	35.35 QP	46.00	-10.65	2.00 H	161	12.86	22.49
7	651.10	32.79 QP	46.00	-13.21	1.00 H	197	9.74	23.05
8	667.71	34.81 QP	46.00	-11.19	1.00 H	139	11.39	23.42
9	720.11	33.15 QP	46.00	-12.85	1.00 H	64	8.35	24.80
10	799.78	38.98 QP	46.00	-7.02	1.50 H	52	12.98	26.00
11	867.76	36.14 QP	46.00	-9.86	1.50 H	267	9.32	26.82

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	70.79	32.13 QP	40.00	-7.87	1.50 V	318	20.42	11.71
2	178.14	33.72 QP	43.50	-9.78	1.50 V	256	21.43	12.29
3	239.87	37.04 QP	46.00	-8.96	1.00 V	164	24.90	12.14
4	600.08	35.72 QP	46.00	-10.28	2.00 V	57	13.23	22.49
5	667.57	36.13 QP	46.00	-9.87	1.00 V	345	12.71	23.42
6	700.59	34.49 QP	46.00	-11.51	1.00 V	152	10.33	24.16
7	799.89	41.26 QP	46.00	-4.74	1.50 V	225	15.26	26.00
8	867.89	35.23 QP	46.00	-10.77	1.50 V	111	8.41	26.82
9	904.66	40.10 QP	46.00	-5.90	1.50 V	132	12.80	27.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	1Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.00	56.33 PK	74.00	-17.67	1.18 H	23	24.94	31.39
2	2386.00	47.08 AV	54.00	-6.92	1.18 H	23	15.69	31.39
3	*2412.00	100.01 PK			1.17 H	18	68.54	31.47
4	*2412.00	96.19 AV			1.17 H	18	64.72	31.47
5	3216.00	44.89 PK	80.01	-35.12	1.08 H	302	11.60	33.29
6	3216.00	39.03 AV	76.19	-37.16	1.08 H	302	5.74	33.29
7	4824.00	50.35 PK	74.00	-23.65	1.02 H	328	13.12	37.23
8	4824.00	46.55 AV	54.00	-7.45	1.02 H	328	9.32	37.23
9	7236.00	49.85 PK	80.01	-30.16	1.02 H	315	6.49	43.36
10	7236.00	41.96 AV	76.19	-34.23	1.02 H	315	-1.40	43.36

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.00	61.69 PK	74.00	-12.31	1.23 V	357	30.30	31.39
2	2386.00	53.00 AV	54.00	-1.00	1.23 V	357	21.61	31.39
3	*2412.00	110.02 PK			1.00 V	308	78.55	31.47
4	*2412.00	106.27 AV			1.00 V	308	74.80	31.47
5	3216.00	46.45 PK	90.02	-43.57	1.06 V	13	13.16	33.29
6	3216.00	41.23 AV	86.27	-45.04	1.06 V	13	7.94	33.29
7	4824.00	52.68 PK	74.00	-21.32	1.10 V	328	15.45	37.23
8	4824.00	48.85 AV	54.00	-5.15	1.10 V	328	11.62	37.23
9	7236.00	52.11 PK	90.02	-37.91	1.45 V	352	8.75	43.36
10	7236.00	48.02 AV	86.27	-38.25	1.45 V	352	4.66	43.36

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	1Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	52.66 PK	74.00	-21.34	1.13 H	32	21.49	31.17
2	2320.00	43.03 AV	54.00	-10.97	1.13 H	32	11.86	31.17
3	*2437.00	104.71 PK			1.16 H	22	73.15	31.56
4	*2437.00	100.93 AV			1.16 H	22	69.37	31.56
5	4874.00	53.58 PK	74.00	-20.42	1.05 H	302	16.23	37.35
6	4874.00	49.85 AV	54.00	-4.15	1.05 H	302	12.50	37.35
7	7311.00	53.55 PK	74.00	-20.45	1.05 H	325	9.98	43.57
8	7311.00	45.89 AV	54.00	-8.11	1.05 H	325	2.32	43.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	61.22 PK	74.00	-12.78	1.05 V	42	30.05	31.17
2	2320.00	50.89 AV	54.00	-3.11	1.05 V	42	19.72	31.17
3	*2437.00	113.98 PK			1.00 V	322	82.42	31.56
4	*2437.00	110.02 AV			1.00 V	322	78.46	31.56
5	3248.00	47.55 PK	93.98	-46.43	1.08 V	17	14.21	33.34
6	3248.00	41.96 AV	90.02	-48.06	1.08 V	17	8.62	33.34
7	4874.00	56.11 PK	74.00	-17.89	1.03 V	333	18.76	37.35
8	4874.00	53.00 AV	54.00	-1.00	1.03 V	333	15.65	37.35
9	7311.00	56.18 PK	74.00	-17.82	1.28 V	348	12.61	43.57
10	7311.00	48.23 AV	54.00	-5.77	1.28 V	348	4.67	43.57

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	1Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.92 PK			1.20 H	29	73.27	31.65
2	*2462.00	101.04 AV			1.20 H	29	69.39	31.65
3	2483.50	55.74 PK	74.00	-18.26	1.20 H	29	24.01	31.73
4	2483.50	46.19 AV	54.00	-7.81	1.20 H	29	14.46	31.73
5	3282.00	45.01 PK	84.92	-39.91	1.10 H	308	11.61	33.40
6	3282.00	39.26 AV	81.04	-41.78	1.10 H	308	5.86	33.40
7	4924.00	53.52 PK	74.00	-20.48	1.03 H	312	16.06	37.46
8	4924.00	49.76 AV	54.00	-4.24	1.03 H	312	12.30	37.46
9	7386.00	53.22 PK	74.00	-20.78	1.00 H	346	9.60	43.62
10	7386.00	45.65 AV	54.00	-8.35	1.00 H	346	2.03	43.62

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	61.05 PK	74.00	-12.95	1.08 V	35	29.88	31.17
2	2320.00	50.50 AV	54.00	-3.50	1.08 V	35	19.33	31.17
3	*2462.00	114.07 PK			1.00 V	335	82.42	31.65
4	*2462.00	110.18 AV			1.00 V	335	78.53	31.65
5	2483.50	61.43 PK	74.00	-12.57	1.02 V	15	29.70	31.73
6	2483.50	52.40 AV	54.00	-1.60	1.02 V	15	20.67	31.73
7	3282.00	47.34 PK	94.07	-46.73	1.09 V	22	13.94	33.40
8	3282.00	41.91 AV	90.18	-48.27	1.09 V	22	8.51	33.40
9	4924.00	56.05 PK	74.00	-17.95	1.08 V	321	18.59	37.46
10	4924.00	52.96 AV	54.00	-1.04	1.08 V	321	15.50	37.46
11	7386.00	56.00 PK	74.00	-18.00	1.33 V	52	12.38	43.62
12	7386.00	48.17 AV	54.00	-5.83	1.33 V	52	4.55	43.62

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency.

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.02 PK	74.00	-15.98	1.23 H	332	26.62	31.40
2	2390.00	45.98 AV	54.00	-8.02	1.23 H	332	14.58	31.40
3	*2412.00	100.02 PK			1.18 H	25	68.55	31.47
4	*2412.00	90.11 AV			1.18 H	25	58.64	31.47
5	4824.00	50.68 PK	74.00	-23.32	1.05 H	322	13.45	37.23
6	4824.00	37.88 AV	54.00	-16.12	1.05 H	322	0.65	37.23

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.98 PK	74.00	-9.02	1.40 V	260	33.58	31.40
2	2390.00	52.97 AV	54.00	-1.03	1.40 V	260	21.57	31.40
3	*2412.00	111.93 PK			1.10 V	245	80.46	31.47
4	*2412.00	101.74 AV			1.10 V	245	70.27	31.47
5	4824.00	53.52 PK	74.00	-20.48	1.33 V	354	16.29	37.23
6	4824.00	40.72 AV	54.00	-13.28	1.33 V	354	3.49	37.23

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	100.35 PK			1.09 H	18	68.79	31.56
2	*2437.00	90.48 AV			1.09 H	18	58.92	31.56
3	4874.00	50.71 PK	74.00	-23.29	1.03 H	312	13.36	37.35
4	4874.00	37.91 AV	54.00	-16.09	1.03 H	312	0.56	37.35

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	112.13 PK			1.13 V	315	80.57	31.56
2	*2437.00	101.76 AV			1.13 V	315	70.20	31.56
3	4874.00	53.50 PK	74.00	-20.50	1.28 V	341	16.15	37.35
4	4874.00	40.68 AV	54.00	-13.32	1.28 V	341	3.33	37.35

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.53 PK			1.20 H	33	68.88	31.65
2	*2462.00	90.59 AV			1.20 H	33	58.94	31.65
3	2483.50	58.30 PK	74.00	-15.70	1.19 H	35	26.57	31.73
4	2483.50	46.22 AV	54.00	-7.78	1.19 H	35	14.49	31.73
5	4924.00	51.22 PK	74.00	-22.78	1.07 H	325	13.76	37.46
6	4924.00	38.36 AV	54.00	-15.64	1.07 H	325	0.90	37.46

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.66 PK			1.26 V	304	81.01	31.65
2	*2462.00	101.77 AV			1.26 V	304	70.12	31.65
3	2483.50	71.53 PK	74.00	-2.47	1.24 V	15	39.80	31.73
4	2483.50	52.26 AV	54.00	-1.74	1.24 V	15	20.53	31.73
5	4924.00	54.56 PK	74.00	-19.44	1.08 V	315	17.10	37.46
6	4924.00	41.69 AV	54.00	-12.31	1.08 V	315	4.23	37.46

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

802.11g OFDM MODULATION_TURBO MODE

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	QPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.33 PK	74.00	-17.67	1.10 H	12	24.93	31.40
2	2390.00	43.89 AV	54.00	-10.11	1.10 H	12	12.49	31.40
3	*2437.00	98.96 PK			1.05 H	28	67.40	31.56
4	*2437.00	88.99 AV			1.05 H	28	57.43	31.56
5	2483.50	56.02 PK	74.00	-17.98	1.01 H	35	24.29	31.73
6	2483.50	43.53 AV	54.00	-10.47	1.01 H	35	11.80	31.73
7	4874.00	49.11 PK	74.00	-24.89	1.08 H	305	11.76	37.35
8	4874.00	36.85 AV	54.00	-17.15	1.08 H	305	-0.50	37.35

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.65 PK	74.00	-13.35	1.05 V	2	29.25	31.40
2	2390.00	51.33 AV	54.00	-2.67	1.05 V	2	19.93	31.40
3	*2437.00	109.65 PK			1.01 V	9	78.09	31.56
4	*2437.00	100.35 AV			1.01 V	9	68.79	31.56
5	2483.50	61.55 PK	74.00	-12.45	1.07 V	11	29.82	31.73
6	2483.50	50.12 AV	54.00	-3.88	1.07 V	11	18.39	31.73
7	4874.00	54.12 PK	74.00	-19.88	1.13 V	322	16.77	37.35
8	4874.00	41.03 AV	54.00	-12.97	1.13 V	322	3.68	37.35

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.00	0.5	PASS
6	2437	12.04	0.5	PASS
11	2462	12.52	0.5	PASS


CH1

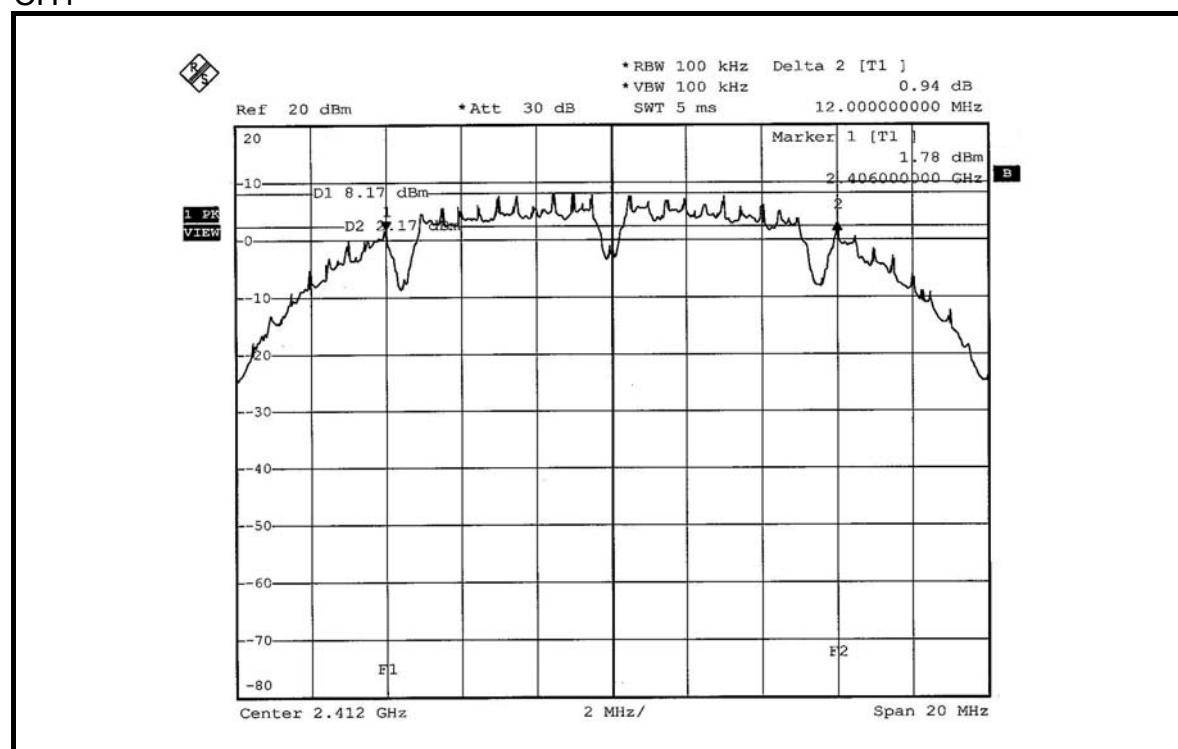

CH6

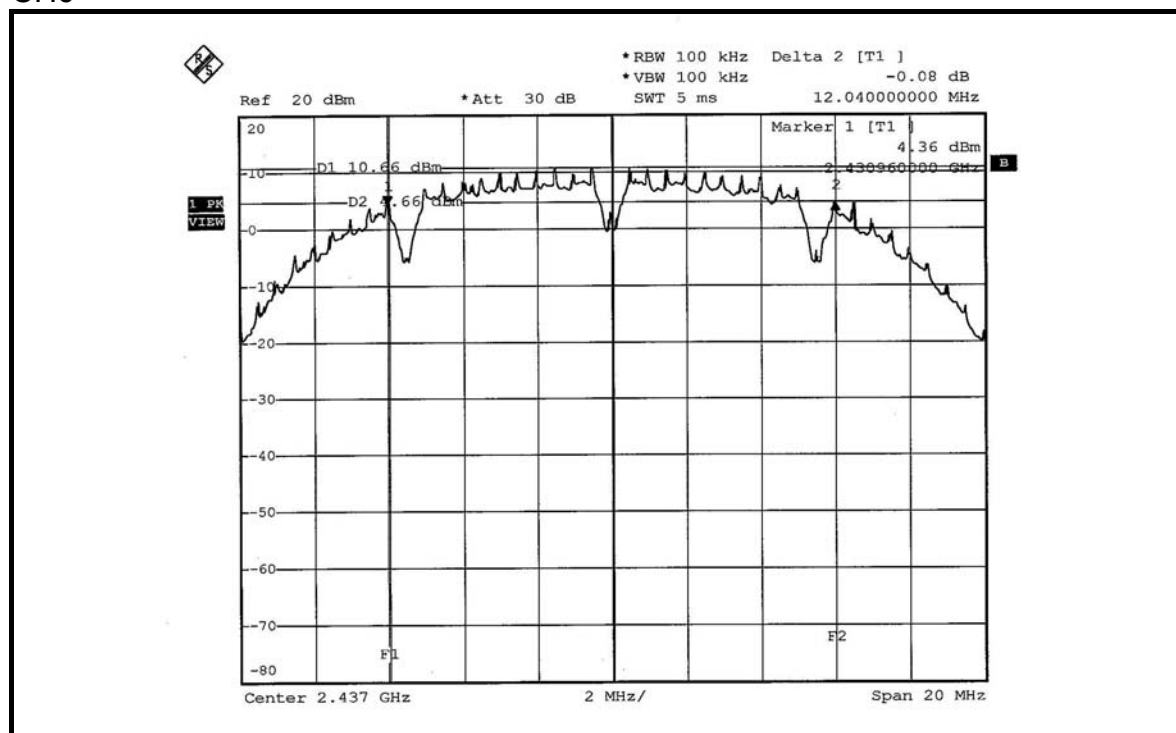

CH11

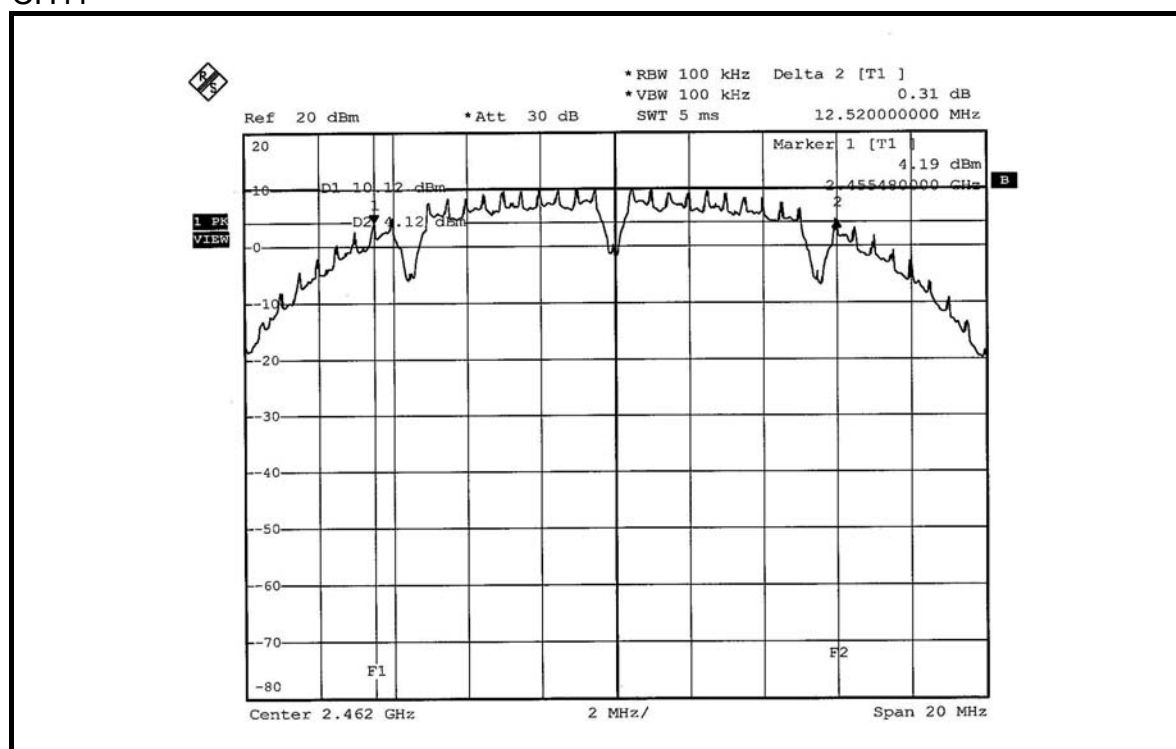


802.11g OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.36	0.5	PASS
6	2437	16.40	0.5	PASS
11	2462	16.40	0.5	PASS


CH1

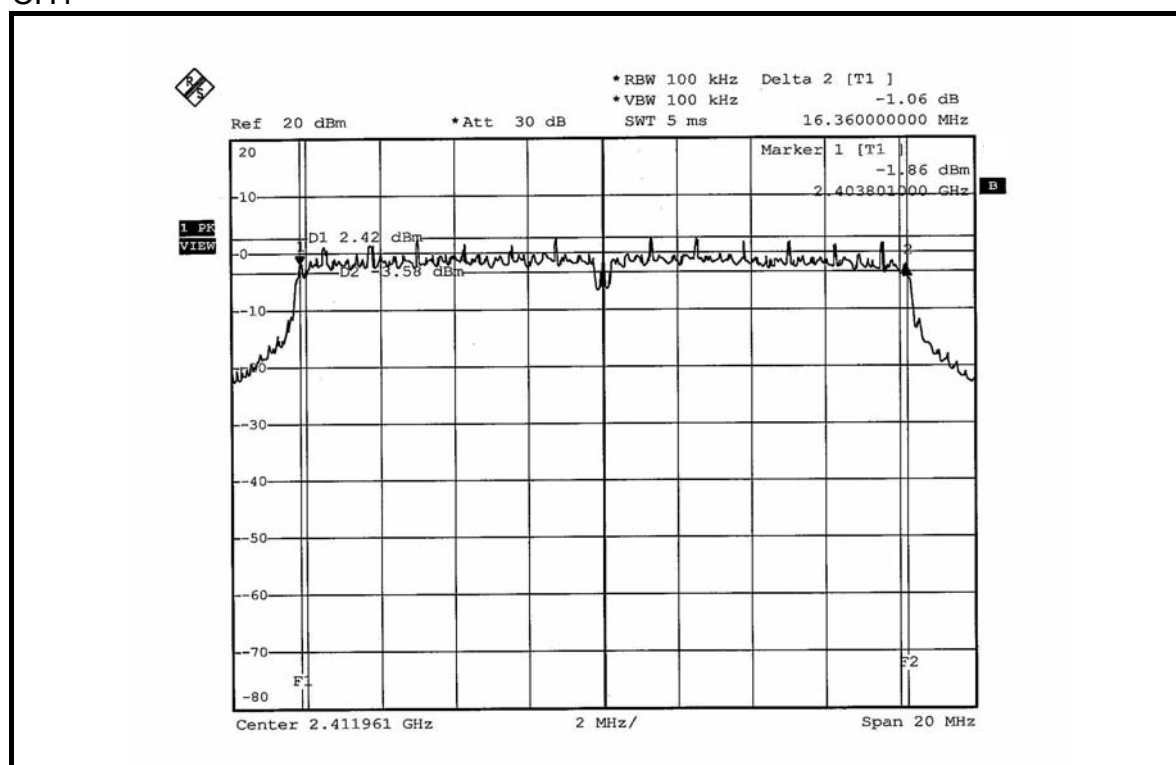

CH6

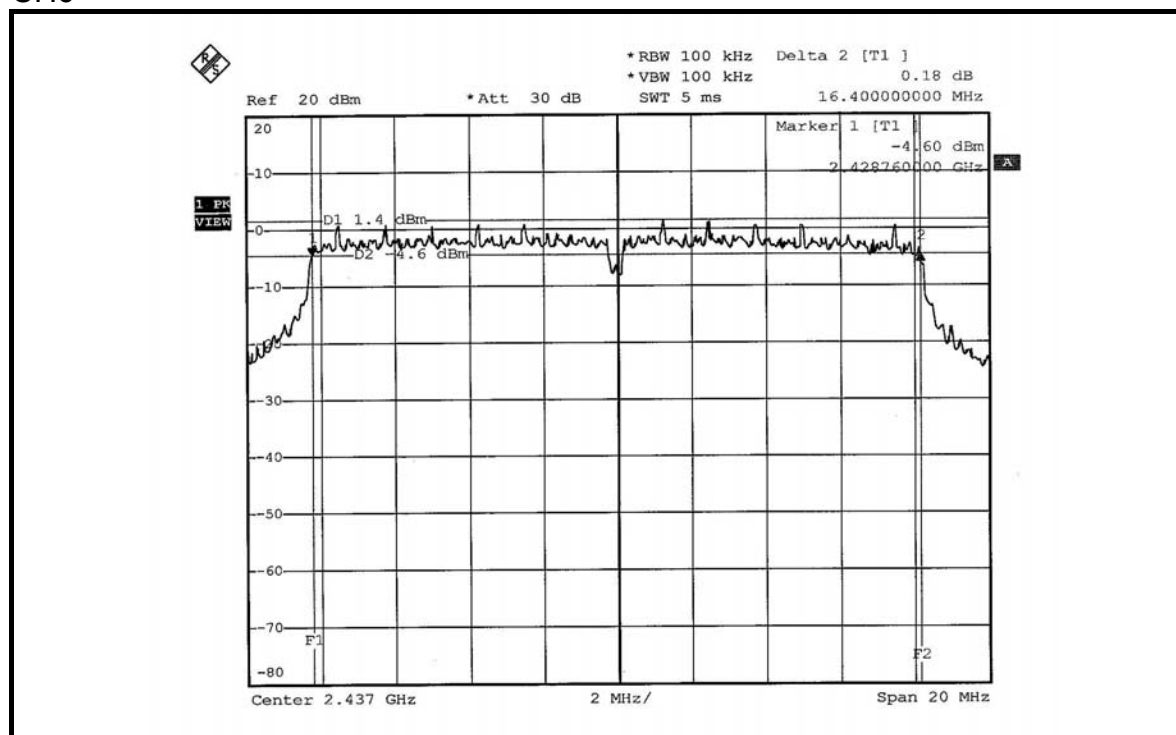

CH11

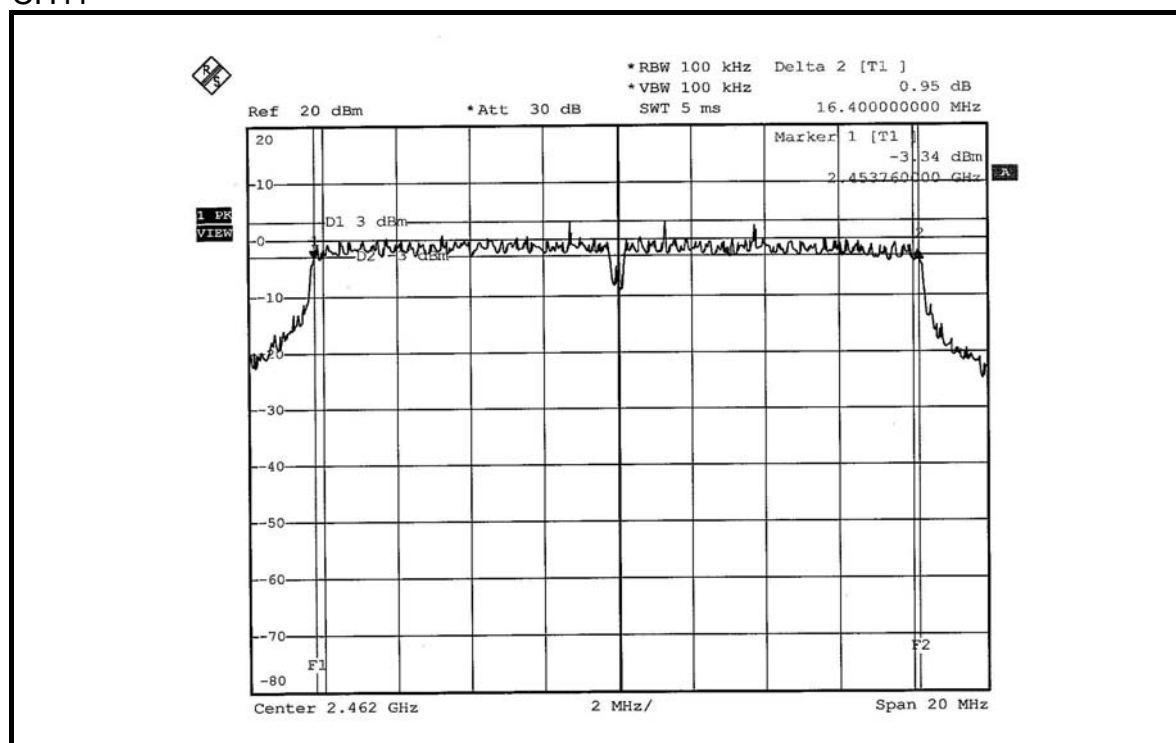


802.11g OFDM MODULATION_TURBO MODE

MODULATION TYPE	QPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
6	2437	31.44	0.5	PASS

CH6

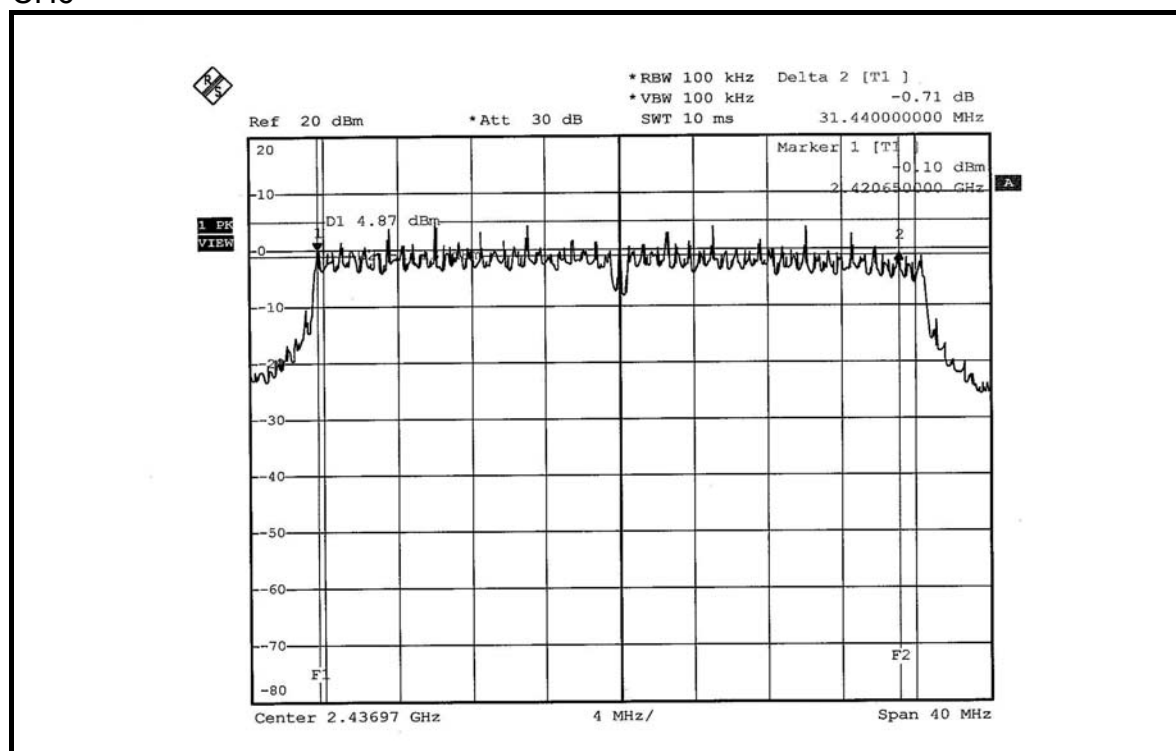

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 07, 2006
TEKTRONIX OSCILLOSCOPE	TDS1012	C037299	Nov. 28, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

4.4.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	70.795	18.50	30	PASS
6	2437	161.065	22.07	30	PASS
11	2462	160.325	22.05	30	PASS

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	79.616	19.01	30	PASS
6	2437	80.538	19.06	30	PASS
11	2462	80.168	19.04	30	PASS

802.11g OFDM MODULATION_TURBO MODE

MODULATION TYPE	QPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
6	2437	80.538	19.06	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6.


4.5.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-7.10	8	PASS
6	2437	-3.31	8	PASS
11	2462	-3.32	8	PASS


CH1

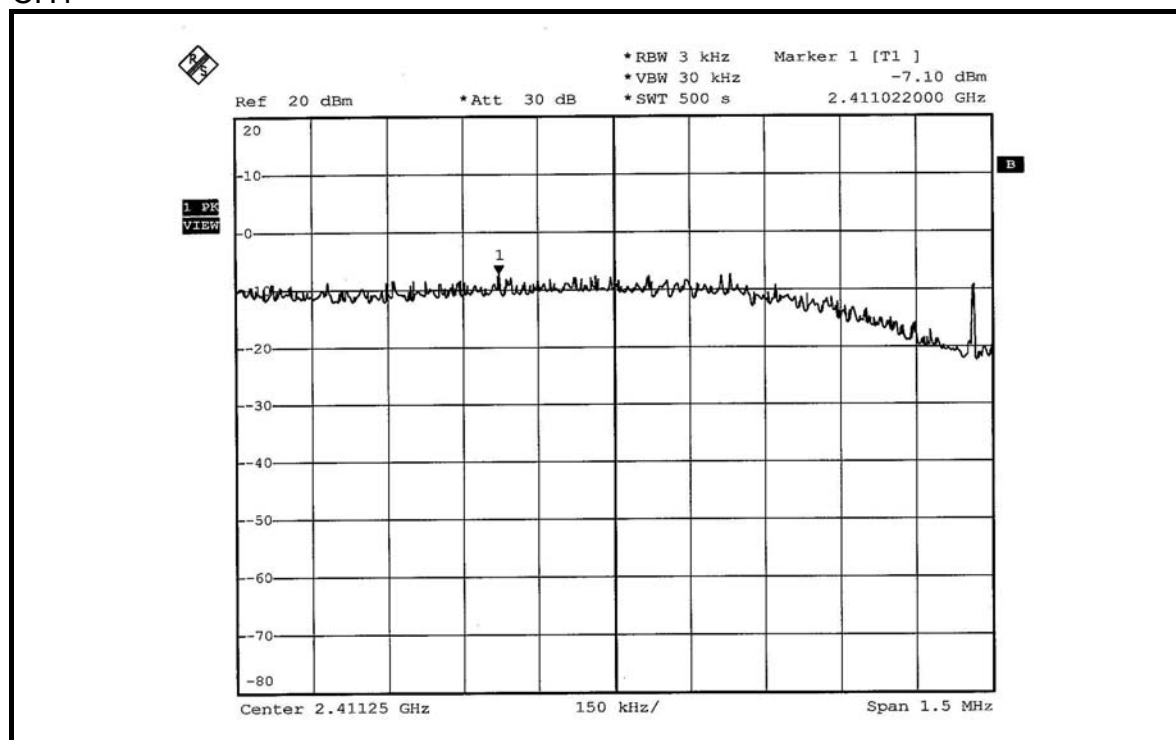

CH6

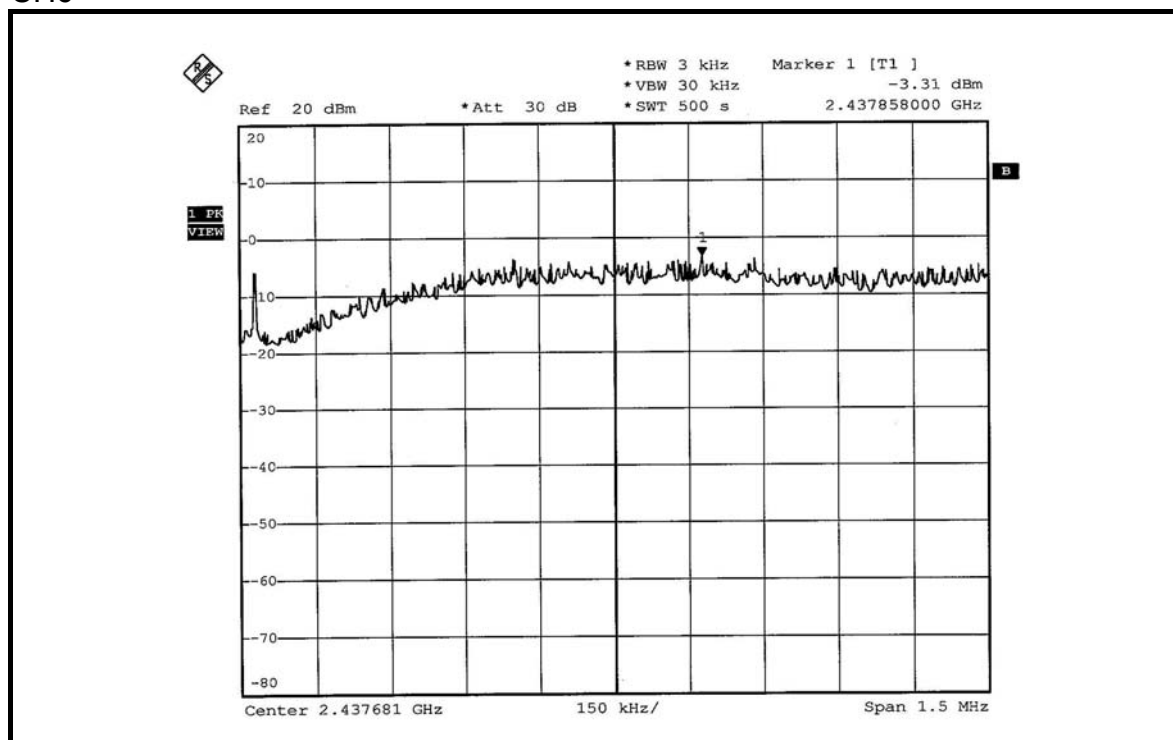

CH11

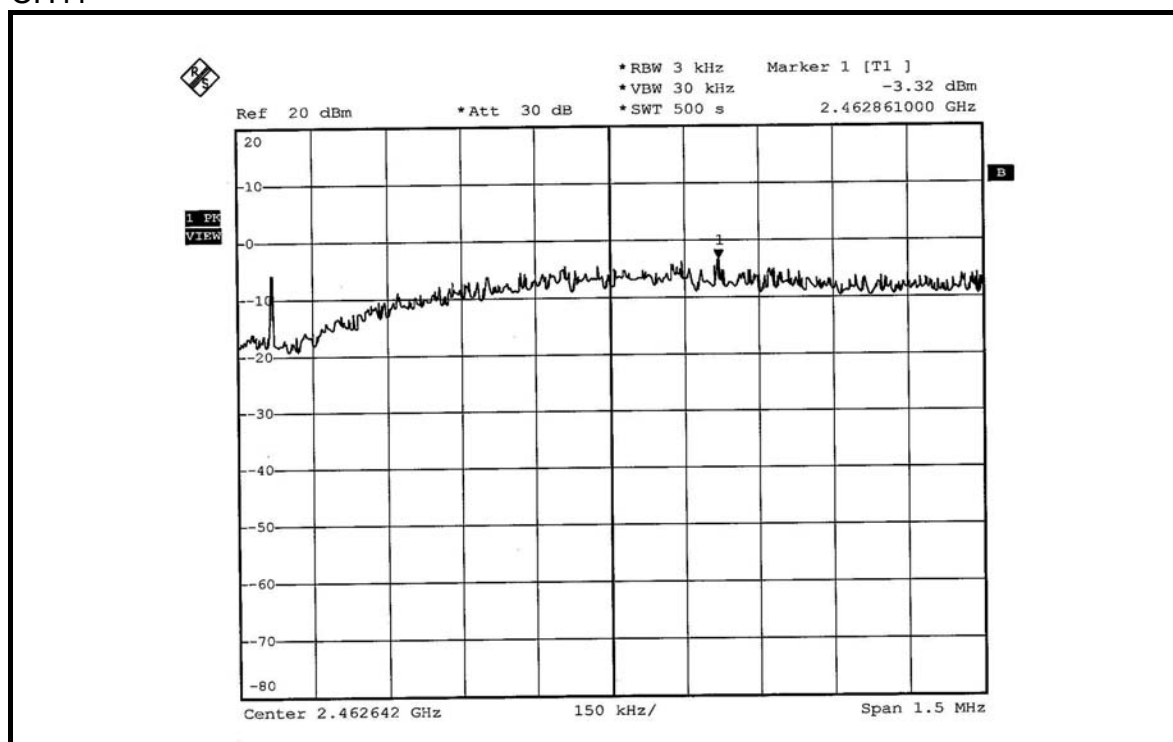


802.11g OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-4.86	8	PASS
6	2437	-12.34	8	PASS
11	2462	-9.06	8	PASS


CH1

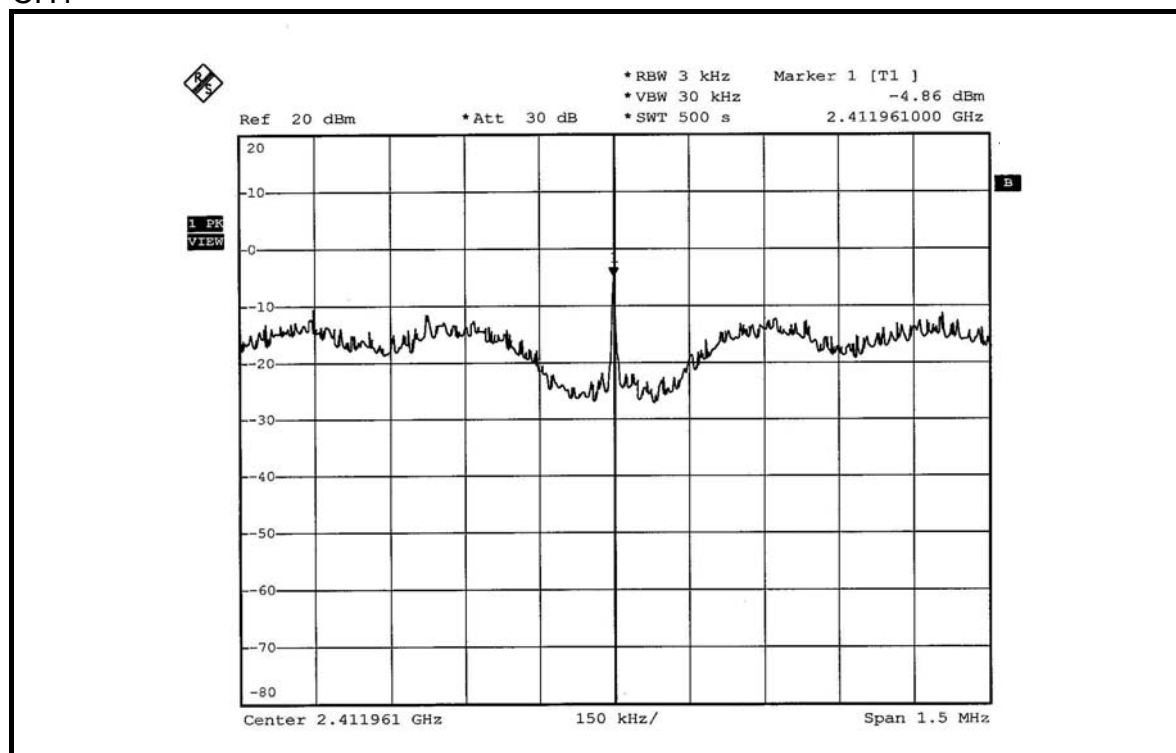

CH6

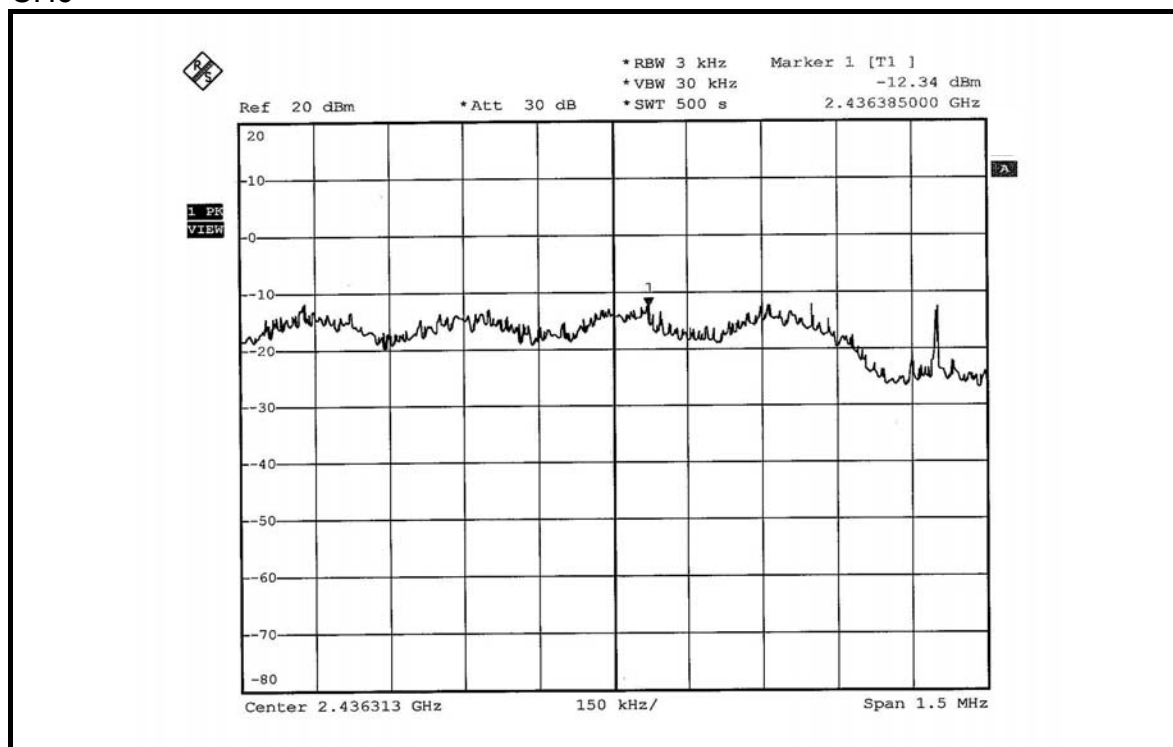

CH11

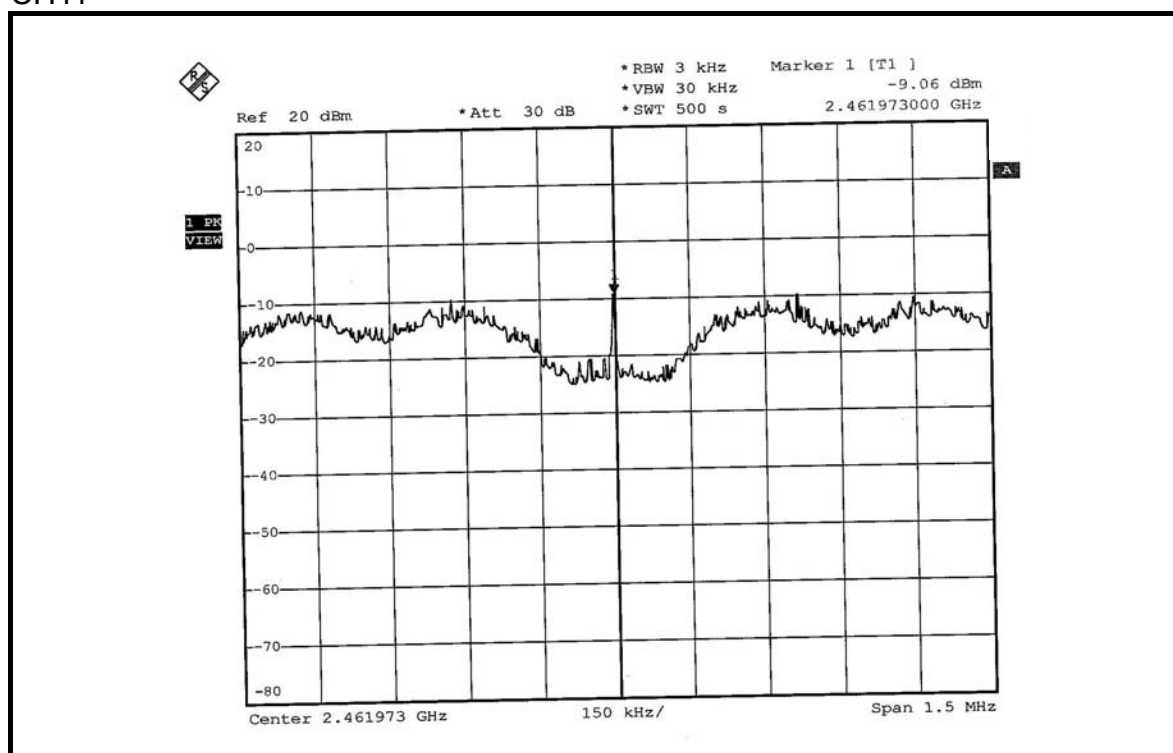


802.11g OFDM MODULATION_TURBO MODE

MODULATION TYPE	QPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
6	2437	-2.20	8	PASS

CH6

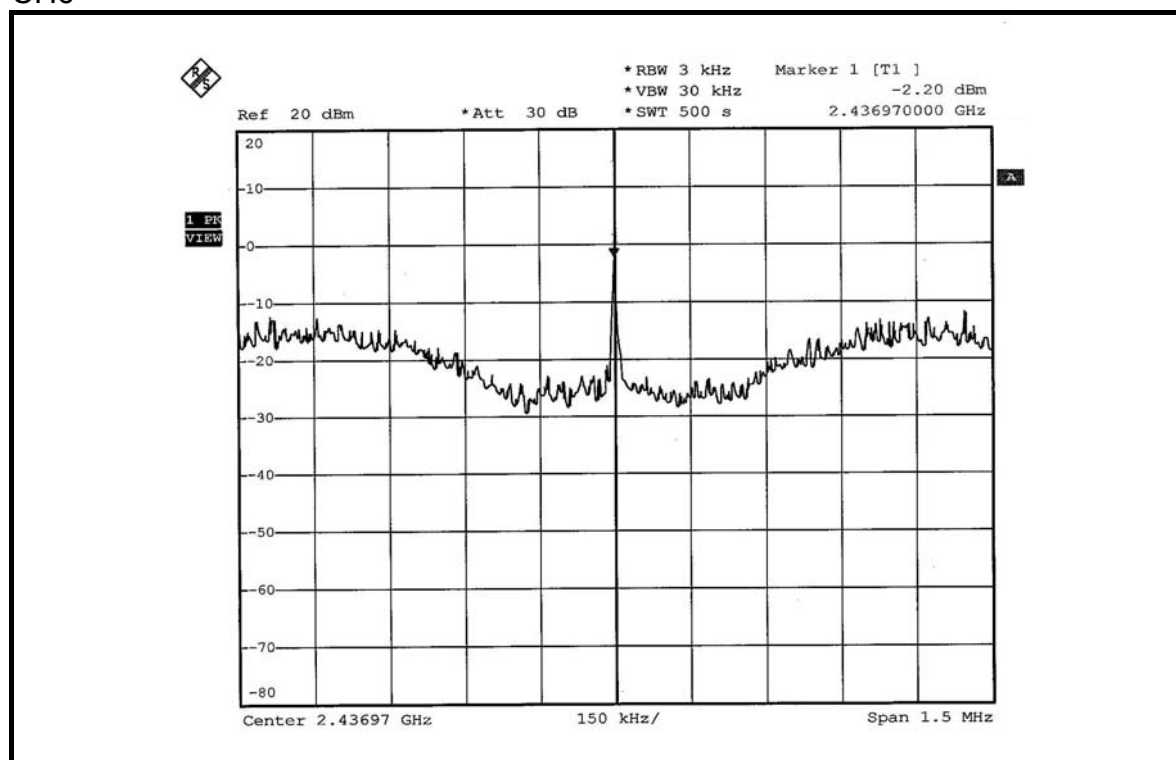

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded. The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6.

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 18 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



802.11b DSSS MODULATION



NOTE 1: The band edge emission plot on the next page shows 49.57dBc between carrier maximum power and local maximum emission in restrict band (2.38592GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 110.02dBuV/m (Peak), so the maximum field strength in restrict band is $110.02 - 49.57 = 60.45$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 54.82dBc between carrier maximum power and local maximum emission in restrict band (2.38620GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 106.27dBuV/m (Average), so the maximum field strength in restrict band is $106.27 - 54.82 = 51.45$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 56.82dBc between carrier maximum power and local maximum emission in restrict band (2.48454GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 114.07dBuV/m (Peak), so the maximum field strength in restrict band is $114.07 - 56.82 = 57.25$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 59.00dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 110.18dBuV/m (Average), so the maximum field strength in restrict band is $110.18 - 59.00 = 51.18$ dBuV/m which is under 54dBuV/m limit.

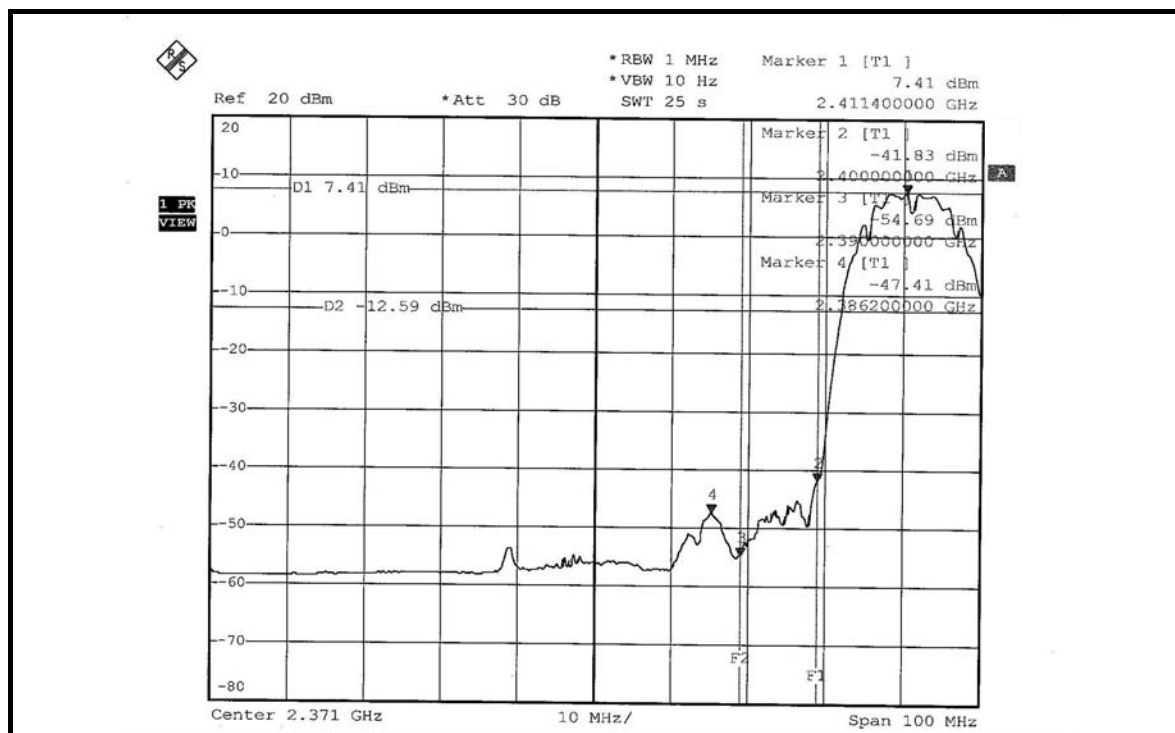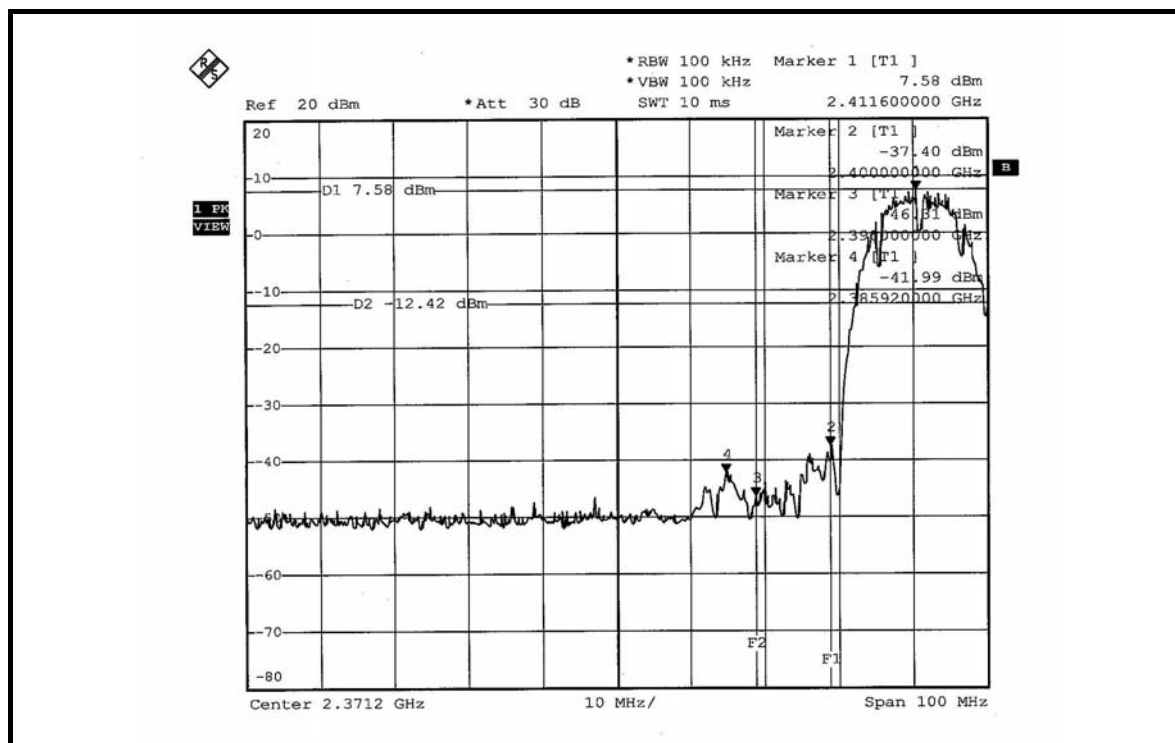

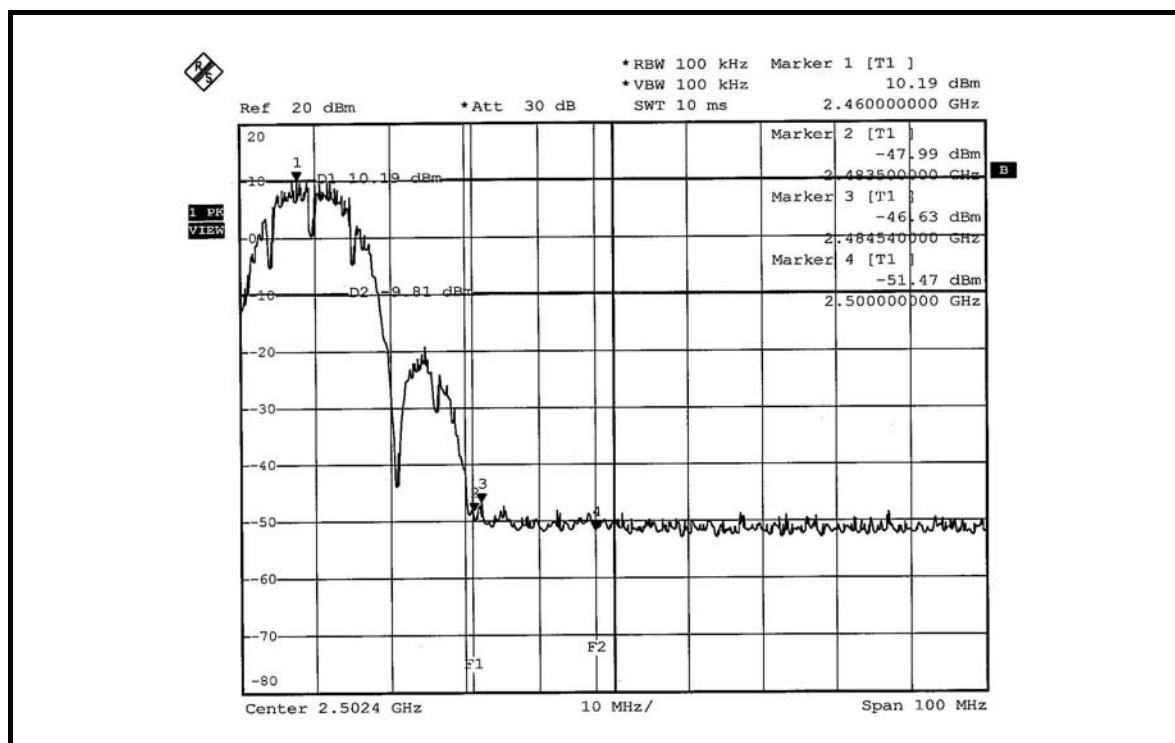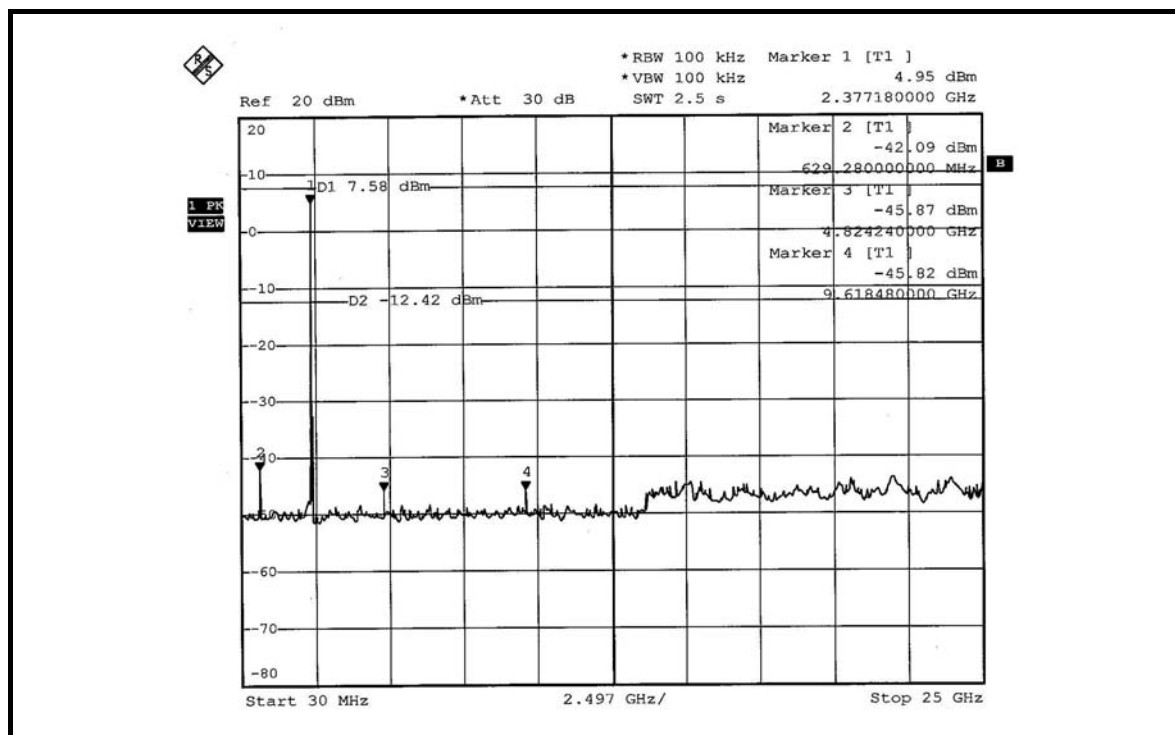

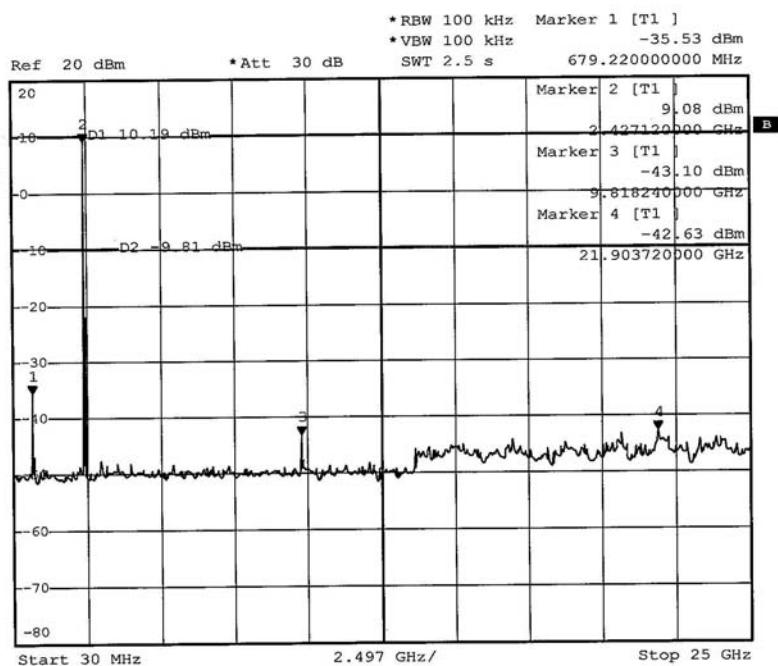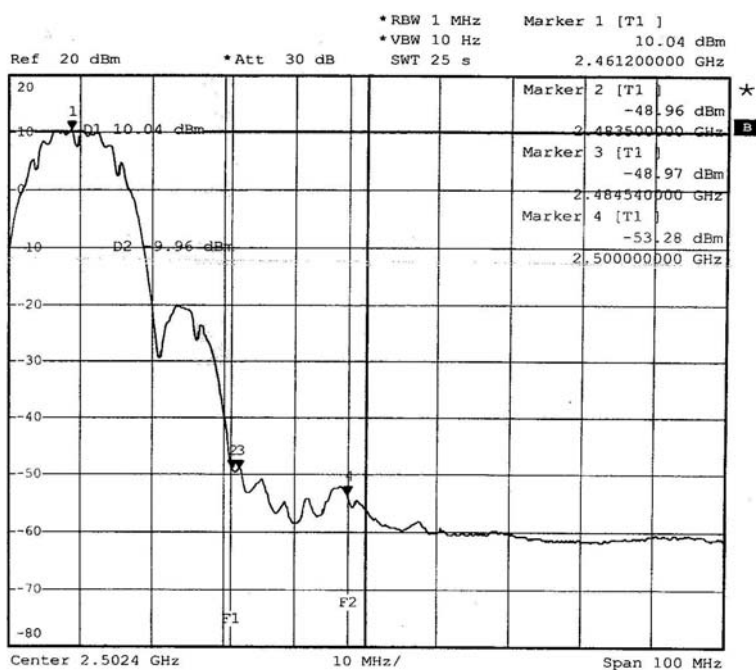



802.11g OFDM MODULATION



NOTE 1: The band edge emission plot on the next page shows 46.93dBc between carrier maximum power and local maximum emission in restrict band (2.38940GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 111.93dBuV/m (Peak), so the maximum field strength in restrict band is $111.93 - 46.93 = 65.00$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 50.40dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 101.74dBuV/m (Average), so the maximum field strength in restrict band is $101.74 - 50.40 = 51.34$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 48.82dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 112.66dBuV/m (Peak), so the maximum field strength in restrict band is $112.66 - 48.82 = 63.84$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 51.53dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 101.77dBuV/m (Average), so the maximum field strength in restrict band is $101.77 - 51.53 = 50.24$ dBuV/m which is under 54dBuV/m limit.

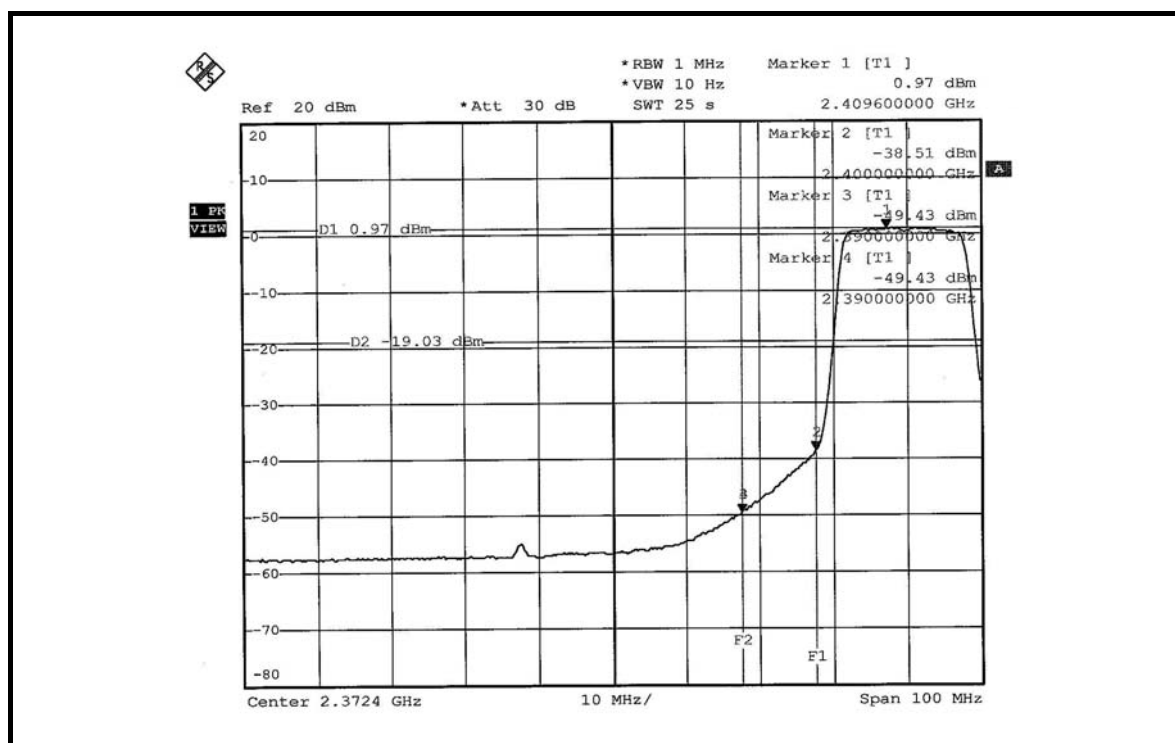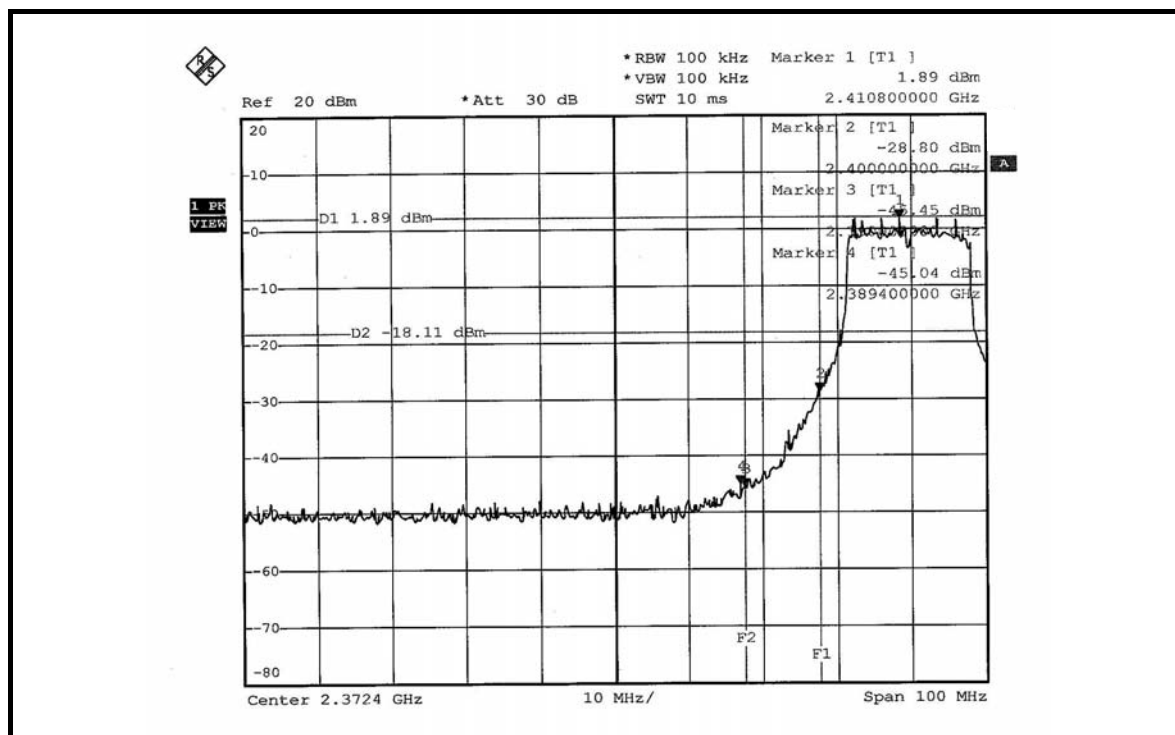

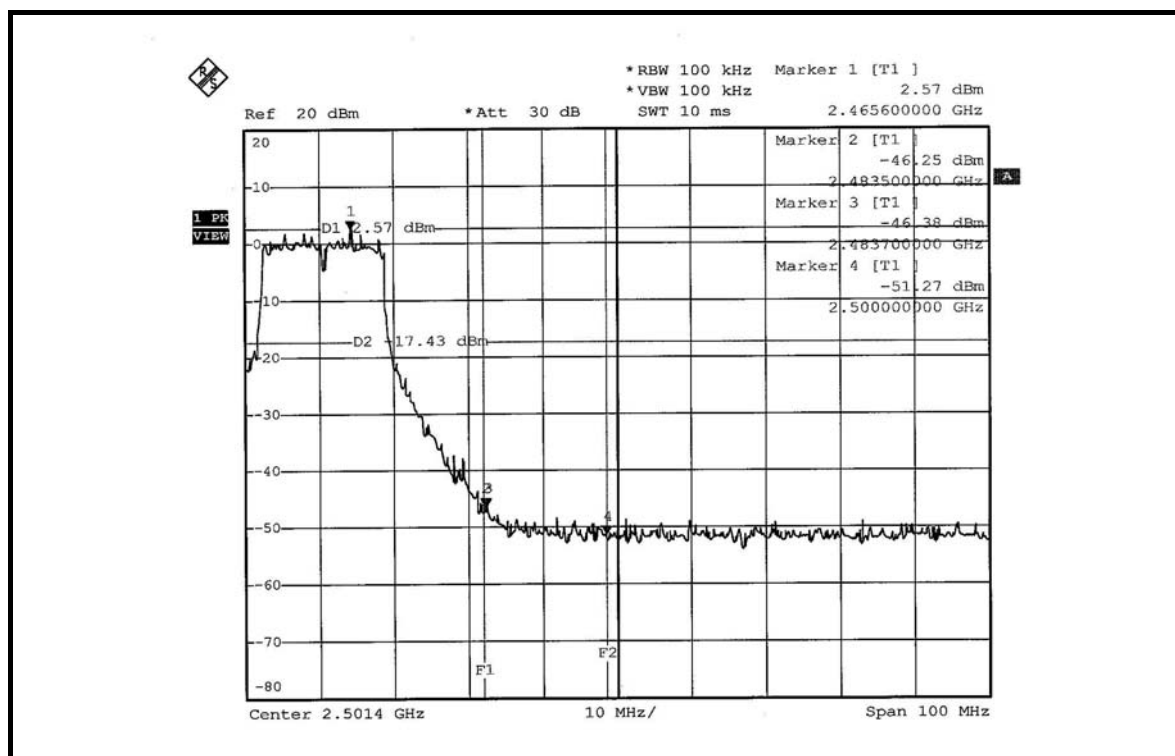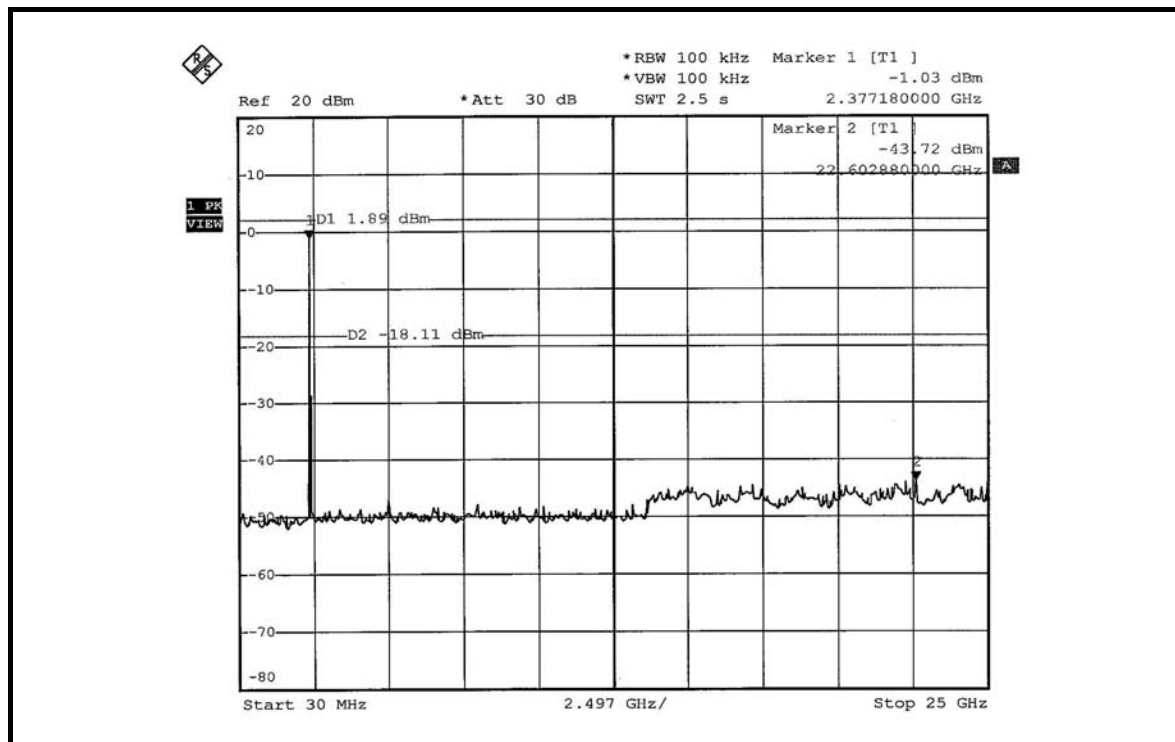

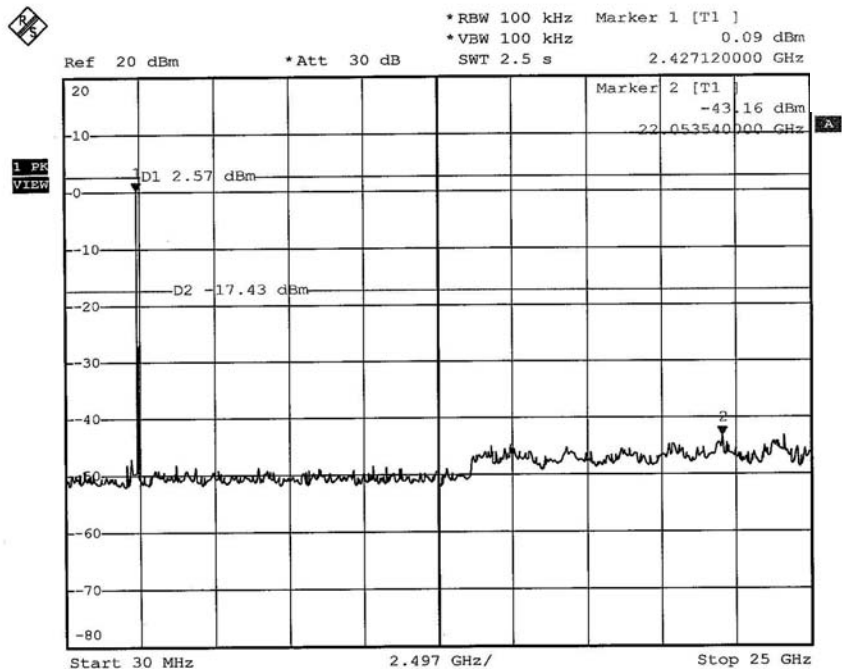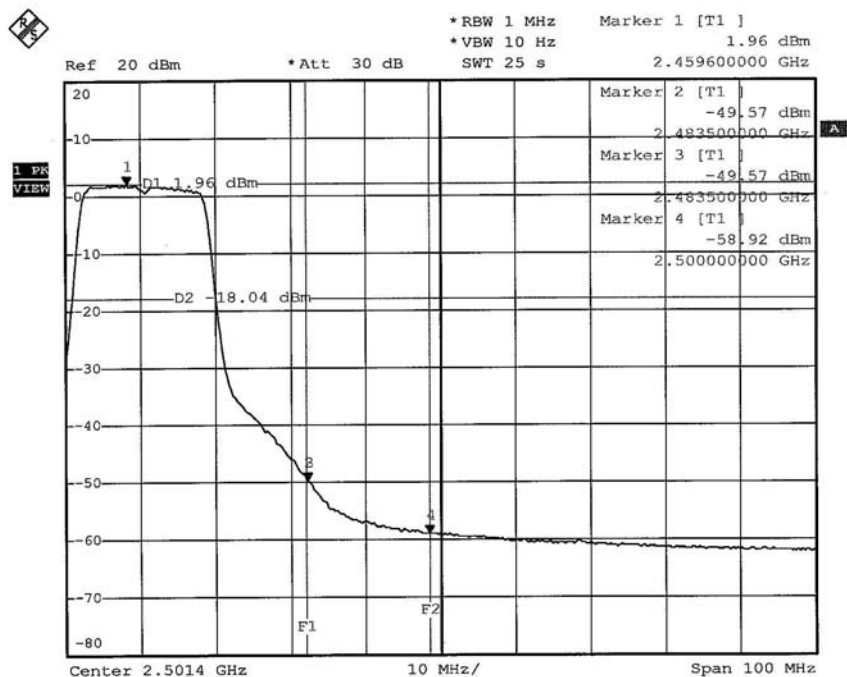



802.11g OFDM MODULATION_TURBO MODE



NOTE 1: The band edge emission plot on the next page shows 49.86dBc between carrier maximum power and local maximum emission in restrict band (2.38568GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 109.65dBuV/m (Peak), so the maximum field strength in restrict band is $109.65 - 49.86 = 59.79$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 47.56dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 100.35dBuV/m (Average), so the maximum field strength in restrict band is $100.35 - 47.56 = 52.79$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 51.72dBc between carrier maximum power and local maximum emission in restrict band (2.48390GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 109.65dBuV/m (Peak), so the maximum field strength in restrict band is $109.65 - 51.72 = 57.93$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 52.10dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 100.35dBuV/m (Average), so the maximum field strength in restrict band is $100.35 - 52.10 = 48.25$ dBuV/m which is under 54dBuV/m limit.

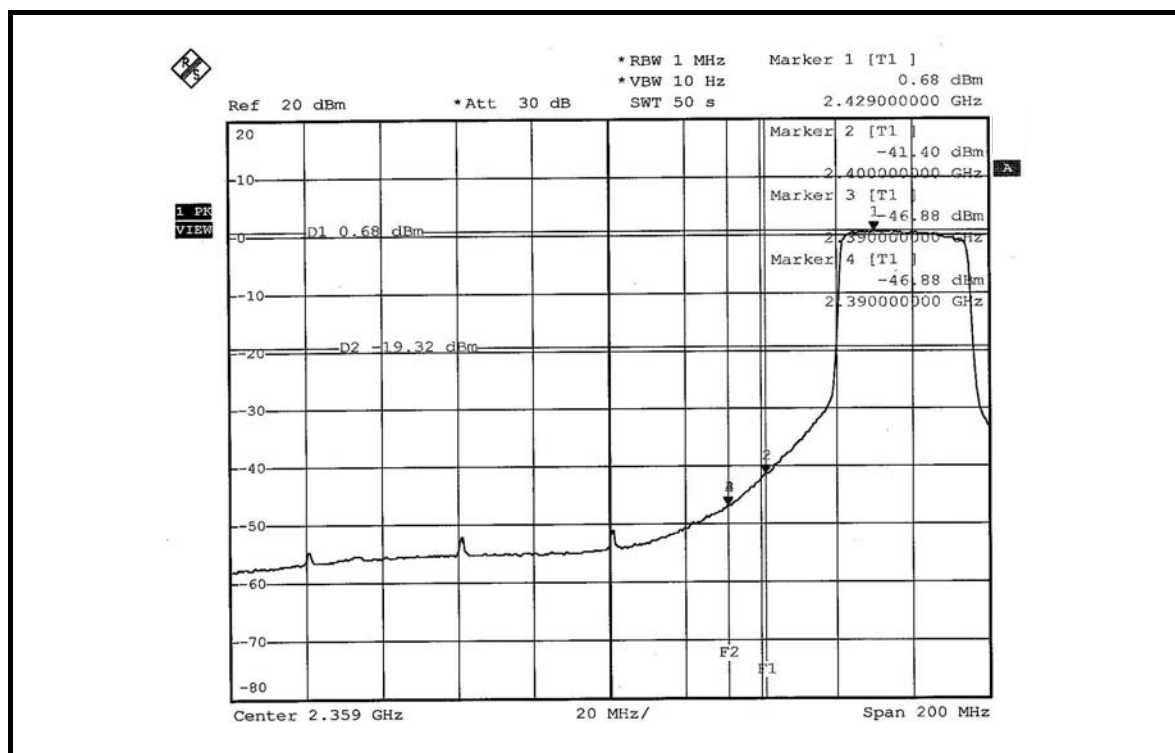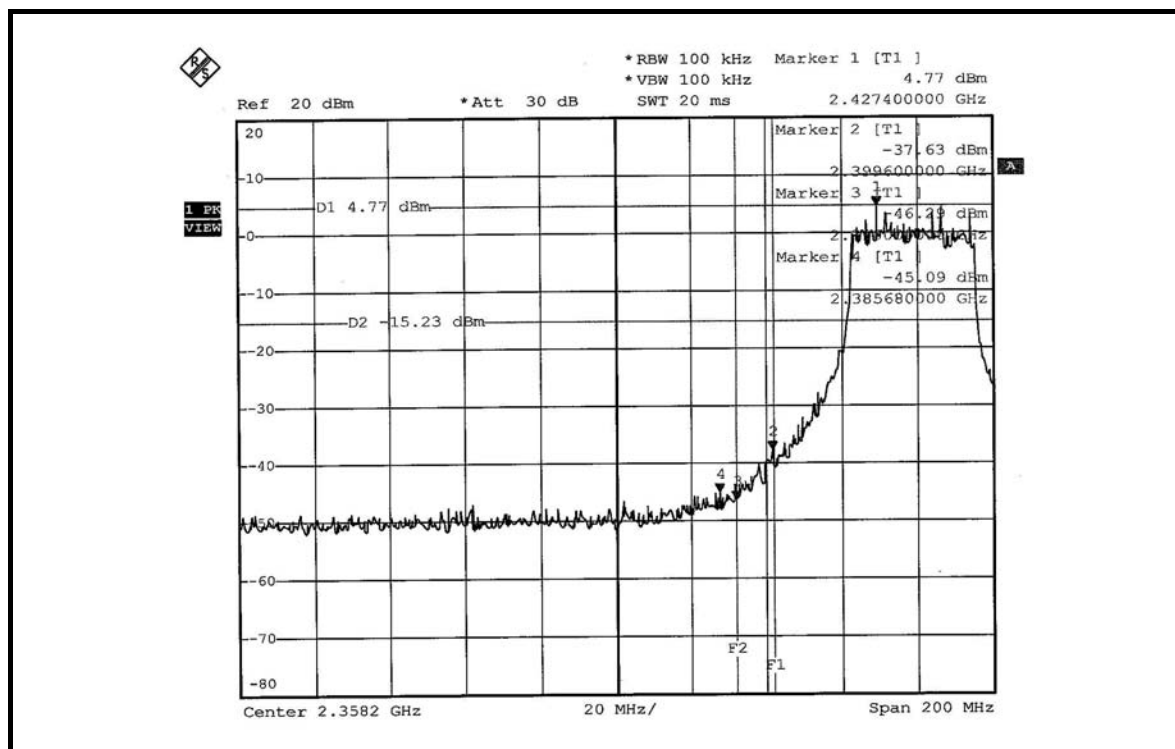

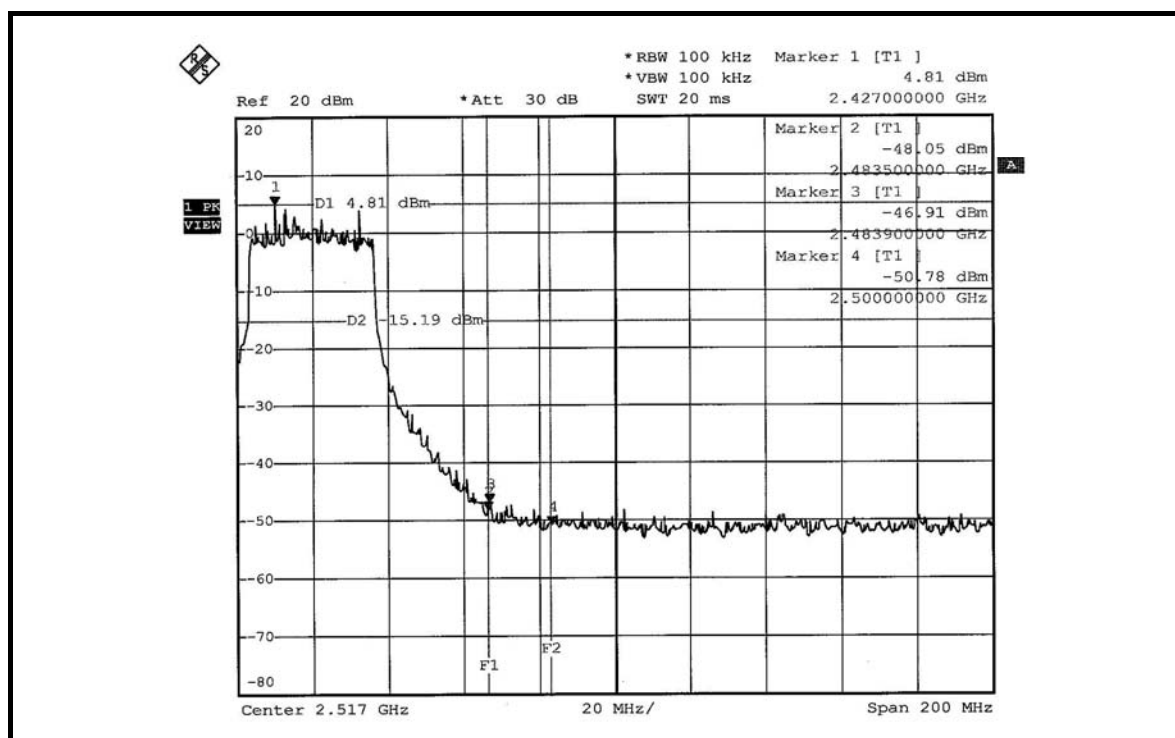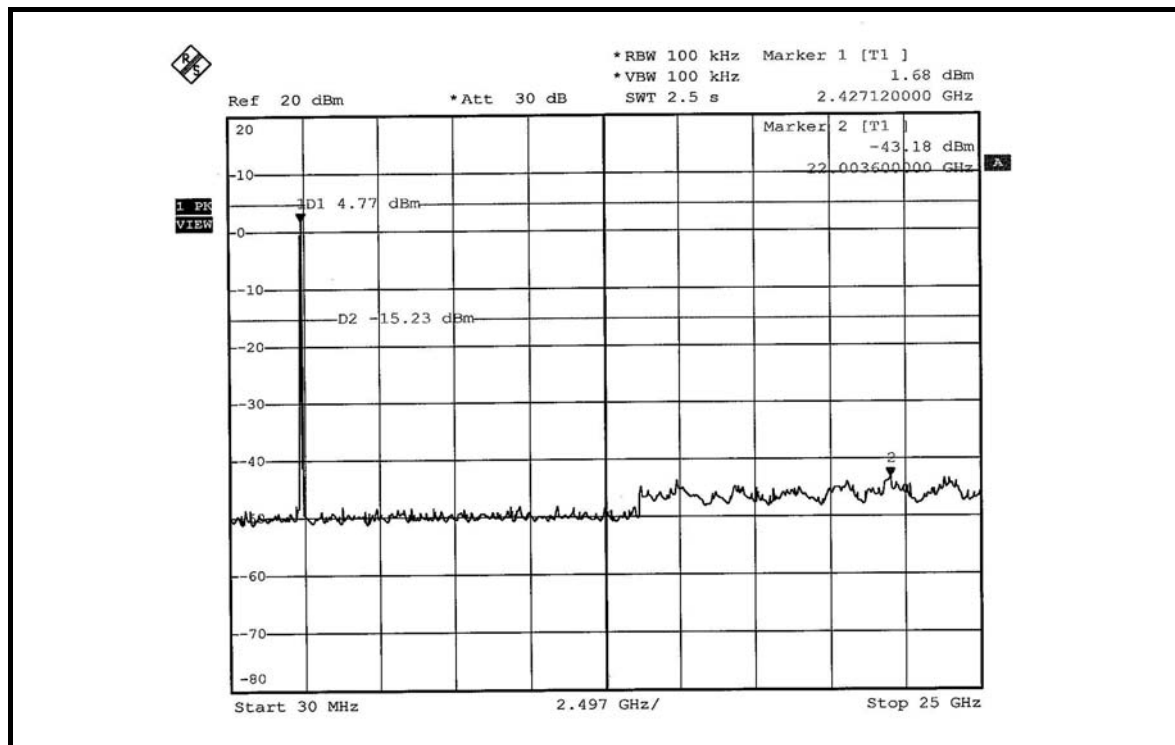

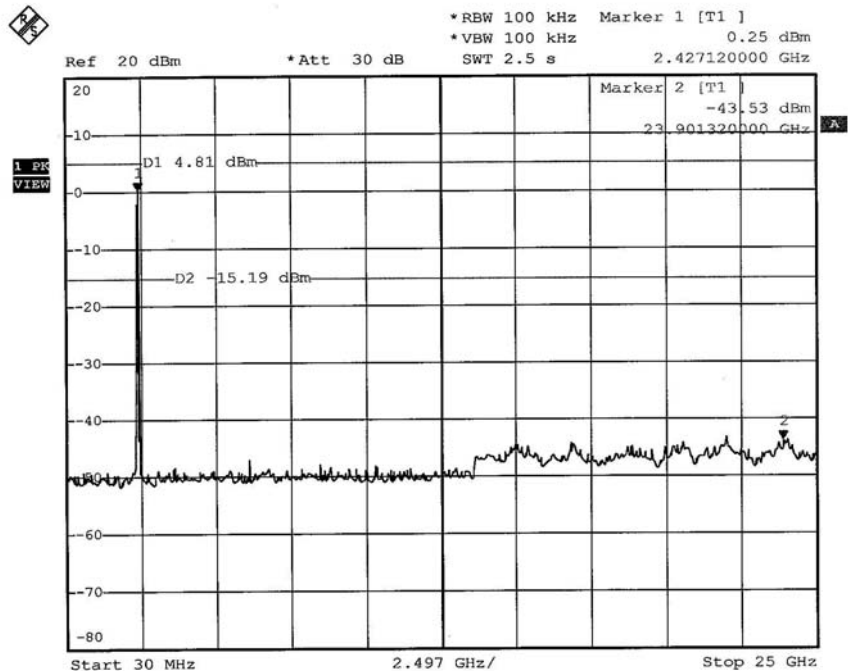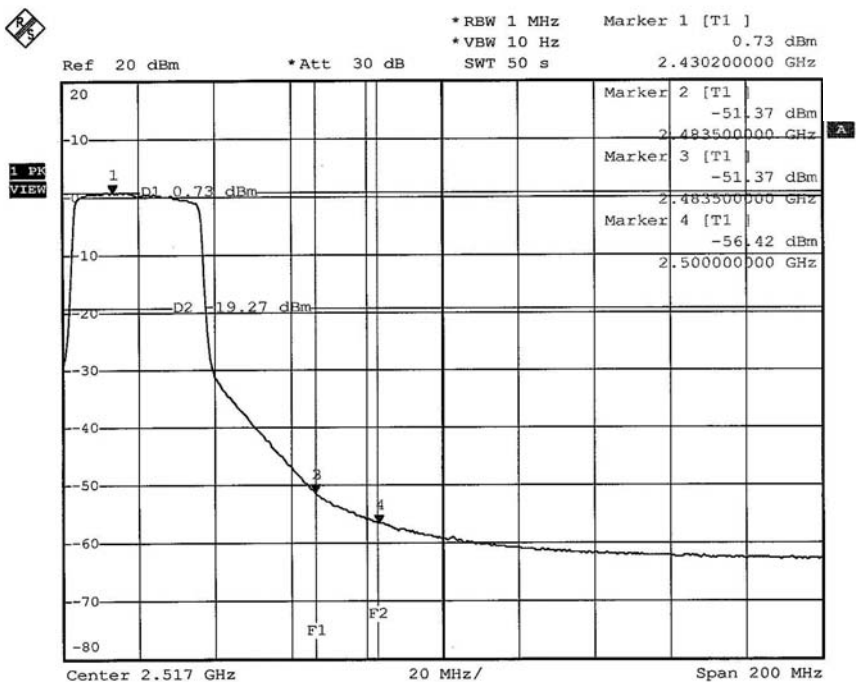

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna type used in this product is Dipole antenna with RSMA antenna connector. The maximum Gain of the antenna is 2dBi.

5 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.