ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

USB Remote Surveillance System Transmitter

MODEL NO.: CA-2000RF

PRODUCT FAMILY: Camlinc

FCC ID: P8BCA-2000RF

REPORT NO: 020010-R

ISSUE DATE: March 13, 2002

Prepared for

AME Optimedia Technology Co., Ltd.
17F-2, No. 79, Hsin Tai Wu Road, Sec. 1,
His-Chih, Taipei Hsien, Taiwan, R. O. C.

Prepared by

C&C LABORATORY, CO., LTD.
#B1, 1st Fl., Universal Center,
No. 183, Sec. 1, Tatung Rd., Hsi Chih,
Taipei Hsien, Taiwan, R.O.C.
TEL: (02)8642-2071~3
FAX: (02)8642-2256

This report shall not be reproduced except in full, without the written approval of C&C

TEST REPORT CERTIFICATION

Applicant : **AME Optimedia Technology Co., Ltd.**

Manufacturer : **AME Optimedia Technology Co., Ltd.**

Description of EUT

a) Product : **USB Remote Surveillance System Transmitter**

b) Model No. : **CA-2000RF**

c) Product Family : **Camlinc**

e) AC Power Adaptor : **Model Name: SCP41-750500**
INPUT: 120VAC / 60Hz / 7W; OUTPUT:7.5VDC / 500mA

Note: The difference between the two model numbers (listed on the report) is identical, just for marketing purpose only

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C (2000)

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.4, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.
2. The testing report shall not be reproduced expect in full, without the written approval of C&C Laboratory Co. Ltd.

Issued Date : March 13, 2002

Approve & Authorized Signer :

Steven Wang / RF Manager

Table of Contents Page

1 GENERAL INFORMATION 5

1.1 Product Description 5
1.2 Characteristics of Device 5
1.3 Test Methodology 5
1.4 Test Facility 5

2 PROVISIONS APPLICABLE 6

2.1 Definition 6
2.2 Requirement for Compliance 7
2.3 Restricted Bands of Operation 9
2.4 Labeling Requirement 9
2.5 User Information 10

3 SYSTEM TEST CONFIGURATION 11

3.1 Justification 11
3.2 Devices for Tested System 11

4 RADIATED EMISSION MEASUREMENT 12

4.1 Applicable Standard 12
4.2 Measurement Procedure 12
4.3 Measuring Instrument 14
4.4 Radiated Emission Data 15
4.4.1 Tx Portion 15
4.4.2 Other Emissions 21
4.5 Field Strength Calculation 28
4.6 Photos of Radiation Measuring Setup 29

5 CONDUCTED EMISSION MEASUREMENT 31

5.1 Standard Applicable 31
5.2 Measurement Procedure 39
5.3 Conducted Emission Data 32
5.4 Result Data Calculation 34
5.5 Conducted Measurement Equipment 39
5.6 Photos of Conduction Measuring Setup 40

This report shall not be reproduced except in full, without the written approval of C&C

6 ANTENNA REQUIREMENT 41

6.1 Standard Applicable 41
6.2 Antenna Construction 41

7 BAND EDGES MEASUREMENT 42

7.1 Standard Applicable 42
7.2 Measurement Procedure 42
7.3 Measurement Equipment 42
7.4 Measurement Data 42

APPENDIX 1 EUT Photographs. 47

APPENDIX 2 53

User Manual
Schematics
Block Diagram
Operational Description
Proposed FCC ID Label Format

This report shall not be reproduced except in full, without the written approval of C&C

1 GENERAL INFORMATION

1.1 Product Description

a) Product	: **USB Remote Surveillance System Transmitter**
b) Model No.	: **CA-2000RF**
c) Product Family	: **Camlinc**
d) FCC ID	: **P8BCA-2000RF**
e) Frequency Range	: **2414MHz to 2468MHz**
f) Channel Number	: **4 Channels**
g) Frequency of Each Channel	: **2414MHz; 2432MHz; 2450MHz; 2468MHz**
h) Type of Modulation	: **FM**
i) AC Power Adaptor	: **Model Name: SCP41-750500** **INPUT: 120VAC / 60Hz / 7W;** **OUTPUT:7.5VDC / 500mA**

Note: The difference between the two model numbers (listed on the report) is identical, just for marketing purpose only

1.2 Characteristics of Device

The EUT is intended for transmission of video and audio signals. There are four channels for operation, and the used transmitting frequencies are 2414, 2432, 2450 and 2468 MHz.
The main function of CA-2000RF video sender is to send the video and audio signals to receiver unit by 2.4GHz RF signal and do the FM demodulation.

1.3 Test Methodology

For Video Sender, both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.4(1992). Other required measurements were illustrated in separate sections of this test report for details.

1.4 Test Facility

The open area test sites and conducted measurement facilities used to collect the radiated data are located at No. 81-1, 210 Lane, Pa-de 2nd Road, Lu-Chu Hsiang, Taoyuan, Taiwan, R.O.C. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

This report shall not be reproduced except in full, without the written approval of C&C Rev. 02

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:
A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:
A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :
A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:
A device that intentionally generates and emits radio frequency energy by radiation or induction.

This report shall not be reproduced except in full, without the written approval of C&C

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:

Frequency MHz	Emissions µV	Emissions dBµV
0.45 - 30.0	250	48.0

For intentional device, according to § 15.207(a) Line Conducted Emission Limits is same as above table.

(2) Radiated Emission Requirement

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dBµV/m	Radiated µV/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

This report shall not be reproduced except in full, without the written approval of C&C

For intentional radiator device, per § 15.249(a), the field strength of emissions shall comply with the following :

Frequency MHz	Distance Meters	Fundamental dBμV/m	Fundamental mV/m	Harmonic dBμV/m	Harmonic μV/m
902 - 928	3	94	50	54	500
2400 - 2483.5	3	94	50	54	500
5725 - 5875	3	94	50	54	500
24000 - 24250	3	108	250	68	2500

In accordance with § 15.249(d), limits shown in above table are based on average limits for frequencies above 1000 MHz, and frequencies below 1000 MHz are based on quasi peak. However, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20 dB.

(3) Spurious in Out Band Requirement

For intentional device, according to § 15.249 (c), emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of fundamental or to the general radiated emission limits in § 15.209.

(4) Antenna Requirement

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

This report shall not be reproduced except in full, without the written approval of C&C

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This report shall not be reproduced except in full, without the written approval of C&C

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-- Reorient or relocate the receiving antenna.

-- Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio / TV technician for help.

This report shall not be reproduced except in full, without the written approval of C&C

3 SYSTEM TEST CONFIGURATION

3.1 Justification

All measurement were intentional to maximum the emissions from EUT by varying the connection cables, therefore, the test result is sure to meet the applicable requirement.

3.2 Devices for Tested System

Device	Manufacture	Model	FCC ID	Description
*USB Remote Surveillance System Transmitter	AME Optimedia Technology Co., Ltd.	CA-2000RF	P8BCA-2000RF	1.8m Unshielded AC Power Adaptor Cord 1.8m Shield USB Cable with a core

Remark "*" means equipment under test.

This report shall not be reproduced except in full, without the written approval of C&C

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For intentional radiators, according to § 15.249 (a), operation within the frequency band of 2.4 to 2.4835 GHz, the fundamental field strength shall not exceed 94 dBuV/m and the harmonics shall not exceed 54 dBuV/m. For out band emission except for harmonics shall be comply with § 15.209 or at least attenuated by 50 dB below the level of the fundamental.

4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.

   Note : A band pass filter was used to avoid pre-amplifier saturated when measure TX operation mode in frequency band above 1 GHz.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

This report shall not be reproduced except in full, without the written approval of C&C Rev. 02

Figure 1 : Frequencies measured below 1 GHz configuration

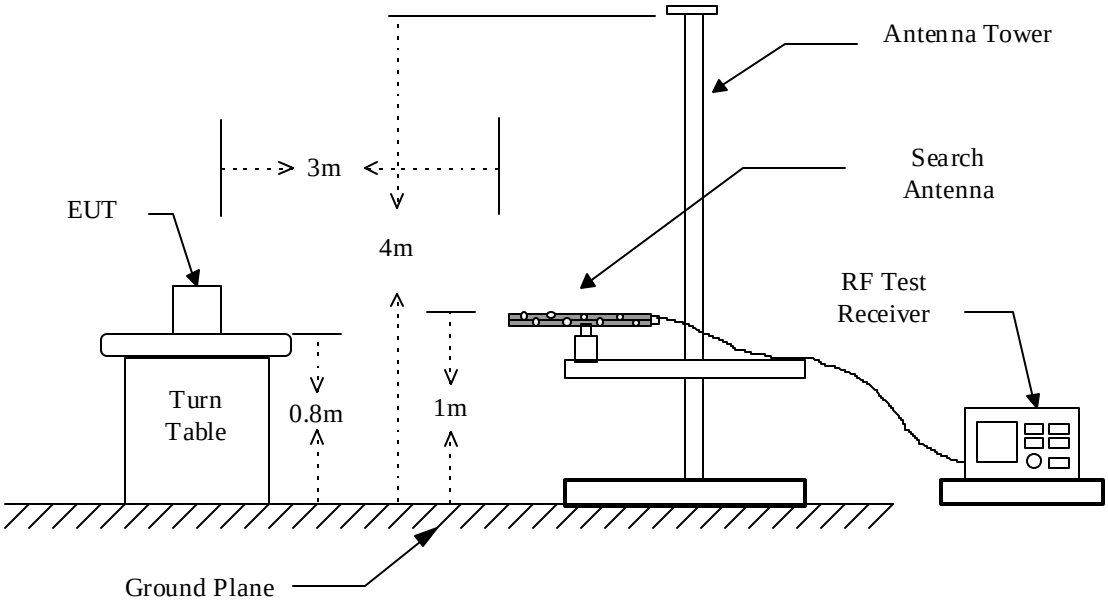

Figure 2 : Frequencies measured above 1 GHz configuration

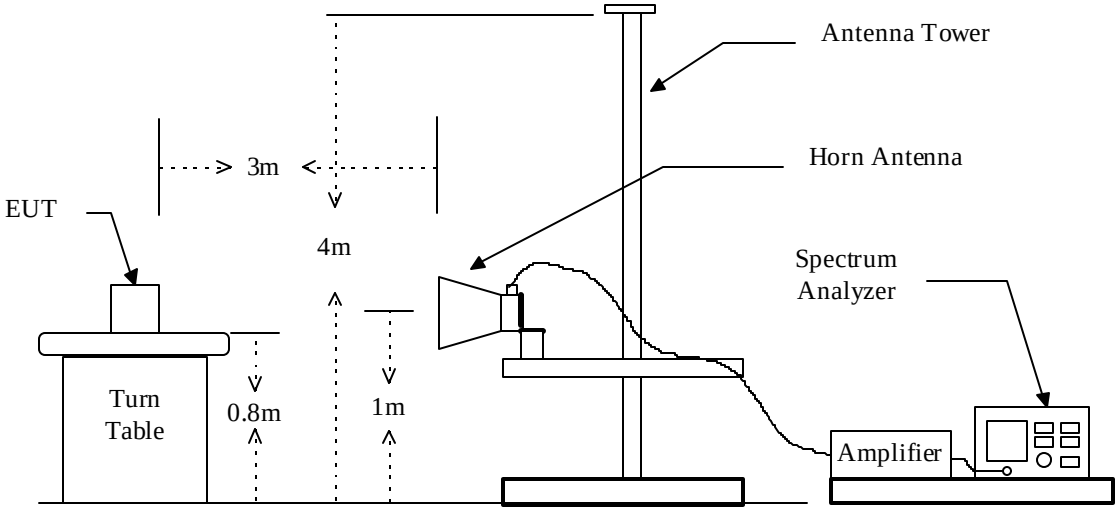

4.3 Measuring Instrument

☒ **Open Area Test Site:** #3

Open Area Test Site # 3					
EQUIPMENT TYPE	**MFR**	**MODEL NO.**	**SERIAL NO.**	**LAST CAL.**	**CAL DUE.**
Spectrum Analyzer	ADVANTEST	R3261A	N/A	03/16/2001	03/15/2002
EMI Test Receiver	R&S	ESVS20	838804/004	01/05/2002	01/04/2003
Pre-Amplifier	HP	8447D	2944A09173	02/19/2001	02/18/2002
Bilog Antenna	CHASE	CBL6112B	SITE2	07/28/2001	07/27/2002
Turn Table	EMCO	2081-1.21	9709-1885	N.C.R	N.C.R
Antenna Tower	EMCO	2075-2	9707-2060	N.C.R	N.C.R
Controller	EMCO	2090	9709-1256	N.C.R	N.C.R
RF Switch	ANRITSU	MP59B	M53867	N.C.R	N.C.R
Site NSA	C&C	N/A	N/A	11/17/2001	11/16/2002
Pre-Amplifier	HP	8449B	3008A00965	10/11/2001	10/10/2002
Horn Antenna	EMCO	3115	5761	02/24/2001	02/23/2002
Horn Antenna	EMCO	3116	2487	08/25/2001	08/24/2002
High Pass Filter	HP	84300-80038	010	08/01/2001	07/31/2002

Measuring instrument setup in measured frequency band

when specified detector function is used:

Frequency Band (MHz)	Instrument	Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120kHz	N/A
	Spectrum Analyzer	Peak	100kHz	100kHz
Above 1000	Spectrum Analyzer	Peak	1MHz	1MHz
	Spectrum Analyzer	Average	1MHz	300Hz

This report shall not be reproduced except in full, without the written approval of C&C

4.4 Radiated Emission Data

4.4.1 Tx Portion

Operation Mode:	Transmitting Mode	Test Date :	February 1, 2002
Fundamental Frequency:	2414MHz (CH 0)	Test By:	Markba Lee
Temperature :	20 ℃	Pol:	Vertical
Humidity :	70 %		

Freq.	Reading	AF	Closs	Pre-amp	Filter	Dist	Level	Limit	Margin	Mark	Pol
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(P/Q/A)	(H/V)
2414.80	97.31	26.90	2.18	37.42	0	9.5	79.47	114.00	-34.53	P	V
2414.80	96.02	26.90	2.18	37.42	0	9.5	78.18	94.00	-15.82	A	V
4829.32*	55.01	31.43	3.45	37.06	1	9.5	44.33	74.00	-29.67	P	V
4829.32*	51.69	31.43	3.45	37.06	1	9.5	41.01	54.00	-12.99	A	V
7244.36	48.96	35.54	4.55	37.39	1	9.5	43.16	74.00	-30.84	P	V
7244.36	44.81	35.54	4.55	37.39	1	9.5	39.01	54.00	-14.99	A	V
9659.20	---	---	---	---	---	---	---	74.00	---	---	---
9659.20	---	---	---	---	---	---	---	54.00	---	---	---
12074.00*	---	---	---	---	---	---	---	74.00	---	---	---
12074.00*	---	---	---	---	---	---	---	54.00	---	---	---
14488.80*	---	---	---	---	---	---	---	74.00	---	---	---
14488.80*	---	---	---	---	---	---	---	54.00	---	---	---
16903.60	---	---	---	---	---	---	---	74.00	---	---	---
16903.60	---	---	---	---	---	---	---	54.00	---	---	---
19318.40*	---	---	---	---	---	---	---	74.00	---	---	---
19318.40*	---	---	---	---	---	---	---	54.00	---	---	---
21733.20	---	---	---	---	---	---	---	74.00	---	---	---
21733.20	---	---	---	---	---	---	---	54.00	---	---	---
24148.00	---	---	---	---	---	---	---	74.00	---	---	---
24148.00	---	---	---	---	---	---	---	54.00	---	---	---

Note :

1. Measurement was up to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamp gain, Filter: High Pass Filter

   Insertion Loss (3.5GHz) Dist: Correction to extra plate reading to 3m specification distance

   1M measurement distance: -9.5dB
3. Analyzer setting P(Peak):RBW=1MHz,VBW=1MHz,A(Average):RBW=1MHz,VBW=10Hz
4. Remark "*" means that Restricted band.

This report shall not be reproduced except in full, without the written approval of C&C Rev. 02

Operation Mode:	Transmitting Mode	Test Date :	February 1, 2002
Fundamental Frequency:	2414MHz (CH 0)	Test By:	Markba Lee
Temperature :	20 ℃	Pol:	Horizontal
Humidity :	70 %		

Freq.	Reading	AF	Closs	Pre-amp	Filter	Dist	Level	Limit	Margin	Mark	Pol
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(P/Q/A)	(H/V)
2414.78	92.86	26.90	2.18	37.42	0	9.5	75.02	114.00	-38.98	P	H
2414.78	92.44	26.90	2.18	37.42	0	9.5	74.60	94.00	-19.40	A	H
4829.68*	53.41	31.43	3.45	37.06	1	9.5	42.73	74.00	-31.27	P	H
4829.68*	50.55	31.43	3.45	37.06	1	9.5	39.87	54.00	-14.13	A	H
7244.54	49.10	35.54	4.55	37.39	1	9.5	43.30	74.00	-30.70	P	H
7244.54	42.72	35.54	4.55	37.39	1	9.5	36.92	54.00	-17.08	A	H
9659.12	---	---	---	---	---	---	---	74.00	---	---	---
9659.12	---	---	---	---	---	---	---	54.00	---	---	---
12073.90*	---	---	---	---	---	---	---	74.00	---	---	---
12073.90*	---	---	---	---	---	---	---	54.00	---	---	---
14488.68*	---	---	---	---	---	---	---	74.00	---	---	---
14488.68*	---	---	---	---	---	---	---	54.00	---	---	---
16903.46	---	---	---	---	---	---	---	74.00	---	---	---
16903.46	---	---	---	---	---	---	---	54.00	---	---	---
19318.24*	---	---	---	---	---	---	---	74.00	---	---	---
19318.24*	---	---	---	---	---	---	---	54.00	---	---	---
21733.02	---	---	---	---	---	---	---	74.00	---	---	---
21733.02	---	---	---	---	---	---	---	54.00	---	---	---
24147.80	---	---	---	---	---	---	---	74.00	---	---	---
24147.80	---	---	---	---	---	---	---	54.00	---	---	---

Note :

1. Measurement was up to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamp gain, Filter: High Pass Filter Insertion Loss (3.5GHz) Dist: Correction to extra plate reading to 3m specification distance 1M measurement distance: -9.5dB
3. Analyzer setting P(Peak):RBW=1MHz,VBW=1MHz,A(Average):RBW=1MHz,VBW=10Hz
4. Remark "*" means that Restricted band.

This report shall not be reproduced except in full, without the written approval of C&C Rev. 02

Operation Mode:	Transmitting Mode	Test Date :	February 1, 2002
Fundamental Frequency:	2432MHz (CH 1)	Test By:	Markba Lee
Temperature :	20 ℃	Pol:	Vertical
Humidity :	70 %		

Freq.	Reading	AF	Closs	Pre-amp	Filter	Dist	Level	Limit	Margin	Mark	Pol
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(P/Q/A)	(H/V)
2432.40	97.09	26.94	2.18	37.41	0	9.5	79.30	114.00	-34.70	P	V
2432.40	96.54	26.94	2.18	37.41	0	9.5	78.75	94.00	-15.25	A	V
4865.6*	54.97	31.50	3.48	37.07	1	9.5	44.38	74.00	-29.62	P	V
4865.6*	52.33	31.50	3.48	37.07	1	9.5	41.74	54.00	-12.26	A	V
7298.2*	51.37	35.62	4.54	37.40	1	9.5	45.63	74.00	-28.37	P	V
7298.2*	47.49	35.62	4.54	37.40	1	9.5	41.75	54.00	-12.25	A	V
9729.60	---	---	---	---	---	---	---	74.00	---	---	---
9729.60	---	---	---	---	---	---	---	54.00	---	---	---
12162.00*	---	---	---	---	---	---	---	74.00	---	---	---
12162.00*	---	---	---	---	---	---	---	54.00	---	---	---
14594.40	---	---	---	---	---	---	---	74.00	---	---	---
14594.40	---	---	---	---	---	---	---	54.00	---	---	---
17026.80	---	---	---	---	---	---	---	74.00	---	---	---
17026.80	---	---	---	---	---	---	---	54.00	---	---	---
19459.20*	---	---	---	---	---	---	---	74.00	---	---	---
19459.20*	---	---	---	---	---	---	---	54.00	---	---	---
21891.60	---	---	---	---	---	---	---	74.00	---	---	---
21891.60	---	---	---	---	---	---	---	54.00	---	---	---
24324.00	---	---	---	---	---	---	---	74.00	---	---	---
24324.00	---	---	---	---	---	---	---	54.00	---	---	---

Note :

1. Measurement was up to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamp gain, Filter: High Pass Filter Insertion Loss (3.5GHz) Dist: Correction to extra plate reading to 3m specification distance 1M measurement distance: -9.5dB
3. Analyzer setting P(Peak):RBW=1MHz,VBW=1MHz,A(Average):RBW=1MHz,VBW=10Hz
4. Remark "*" means that Restricted band.

This report shall not be reproduced except in full, without the written approval of C&C Rev. 02

Operation Mode:	Transmitting Mode	Test Date :	February 1, 2002
Fundamental Frequency:	2432MHz (CH 1)	Test By:	Markba Lee
Temperature :	20 ℃	Pol:	Horizontal
Humidity :	70 %		

Freq.	Reading	AF	Closs	Pre-amp	Filter	Dist	Level	Limit	Margin	Mark	Pol
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(P/Q/A)	(H/V)
2431.28	92.44	26.94	2.18	37.41	0	9.5	74.65	114.00	-39.35	P	H
2431.28	91.06	26.94	2.18	37.41	0	9.5	73.27	94.00	-20.73	A	H
4861.84*	52.15	31.50	3.48	37.07	1	9.5	41.56	74.00	-32.44	P	H
4861.84*	47.66	31.50	3.48	37.07	1	9.5	37.07	54.00	-16.93	A	H
7298.08*	49.18	35.62	4.54	37.40	1	9.5	43.44	74.00	-30.56	P	H
7298.08*	42.81	35.62	4.54	37.40	1	9.5	37.07	54.00	-16.93	A	H
9725.12	---	---	---	---	---	---	---	74.00	---	---	---
9725.12	---	---	---	---	---	---	---	54.00	---	---	---
12156.40*	---	---	---	---	---	---	---	74.00	---	---	---
12156.40*	---	---	---	---	---	---	---	54.00	---	---	---
14587.68	---	---	---	---	---	---	---	74.00	---	---	---
14587.68	---	---	---	---	---	---	---	54.00	---	---	---
17018.96	---	---	---	---	---	---	---	74.00	---	---	---
17018.96	---	---	---	---	---	---	---	54.00	---	---	---
19450.24*	---	---	---	---	---	---	---	74.00	---	---	---
19450.24*	---	---	---	---	---	---	---	54.00	---	---	---
21881.52	---	---	---	---	---	---	---	74.00	---	---	---
21881.52	---	---	---	---	---	---	---	54.00	---	---	---
24312.80	---	---	---	---	---	---	---	74.00	---	---	---
24312.80	---	---	---	---	---	---	---	54.00	---	---	---

Note :

1. Measurement was up to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamp gain, Filter: High Pass Filter Insertion Loss (3.5GHz) Dist: Correction to extra plate reading to 3m specification distance 1M measurement distance: -9.5dB
3. Analyzer setting P(Peak):RBW=1MHz,VBW=1MHz,A(Average):RBW=1MHz,VBW=10Hz
4. Remark "*" means that Restricted band.

This report shall not be reproduced except in full, without the written approval of C&C Rev. 02

Operation Mode:	Transmitting Mode	Test Date :	February 1, 2002
Fundamental Frequency:	2468MHz (CH 3)	Test By:	Markba Lee
Temperature :	20 ℃	Pol:	Vertical
Humidity :	70 %		

Freq. (MHz)	Reading (dBuV)	AF (dBuV)	Closs (dB)	Pre-amp (dB)	Filter (dB)	Dist (dB)	Level (dBuV/m)	Limit FCC_B	Margin (dB)	Mark (P/Q/A)	Pol (H/V)
2468.48	95.43	27.04	2.20	37.39	0	9.5	77.78	114.00	-36.22	P	V
2468.48	92.99	27.04	2.20	37.39	0	9.5	75.34	94.00	-18.66	A	V
4937.6*	54.78	31.68	3.55	37.11	1	9.5	44.40	74.00	-29.60	P	V
4937.6*	51.13	31.68	3.55	37.11	1	9.5	40.75	54.00	-13.25	A	V
7406.84*	49.83	35.77	4.50	37.41	1	9.5	44.19	74.00	-29.81	P	V
7406.84*	44.13	35.77	4.50	37.41	1	9.5	38.49	54.00	-15.51	A	V
9873.92	---	---	---	---	---	---	---	74.00	---	---	---
9873.92	---	---	---	---	---	---	---	54.00	---	---	---
12342.40*	---	---	---	---	---	---	---	74.00	---	---	---
12342.40*	---	---	---	---	---	---	---	54.00	---	---	---
14810.88	---	---	---	---	---	---	---	74.00	---	---	---
14810.88	---	---	---	---	---	---	---	54.00	---	---	---
17279.36	---	---	---	---	---	---	---	74.00	---	---	---
17279.36	---	---	---	---	---	---	---	54.00	---	---	---
19747.84*	---	---	---	---	---	---	---	74.00	---	---	---
19747.84*	---	---	---	---	---	---	---	54.00	---	---	---
22216.32*	---	---	---	---	---	---	---	74.00	---	---	---
22216.32*	---	---	---	---	---	---	---	54.00	---	---	---
24684.80	---	---	---	---	---	---	---	74.00	---	---	---
24684.80	---	---	---	---	---	---	---	54.00	---	---	---

Note :

1. Measurement was up to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamp gain, Filter: High Pass Filter Insertion Loss (3.5GHz) Dist: Correction to extra plate reading to 3m specification distance 1M measurement distance: -9.5dB
3. Analyzer setting P(Peak):RBW=1MHz,VBW=1MHz,A(Average):RBW=1MHz,VBW=10Hz
4. Remark "*" means that Restricted band.

This report shall not be reproduced except in full, without the written approval of C&C Rev. 02

Operation Mode:	Transmitting Mode	Test Date :	February 1, 2002
Fundamental Frequency:	2468MHz (CH 3)	Test By:	Markba Lee
Temperature :	20 ℃	Pol:	Horizontal
Humidity :	70 %		

Freq. (MHz)	Reading (dBuV)	AF (dBuV)	Closs (dB)	Pre-amp (dB)	Filter (dB)	Dist (dB)	Level (dBuV/m)	Limit FCC_B	Margin (dB)	Mark (P/Q/A)	Pol (H/V)
2467.08	92.52	27.04	2.20	37.39	0	9.5	74.87	114.00	-39.13	P	H
2467.08	91.43	27.04	2.20	37.39	0	9.5	73.78	94.00	-20.22	A	H
4937.52*	50.05	31.68	3.55	37.11	1	9.5	39.67	74.00	-34.33	P	H
4937.52*	45.22	31.68	3.55	37.11	1	9.5	34.84	54.00	-19.16	A	H
7406.2*	49.31	35.77	4.50	37.41	1	9.5	43.67	74.00	-30.33	P	H
7406.2*	43.37	35.77	4.50	37.41	1	9.5	37.73	54.00	-16.27	A	H
9868.32	---	---	---	---	---	---	---	74.00	---	---	---
9868.32	---	---	---	---	---	---	---	54.00	---	---	---
12335.40*	---	---	---	---	---	---	---	74.00	---	---	---
12335.40*	---	---	---	---	---	---	---	54.00	---	---	---
14802.48	---	---	---	---	---	---	---	74.00	---	---	---
14802.48	---	---	---	---	---	---	---	54.00	---	---	---
17269.56	---	---	---	---	---	---	---	74.00	---	---	---
17269.56	---	---	---	---	---	---	---	54.00	---	---	---
19736.64*	---	---	---	---	---	---	---	74.00	---	---	---
19736.64*	---	---	---	---	---	---	---	54.00	---	---	---
22203.72*	---	---	---	---	---	---	---	74.00	---	---	---
22203.72*	---	---	---	---	---	---	---	54.00	---	---	---
24670.80	---	---	---	---	---	---	---	74.00	---	---	---
24670.80	---	---	---	---	---	---	---	54.00	---	---	---

Note :

1. Measurement was up to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamp gain, Filter: High Pass Filter Insertion Loss (3.5GHz) Dist: Correction to extra plate reading to 3m specification distance 1M measurement distance: -9.5dB
3. Analyzer setting P(Peak):RBW=1MHz,VBW=1MHz,A(Average):RBW=1MHz,VBW=10Hz
4. Remark "*" means that Restricted band.

This report shall not be reproduced except in full, without the written approval of C&C Rev. 02

4.4.2 Other Emissions

Operation Mode:	Transmitting Mode	Test Date :	February 4, 2002
Fundamental Frequency:	2468MHz (CH 3)	Test By:	Markba Lee
Temperature :	20 ℃	Humidity :	70 %

Freq. (MHz)	Meter Reading (dBuV)	C.F (dB/m)	Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Mark (P/Q/A)	Pol (H/V)	Az (Deg)	Height (Meter)
172.03*	16.8	12.3	29.1	43.5	-14.4	P	3mV	360.0	337.6
196.62	19.9	14.6	34.5	43.5	-9.0	P	3mV	0.0	100.0
245.77*	11.4	16.1	27.5	46.0	-18.5	P	3mV	23.1	400.0
270.03*	13.1	15.8	28.9	46.0	-17.1	P	3mV	136.7	100.0
462.99	13.6	20.8	34.4	46.0	-11.6	P	3mV	161.7	400.0
621.04	8.6	25.2	33.8	46.0	-12.2	P	3mV	133.7	384.6
172.02*	22.5	12.3	34.8	43.5	-8.7	P	3mH	0.0	100.0
196.60	21.2	14.6	35.8	43.5	-7.7	P	3mH	0.0	100.0
417.78	18.1	20.5	38.6	46.0	-7.4	P	3mH	0.0	100.0
462.98	6.0	20.8	26.8	46.0	-19.2	P	3mH	0.0	100.0
512.00	11.2	22.9	34.1	46.0	-11.9	P	3mH	0.0	100.0
567.05	7.8	24.7	32.5	46.0	-13.5	P	3mH	0.0	100.0
624.07	5.8	25.1	30.9	46.0	-15.1	P	3mH	0.0	100.0

Note:

1. The channel 3 of highest emission the worse case check then other channel.
2. Please refer to the other channel plot data below.
3. Remark "*" means that restricted band.
4. Item of margin shown in above table refers to Q.P. limit.
5. C.F: Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain;
   Corrected: Result = Meter Reading + Corrected Factor

This report shall not be reproduced except in full, without the written approval of C&C Rev. 02

C&C Lab. Co. Open Site 3

Customer:AME
Antenna :VULB9163
S.P.A. :R3261X
Rule :FCC-B
Receiver:ESVS 20
Remark :CH-0 TX MODE

Model :CA-2000RF
Polr. :Vertical-3 M
PreAmp.:HP 8447D
Mode :.
Tester :MARKBA LEE

Date: 4 Feb 2002
Time:13:34:06
File#: 735
Tmp.(C):20
Humid(%):70

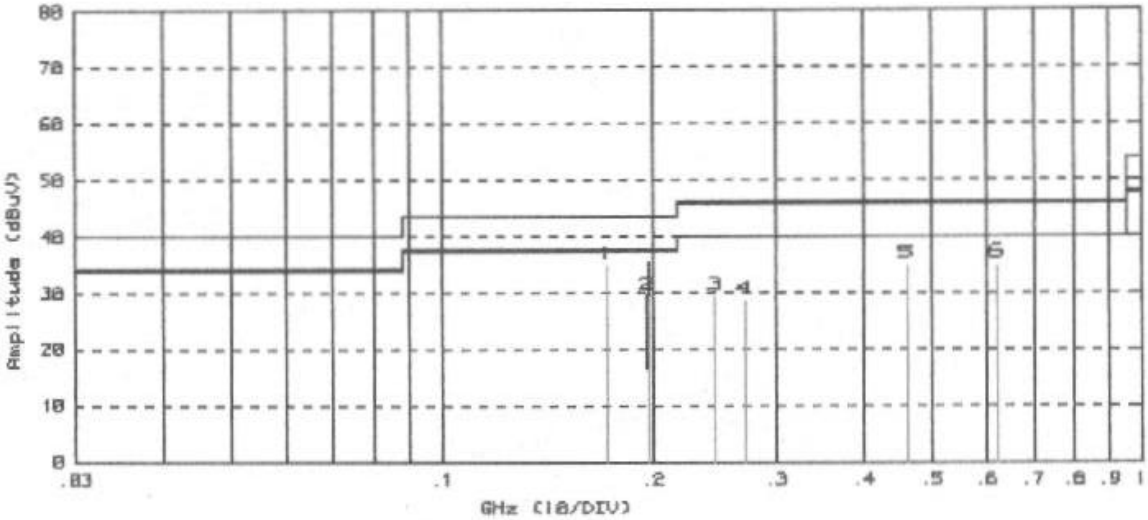

Note: with 'x' mark means QP reading

No.	FREQ. <MHz>	RAW DATA <dBuV>	C'Fac <dB>	CORR'd < dBuV/m >	LIMIT	MARGIN <dB>	ANTENNA HEIGHT	TABLE ANGLE
1	172.02	22.3	12.3	34.6	43.5	-8.9	337.6	360.0
2	196.69	14.5	14.6	29.1	43.5	-14.4	100.0	0.0
3	245.76	13.0	16.1	29.1	46.0	-16.9	400.0	23.1
4	270.02	12.7	15.8	28.5	46.0	-17.5	100.0	136.7
5	462.99	13.7	20.8	34.5	46.0	-11.5	400.0	161.7
6	621.05	9.5	25.2	34.7	46.0	-11.3	384.6	133.7

Page 1/1 of 735

C&C Lab. Co. Open Site 3

Customer:AME
Antenna :VULB9163
S.P.A. :R3261X
Rule :FCC-B
Receiver:ESVS 20
Remark :CH-0 TX MODE

Model :CA-2000RF
Polr. :Horizontal-3 M
PreAmp.:HP 8447D
Mode :.
Tester :MARKBA LEE

Date: 4 Jan 2002
Time:12:14:05
file#: 712
Tmp.(C):20
Humid(%):70

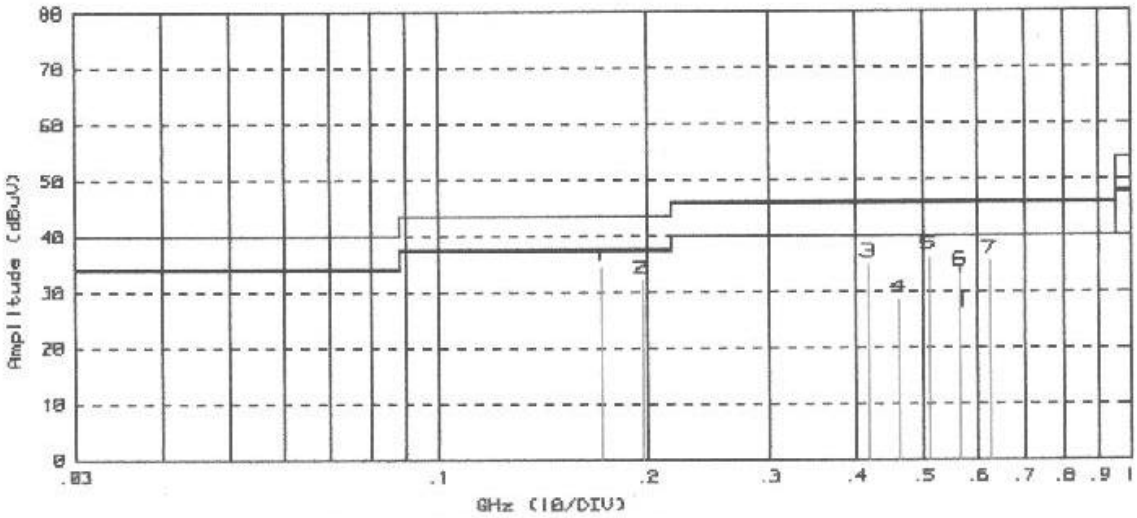

Note: with 'x' mark means QP reading

No.	FREQ. <MHz>	RAW DATA <dBuV>	C'Fac <dB>	CORR'd < dBuV/m >	LIMIT	MARGIN <dB>	ANTENNA HEIGHT	TABLE ANGLE
1	172.02	21.8	12.3	34.1	43.5	-9.4	400.0	317.2
2	196.60	17.4	14.6	32.0	43.5	-11.5	386.2	184.5
3	417.78	14.2	20.5	34.7	46.0	-11.3	400.0	82.1
4	463.00	7.6	20.8	28.4	46.0	-17.6	384.1	177.8
5	512.01	13.0	22.9	35.9	46.0	-10.1	244.2	359.9
6	567.05	8.5	24.7	33.2	46.0	-12.8	311.8	191.8
7	624.09	10.1	25.1	35.2	46.0	-10.8	363.1	155.6

Page 1/1 of 712

This report shall not be reproduced except in full, without the written approval of C&C Rev. 02

C&C Lab. Co. Open Site 3

Customer:AME
Antenna :VULB9163
S.P.A. :R3261X
Rule :FCC-B
Receiver:ESVS 20
Remark :CH-1 TX MODE

Model :CA-2000RF
Polr. :Vertical-3 M
PreAmp.:HP 8447D
Mode :.
Tester :MARKBA LEE

Date: 4 Feb 2002
Time:13:35:22
File#: 746
Tmp.(C):20
Humid(%):70

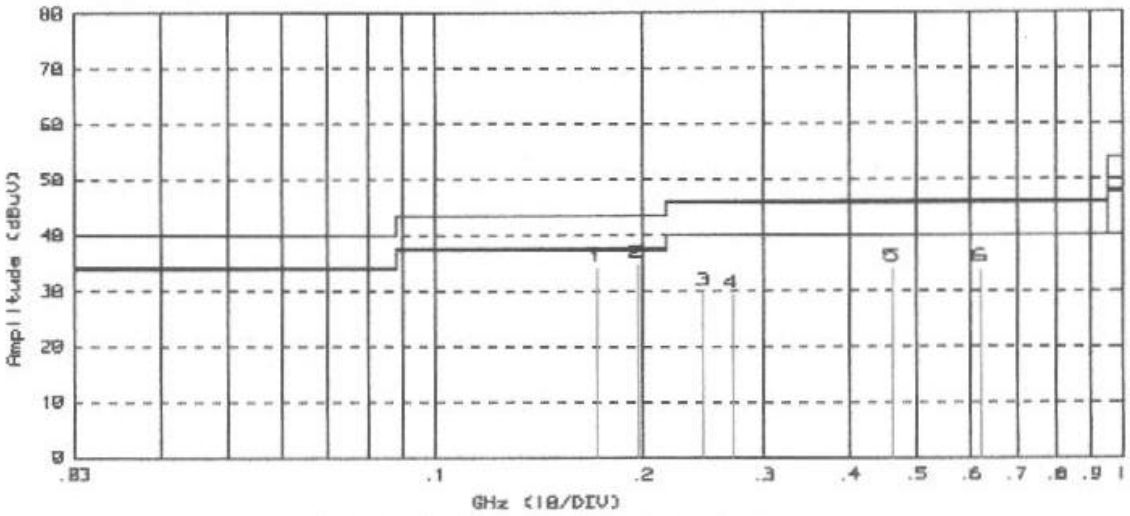

Note: with 'x' mark means QP reading

No.	FREQ. <MHz>	RAW DATA <dBuV>	C'Fac <dB>	CORR'd < dBuV/m >	LIMIT	MARGIN <dB>	ANTENNA HEIGHT	TABLE ANGLE
1	172.02	21.4	12.3	33.7	43.5	-9.8	100.0	0.0
2	196.61	19.9	14.6	34.5	43.5	-9.0	100.0	0.0
3	245.76	13.4	16.1	29.5	46.0	-16.5	100.0	0.0
4	270.01	13.3	15.8	29.1	46.0	-16.9	100.0	0.0
5	463.00	13.0	20.8	33.8	46.0	-12.2	100.0	0.0
6	621.06	8.4	25.2	33.6	46.0	-12.4	100.0	0.0

Page 1/1 of 746

This report shall not be reproduced except in full, without the written approval of C&C Rev. 02

C&C Lab. Co. Open Site 3

Customer:AME	Model :CA-2000RF	Date: 4 Feb 2002
Antenna :VULB9163	Polr. :Horizontal-3 M	Time:15:33:01
S.P.A. :R3261X	PreAmp.:HP 8447D	file#: 738
Rule :FCC-B	Mode :.	Tmp.(C):20
Receiver:ESVS 20	Tester :MARKBA LEE	Humid(%):70
Remark :CH-1 TX MODE		

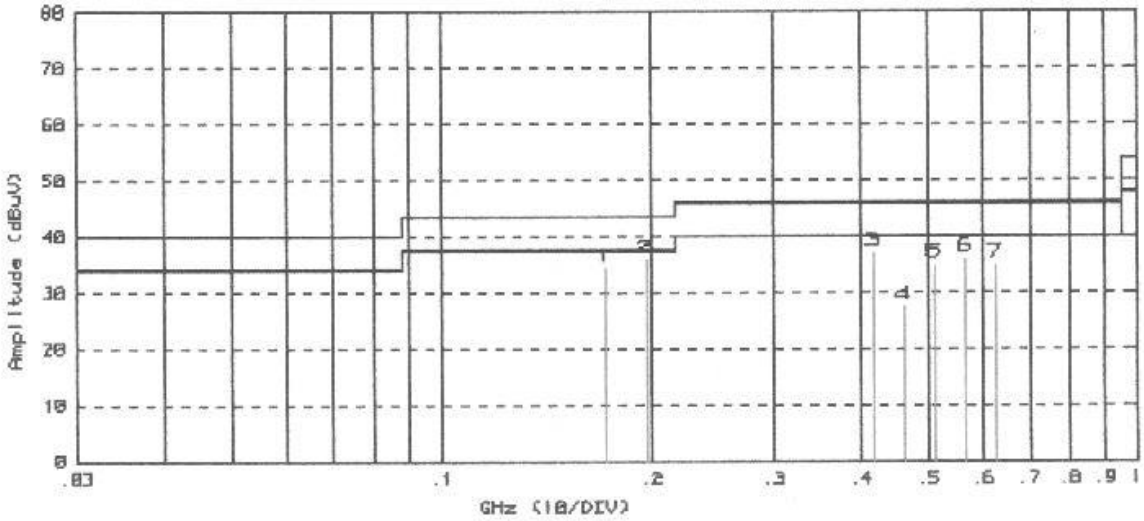

Note: with 'x' mark means QP reading

No.	FREQ. <MHz>	RAW DATA <dBuV>	C'Fac <dB>	CORR'd < dBuV/m >	LIMIT	MARGIN <dB>	ANTENNA HEIGHT	TABLE ANGLE
1	172.02	21.8	12.3	34.1	43.5	-9.4	100.0	0.0
2	196.60	21.0	14.6	35.6	43.5	-7.9	100.0	0.0
3	417.78	16.2	20.5	36.7	46.0	-9.3	100.0	0.0
4	462.99	6.4	20.8	27.2	46.0	-18.8	100.0	0.0
5	511.99	11.8	22.9	34.7	46.0	-11.3	100.0	0.0
6	567.07	11.1	24.7	35.8	46.0	-10.2	100.0	0.0
7	624.10	9.6	25.1	34.7	46.0	-11.3	100.0	0.0

Page 1/1 of 738

This report shall not be reproduced except in full, without the written approval of C&C Rev. 02

C&C Lab. Co. Open Site 3

Customer:AME
Antenna :VULB9163
S.P.A. :R3261X
Rule :FCC-B
Receiver:ESVS 20
Remark :CH-3 TX MODE

Model :CA-2000RF
Polr. :Vertical-3 M
PreAmp.:HP 8447D
Mode :.
Tester :MARKBA LEE

Date: 4 Feb 2002
Time:13:46:29
File#: 736
Tmp.(C):20
Humid(%):70

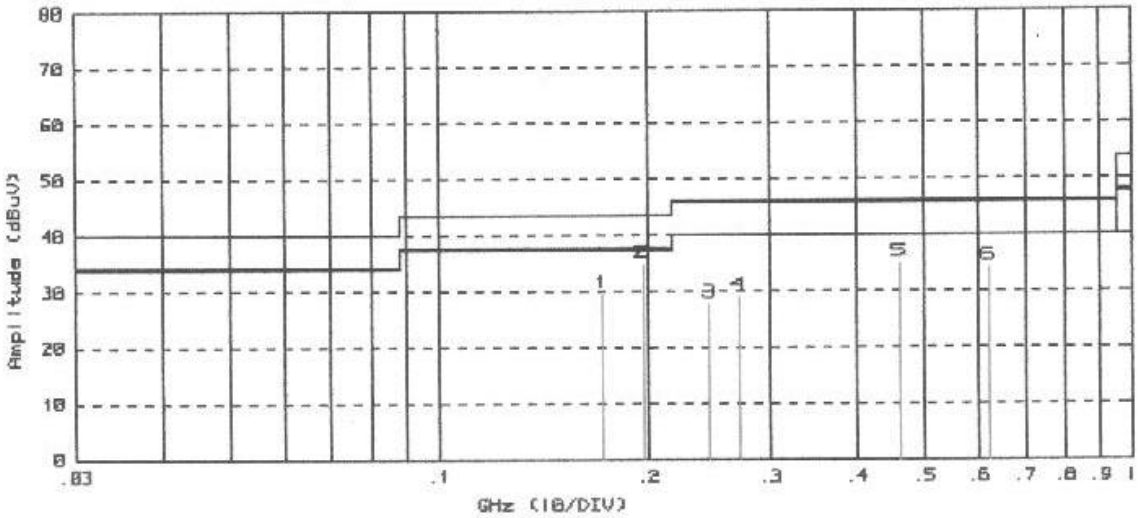

Note: with 'x' mark means QP reading

No.	FREQ. <MHz>	RAW DATA <dBuV>	C'Fac <dB>	CORR'd < dBuV/m	LIMIT >	MARGIN <dB>	ANTENNA HEIGHT	TABLE ANGLE
1	172.03	16.8	12.3	29.1	43.5	-14.4	337.6	360.0
2	196.62	19.9	14.6	34.5	43.5	-9.0	100.0	0.0
3	245.77	11.4	16.1	27.5	46.0	-18.5	400.0	23.1
4	270.03	13.1	15.8	28.9	46.0	-17.1	100.0	136.7
5	462.99	13.6	20.8	34.4	46.0	-11.6	400.0	161.7
6	621.04	8.6	25.2	33.8	46.0	-12.2	384.6	133.7

Page 1/1 of 736

This report shall not be reproduced except in full, without the written approval of C&C Rev. 02

C&C Lab. Co. Open Site 3

Customer:AME	Model : CA-2000RF	Date: 4 Feb 2002
Antenna :VULB9163	Polr. :Horizontal-3 M	Time:15:05:53
S.P.A. :R3261X	PreAmp.:HP 8447D	file#: 737
Rule :FCC-B	Mode :.	Tmp.(C):20
Receiver:ESVS 20	Tester :MARKBA LEE	Humid(%):70
Remark :CH-3 TX MODE		

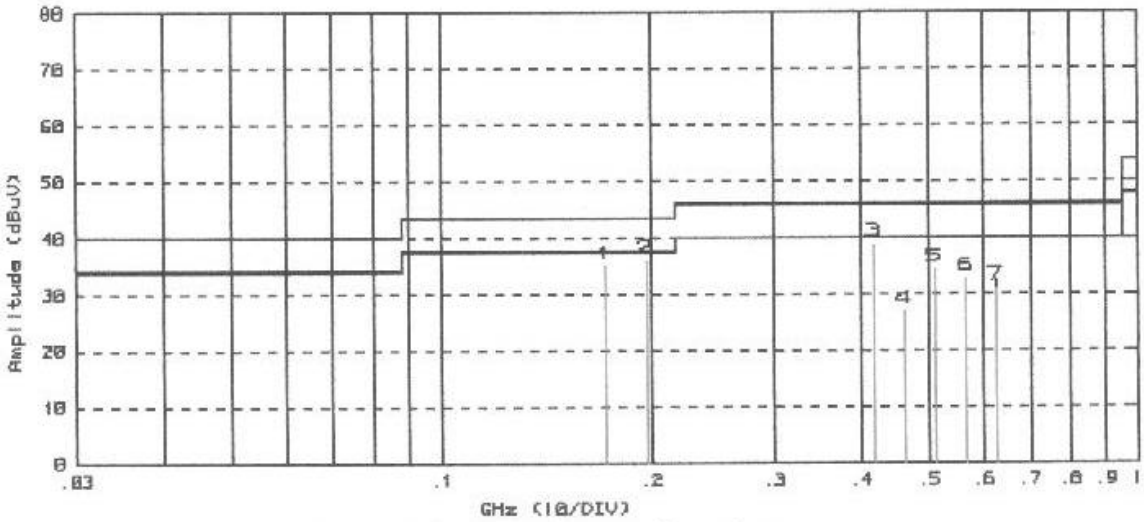

Note: with 'x' mark means QP reading

No.	FREQ. <MHz>	RAW DATA <dBuV>	C'Fac <dB>	CORR'd < dBuV/m >	LIMIT	MARGIN <dB>	ANTENNA HEIGHT	TABLE ANGLE
1	172.02	22.5	12.3	34.8	43.5	-8.7	100.0	0.0
2	196.60	21.2	14.6	35.8	43.5	-7.7	100.0	0.0
3	417.78	18.1	20.5	38.6	46.0	-7.4	100.0	0.0
4	462.98	6.0	20.8	26.8	46.0	-19.2	100.0	0.0
5	512.00	11.2	22.9	34.1	46.0	-11.9	100.0	0.0
6	567.05	7.8	24.7	32.5	46.0	-13.5	100.0	0.0
7	624.07	5.8	25.1	30.9	46.0	-15.1	100.0	0.0

Page 1/1 of 737

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading.

The basic equation calculation is as follows:

Result = Reading + Corrected Factor = Corrected Reading

where Corrected Factor

= Antenna FACTOR + Cable Loss - Amplifier Gain

This report shall not be reproduced except in full, without the written approval of C&C

4.6 Photos of Radiation Measuring Setup

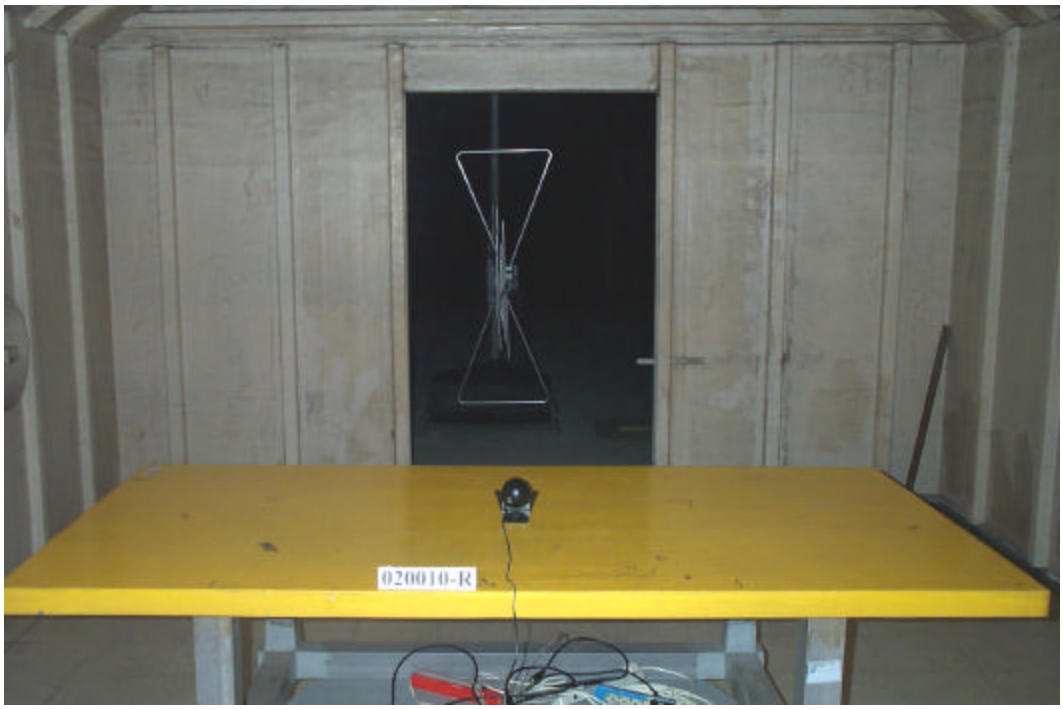

020010-R

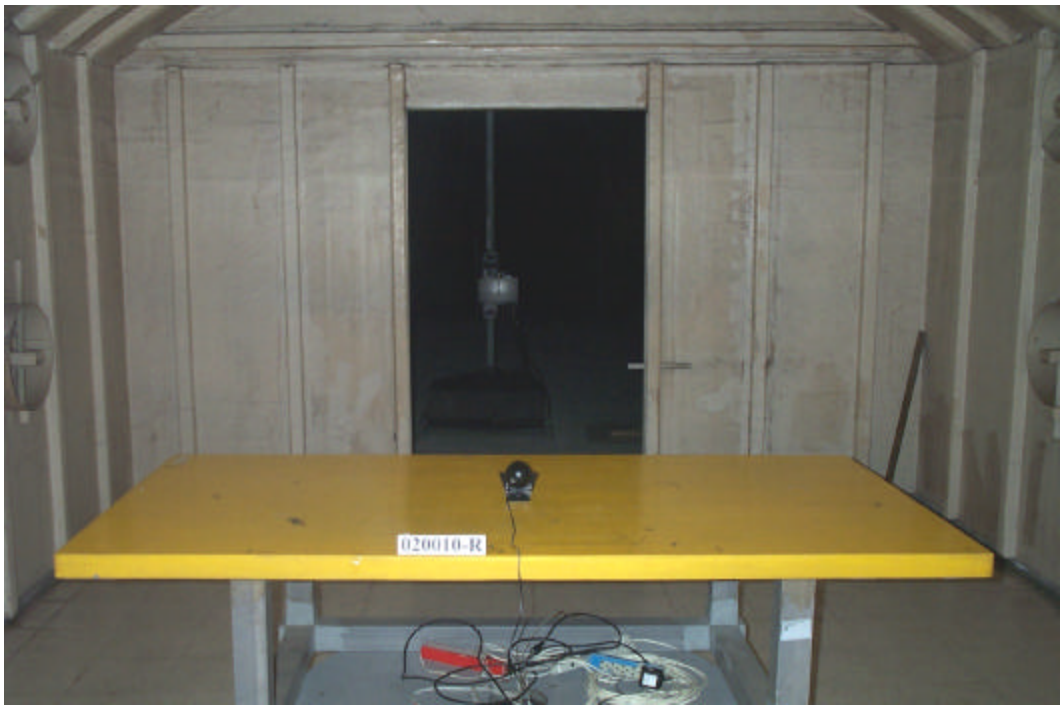
020010-R

5 CONDUCTED EMISSION MEASUREMENT

5.1 Standard Applicable

For intentional device, Line Conducted Emission Limits are in accordance to § 15.207(a), any emissions level shall not exceed 48 dBuV.

5.2 Measurement Procedure

1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 or 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

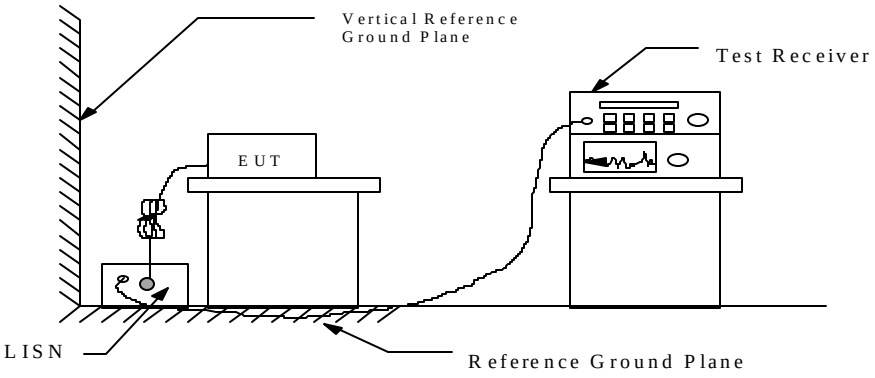

5.3 Conducted Emission Data

Operation Mode:	Transmitting Mode	Test Date :	February 2, 2002
Fundamental Frequency:	2468MHz (CH 3)	Test By:	Markba Lee
Temperature :	19 ℃	Humidity :	70 %

Freq. (MHz)	Reading (dBuV)	C.F (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV)	Margin (dB)	Reading Type (P/Q/A)	Mark (L/N)
0.58	35.4	0.4	35.80	48.00	-12.20	P	L
1.63	16.1	0.4	16.50	48.00	-31.50	P	L
4.17	14.2	0.5	14.70	48.00	-33.30	P	L
5.60	14.4	0.5	14.90	48.00	-33.10	P	L
7.15	14.6	0.5	15.10	48.00	-32.90	P	L
7.85	15.5	0.5	16.00	48.00	-32.00	P	L
10.28	13.8	0.5	14.30	48.00	-33.70	P	L
11.07	14.5	0.5	15.00	48.00	-33.00	P	L
12.14	14.8	0.5	15.30	48.00	-32.70	P	L
13.93	14.3	0.5	14.80	48.00	-33.20	P	L
15.55	15.7	0.5	16.20	48.00	-31.80	P	L
16.50	14.3	0.5	14.80	48.00	-33.20	P	L
19.44	16.0	0.5	16.50	48.00	-31.50	P	L
20.21	15.2	0.4	15.60	48.00	-32.40	P	L
22.37	20.7	0.4	21.10	48.00	-26.90	P	L
23.33	24.4	0.4	24.80	48.00	-23.20	P	L
24.58	17.2	0.4	17.60	48.00	-30.40	P	L
25.88	17.1	0.7	17.80	48.00	-30.20	P	L
27.02	15.5	0.7	16.20	48.00	-31.80	P	L
29.98	15.0	0.7	15.70	48.00	-32.30	P	L
0.62	39.5	0.5	40.00	48.00	-8.00	P	N
1.44	19.5	0.5	20.00	48.00	-28.00	P	N
2.94	14.1	0.3	14.40	48.00	-33.60	P	N
4.92	14.4	0.4	14.80	48.00	-33.20	P	N
6.26	14.2	0.4	14.60	48.00	-33.40	P	N
7.85	16.9	0.4	17.30	48.00	-30.70	P	N
9.51	15.1	0.4	15.50	48.00	-32.50	P	N
11.91	14.3	0.3	14.60	48.00	-33.40	P	N
13.32	14.7	0.3	15.00	48.00	-33.00	P	N
14.32	14.4	0.3	14.70	48.00	-33.30	P	N
15.55	16.1	0.2	16.30	48.00	-31.70	P	N
16.99	14.3	0.2	14.50	48.00	-33.50	P	N
19.44	16.1	0.2	16.30	48.00	-31.70	P	N
20.68	16.0	0.1	16.10	48.00	-31.90	P	N
22.18	21.1	0.1	21.20	48.00	-26.80	P	N
23.32	25.1	0.1	25.20	48.00	-22.80	P	N
24.02	17.7	0.1	17.80	48.00	-30.20	P	N
25.95	17.5	0.3	17.80	48.00	-30.20	P	N
27.00	15.4	0.3	15.70	48.00	-32.30	P	N

Note:

1. The channel 3 of highest emission the worse case check then other channel
2. Please refer to the other channel plot data below.

This report shall not be reproduced except in full, without the written approval of C&C Rev. 02

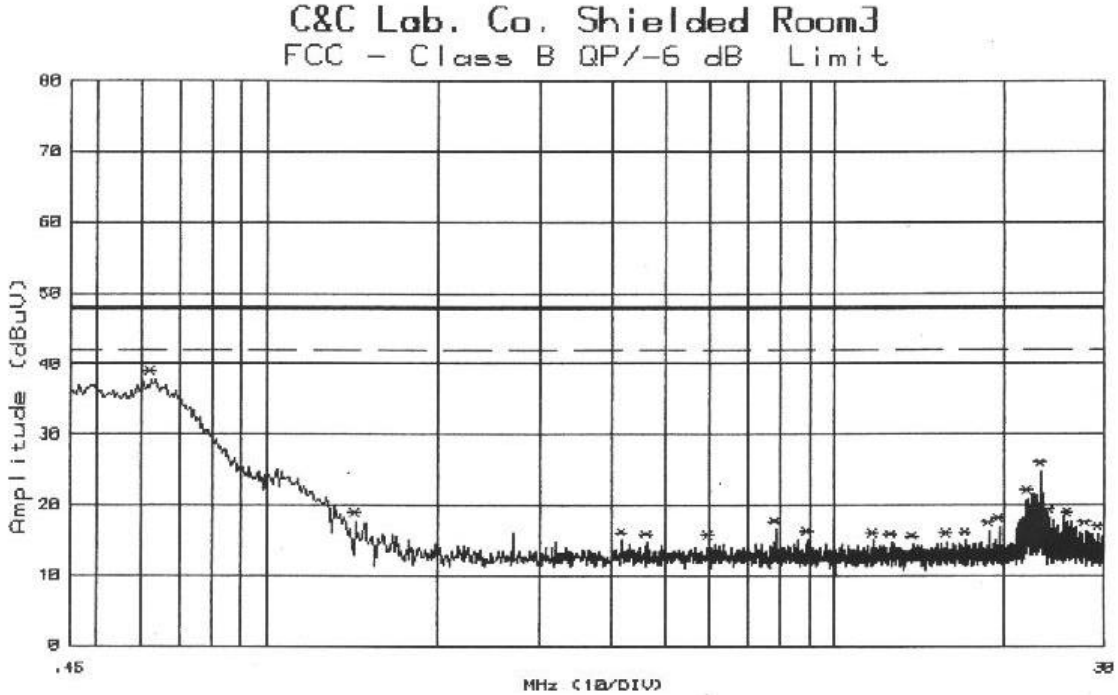

Customer:AME File#: 1045 Date : 2 Feb 2002 10:43:01
Model :CA-2000RF Humd.:70 (%) Temp. :19 (C)
Mode :. Port :L1 Tested by:MARKBA LEE
Reading :Peak(R&S Receiver)
Remark :CH-0 TX MODE

No.	Freq. (MHz)	Reading (dBuV)	I_Loss (dB)	Total (dBuV)	QP.Lmt (dBuV)	Margin (dB)	Warning Mark
1	.625	37.4	.4	37.8	48.0	-10.2	
2	1.430	17.3	.4	17.7	48.0	-30.3	
3	4.190	14.4	.5	14.9	48.0	-33.1	
4	4.650	14.2	.5	14.7	48.0	-33.3	
5	5.990	14.1	.5	14.6	48.0	-33.4	
6	7.850	16.0	.5	16.5	48.0	-31.5	
7	8.960	14.5	.5	15.0	48.0	-33.0	
8	11.770	14.4	.5	14.9	48.0	-33.1	
9	12.680	14.2	.5	14.7	48.0	-33.3	
10	13.860	13.9	.5	14.4	48.0	-33.6	
11	15.960	14.3	.5	14.8	48.0	-33.2	
12	17.200	14.4	.5	14.9	48.0	-33.1	
13	18.920	15.8	.5	16.3	48.0	-31.7	
14	19.730	16.4	.5	16.9	48.0	-31.1	
15	22.130	20.5	.4	20.9	48.0	-27.1	
16	23.330	24.4	.4	24.8	48.0	-23.2	
17	24.060	17.7	.4	18.1	48.0	-29.9	
18	25.960	17.0	.7	17.7	48.0	-30.3	
19	27.840	15.6	.7	16.3	48.0	-31.7	
20	29.360	15.0	.7	15.7	48.0	-32.3	

End of file : 1045

This report shall not be reproduced except in full, without the written approval of C&C Rev. 02

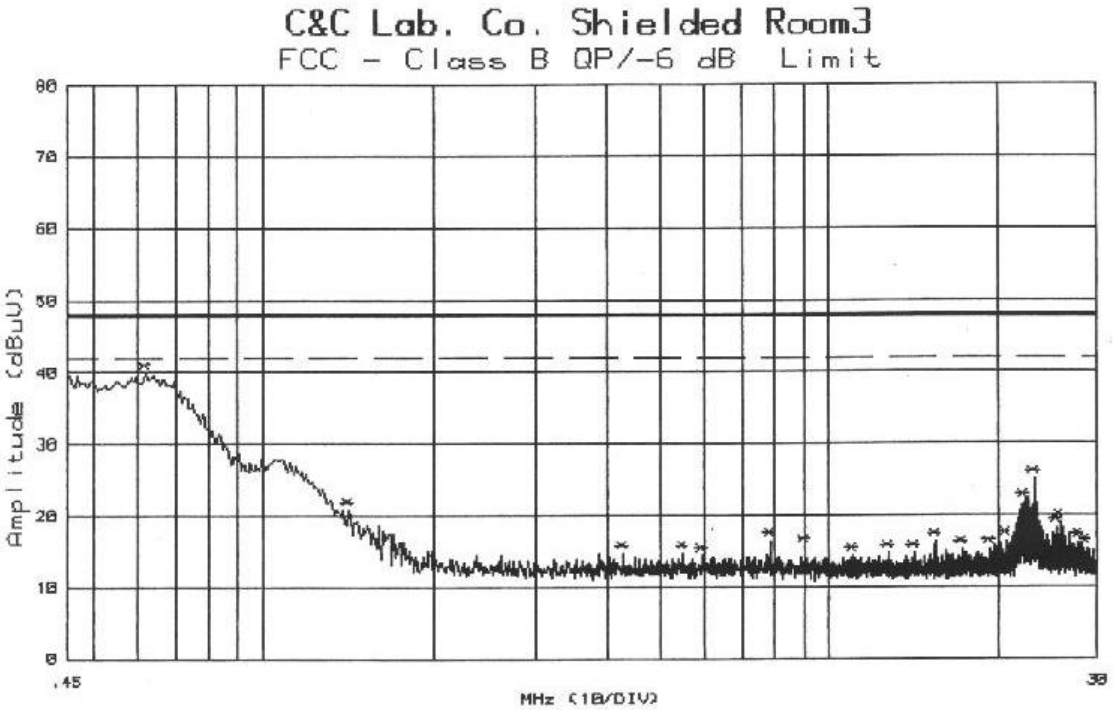

Customer:AME File#: 1044 Date : 2 Feb 2002 10:34:24
Model :CA-2000RF Humd.:70 (%) Temp. :19 (C)
Mode :. Port :L2 Tested by:MARKBA LEE
Reading :Peak(R&S Receiver)
Remark :CH-0 TX MODE

No.	Freq. (MHz)	Reading (dBuV)	I_Loss (dB)	Total (dBuV)	QP.Lmt (dBuV)	Margin (dB)	Warning Mark
1	.620	39.4	.5	39.8	48.0	-8.2	
2	1.410	20.2	.5	20.7	48.0	-27.3	
3	4.270	14.3	.4	14.7	48.0	-33.3	
4	5.490	14.3	.4	14.7	48.0	-33.3	
5	5.930	13.9	.4	14.3	48.0	-33.7	
6	7.850	16.0	.4	16.4	48.0	-31.6	
7	9.060	15.1	.4	15.5	48.0	-32.5	
8	11.010	14.0	.3	14.3	48.0	-33.7	
9	12.780	14.3	.3	14.6	48.0	-33.4	
10	14.220	14.4	.3	14.7	48.0	-33.3	
11	15.550	16.0	.2	16.2	48.0	-31.8	
12	17.250	15.0	.2	15.2	48.0	-32.8	
13	19.440	15.1	.2	15.3	48.0	-32.7	
14	20.640	16.3	.1	16.4	48.0	-31.6	
15	22.330	21.6	.1	21.7	48.0	-26.3	
16	23.190	24.9	.1	25.0	48.0	-23.0	
17	25.370	18.0	.3	18.3	48.0	-29.7	
18	25.750	18.6	.3	18.9	48.0	-29.1	
19	27.710	15.9	.3	16.2	48.0	-31.8	
20	28.660	15.0	.3	15.3	48.0	-32.7	

End of file : 1044

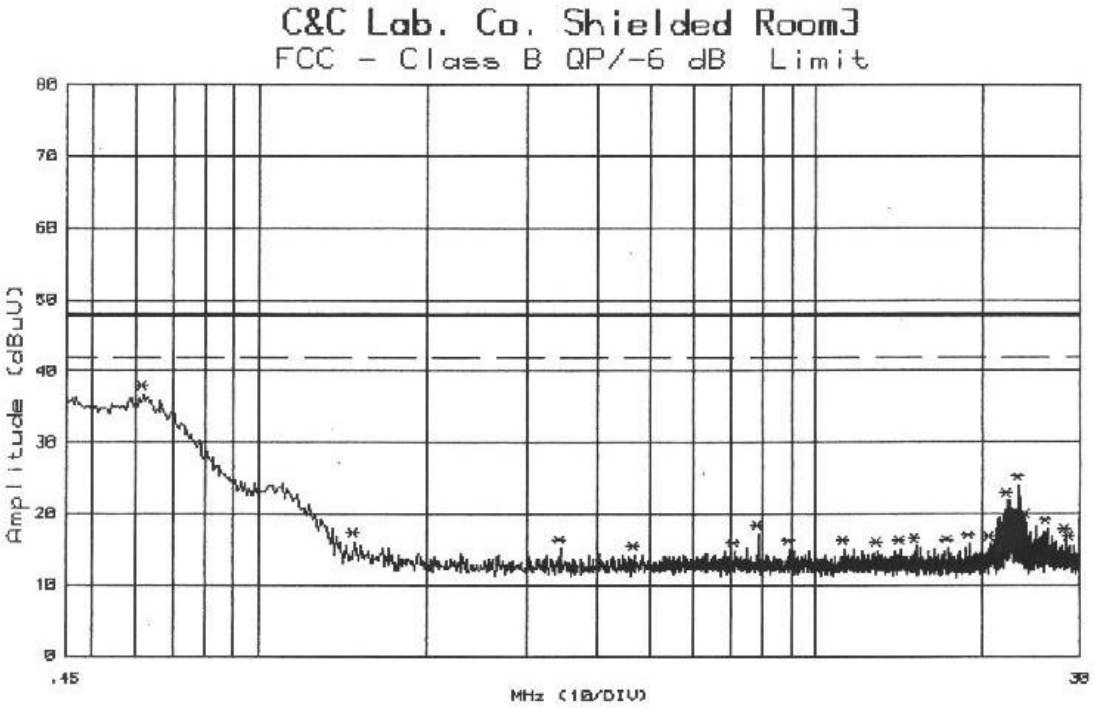

Customer:AME File#: 1047 Date : 2 Feb 2002 11:06:56
Model :CA-2000RF Humd.:70 (%) Temp. :19 (C)
Mode :. Port :L1 Tested by:MARKBA LEE
Reading :Peak(R&S Receiver)
Remark :CH-1 TX MODE

No.	Freq. (MHz)	Reading (dBuV)	I_Loss (dB)	Total (dBuV)	QP.Lmt (dBuV)	Margin (dB)	Warning Mark
1	.620	36.4	.4	36.8	48.0	-11.2	
2	1.480	15.7	.4	16.1	48.0	-31.9	
3	3.450	14.9	.3	15.2	48.0	-32.8	
4	4.670	13.8	.5	14.3	48.0	-33.7	
5	7.110	14.2	.5	14.7	48.0	-33.3	
6	7.850	16.6	.5	17.1	48.0	-30.9	
7	8.980	14.5	.5	15.0	48.0	-33.0	
8	11.240	14.6	.5	15.1	48.0	-32.9	
9	12.970	14.3	.5	14.8	48.0	-33.2	
10	14.260	14.5	.5	15.0	48.0	-33.0	
11	15.220	14.9	.5	15.4	48.0	-32.6	
12	17.390	14.7	.5	15.2	48.0	-32.8	
13	19.120	15.2	.5	15.7	48.0	-32.3	
14	20.680	15.2	.4	15.6	48.0	-32.4	
15	22.330	21.3	.4	21.7	48.0	-26.3	
16	23.330	23.6	.4	24.0	48.0	-24.0	
17	24.050	18.4	.4	18.8	48.0	-29.2	
18	26.180	17.2	.7	17.9	48.0	-30.1	
19	28.280	16.0	.7	16.7	48.0	-31.3	
20	28.780	14.9	.7	15.6	48.0	-32.4	

End of file : 1047

This report shall not be reproduced except in full, without the written approval of C&C Rev. 02

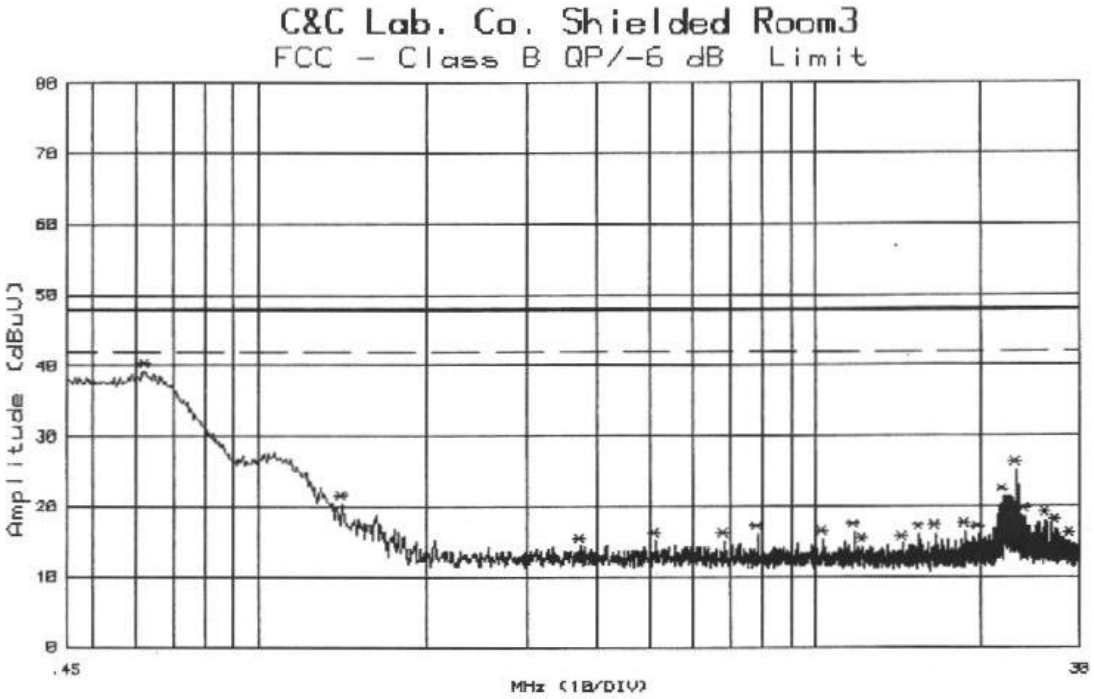

Customer:AME File#: 1046 Date : 2 Feb 2002 10:57:24
Model :CA-2000RF Humd.:70 (%) Temp. :19 (C)
Mode :. Port :L2 Tested by:MARKBA LEE
Reading :Peak(R&S Receiver)
Remark :CH-1 TX MODE

No.	Freq. (MHz)	Reading (dBuV)	I_Loss (dB)	Total (dBuV)	QP.Lmt (dBuV)	Margin (dB)	Warning Mark
1	.625	38.7	.5	39.2	48.0	-8.8	
2	1.410	19.8	.5	20.3	48.0	-27.7	
3	3.740	14.0	.3	14.3	48.0	-33.7	
4	5.120	14.7	.4	15.1	48.0	-32.9	
5	6.820	14.7	.4	15.1	48.0	-32.9	
6	7.850	15.6	.4	16.0	48.0	-32.0	
7	10.280	15.0	.3	15.3	48.0	-32.7	
8	11.750	16.0	.3	16.3	48.0	-31.7	
9	12.190	14.0	.3	14.3	48.0	-33.7	
10	14.420	14.3	.3	14.6	48.0	-33.4	
11	15.460	15.8	.2	16.0	48.0	-32.0	
12	16.630	16.0	.2	16.2	48.0	-31.8	
13	18.760	16.2	.2	16.4	48.0	-31.6	
14	19.860	15.8	.2	16.0	48.0	-32.0	
15	22.000	21.2	.1	21.3	48.0	-26.7	
16	23.180	25.0	.1	25.1	48.0	-22.9	
17	24.000	18.4	.1	18.5	48.0	-29.5	
18	26.170	17.7	.3	18.0	48.0	-30.0	
19	27.270	16.6	.3	16.9	48.0	-31.1	
20	28.870	14.8	.3	15.1	48.0	-32.9	

End of file : 1046

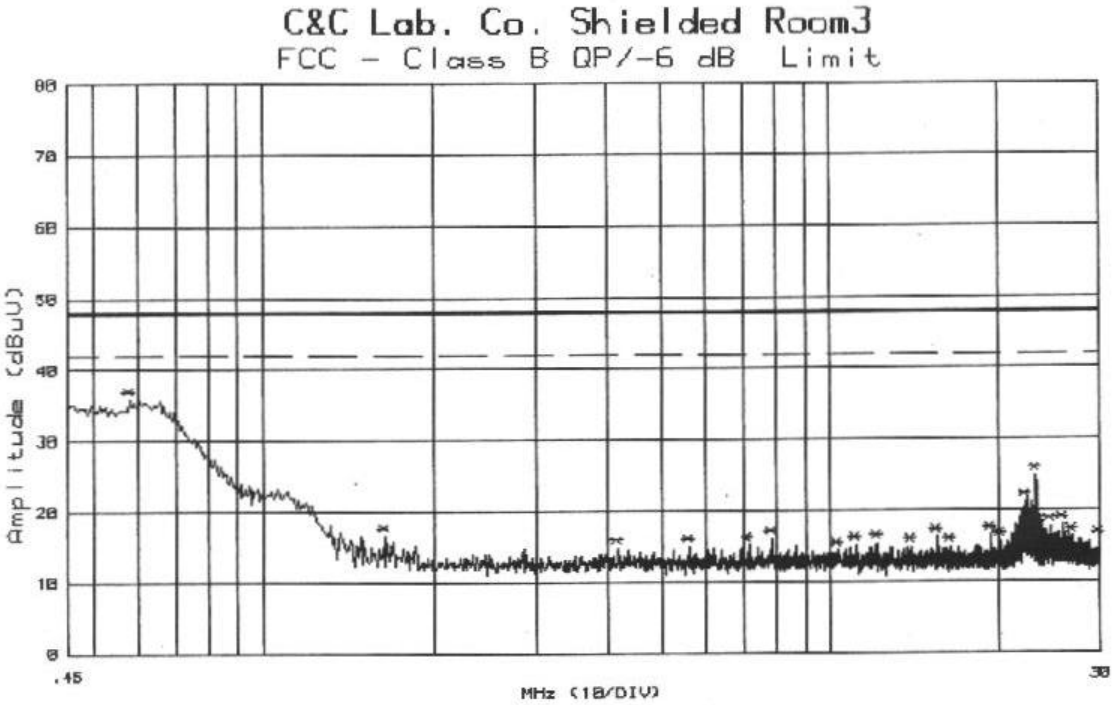

Customer:AME File#: 1048 Date : 2 Feb 2002 11:17:54
Model :CA-2000RF Humd.:70 (%) Temp. :19 (C)
Mode :. Port :L1 Tested by:MARKBA LEE
Reading :Peak(R&S Receiver)
Remark :CH-3 TX MODE

No.	Freq. (MHz)	Reading (dBuV)	I_Loss (dB)	Total (dBuV)	QP.Lmt (dBuV)	Margin (dB)	Warning Mark
1	.580	35.4	.4	35.8	48.0	-12.2	
2	1.630	16.1	.4	16.5	48.0	-31.5	
3	4.170	14.2	.5	14.7	48.0	-33.3	
4	5.600	14.4	.5	14.9	48.0	-33.1	
5	7.150	14.6	.5	15.1	48.0	-32.9	
6	7.850	15.5	.5	16.0	48.0	-32.0	
7	10.280	13.8	.5	14.3	48.0	-33.7	
8	11.070	14.5	.5	15.0	48.0	-33.0	
9	12.140	14.8	.5	15.3	48.0	-32.7	
10	13.930	14.3	.5	14.8	48.0	-33.2	
11	15.550	15.7	.5	16.2	48.0	-31.8	
12	16.500	14.3	.5	14.8	48.0	-33.2	
13	19.440	16.0	.5	16.5	48.0	-31.5	
14	20.210	15.2	.4	15.6	48.0	-32.4	
15	22.370	20.7	.4	21.1	48.0	-26.9	
16	23.330	24.4	.4	24.8	48.0	-23.2	
17	24.580	17.2	.4	17.6	48.0	-30.4	
18	25.880	17.1	.7	17.8	48.0	-30.2	
19	27.020	15.5	.7	16.2	48.0	-31.8	
20	29.980	15.0	.7	15.7	48.0	-32.3	

End of file : 1048

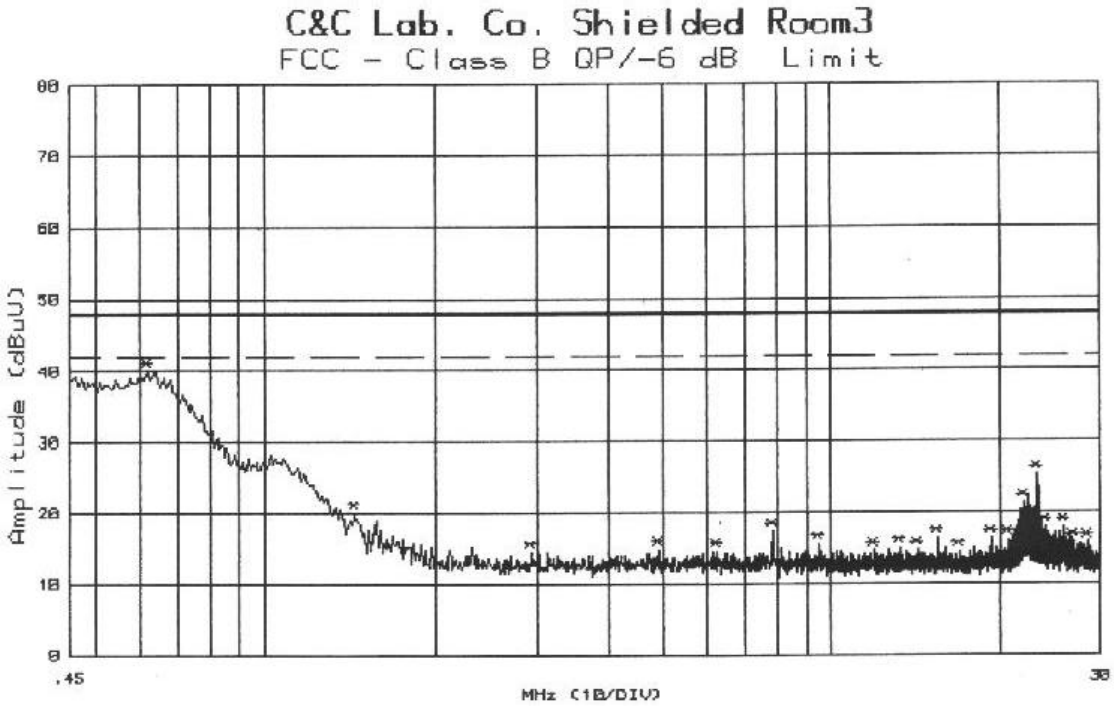

Customer:AME File#: 1049 Date : 2 Feb 2002 11:44:05
Model :CA-2000RF Humd.:70 (%) Temp. :19 (C)
Mode :. Port :L2 Tested by:MARKBA LEE
Reading :Peak(R&S Receiver)
Remark :CH-3 TX MODE

No.	Freq. (MHz)	Reading (dBuV)	I_Loss (dB)	Total (dBuV)	QP.Lmt (dBuV)	Margin (dB)	Warning Mark
1	.620	39.5	.5	39.9	48.0	-8.1	
2	1.440	19.5	.5	20.0	48.0	-28.0	
3	2.940	14.1	.3	14.4	48.0	-33.6	
4	4.920	14.4	.4	14.8	48.0	-33.2	
5	6.260	14.2	.4	14.6	48.0	-33.4	
6	7.850	16.9	.4	17.3	48.0	-30.7	
7	9.510	15.1	.4	15.5	48.0	-32.5	
8	11.910	14.3	.3	14.6	48.0	-33.4	
9	13.320	14.7	.3	15.0	48.0	-33.0	
10	14.320	14.4	.3	14.7	48.0	-33.3	
11	15.550	16.1	.2	16.3	48.0	-31.7	
12	16.990	14.3	.2	14.5	48.0	-33.5	
13	19.440	16.1	.2	16.3	48.0	-31.7	
14	20.680	16.0	.1	16.1	48.0	-31.9	
15	22.180	21.1	.1	21.2	48.0	-26.8	
16	23.320	25.1	.1	25.2	48.0	-22.8	
17	24.020	17.7	.1	17.8	48.0	-30.2	
18	25.950	17.5	.3	17.8	48.0	-30.2	
19	27.000	15.4	.3	15.7	48.0	-32.3	
20	28.540	15.3	.3	15.6	48.0	-32.4	

End of file : 1049

5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

RESULT = READING + LISN FACTOR

Assume a receiver reading of 22.5 dBμV is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dBμV.

RESULT = 22.5 + 0.1 = 22.6 dBμV
Level in μV = Common Antilogarithm[(22.6 dBμV)/20]
= 13.48 μV

5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test .

☒ **Conducted Test Site:** Conducted Room

Conducted Emission Test Site # 3					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
EMI Test Receiver	R&S	ESHS10	843743/015	12/19/2001	12/18/2002
LISN	R&S	ESH2-Z5	843285/010	12/10/2001	12/09/2002
LISN	EMCO	3825/2	9003-1628	07/16/2001	07/15/2002
Spectrum Analyzer	ADVANTEST	R3261AN	31720234	08/03/2001	08/02/2002
2X2 WIRE ISN	R&S	ENY22	830661/027	04/06/2001	04/05/2002
FOUR WIRE ISN	R&S	ENY41	830663/024	04/04/2001	04/03/2002

This report shall not be reproduced except in full, without the written approval of C&C

5.6 Photos of Conduction Measuring Setup

6 ANTENNA REQUIREMENT

6.1 Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 Antenna Construction

The antenna is permanently mounted on RF box, no consideration of replacement.

This report shall not be reproduced except in full, without the written approval of C&C

7 BAND EDGES MEASUREMENT

7.1 Standard Applicable

According to 15.249(c), out band emission except for harmonics shall be comply with § 15.209 or at least attenuated by 50 dB below the level of the fundamental.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT lowered and highest channel frequencies ban. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

7.3 Measurement Equipment

Equipment	Model No.	Serial No.	Cal. Due.
R&S Spectrum Analyzer	FSP 30	1093.4495.30	05/28/2002
HP Plotter	7475	2325A82294	N/A
EMCO Antenna	3115	5761	02/23/2002
Huber + Suhner low loss cable	Sucoflex 104	N/A	N/A

7.4 Measurement Data

Test Date: 2002/01/28 Temperature: 20 Humidity: 70

Note: Please refer to the plot as below.

This report shall not be reproduced except in full, without the written approval of C&C

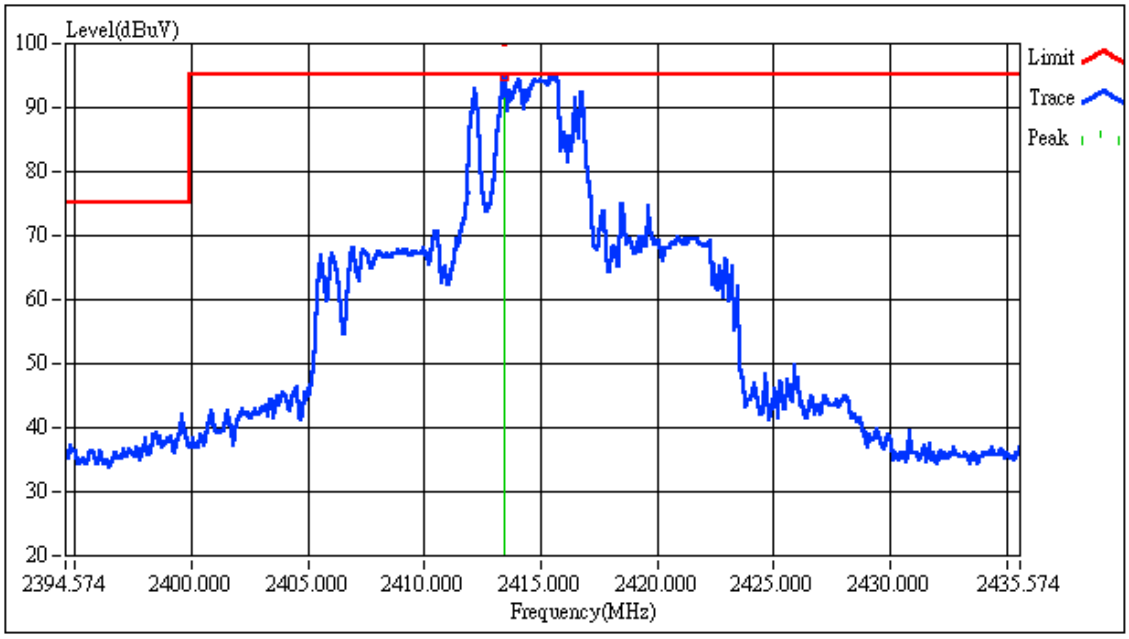

Custom Name: AME

Engineer: MARKBA LEE

Model Name: CA-2000RF

Report No.: 020010-R

Test Mode: CH-0

	Frequency(MHz)	Read Level (dBuV)	Probe (dB)	Cable Loss (dB)	Level(dBuV)
1	2413.3898	92.50	0.00	2.40	94.90

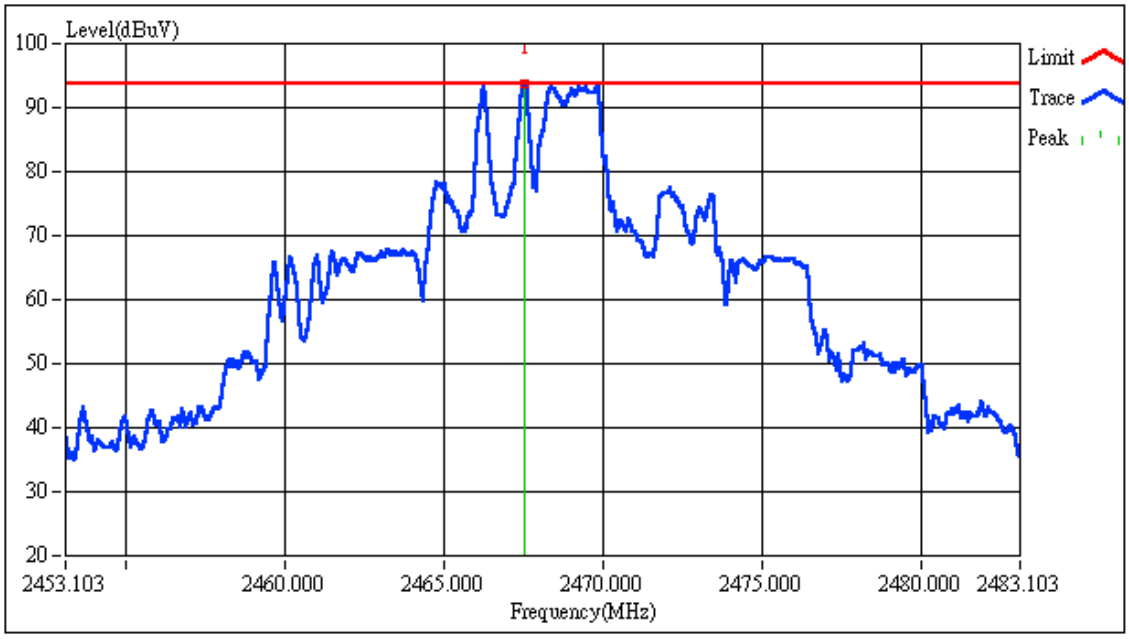

Custom Name: AME

Engineer: MARKBA LEE

Model Name: CA-2000RF

Report No.: 020010-R

Test Mode: TX CH-3

	Frequency(MHz)	Read Level (dBuV)	Probe (dB)	Cable Loss (dB)	Level(dBuV)
1	2467.5315	91.21	0.00	2.40	93.61

Data with 1kHz Audio Modulation Signal

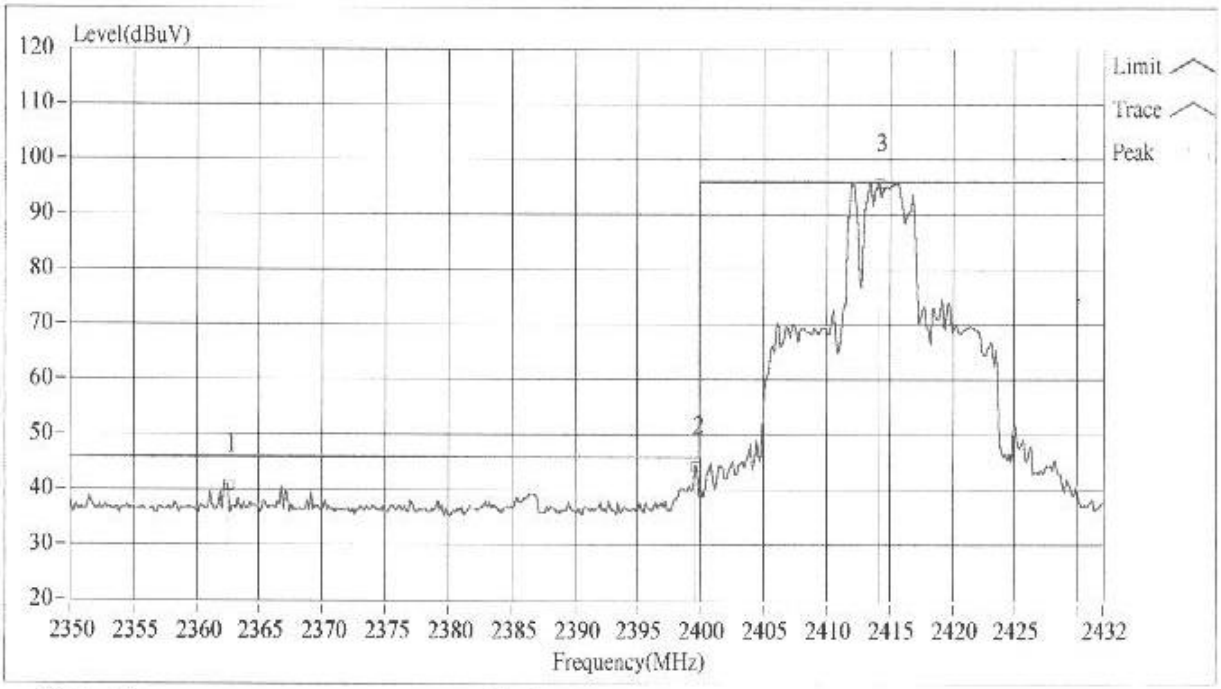

Custom Name: AME

Engineer: MARKBA LEE

Model Name: CA-2000RF

Report No.: 020010-R

Test Mode: CH-0

	Frequency(MHz)	Read Level (dBuV)	Probe (dB)	Cable Loss (dB)	Level(dBuV)
1	2362.4890	38.84	0.00	2.40	41.24
2	2399.6273	42.25	0.00	2.40	44.65
3	2414.2525	93.85	0.00	2.40	96.25

This report shall not be reproduced except in full, without the written approval of C&C

Data with 1kHz Audio Modulation Signal

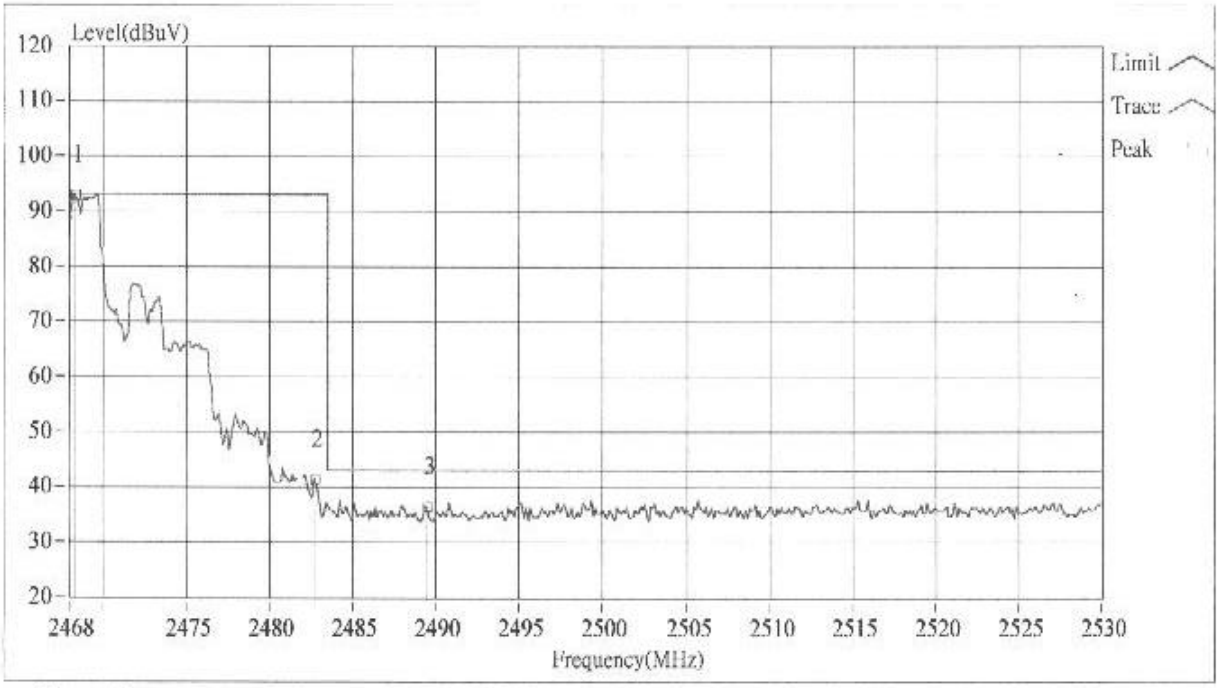

Custom Name: AME

Engineer: MARKBA LEE

Model Name: CA-2000RF

Report No.: 020010-R

Test Mode: TX CH-3

	Frequency(MHz)	Read Level (dBuV)	Probe (dB)	Cable Loss (dB)	Level(dBuV)
1	2468.3727	90.80	0.00	2.40	93.20
2	2482.7856	39.26	0.00	2.40	41.66
3	2489.4950	34.46	0.00	2.40	36.86

This report shall not be reproduced except in full, without the written approval of C&C