



**Shenzhen GTI Technology Co., Ltd.**

1F,2 Block, Jiaquan Building, Guanlan High-tech Park Baoan District,  
Shenzhen, Guangdong, China.

Tel: +86-755- 27521059

Fax: +86-755- 27521011

# TEST REPORT

**Product Name** ..... : GEMNFC

**Trademark** ..... : N.A

**Model/Type reference** ..... : GEMNFC02

**Listed Model(s)** ..... : N.A

**IC ID** ..... : 10563A-WF125

**Test Standards** ..... : **RSS-GEN Issue 4, November 2014**  
**RSS-210 Issue 9 August 2016**

**Report No** ..... : GTI20180534F-3

**Applicant** ..... : Wahoo Fitness L.L.C.

**Address of applicant** ..... : 90 W WIEUCA RD NE STE 110 ATLANTA GA 30342

**Date of Receipt** ..... : Mar. 18, 2018

**Date of Test Date**..... : Mar. 18, 2018- Apr 06, 2018

**Data of issue.** ..... : Apr 07, 2018

|                    |               |
|--------------------|---------------|
| <b>Test result</b> | <b>Pass *</b> |
|--------------------|---------------|

\* In the configuration tested, the EUT complied with the standards specified above

| GENERAL DESCRIPTION OF EUT |                                                                                  |
|----------------------------|----------------------------------------------------------------------------------|
| Equipment:                 | GEMNFC                                                                           |
| Model Name:                | GEMNFC02                                                                         |
| Adding Model(s):           | N.A.                                                                             |
| Model difference:          | N.A.                                                                             |
| Manufacturer:              | Wahoo Fitness L.L.C.                                                             |
| Manufacturer Address:      | 90 W WIEUCA RD NE STE 110 ATLANTA GA 30342                                       |
| Factory:                   | Flextronics Electronics Technology (Suzhou) Co., Ltd.                            |
| Address:                   | No.268 Suhong Road, Suzhou Industrial Park, Suzhou City, Jiangsu Province, China |
| Power Rating:              | DC 5V(from USB port)                                                             |

Compiled By:



(Zaki Zhang)

Reviewed By:



(Gavin Shi)

Approved By:



(Walter Chen)

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by GTI. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to GTI within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

## Table of Contents

## Page

|                                                   |           |
|---------------------------------------------------|-----------|
| <b>1. SUMMARY.....</b>                            | <b>4</b>  |
| 1.1. TEST STANDARDS.....                          | 4         |
| 1.2. TEST DESCRIPTION.....                        | 4         |
| 1.3. TEST FACILITY .....                          | 5         |
| 1.4. MEASUREMENT UNCERTAINTY .....                | 5         |
| <b>2. GENERAL INFORMATION .....</b>               | <b>6</b>  |
| 2.1. GENERAL DESCRIPTION OF EUT .....             | 6         |
| 2.2. DESCRIPTION OF TEST MODES .....              | 7         |
| 2.3. MEASUREMENT INSTRUMENTS LIST .....           | 8         |
| <b>7. TEST CONDITIONS AND RESULTS .....</b>       | <b>9</b>  |
| 7.1. CONDUCTED EMISSION MEASUREMENT.....          | 9         |
| 7.2. RADIATED EMISSION .....                      | 13        |
| 7.3. OCCUPIED BANDWIDTH.....                      | 18        |
| 7.4. FREQUENCY STABILITY .....                    | 20        |
| 7.5. ANTENNA REQUIREMENT.....                     | 21        |
| <b>8. EUT TEST PHOTO .....</b>                    | <b>22</b> |
| <b>9. PHOTOGRAPHS OF EUT CONSTRUCTIONAL .....</b> | <b>24</b> |



## 1. SUMMARY

### 1.1. Test Standards

The tests were performed according to following standards:

[RSS-210 Issue 9](#): Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

[ANSI C63.10 -2013](#): American National Standard for Testing Unlicensed Wireless Devices

The tests were performed according to following standards:

[RSS-Gen Issue 4 November 2014](#): General Requirements for Compliance of Radio Apparatus

### 1.2. Test Description

| Emission Measurement requirements |                             |      |
|-----------------------------------|-----------------------------|------|
| Radiated Emission                 | RSS-GEN; RSS-210 Annex A2.6 | PASS |
| Conducted Disturbance             | RSS-GEN                     | PASS |
| Occupied bandwidth                | RSS-210 Annex A2.6          | PASS |
| Frequency stability               | RSS-210 Annex A2.6          | PASS |
| Antenna Requirement               | RSS-Gen                     | PASS |

.Note 1:EUT is battery power supply. conducted emission is not need

## 1.3. Test Facility

### 1.3.1 Address of the test laboratory

#### Shenzhen General Testing & Inspection Technology Co., Ltd.

Add: 1F, 2 Block, Jiaquan Building, Guanlan High-tech Park Baoan District, Shenzhen, Guangdong, China

### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### IC Registration No.: 9783A

The 3m alternate test site of Shenzhen GTI Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

#### FCC-Registration No.: 951311

Shenzhen GTI Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017

## 1.4. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements and is documented in the Shenzhen General Testing & Inspection Technology Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for General Testing & Inspection laboratory is reported:

| Test Items                              | Measurement Uncertainty | Notes |
|-----------------------------------------|-------------------------|-------|
| Transmitter power conducted             | 0.57 dB                 | (1)   |
| Transmitter power Radiated              | 2.20 dB                 | (1)   |
| Conducted spurious emission 9KHz-40 GHz | 1.60 dB                 | (1)   |
| Radiated spurious emission 9KHz-40 GHz  | 2.20 dB                 | (1)   |
| Conducted Emission 9KHz-30MHz           | 3.39 dB                 | (1)   |
| Radiated Emission 30~1000MHz            | 4.24 dB                 | (1)   |
| Radiated Emission 1~18GHz               | 5.16 dB                 | (1)   |
| Radiated Emission 18-40GHz              | 5.54 dB                 | (1)   |
| Occupied Bandwidth                      | -----                   | (1)   |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

## 2. GENERAL INFORMATION

### 2.1. General Description of EUT

|                       |                            |
|-----------------------|----------------------------|
| Product Name:         | GEMNFC                     |
| Model/Type reference: | GEMNFC02                   |
| Power supply:         | DC 5V(from USB port)       |
| Hardware version:     | V1.0                       |
| Software version:     | V1.0                       |
| <b>Bluetooth:</b>     |                            |
| Supported type:       | Version 4.0 for low Energy |
| Modulation:           | GFSK                       |
| Operation frequency:  | 2402MHz to 2480MHz         |
| Channel number:       | 40                         |
| Channel separation:   | 2 MHz                      |
| Antenna type:         | Ceramic Antenna            |
| Antenna gain:         | 4.17dBi                    |
| <b>ANT+:</b>          |                            |
| Supported type:       | ANT+                       |
| Modulation:           | GFSK                       |
| Operation frequency:  | 2457MHz                    |
| Channel number:       | 1                          |
| Channel separation:   | /                          |
| Antenna type:         | Ceramic Antenna            |
| Antenna gain:         | 4.17dBi                    |
| <b>NFC:</b>           |                            |
| Supported type:       | NFC                        |
| Modulation:           | RFID                       |
| Operation frequency:  | 13.56MHz                   |
| Channel number:       | 1                          |
| Channel separation:   | /                          |
| Antenna type:         | PCB Antenna                |
| Antenna gain:         | 0dBi                       |

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

## 2.2. Description of Test Modes

### Peripherals Devices:

| Name:  | Model:   | Serial | Manufacture | Remark |
|--------|----------|--------|-------------|--------|
| Laptop | Thinkpad | /      | Lenovo      | /      |

**Note:** All the above equipment /cable were placed in worse case position to maximize emission signals during emission test.

### Operation Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) mode for testing.

### NFC

| Channel | Frequency (MHz) |
|---------|-----------------|
| 01      | 13.56           |



## 2.3.Measurement Instruments List

| Maximum Peak Output Power / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission /Hopping Require/ 20dB bandwidth |                             |                 |           |            |                  |
|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-----------------|-----------|------------|------------------|
| Item                                                                                                                              | Test Equipment              | Manufacturer    | Model No. | Serial No. | Calibrated until |
| 1                                                                                                                                 | Spectrum Analyzer           | Rohde & Schwarz | FSU       | 100105     | Jan. 04,2019     |
| 2                                                                                                                                 | RF Cable                    | Schwarzbeck     | AH32D4    | SF0150     | Jan. 04,2019     |
| 3                                                                                                                                 | Temporary Antenna connector | Schwarzbeck     | SMA24D    | ED1201     | Jan. 04,2019     |

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

3.

| Conducted Emission |                   |              |           |            |                 |
|--------------------|-------------------|--------------|-----------|------------|-----------------|
| Item               | Test Equipment    | Manufacturer | Model No. | Serial No. | Calibrate until |
| 1                  | LISN              | R&S          | ENV216    | 101112     | Jan. 04,2019    |
| 2                  | LISN              | R&S          | ENV216    | 101113     | Jan. 04,2019    |
| 3                  | EMI Test Receiver | R&S          | ESCI      | 100920     | Jan. 04,2019    |
| 4                  | Cable             | Schwarzbeck  | AK9515E   | 33156      | Jan. 04,2019    |

4.

| Radiated Emission |                         |                 |              |            |                  |
|-------------------|-------------------------|-----------------|--------------|------------|------------------|
| Item              | Test Equipment          | Manufacturer    | Model No.    | Serial No. | Calibrated until |
| 1                 | EMI Test Receiver       | R&S             | ESCI         | 100967     | Jan. 04,2019     |
| 2                 | High pass filter        | micro-tranics   | HPM50111     | 34202      | Jan. 04,2019     |
| 3                 | Log-Bicon Antenna       | Schwarzbeck     | CBL6141A     | 4180       | Jan. 04,2019     |
| 4                 | Ultra-Broadband Antenna | ShwarzBeck      | BBHA9170     | 25841      | Jan. 04,2019     |
| 5                 | Loop Antenna            | LAPLAC          | RF300        | 9138       | Jan. 04,2019     |
| 6                 | Spectrum Analyzer       | Rohde & Schwarz | FSU          | 100105     | Jan. 04,2019     |
| 7                 | Horn Antenna            | Schwarzbeck     | BBHA 9120D   | 648        | Jan. 04,2019     |
| 8                 | Pre-Amplifier           | HP              | 8447D        | 1937A03050 | Jan. 04,2019     |
| 9                 | Pre-Amplifier           | EMCI            | EMC05183 5   | 980075     | Jan. 04,2019     |
| 10                | Antenna Mast            | UC              | UC3000       | N/A        | N/A              |
| 11                | Turn Table              | UC              | UC3000       | N/A        | N/A              |
| 12                | Cable Below 1GHz        | Schwarzbeck     | AK9515E      | 33155      | Jan. 04,2019     |
| 13                | Cable Above 1GHz        | Hubersuhner     | SUCOFLEX1 02 | DA1580     | Jan. 04,2019     |

5. Note: 1. The Cal.Interval was one year.

6. 2. The cable loss has calculated in test result which connection between each test instruments.

## 7. TEST CONDITIONS AND RESULTS

### 7.1. CONDUCTED EMISSION MEASUREMENT

#### Limit

POWER LINE CONDUCTED EMISSION

(Frequency Range 150KHz-30MHz)

| FREQUENCY (MHz) | Class A (dBuV) |         | Class B (dBuV) |           |
|-----------------|----------------|---------|----------------|-----------|
|                 | Quasi-peak     | Average | Quasi-peak     | Average   |
| 0.15 -0.5       | 79.00          | 66.00   | 66 - 56 *      | 56 - 46 * |
| 0.50 -5.0       | 73.00          | 60.00   | 56.00          | 46.00     |
| 5.0 -30.0       | 73.00          | 60.00   | 60.00          | 50.00     |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

#### Test Procedure

1. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
2. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m. Repeat above procedures until all frequency measurements have been completed.
4. LISN at least 80 cm from nearest part of EUT chassis.
5. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### Test Configuration

For the actual test configuration, please refer to the related Item –EUT Test Photos.

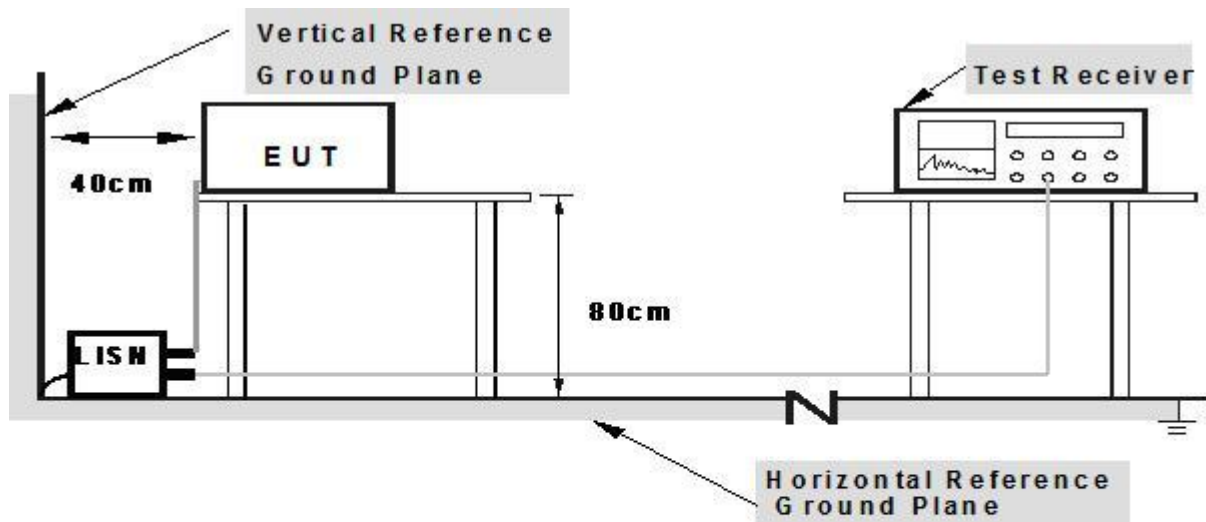

**Note: 1.Support units were connected to second LISN.**


**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

### Test Results



## TEST RESULTS

|                |              |                     |            |
|----------------|--------------|---------------------|------------|
| Temperature :  | 21 °C        | Relative Humidity : | 60%        |
| Pressure :     | 101 Kpa      | Test Date :         | 2018-03-25 |
| Test Mode :    | Mode 1       | Phase :             | L          |
| Test Voltage : | AC 120V/60Hz |                     |            |

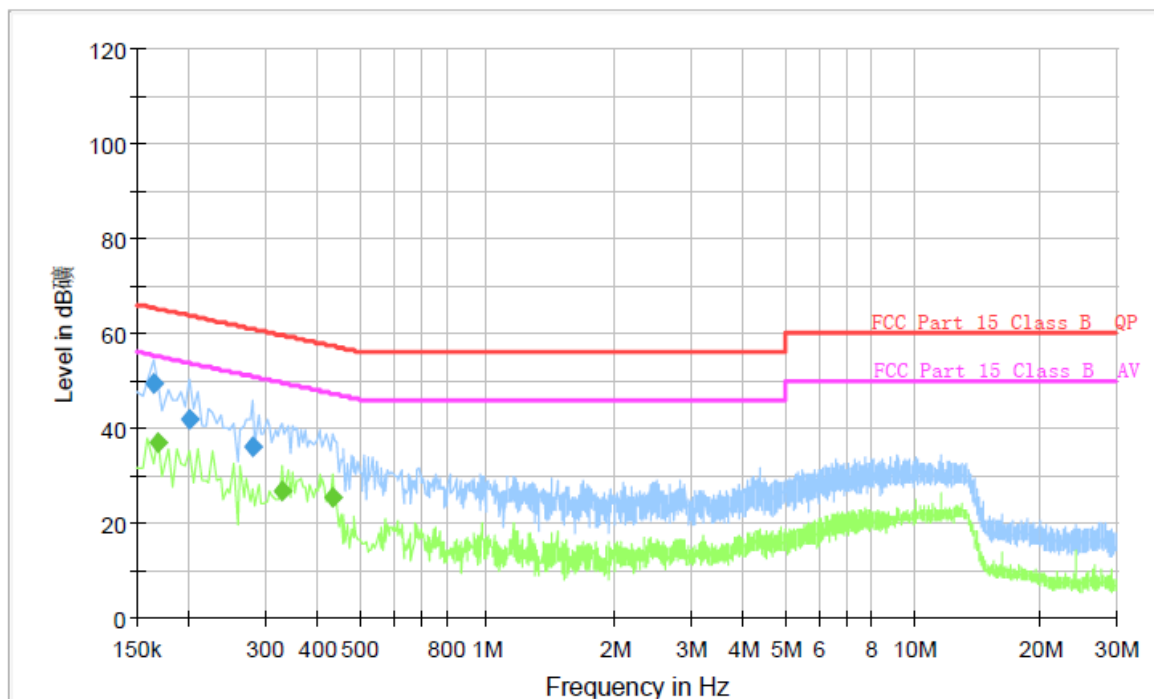


## Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dBμV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) | Comment |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------|--------------|---------|
| 0.163500        | 49.2             | 1000.000        | 9.000           | Off    | L1   | 10.0       | 16.1        | 65.3         |         |
| 0.199500        | 41.8             | 1000.000        | 9.000           | Off    | L1   | 10.0       | 21.8        | 63.6         |         |
| 0.280500        | 36.2             | 1000.000        | 9.000           | Off    | L1   | 9.9        | 24.6        | 60.8         |         |

## Final Measurement Detector 2

| Frequency (MHz) | Average (dBμV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) | Comment |
|-----------------|----------------|-----------------|-----------------|--------|------|------------|-------------|--------------|---------|
| 0.168000        | 36.8           | 1000.000        | 9.000           | Off    | L1   | 10.0       | 18.3        | 55.1         |         |
| 0.330000        | 26.7           | 1000.000        | 9.000           | Off    | L1   | 9.9        | 22.8        | 49.5         |         |
| 0.433500        | 25.3           | 1000.000        | 9.000           | Off    | L1   | 9.8        | 21.9        | 47.2         |         |

|                |              |                     |            |
|----------------|--------------|---------------------|------------|
| Temperature :  | 21 °C        | Relative Humidity : | 60%        |
| Pressure :     | 101 Kpa      | Test Date :         | 2018-03-25 |
| Test Mode :    | Mode 1       | Phase :             | N          |
| Test Voltage : | AC 120V/60Hz |                     |            |

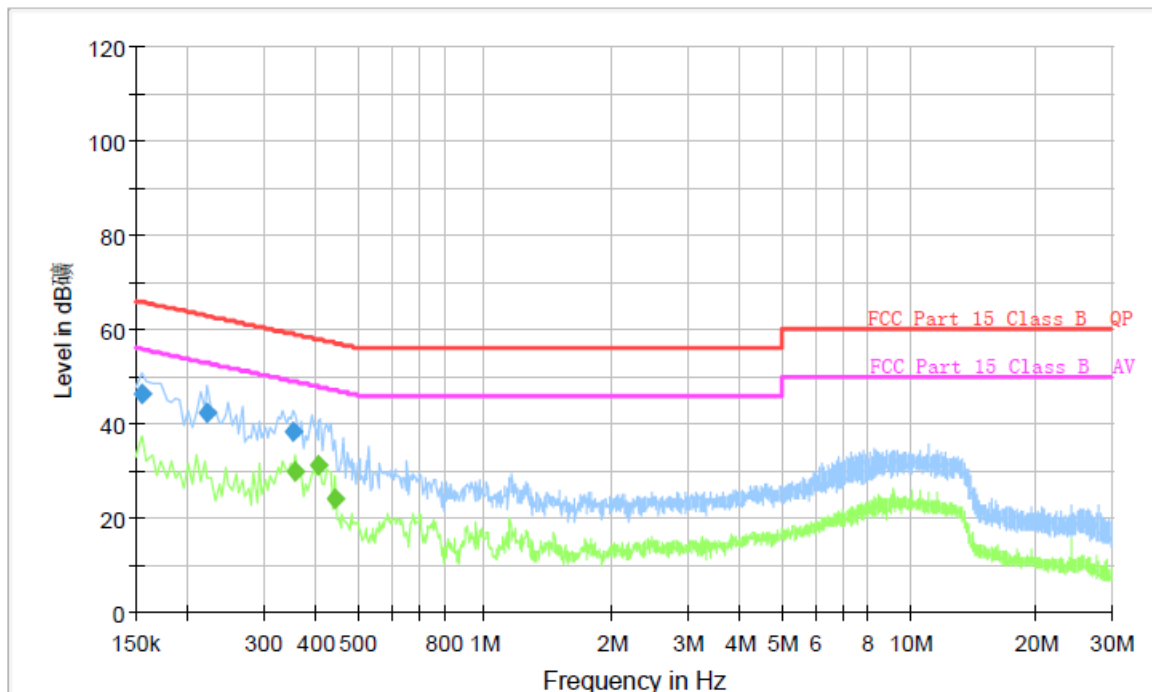

### Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dBμV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) | Comment |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------|--------------|---------|
| 0.154500        | 46.3             | 1000.000        | 9.000           | Off    | N    | 9.6        | 19.5        | 65.8         |         |
| 0.222000        | 42.2             | 1000.000        | 9.000           | Off    | N    | 9.6        | 20.5        | 62.7         |         |
| 0.352500        | 38.3             | 1000.000        | 9.000           | Off    | N    | 9.9        | 20.6        | 58.9         |         |

### Final Measurement Detector 2

| Frequency (MHz) | Average (dBμV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) | Comment |
|-----------------|----------------|-----------------|-----------------|--------|------|------------|-------------|--------------|---------|
| 0.357000        | 30.0           | 1000.000        | 9.000           | Off    | N    | 9.9        | 18.8        | 48.8         |         |
| 0.406500        | 31.3           | 1000.000        | 9.000           | Off    | N    | 10.0       | 16.4        | 47.7         |         |
| 0.442500        | 24.2           | 1000.000        | 9.000           | Off    | N    | 10.0       | 22.8        | 47.0         |         |

## 7.2. Radiated Emission

### Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table.

The frequency spectrum above 1 GHz for Transmitter was investigated. All emission not reported are much lower than the prescribed limits. Set the RBW=1MHz, VBW=3MHz for Peak Detector while the RBW=1MHz, VBW=10Hz for Average Detector, Readings are both peak and average values. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

| Frequency (MHz) | Distance (Meters) | Radiated (dBuV/m)                          | Radiated (μV/m)       |
|-----------------|-------------------|--------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 3                 | $20\log(30)+40\log(30/3)$                  | 30                    |
| 30-88           | 3                 | 40.0                                       | 100                   |
| 88-216          | 3                 | 43.5                                       | 150                   |
| 216-960         | 3                 | 46.0                                       | 200                   |
| Above 960       | 3                 | 54.0                                       | 500                   |

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

(Radiated Emission <30MHz (9KHz-30MHz, H-field))

According to FCC section 15.225, for <30MHz, Radiated emissions were measured according to ANSIC63.4. The EUT was set to transmit at the highest output power. The EUT was set 30 meter away from the measuring antenna. The loop antenna was positioned 1 meter above the ground from the center of the loop. The measuring bandwidth was set to 10KHz. (Note: During testing the receive antenna was rotated about its axis to maximize the emission from the EUT)

There was no detected Restricted bands and Radiated spurious emission below 30MHz. The 30m limit was converted to 3m Limit using square factor(x) as it was found by measurements as follows;

$$10 \text{ m Limit(dBuV/m)} = 20\log(X)+40\log(30/10)= 20\log(15,848)+40\log(30/10) =103.1\text{dBuV}$$

$$10 \text{ m Limit(dBuV/m)} = 20\log(X)+40\log(30/10)= 20\log(30)+40\log(30/10) =48.6\text{BuV}$$

### Test Procedure

1. The EUT was placed on a turn table which is 0.8m(below 1GHz)or1.5m(above 1GHz) above ground plane.
6. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT

7. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. Repeat above procedures until all frequency measurements have been completed.

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

|                           |                                            |
|---------------------------|--------------------------------------------|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |                                            |

For example

| Frequency (MHz) | FS (dBμV/m) | RA (dBμV/m) | AF (dB) | CL (dB) | AG (dB) | Transd (dB) |
|-----------------|-------------|-------------|---------|---------|---------|-------------|
| 150.00          | 40          | 58.1        | 12.2    | 1.6     | 31.90   | -18.1       |


$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

### Test Configuration


For the actual test configuration, please refer to the related Item –EUT Test Photos.




### Frequency range 9 KHz – 30MHz

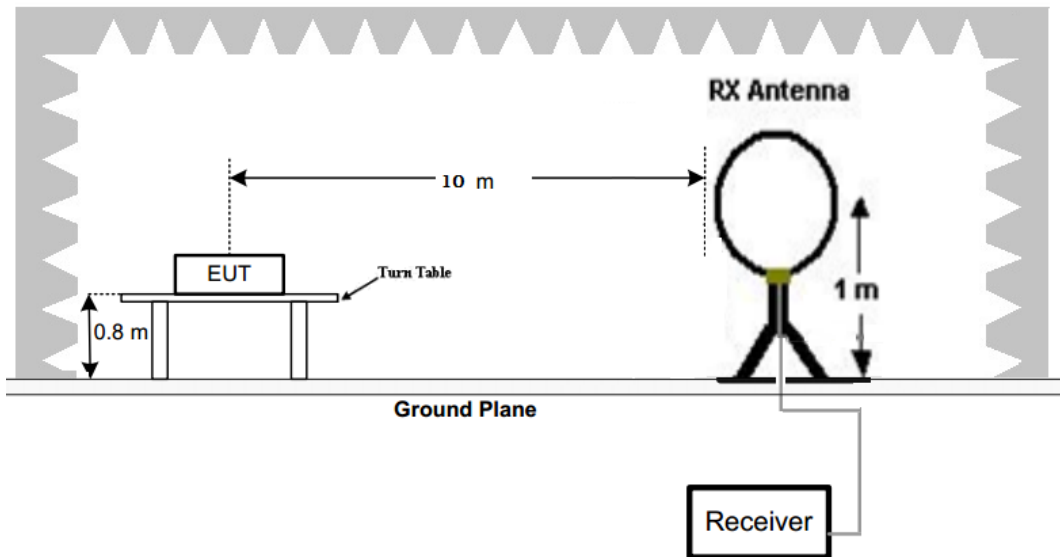

### Frequency range 30MHz – 1000MHz

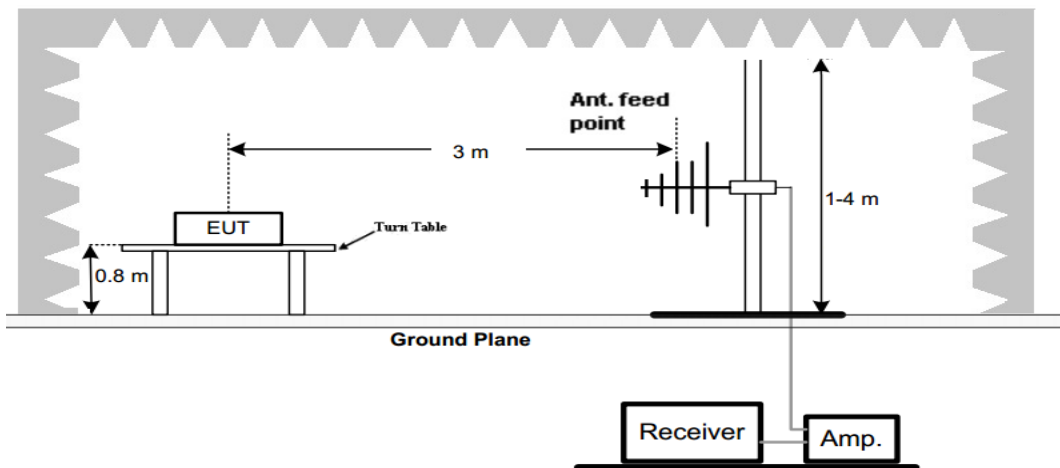

### Frequency range above 1GHz-25GHz

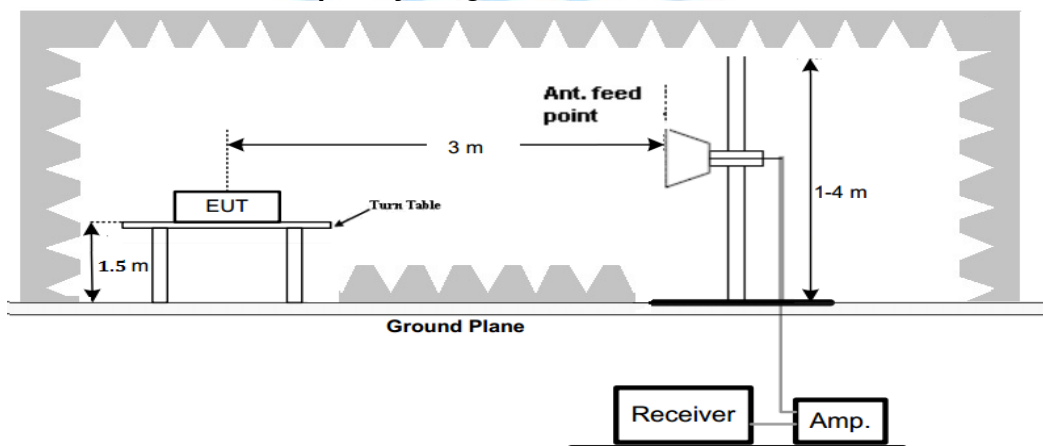


## Test Results


Remark:

### For 9 KHz-30MHz

| Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>dB | Calculate result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Result |
|----------------|---------------------|--------------|------------------------------|-------------------|----------------|--------|
| 13.553-13.567  | 55.17               | 24.7         | 79.87                        | 103.1             | -23.23         | Pass   |
| 13.410~13.553  | 31.21               | 24.7         | 55.91                        | 69.6              | -13.69         | Pass   |
| 13.567~13.710  | 30.14               | 24.7         | 54.84                        | 69.6              | -14.76         | Pass   |
| 13.110-13.410  | 29.23               | 24.7         | 53.93                        | 59.6              | -5.67          | Pass   |
| 13.710-14.010  | 29.84               | 24.7         | 54.54                        | 59.6              | -5.06          | Pass   |

### For 30MHz-1GHz

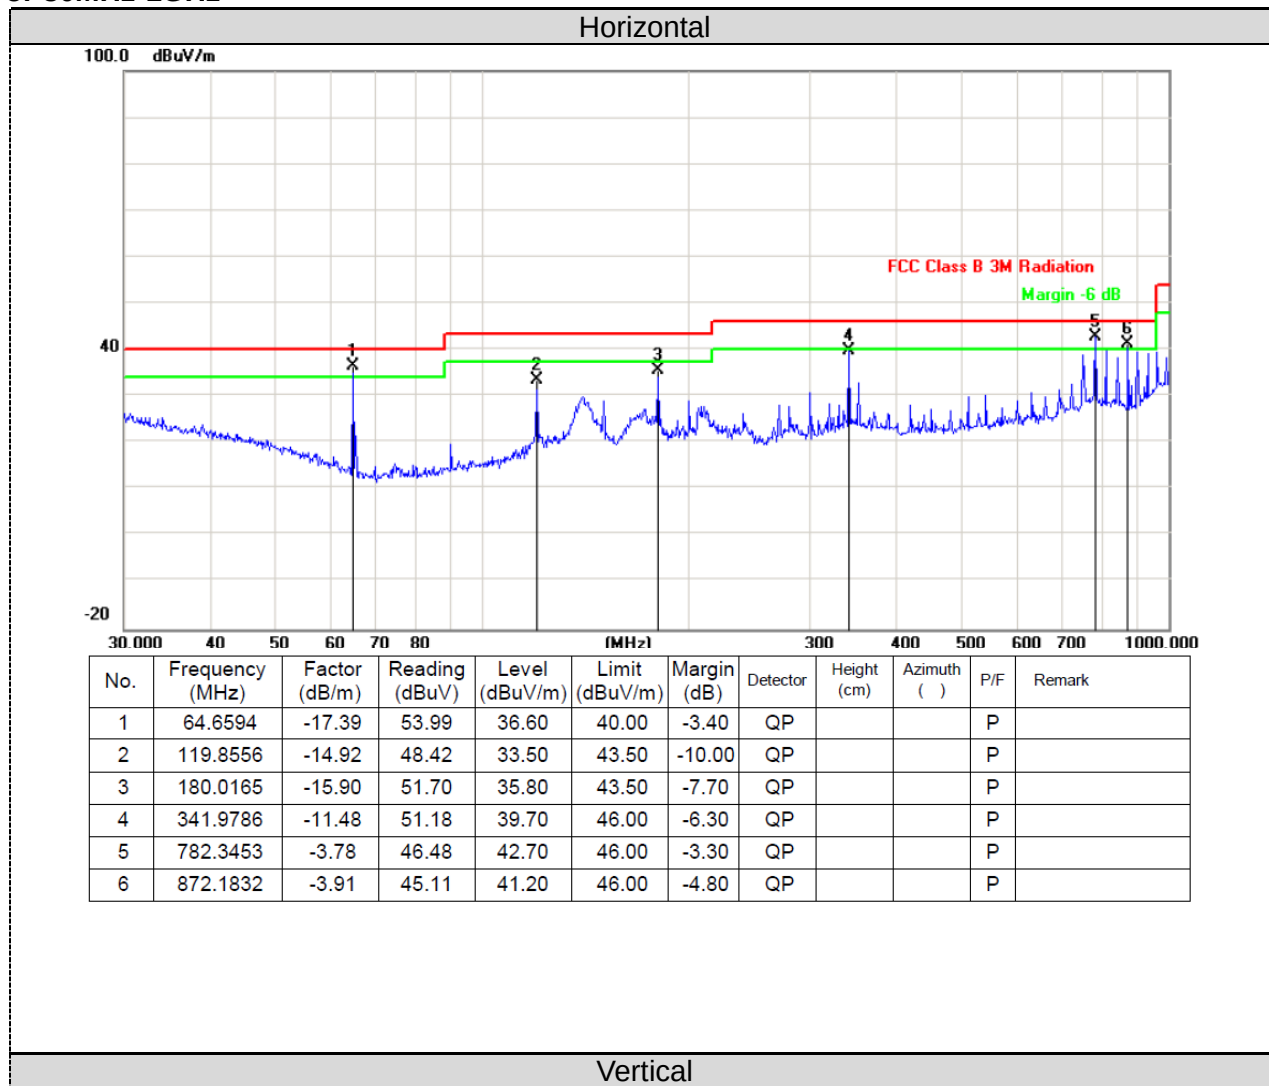

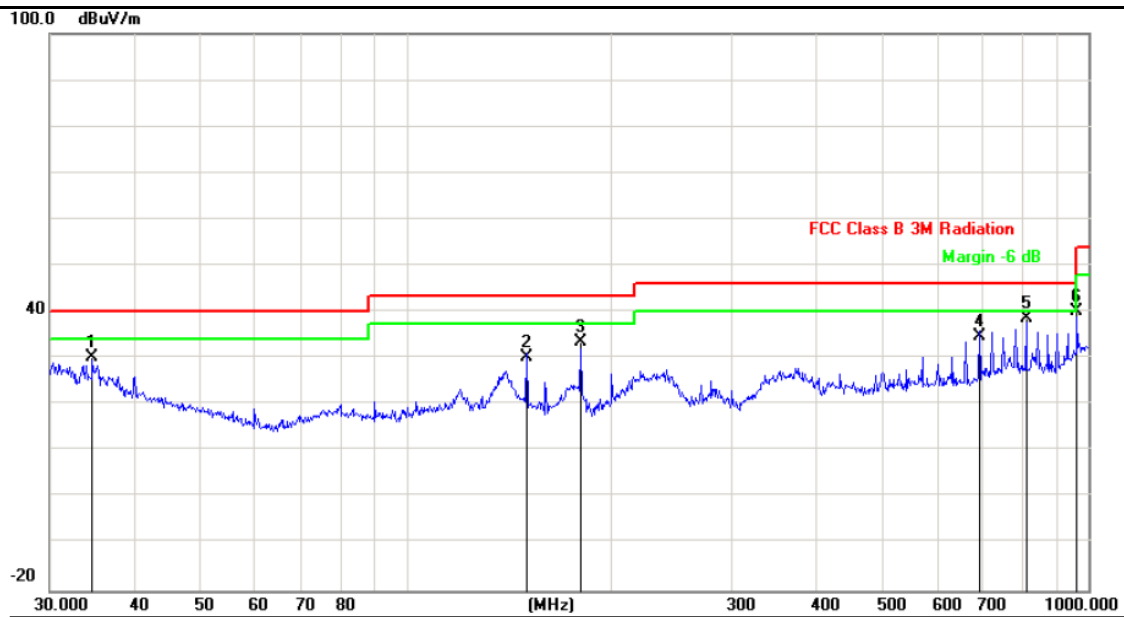

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth ( ) | P/F | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|-------------|-------------|-----|--------|
| 1   | 34.6385         | -6.97         | 37.17          | 30.20          | 40.00          | -9.80       | QP       |             |             | P   |        |
| 2   | 150.0108        | -16.08        | 46.48          | 30.40          | 43.50          | -13.10      | QP       |             |             | P   |        |
| 3   | 180.0165        | -15.90        | 49.40          | 33.50          | 43.50          | -10.00      | QP       |             |             | P   |        |
| 4   | 691.9867        | -5.89         | 40.59          | 34.70          | 46.00          | -11.30      | QP       |             |             | P   |        |
| 5   | 810.2654        | -4.11         | 42.91          | 38.80          | 46.00          | -7.20       | QP       |             |             | P   |        |
| 6   | 962.1623        | -0.25         | 40.45          | 40.20          | 54.00          | -13.80      | QP       |             |             | P   |        |

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

### 7.3.Occupied Bandwidth

#### Limit

Federal Communications Commission: Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

#### Test Procedure

1. The transmitter output was connected to the spectrum analyzer.
2. Set SA as follow:
  - a) RBW: 10 kHz.
  - b) VBW:  $\geq 3 \times \text{RBW}$ .
  - c) Detector: Peak.
  - d) Trace mode: max hold.
  - e) Sweep: auto couple.
3. Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



#### Test Configuration



#### Test Results

| Type     | 20 dB Bandwidth (kHz) | 99% Bandwidth (kHz) | Result |
|----------|-----------------------|---------------------|--------|
| 13.56MHz | 9.615                 | 7.211               | Pass   |

Test plot as follows:

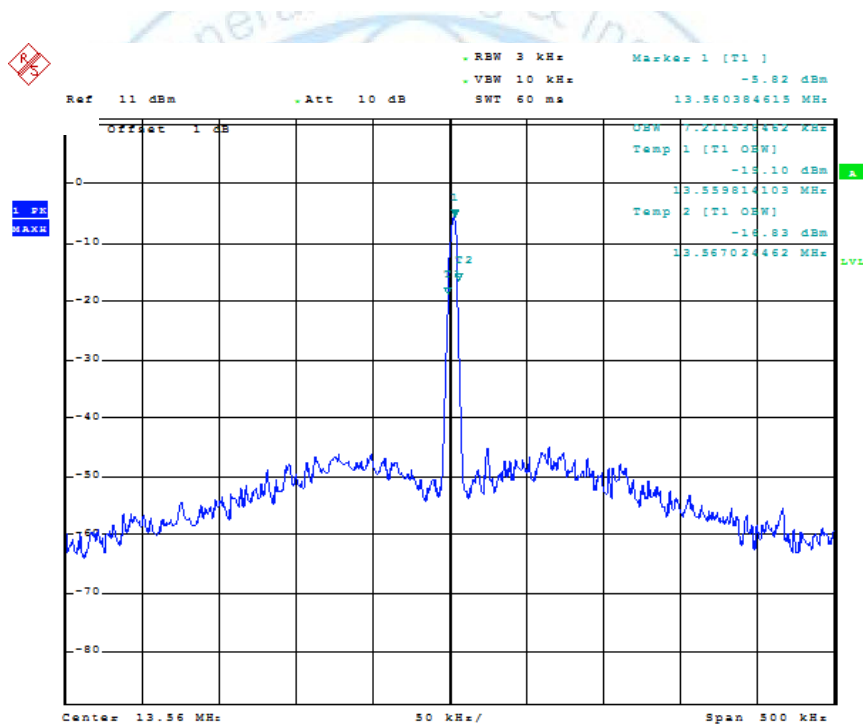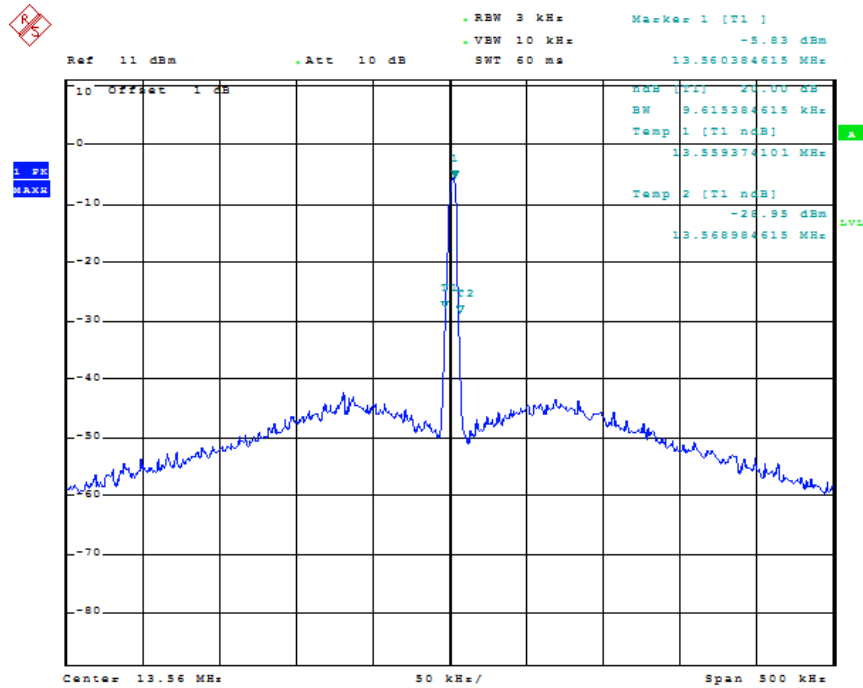

## 7.4. Frequency stability

### Limit

Carrier frequency stability shall be maintained to  $\pm 0.01\%$  ( $\pm 100$  ppm).

### Test Procedure

With the EUT setup as per section 9 of this report and connected as per Figure v, the frequency was measured under varying conditions of temperature and supply voltage. The measurements were performed with EUT set in a CW mode of operation. Measurements were made once temperature stability was achieved at each temperature.

### Test Results

| Test Enviroment |            | Measured<br>Frequency(MHz) | Frequency<br>error(MHz) | Frequency<br>error(%) | Result |
|-----------------|------------|----------------------------|-------------------------|-----------------------|--------|
| Temperature(°C) | Power(VDC) |                            |                         |                       |        |
| -20             | 5          | 13.560384615               | 0.00284                 | 0.01                  | PASS   |
| -10             | 5          | 13.560384626               | 0.00284                 | 0.01                  | PASS   |
| 0               | 5          | 13.560384632               | 0.00284                 | 0.01                  | PASS   |
| 10              | 5          | 13.560384624               | 0.00284                 | 0.01                  | PASS   |
| 20              | 4.5        | 13.560384621               | 0.00284                 | 0.01                  | PASS   |
|                 | 5.0        | 13.560384653               | 0.00284                 | 0.01                  | PASS   |
|                 | 5.5        | 13.560384632               | 0.00284                 | 0.01                  | PASS   |
| 30              | 5          | 13.560384628               | 0.00284                 | 0.01                  | PASS   |
| 40              | 5          | 13.560384614               | 0.00284                 | 0.01                  | PASS   |
| 50              | 5          | 13.560384637               | 0.00284                 | 0.01                  | PASS   |

## 7.5. Antenna Requirement

### Standard Applicable


**For intentional device, according to FCC 47 CFR Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

Result


The EUT's antenna used a Antenna, soldered on the PCB., The antenna's gain is 4.17dBi. Complying with the standard requirement.

### Test Result:

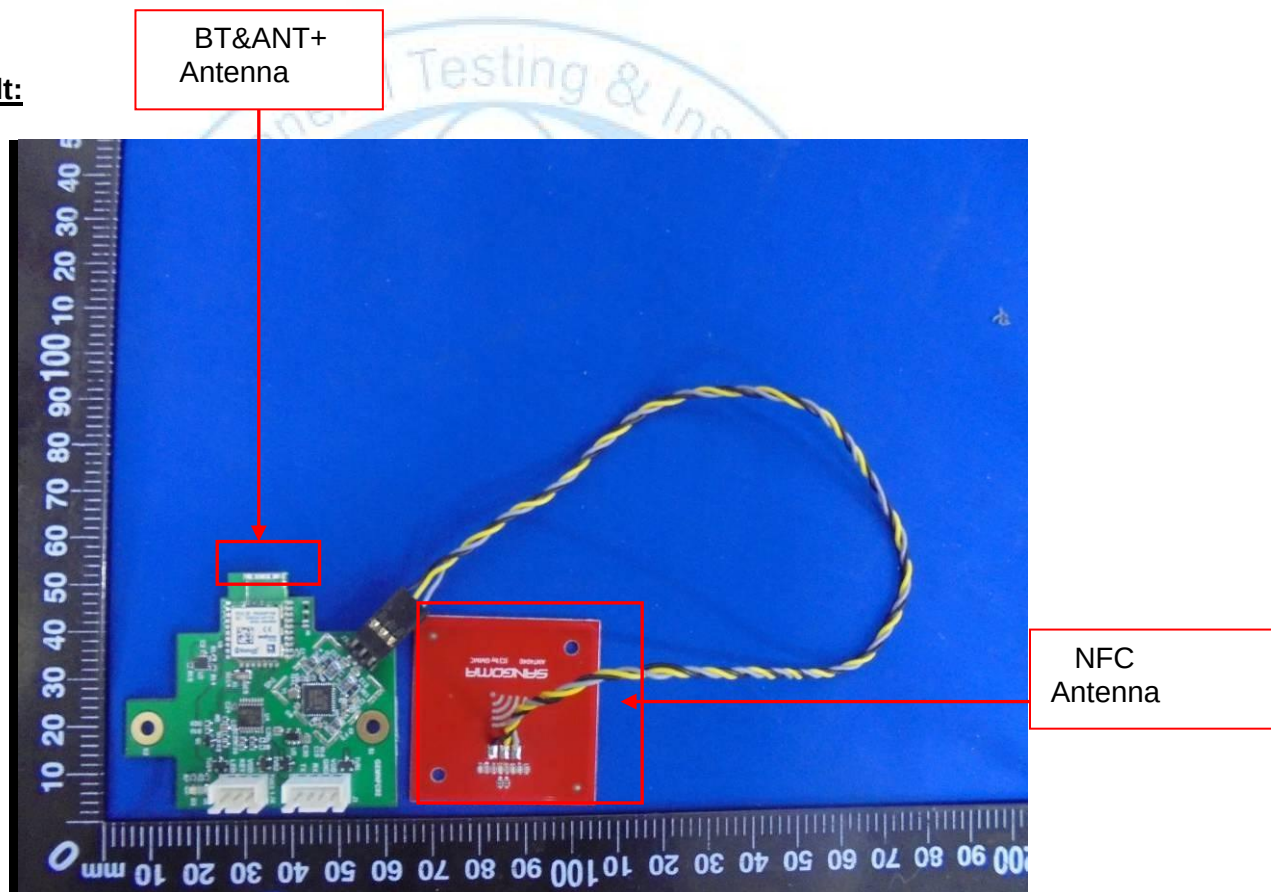


## 8. EUT TEST PHOTO

### Conducted Emission

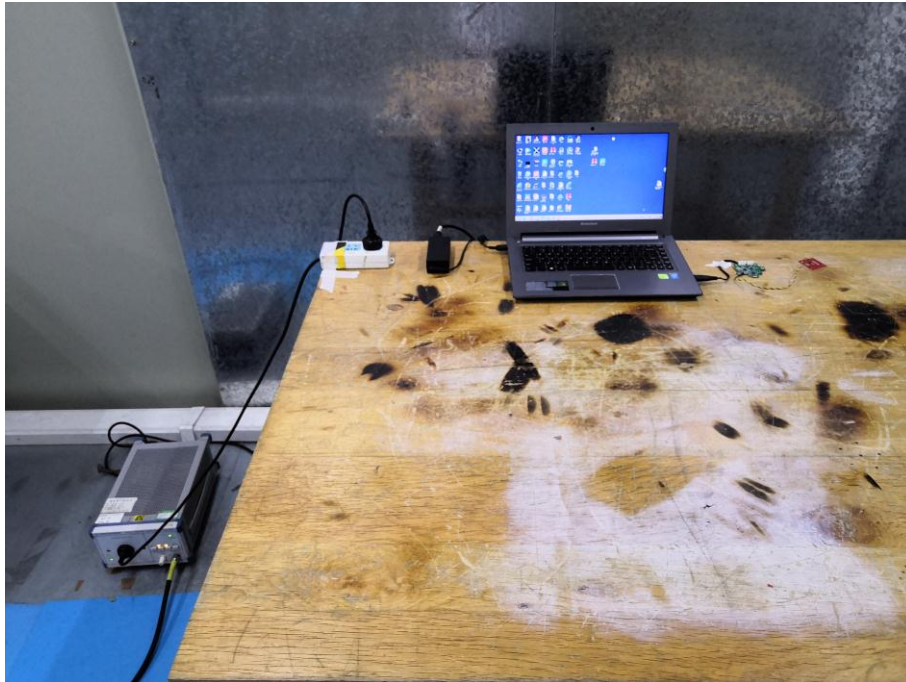

### Radiated Emission



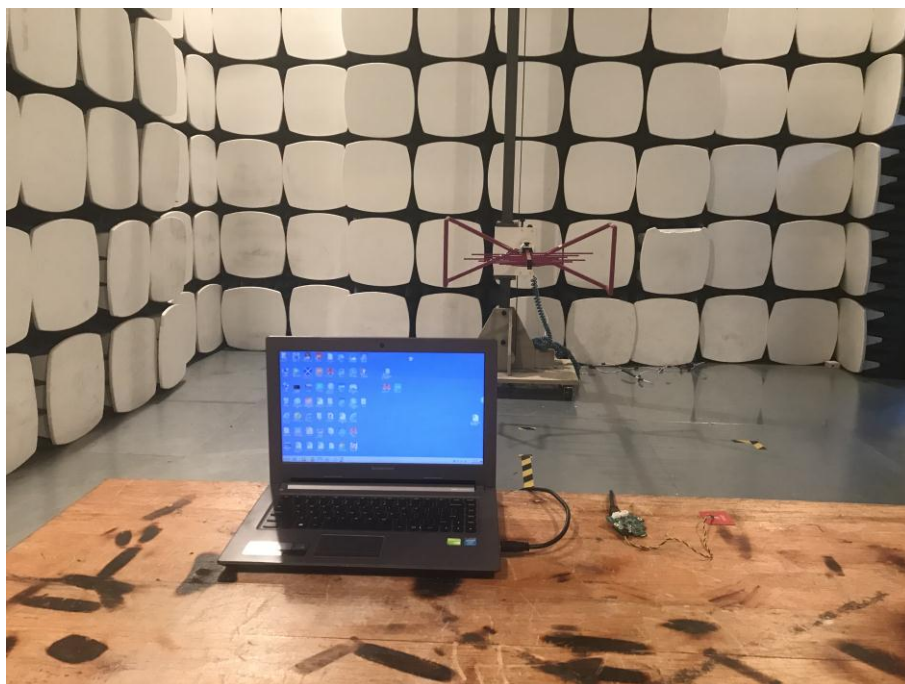

## 9. PHOTOGRAPHS OF EUT CONSTRUCTIONAL

10. Please reference to the test report No.: GTI20180534F-1

\*\*\*\*\*THE END\*\*\*\*\*

