



WIFI 2.4GHz-Body Horizontal-Up CH11	2
WIFI 2.4GHz-Body Horizontal-Down CH11	3
WIFI 2.4GHz-Body Vertical-Front CH11.....	5
WIFI 2.4GHz-Body Vertical-Back CH11	6
WIFI 2.4GHz-Body Tip CH11.....	7

Test Laboratory: Compliance Certification Services Inc.

Date: 11/4/2015

WIFI 2.4GHz-Body Horizontal-Up CH11**DUT: WLAN and BT Combo Dongle; Type: CL-8723BU; Serial: N/A**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.939$ S/m; $\epsilon_r = 51.12$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2015
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Body CH11/Area Scan (8x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.540 W/kg



WIFI/Body CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.85 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.596 W/kg

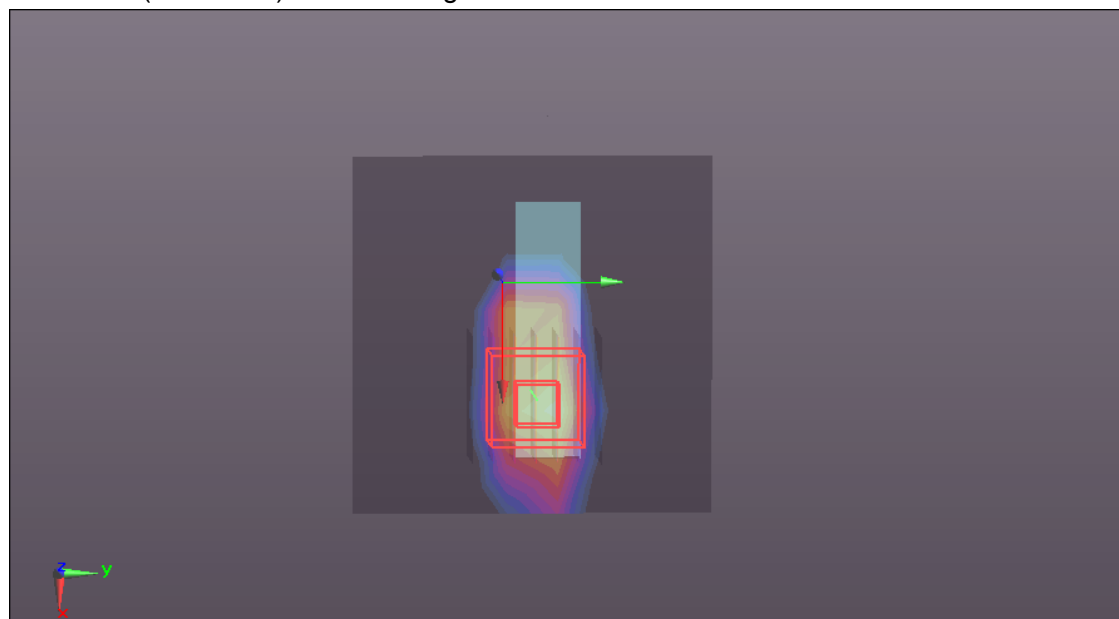

0 dB = 0.596 W/kg = -2.25 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 11/4/2015

WIFI 2.4GHz-Body Horizontal-Down CH11**DUT: WLAN and BT Combo Dongle; Type: CL-8723BU; Serial: N/A**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.939 \text{ S/m}$; $\epsilon_r = 51.12$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2015
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Body CH11/Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.504 W/kg



WIFI/Body CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.43 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.859 W/kg

SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.191 W/kg

Maximum value of SAR (measured) = 0.627 W/kg

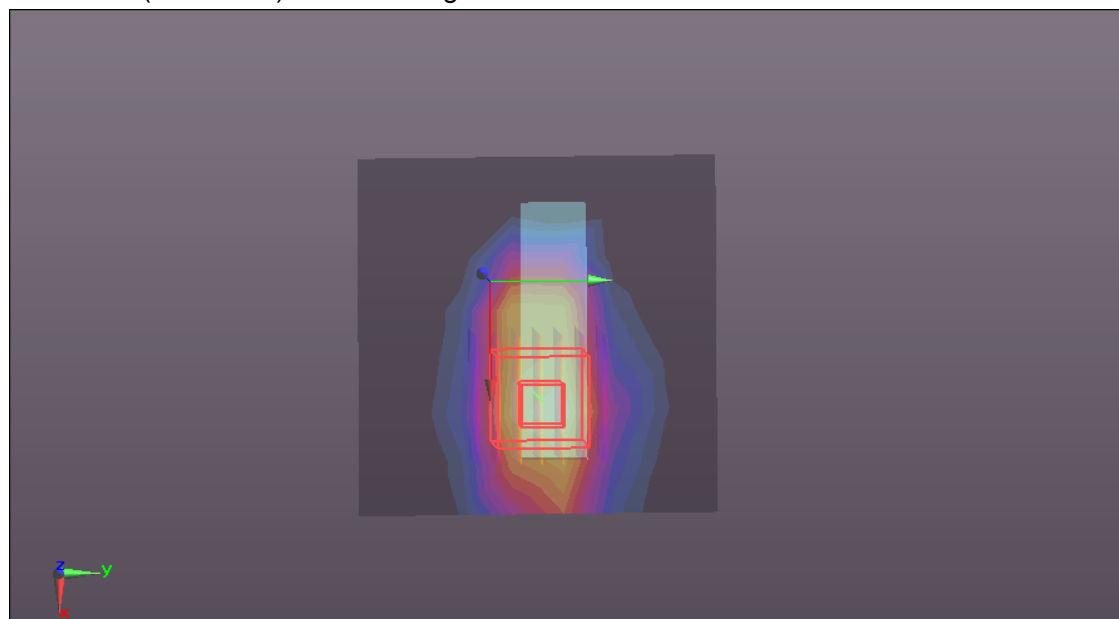

0 dB = 0.627 W/kg = -2.03 dBW/kg

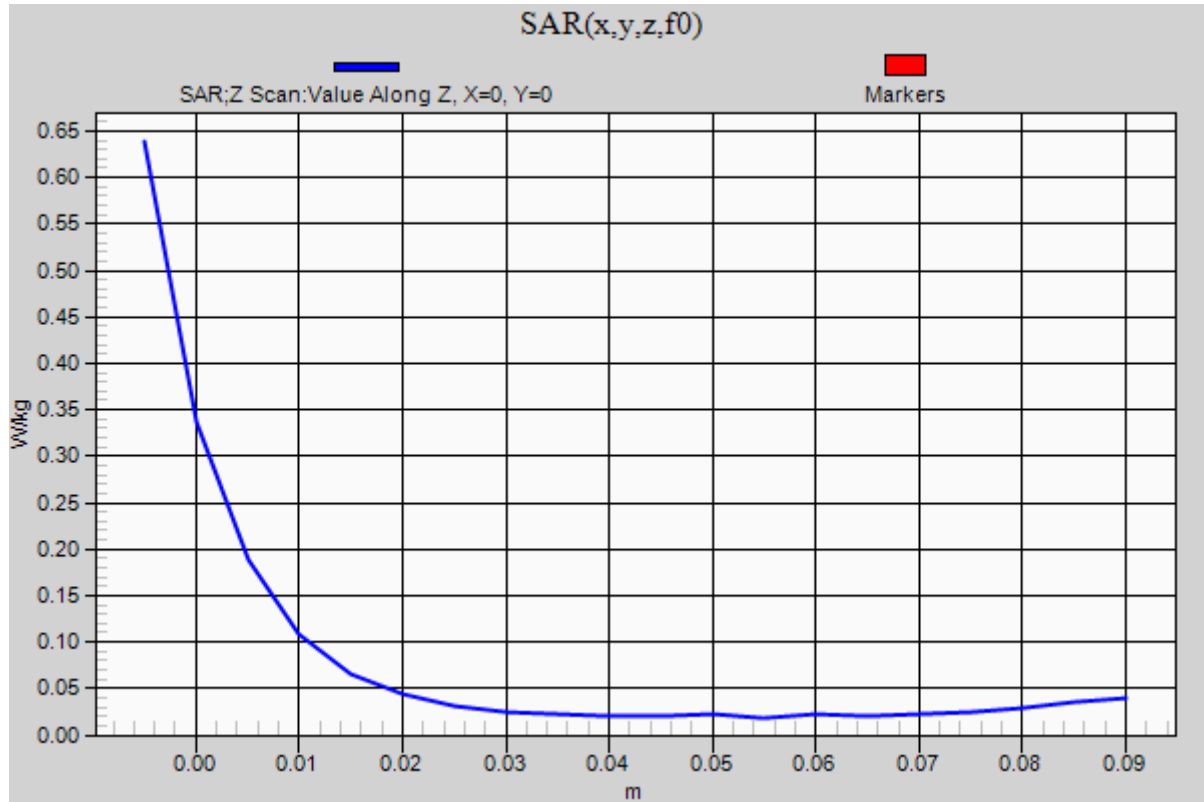

Test Laboratory: Compliance Certification Services Inc.

Date: 11/4/2015

WIFI 2.4GHz-Body Vertical-Front CH11

DUT: WLAN and BT Combo Dongle; Type: CL-8723BU; Serial: N/A

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.939$ S/m; $\epsilon_r = 51.12$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2015
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Body CH11/Area Scan (8x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.230 W/kg



WIFI/Body CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.675 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.399 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.287 W/kg

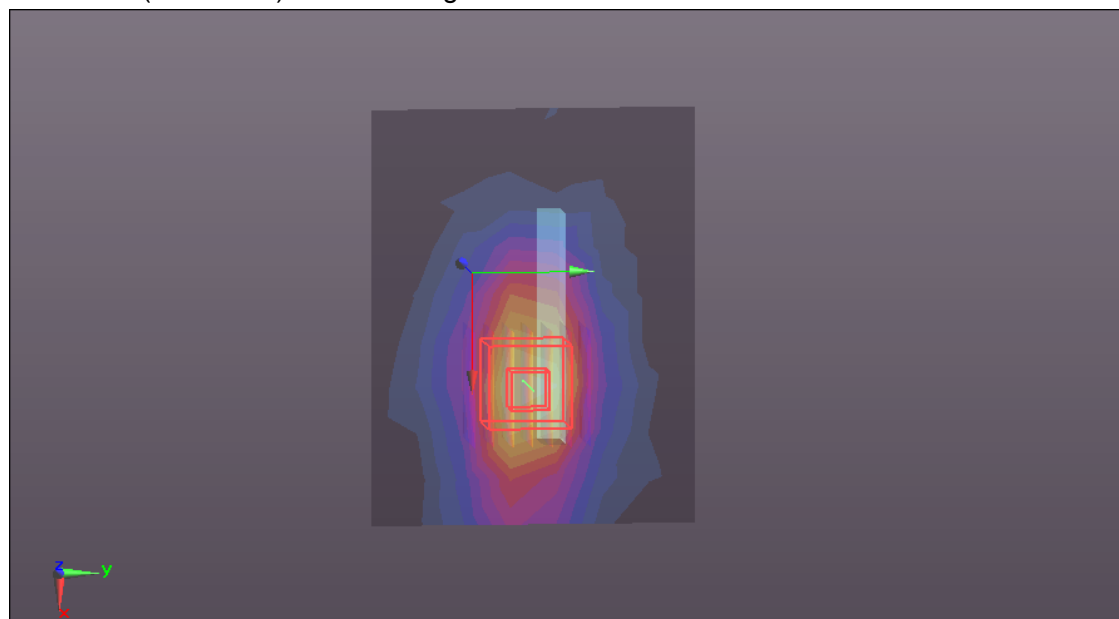

0 dB = 0.287 W/kg = -5.42 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 11/4/2015

WIFI 2.4GHz-Body Vertical-Back CH11

DUT: WLAN and BT Combo Dongle; Type: CL-8723BU; Serial: N/A

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.939$ S/m; $\epsilon_r = 51.12$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2015
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Body CH11/Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.416 W/kg


WIFI/Body CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.812 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.603 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.445 W/kg

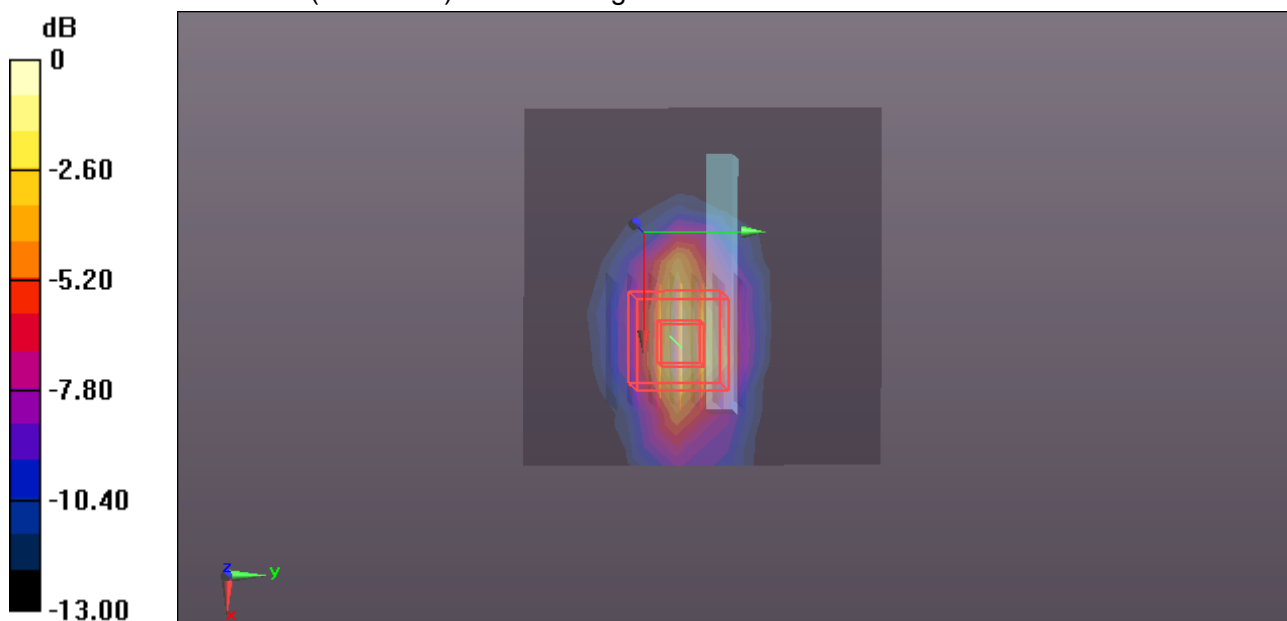

0 dB = 0.445 W/kg = -3.52 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 11/4/2015

WIFI 2.4GHz-Body Tip CH11

DUT: WLAN and BT Combo Dongle; Type: CL-8723BU; Serial: N/A

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.939$ S/m; $\epsilon_r = 51.12$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2015
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Body CH11/Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0867 W/kg


WIFI/Body CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.982 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0939 W/kg

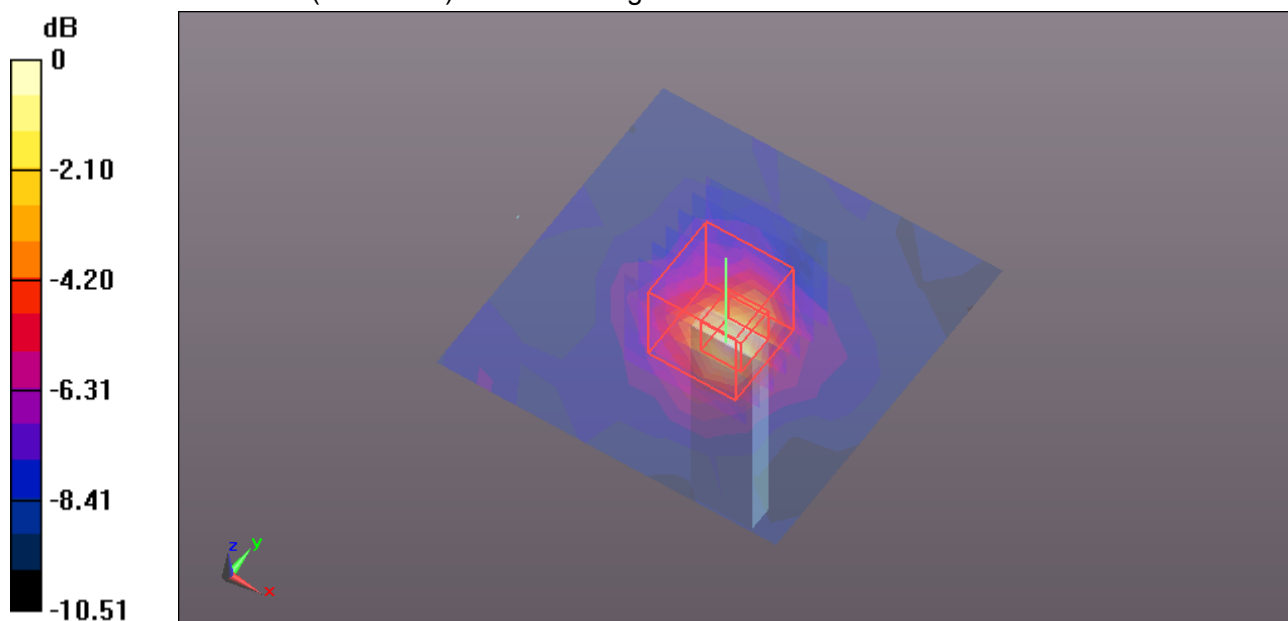

0 dB = 0.0939 W/kg = -10.27 dBW/kg