

Measurement of MPE

1. Foreword

In adopt with the Human Exposure IEEE C95.1, and according to the FCC 1.1310. The *Maximum Permissible Exposure (MPE)* is obligated to measure in order to prove the safety of radiation harmfulness to the human body.

The *Gain* of the antenna used is measured in an *Anechoic chamber*. The *maximum total power to the antenna* is to be recorded. By adopting the ***Friis Transmission Formula*** and the *power gain of the antenna*, we can find the distance right away from the product, where the limit of the MPE is.

2. Description of EUT

Granted FCC ID	:	PB6-02102
Product name	:	Wireless LAN Access Point
Model name	:	A14
Classification	:	Mobile Device (i) Under normal use condition, the antenna is at least 20cm away from the user; (ii) Warning statement for keeping 20cm separation distance and the prohibition of operating next to the person has been printed in the user's manual
Frequency Range	:	2.412 GHz ~ 2.462GHz
Supported Channel	:	11 Channel
Modulation Skill	:	DBPSK, DQPSK, CCK
Power Type	:	By the Power Adaptor Mfg.: Touch Electronic Co., Ltd. M/N: SA070507 I/P: 100-240Vac, 50-60Hz; 0.4A O/P: 5Vdc, 10W
Power Cable	:	180cm long, non-shielded, no ferrite core

3. Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	100	6
3.0-30	1842/f	4.89/f	900/f ²	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	100	30
1.34-30	824/f	2.19/f	180/f ²	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

[The EUT is tested in transmit and receive modes and in the first, middle and the last channel separately. The following shows only our observation have the greatest emissions.]

According to OET BULLETIN 56 Fourth Edition / August 1999, Equation for Predicting RF Fields:

$$\text{Friis Transmission Formula: } S = \frac{PG}{4pR^2} = \frac{119.399 \times 1.585}{4p(20)^2} = 3.765 \times 10^{-2} \text{ mW/cm}^2$$

$$\text{Estimated safe separation: } R = \sqrt{\frac{PG}{4p}} = \sqrt{\frac{119.399 \times 1.585}{4p}} = 3.88 \text{ cm}$$

Remarks: "The safe estimated separation that the user must maintain from the antenna is at least 3.88cm."

Where: S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)



The Numeric gain G of antenna with a gain specified in dB is determined by:

$$G = \text{Log}^{-1} (\text{dB antenna gain} / 10)$$

$$G = \text{Log}^{-1} (2 / 10) = 1.585$$

THE CONTENTS OF THIS DOCUMENT ARE UNCLASSIFIED TO ACRN. CHINESE IS SWIFT
 CONFIDENTIAL AND SHALL NOT BE DISCLOSED TO CHINESE OR THIRD PARTY PURPOSES OTHER
 THAN DISCLOSURE BY THE WRITTEN APPROVAL OF ACRN.

REVISION			
REV	BY	DESCRIPTION	DATE
1			

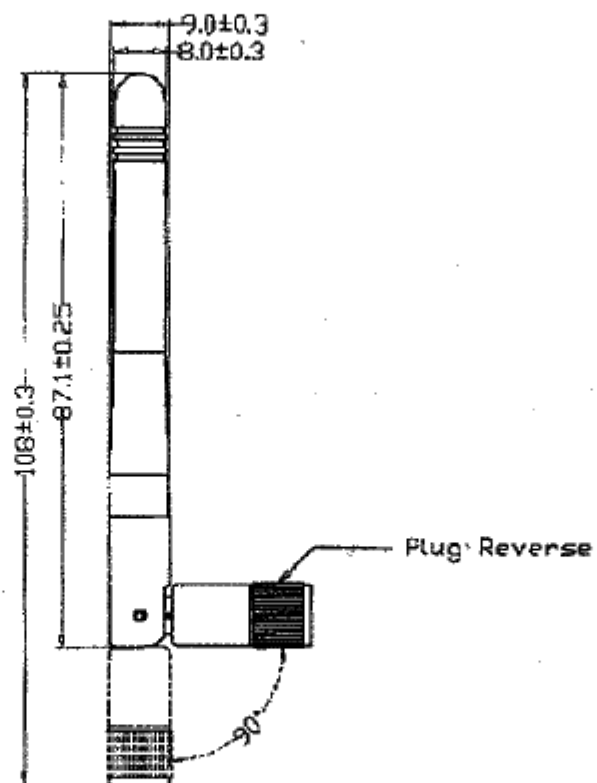

1				
ITEM	REV	DATE	DESCRIPTION	
PART LIST				
欣格科技股份有限公司 Antenniques Corp. Ltd.				
2.4GHz Dipole Antenna SNA Plug Reverse				
PART NO.		MCS-003-134-01		
DRAWING NO.		WR-R-AD0008-A1		

TECHNICAL DATA

● Electrical Properties

Frequency Range	: 2.4~2.5GHz
Impedance	: 50 Ohm nominal
VSWR	: ≤ 2.0
Gain	: 2dBi
Radiation	: Omni
Polarization	: Vertical
Electrical Wave	: $\lambda/4$ Dipole

● Mechanical Properties

Antenna Cover	: PU
Color	: Black
Operation Temperature	: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
Storage Temperature	: $-30^{\circ}\text{C} \sim +75^{\circ}\text{C}$